

CAC

**CAUTION: THE INFORMATION IN THIS
PUBLICATION MAY BE SUPERSEDED
BY NOTAM OR AIP SUPPLEMENT**

**ATTENTION : LE CONTENU
DE LA PRÉSENTE PUBLICATION
PEUT ÊTRE REMPLACÉ PAR
NOTAM OU SUPPLÉMENT D'AIP**

EFFECTIVE | EN VIGUEUR

0901Z 7 AUGUST | AOÛT 2025

TO | AU

0901Z 2 OCTOBER | OCTOBRE 2025

CANADIAN AIRPORT CHARTS

CARTES DES AÉROPORTS CANADIENS

Serving a world in motion
Au service d'un
monde en mouvement
navcanada.ca



CANADIAN AIRPORT CHARTS

CARTES DES AÉROPORTS CANADIENS



The information in the Canadian Airport Charts provides pictorial displays of Canadian airport manoeuvring areas found in the Canada Air Pilot or the military GPH 200, and may be reproduced for the sole purpose of assisting pilots during aircraft ground movement operations. Up-to-date information on flight planning procedures and airport services, including fuel, lighting, and local prohibitions or procedures is found in the Canada Flight Supplement.

L'information qui se trouve dans les Cartes des aéroports canadiens contient des indicateurs topographiques des aires de manœuvre des aéroports canadiens provenant du Canada Air Pilot ou du GPH 200 militaire et peut être reproduite à seule fin d'aider les pilotes durant les mouvements d'aéronefs au sol. De l'information à jour sur les procédures de préparation de plans de vol et les services d'aéroport, y compris le carburant, le balisage, ainsi que les interdictions et les procédures locales, se trouve dans le Supplément de vol Canada.

Published by NAV CANADA in accordance with ICAO Annexes 4 and 15 of the Convention on International Civil Aviation

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

Source of Canadian Military Aeronautical Data:
His Majesty the King in Right of Canada Department of National Defence

Publié par NAV CANADA en vertu des Annexes 4 et 15 de la Convention relative à l'aviation civile internationale de l'OACI

Source des données aéronautiques civiles canadiennes : © 2025 NAV CANADA Tous droits réservés

Source des données aéronautiques militaires canadiennes :
Ministère de la Défense Nationale de Sa Majesté le Roi aux droits du Canada

Preface

NAV CANADA, as the office responsible for the publication and distribution of aeronautical information, has decided to make aerodrome diagrams readily available to general aviation pilots through its website. This move will contribute to enhance aviation safety and will help to mitigate some of the risks associated with runway incursions.

Hot Spot: A location on an aerodrome movement area with a high risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

Hot Spots are found on applicable Canadian Aerodrome Charts.

Préface


NAV CANADA, en tant que responsable de la publication et de la distribution de l'information aéronautique, a décidé de mettre les schémas d'aérodrome à la disponibilité des pilotes d'aviation générale par l'intermédiaire de son site Web. Cette décision contribuera à accroître la sécurité aérienne et aidera à atténuer certains des risques associés aux incursions sur piste.

Point chaud : Endroit sur l'aire de mouvement d'un aérodrome où il y a un risque accru de collision ou d'incursion sur piste et où une attention soutenue de la part du pilote/conducteur est requise.

Les points chauds se trouvent sur les cartes d'aérodrome canadiennes applicables.

AERODROME CHART LEGEND

All graphics presented here are for explanatory purposes only and are not intended to be used for navigation.

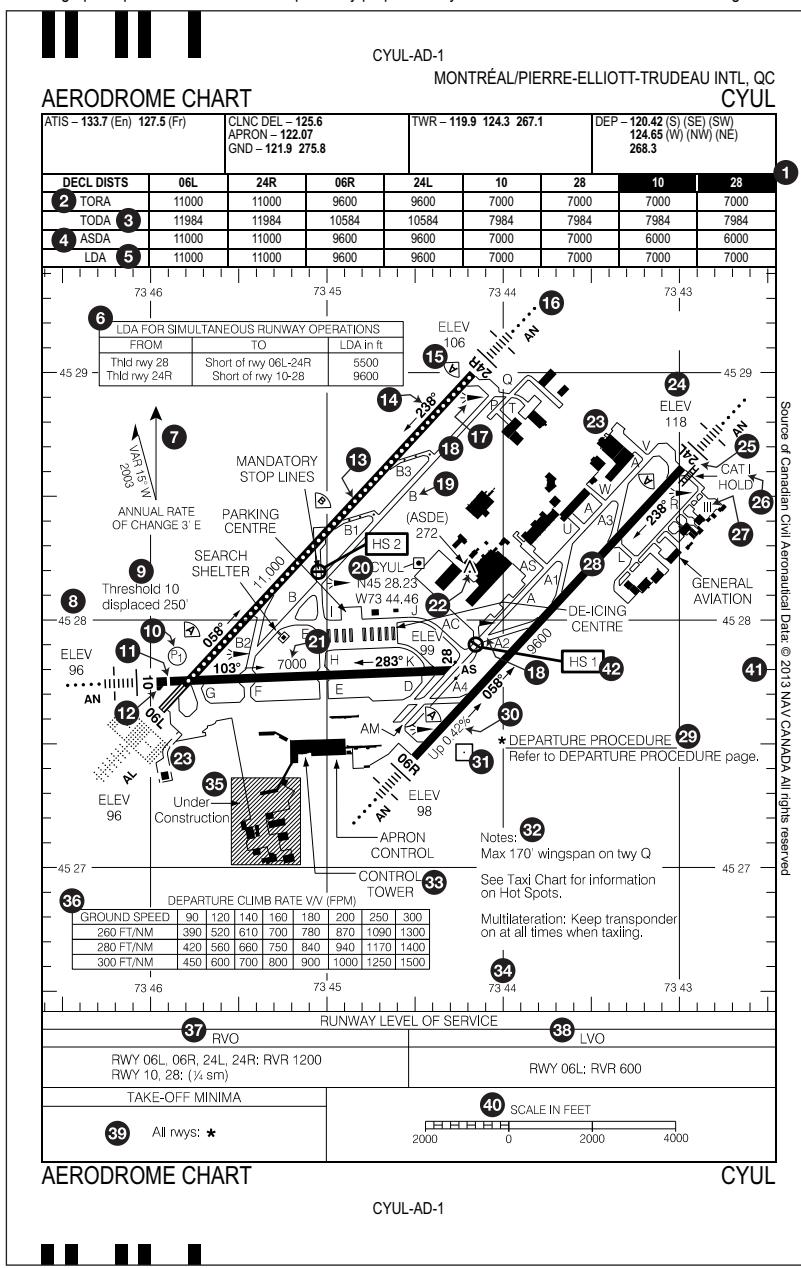

AERODROME CHART LEGEND


Aerodrome Chart Legend

- | | |
|--------------------------------------|---------------------------------------|
| ① Declared Distance Night | ②2 Obstruction |
| ② Take Off Run Available | ②3 Building |
| ③ Take Off Distance Available | ②4 Threshold Elevation |
| ④ Accelerate Stop Distance Available | ②5 Runway Number |
| ⑤ Landing Distance Available | ②6 CAT I Holding Bar |
| ⑥ Landing Distance Available Table | ②7 Apron Identification |
| ⑦ Magnetic Variation | ②8 Runway |
| ⑧ Latitude Coordinate | ②9 Departure Procedure |
| ⑨ Threshold Displacement Note | ③0 Runway Slope Gradient* |
| ⑩ Visual Glide Slope Indicator | ③1 NAVAID within AD Limit |
| ⑪ Displaced Runway Threshold | ③2 Operational Notes |
| ⑫ Turnaround Bay | ③3 Control Tower |
| ⑬ Centreline Light | ③4 Longitude Coordinate |
| ⑭ Runway Bearing | ③5 Construction Area |
| ⑮ RVR Sensor | ③6 Departure Climb Rate Table |
| ⑯ Approach Lighting | ③7 Reduced Visibility Operation Table |
| ⑰ Wind Direction Indicator | ③8 Low Visibility Operation Table |
| ⑱ Taxiway | ③9 Take-off Minima Box |
| ⑲ Taxiway Identification | ④0 Scale Bar |
| ⑳ Aerodrome Reference Point | ④1 Geographic Grid |
| ㉑ Runway Dimensions | ㉒ Hot Spot |

* If only one value for runway slope is provided, it can be assumed that the runway has a constant slope for the length indicated and the slope direction is reversed in the opposing runway direction. If no length is indicated, this means the provided slope applies for the entire runway length. For example, for a published slope of RWY 04 DOWN 0.36%, it can be assumed that the slope for RWY 22 is UP 0.36% and that this applies for the entire runway length.

LÉGENDE DES CARTES D'AÉRODROME

Toute illustration n'est présentée ici qu'à titre indicatif et ne doit pas être utilisée pour la navigation.

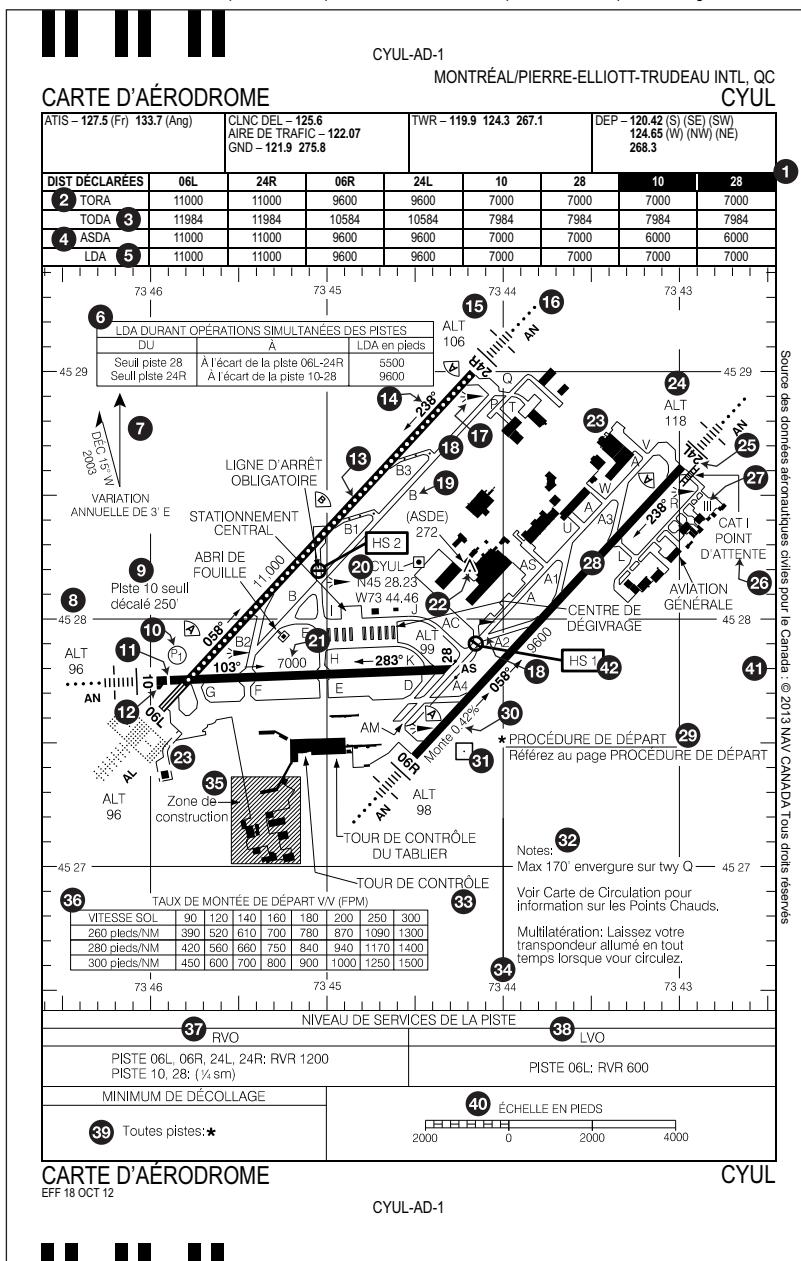

Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

LÉGENDE DES CARTES D'AÉRODROME

LÉGENDE DES CARTES D'AERODROME

Légende des cartes d'aérodrome


- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--------------------------|---|---|---|----------------------------------|---|---|---|--------------------------------------|---|--|---|------------------------|---|------------------------|---|-------------------------------|---|---------------------------------------|---|-----------------------|---|-------------------|---|------------------------|---|------------------------|---|-------------|---|------------------------------|---|---------------------------------|---|---------------------|---|----------------------------------|---|--------------------------------|---|------------------------|---|-------------|---|------|---|-------------------|---|-----------------|---|-----------------------------|---|------------------------------------|---|-------|---|---------------------|---|--------------------|---|------------------------|---|-----------------------|---|------------------|---|-------------------------|---|----------------------|---|--------------------------------------|---|---|---|--|---|---------------------------------|---|-----------------|---|---------------------|---|-------------|
| ❶ | Distance déclarée (nuit) | ❷ | Longueur de roulement utilisable au décollage | ❸ | Distance de décollage utilisable | ❹ | Distance utilisable pour l'accélération-arrêt | ❺ | Distance d'atterrissement utilisable | ❻ | Tableau des distances d'atterrissement utilisables | ❽ | Déclinaison magnétique | ❸ | Coordonnée de latitude | ❾ | Note sur le décalage du seuil | ❿ | Indicateur visuel de pente d'approche | ❻ | Seuil de piste décalé | ❻ | Aire de demi-tour | ❻ | Feux de l'axe de piste | ❻ | Relèvement de la piste | ❻ | Capteur RVR | ❻ | Balisage lumineux d'approche | ❻ | Indicateur de direction du vent | ❻ | Voie de circulation | ❻ | Indicatif de voie de circulation | ❻ | Point de référence d'aérodrome | ❻ | Dimensions de la piste | ❻ | Obstruction | ❻ | Bâti | ❻ | Altitude du seuil | ❻ | Numéro de piste | ❻ | Barre d'attente d'ILS CAT I | ❻ | Identification de l'aire de trafic | ❻ | Piste | ❻ | Procédure de départ | ❻ | Pente de la piste* | ❻ | NAVAID sur l'aérodrome | ❻ | Notes opérationnelles | ❻ | Tour de contrôle | ❻ | Coordonnée de longitude | ❻ | Zone de construction | ❻ | Tableau des taux de montée de départ | ❻ | Tableau des opérations par visibilité réduite | ❻ | Tableau des opérations par faible visibilité | ❻ | Cases des minimums de décollage | ❻ | Barre d'échelle | ❻ | Grille géographique | ❻ | Point chaud |
|---|--------------------------|---|---|---|----------------------------------|---|---|---|--------------------------------------|---|--|---|------------------------|---|------------------------|---|-------------------------------|---|---------------------------------------|---|-----------------------|---|-------------------|---|------------------------|---|------------------------|---|-------------|---|------------------------------|---|---------------------------------|---|---------------------|---|----------------------------------|---|--------------------------------|---|------------------------|---|-------------|---|------|---|-------------------|---|-----------------|---|-----------------------------|---|------------------------------------|---|-------|---|---------------------|---|--------------------|---|------------------------|---|-----------------------|---|------------------|---|-------------------------|---|----------------------|---|--------------------------------------|---|---|---|--|---|---------------------------------|---|-----------------|---|---------------------|---|-------------|

* Si une seule valeur de pente de piste est donnée, on peut supposer que la pente est constante sur la longueur indiquée et que la direction de la pente est inversée dans la direction de la piste opposée. Si aucune longueur n'est indiquée, la pente donnée s'applique à toute la longueur de la piste. Par exemple, pour une pente publiée de PISTE 04 DESCEND 0,36 %, on peut supposer que la pente de PISTE 22 MONTE 0,36 % et que cette valeur s'applique à toute la longueur de la piste.

CYKD-AD

AKLAVIK/FREDDIE CARMICHAEL, NT
CYKD

AERODROME CHART

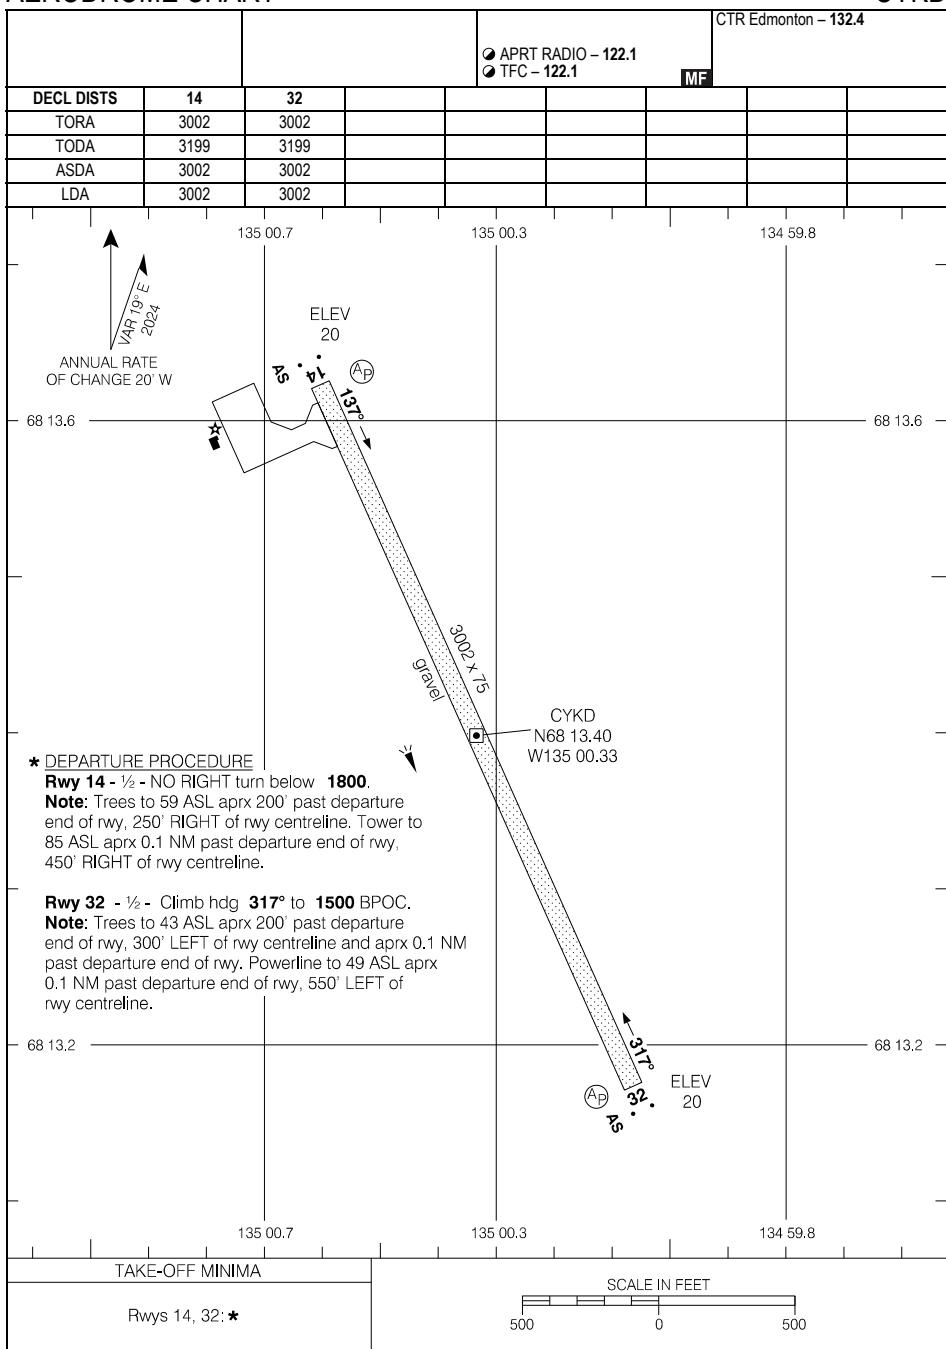

AERODROME CHART

EFF 31 OCT 24

CYKD

CYKD-AD

CYLT-AD


ALERT, NU
CYLT

AERODROME CHART (DND)

TFC - 126.7

ATR

DECL DISTS	05	23						
TORA	5500	5500						
TODA	5500	5500						
ASDA	5500	5500						
LDA	5500	5500						

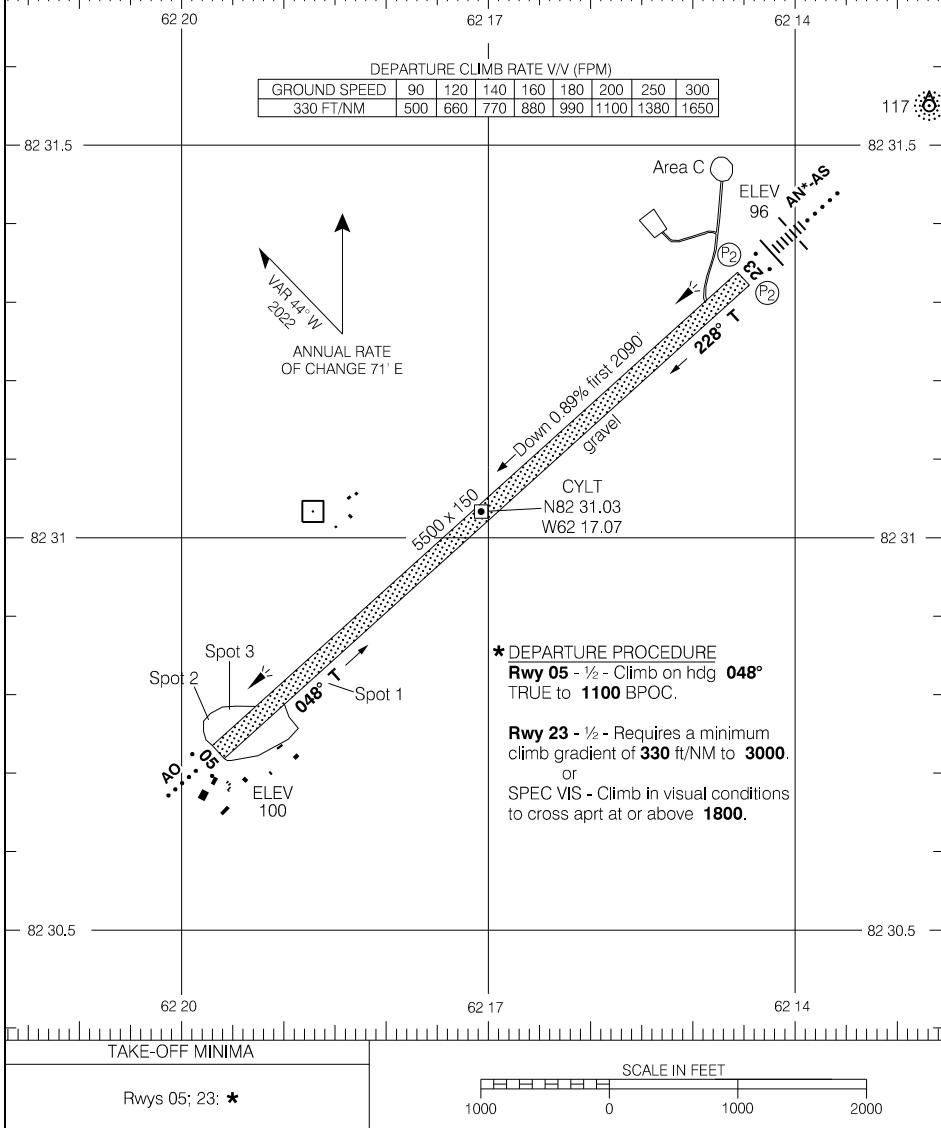

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART (DND)

EFF 21 MAR 24


CYLT

CYLT-AD

CYEK-AD

ARVIAT, NU
CYEK

AERODROME CHART

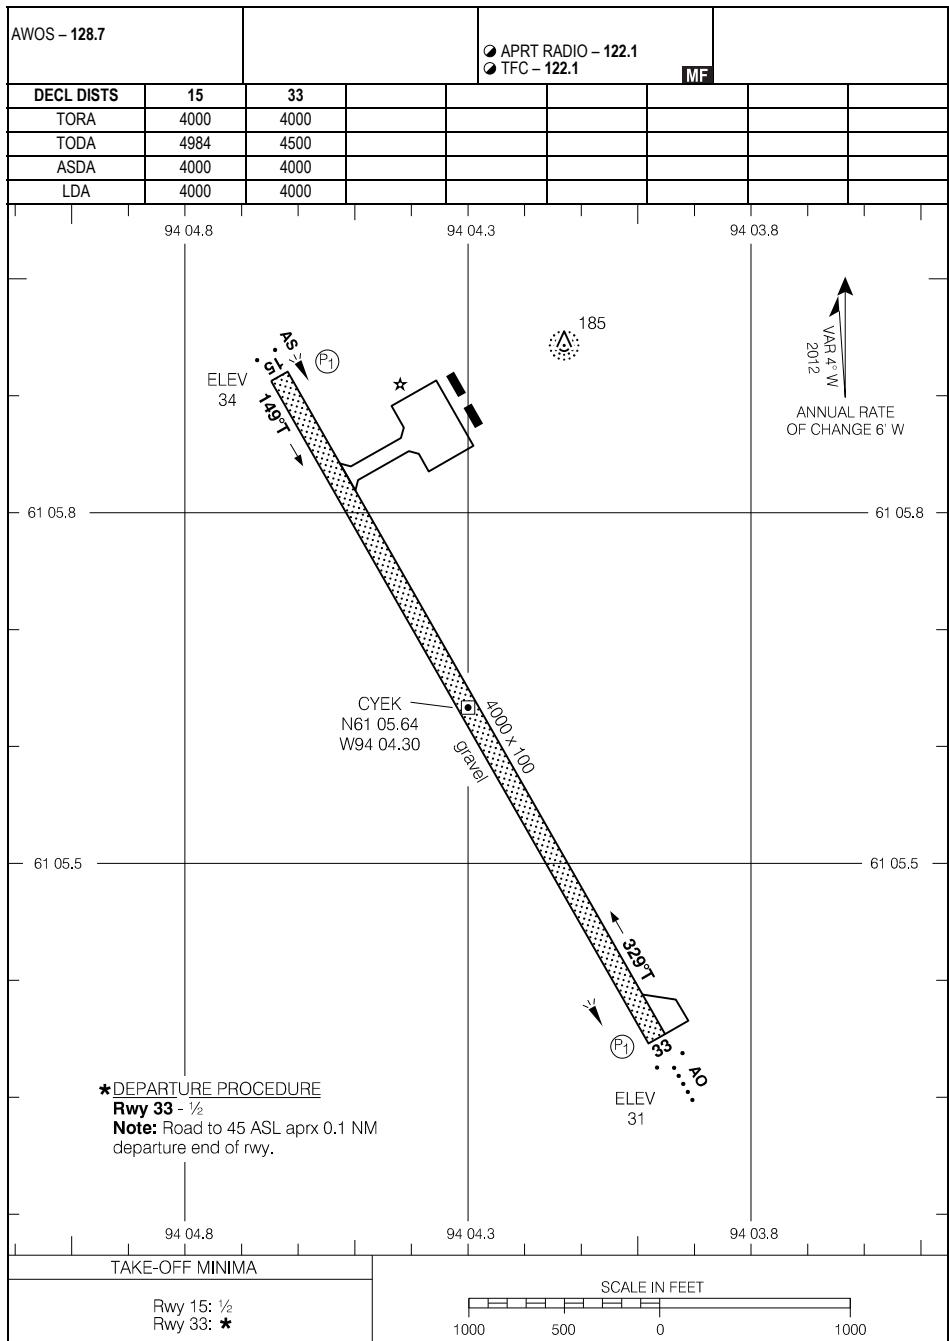

AERODROME CHART

EFF 8 SEP 22


CYEK-AD

CYEK

CYBK-AD

BAKER LAKE, NU
CYBK

AERODROME CHART

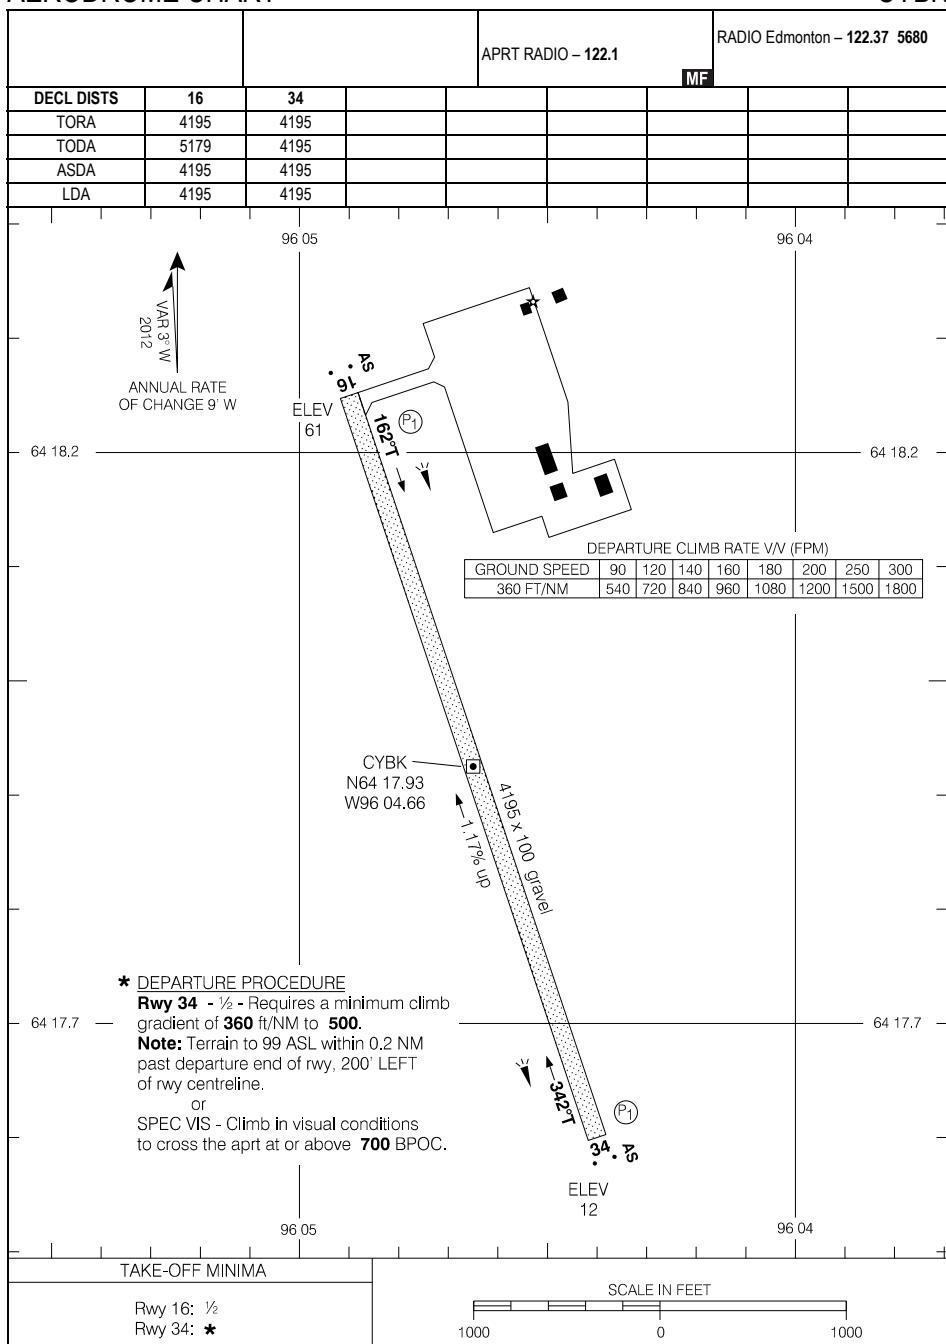

AERODROME CHART

EFF 29 DEC 22


CYBK-AD

CYBK

CYXQ-AD

BEAVER CREEK, YT
CYXQ

AERODROME CHART

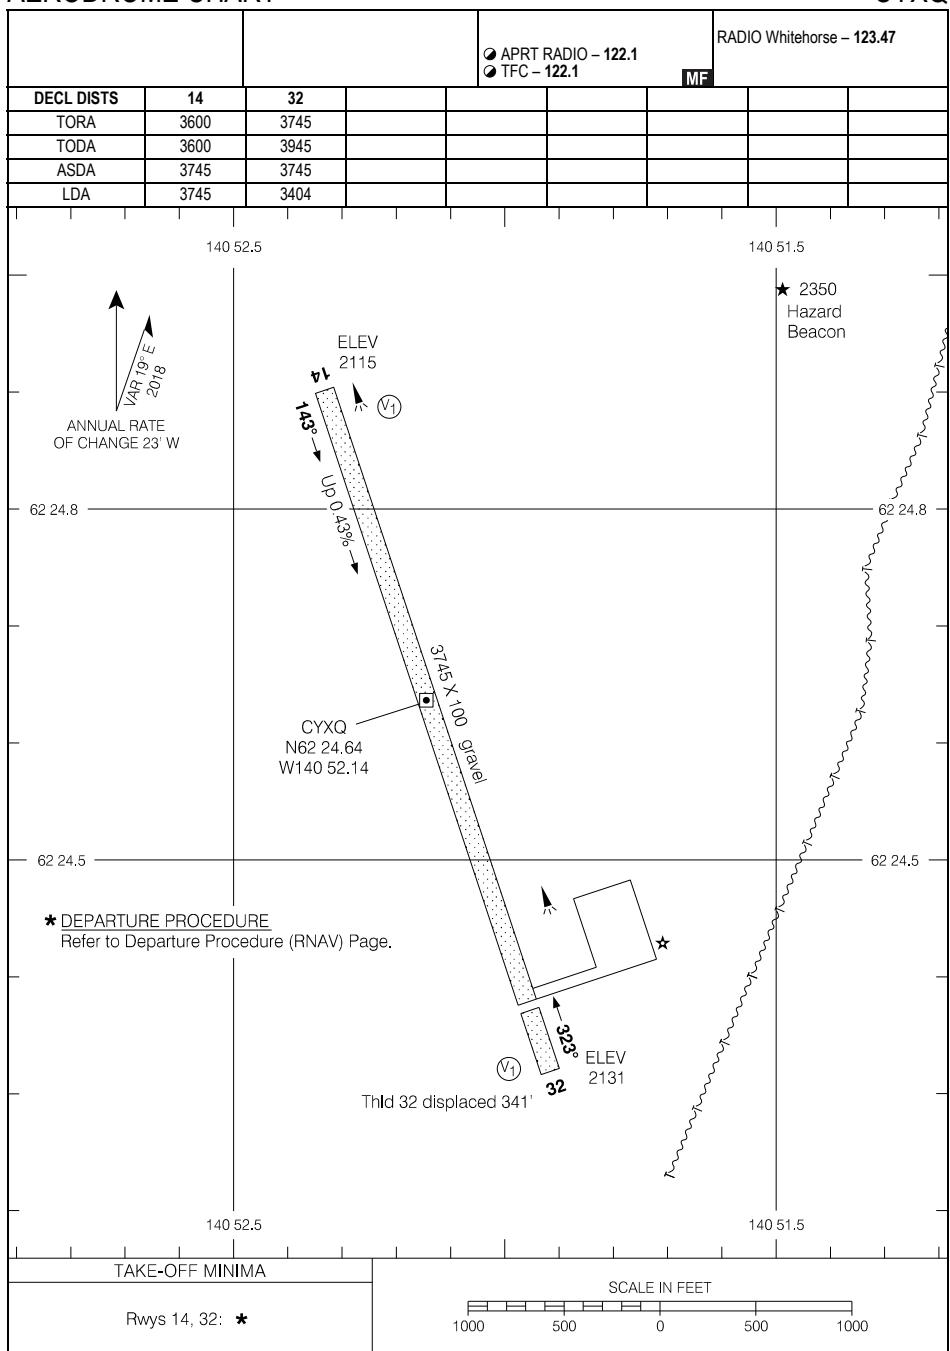

AERODROME CHART

EFF 14 JUL 22


CYXQ-AD

CYXQ

CYDB-AD

BURWASH, YT
CYDB

AERODROME CHART

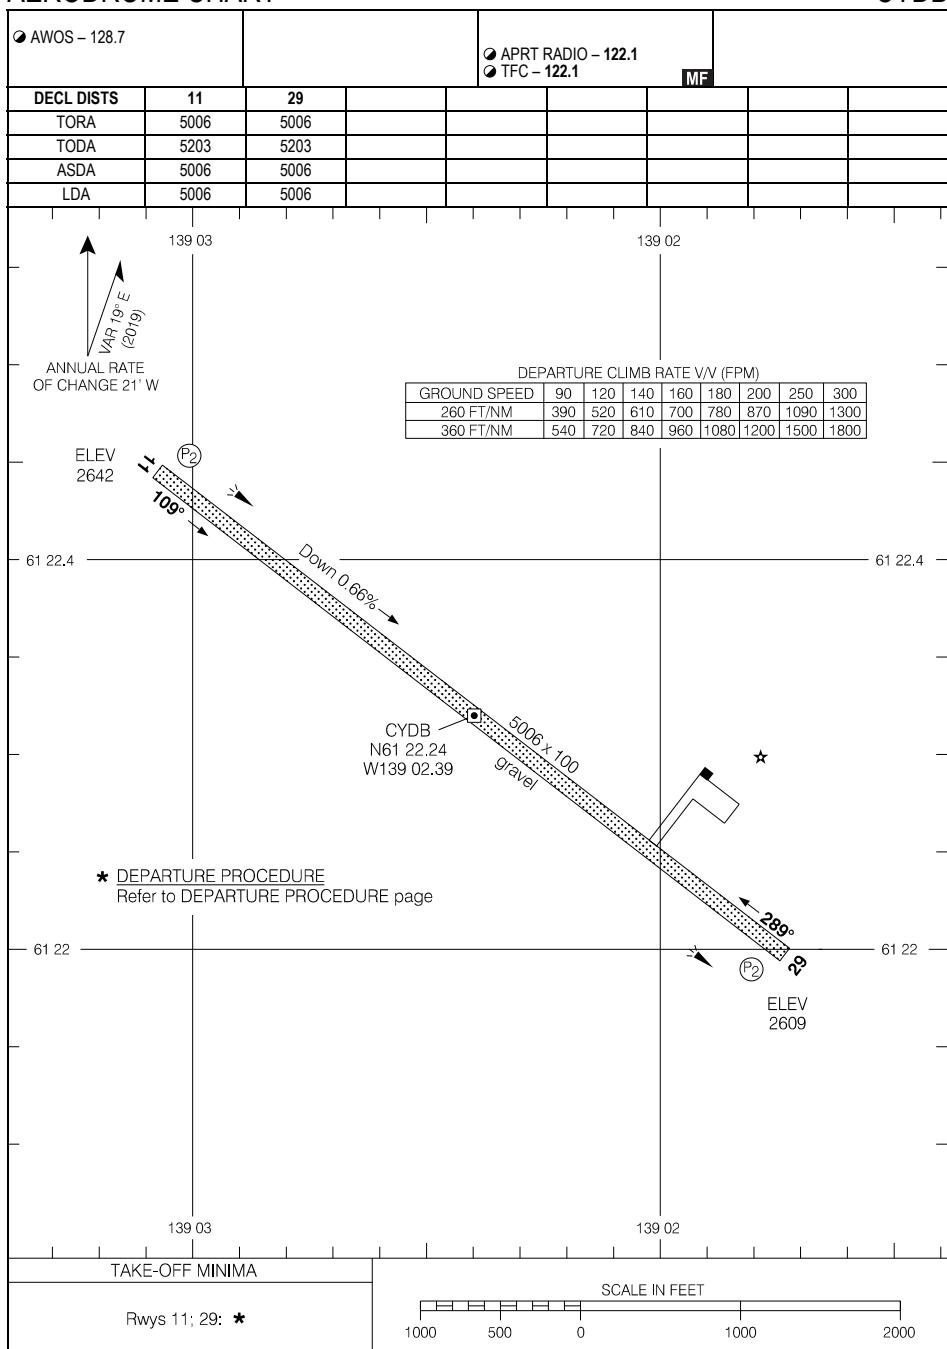

AERODROME CHART

EFF 5 OCT 23


CYDB-AD

CYDB

CYCB-AD

CAMBRIDGE BAY, NU
CYCB

AERODROME CHART

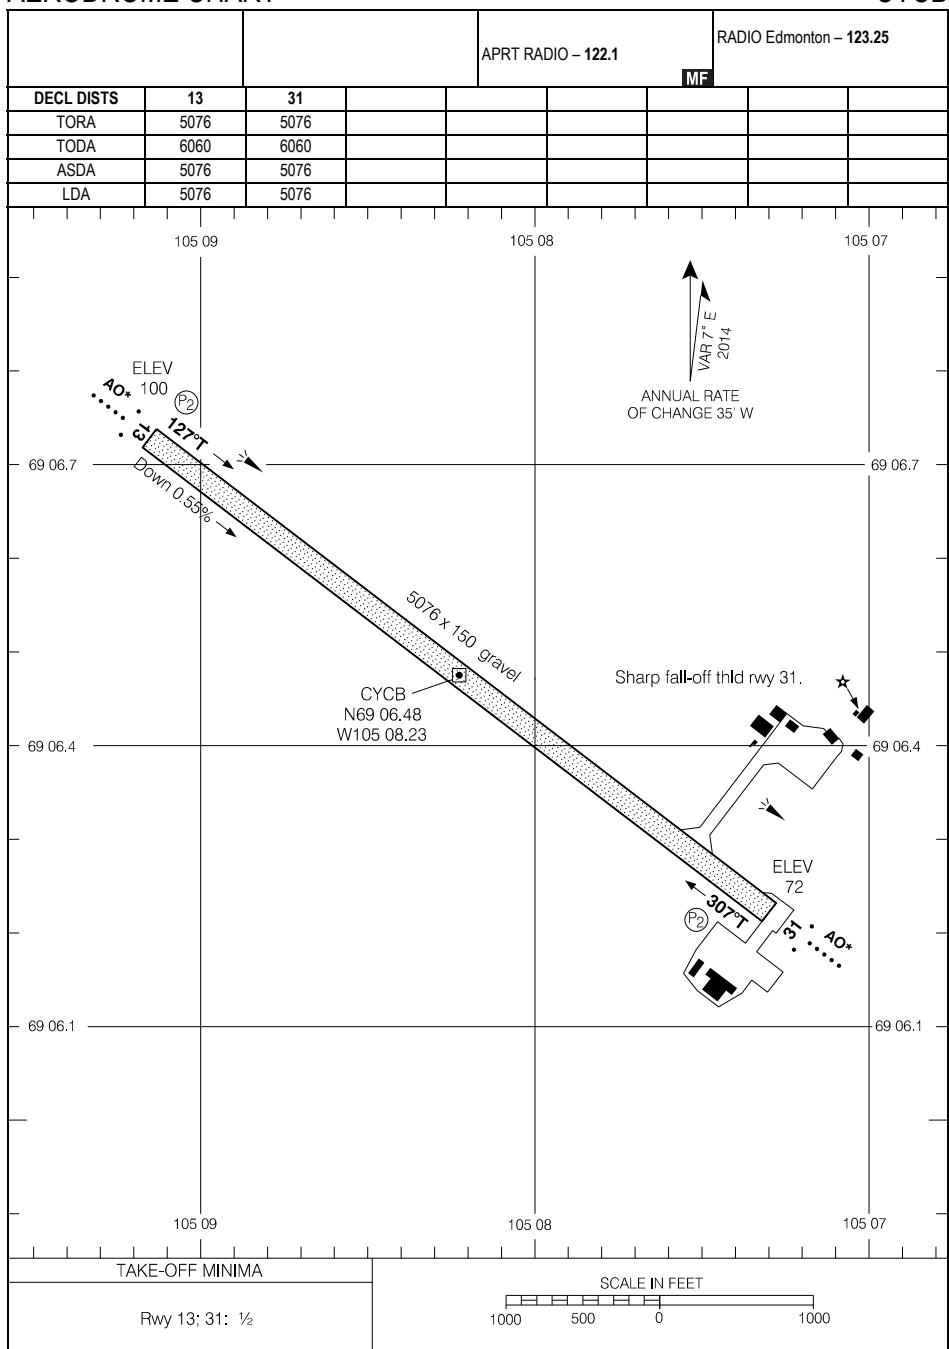

AERODROME CHART

EFF 29 DEC 22

CYCB

CYCB-AD


CYCS-AD

CHESTERFIELD INLET, NU
CYCS

AERODROME CHART

				<input checked="" type="radio"/> APRT RADIO – 122.1			
		<input checked="" type="radio"/> TFC – 122.1		MF			
DECL DISTS	12	30					
TORA	3600	3600					
TODA	4584	4584					
ASDA	3600	3600					
LDA	3600	3600					

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

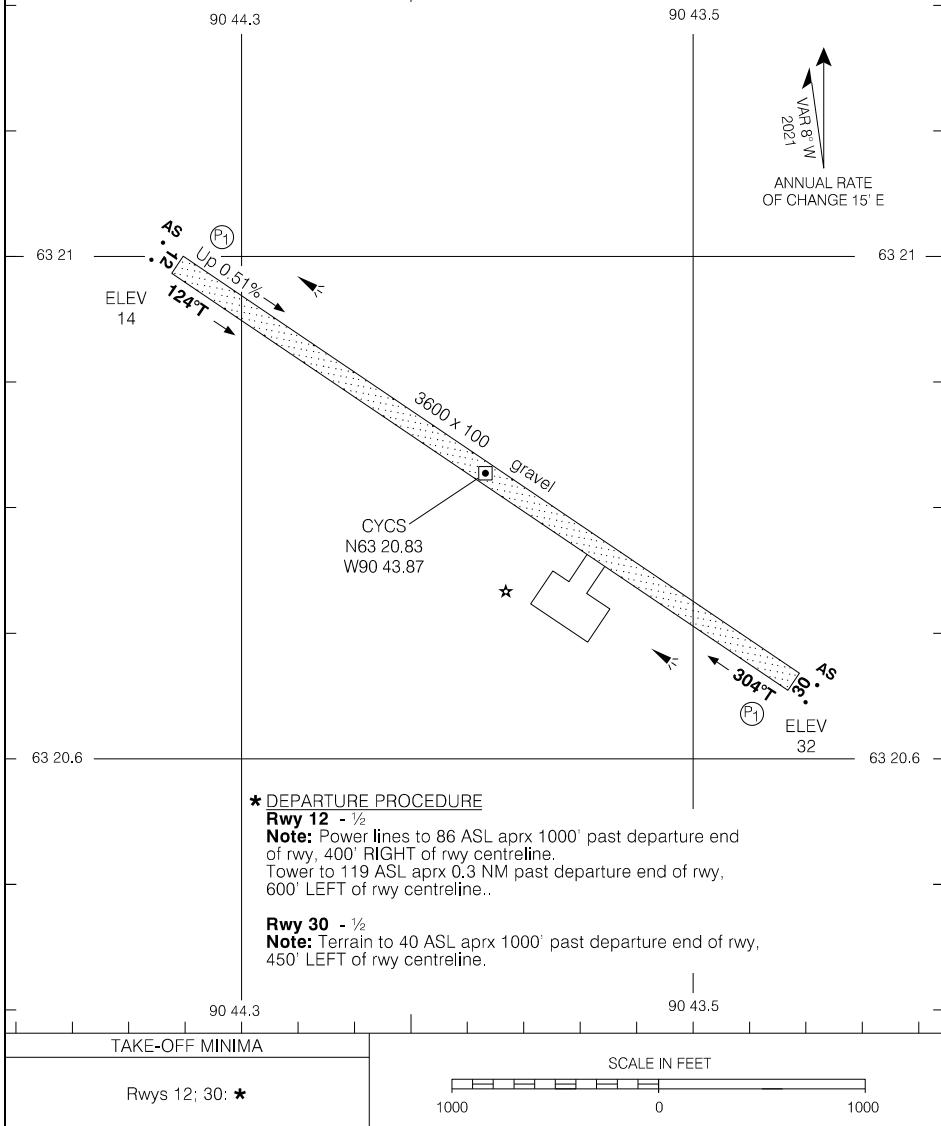

AERODROME CHART

EFF 8 SEP 22

CYCS-AD

CYCY-AD

CLYDE RIVER, NU
CYCY

AERODROME CHART

AWOS – 124.6

● APRT RADIO – 122.1
● TFC – 122.1

ME

DECL DISTS	02	20					MF	
TORA	3501	3501						
TODA	4485	4485						
ASDA	3501	3501						
LDA	3501	3501						

*DEPARTURE PROCEDURE
**Rwy 02 - ½ - (CAT A, B and C only) Climb hdg 018°T
to 1900 BPOC.**

Rwy 20 - 1/2 - (CAT A, B and C only) Requires a minimum climb gradient of **430 ft/NM** to **1500**. Climb hdg. **198°T** to **2800** BPOC.
or
SPEC VIS - Climb in visual conditions to cross the apron at or above **2300** BPOC.

233

The diagram illustrates a vector representing the variance (VAR) for the year 2015. The vector originates from the bottom left and points upwards and to the right, labeled "VAR 32° W 2015". To the right of the vector, a wavy line indicates a trend, and the text "ANNUAL RATE OF CHANGE 38° E" is written below it.

DEPARTURE CLIMB RATE VN (FPM)

GROUND SPEED	90	120	140	160	180	200	250	300
430 FT/NM	650	860	1010	1150	1290	1440	1800	2150

00 32

Rwys 02; 20: *

SCALE IN FEET

GCGY

AFRODROME CHART

EEE 7 AUG 25

CYCY-AD


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CYVL-AD

COLVILLE LAKE/TOMMY KOCHON, NT

CYVL

AERODROME CHART

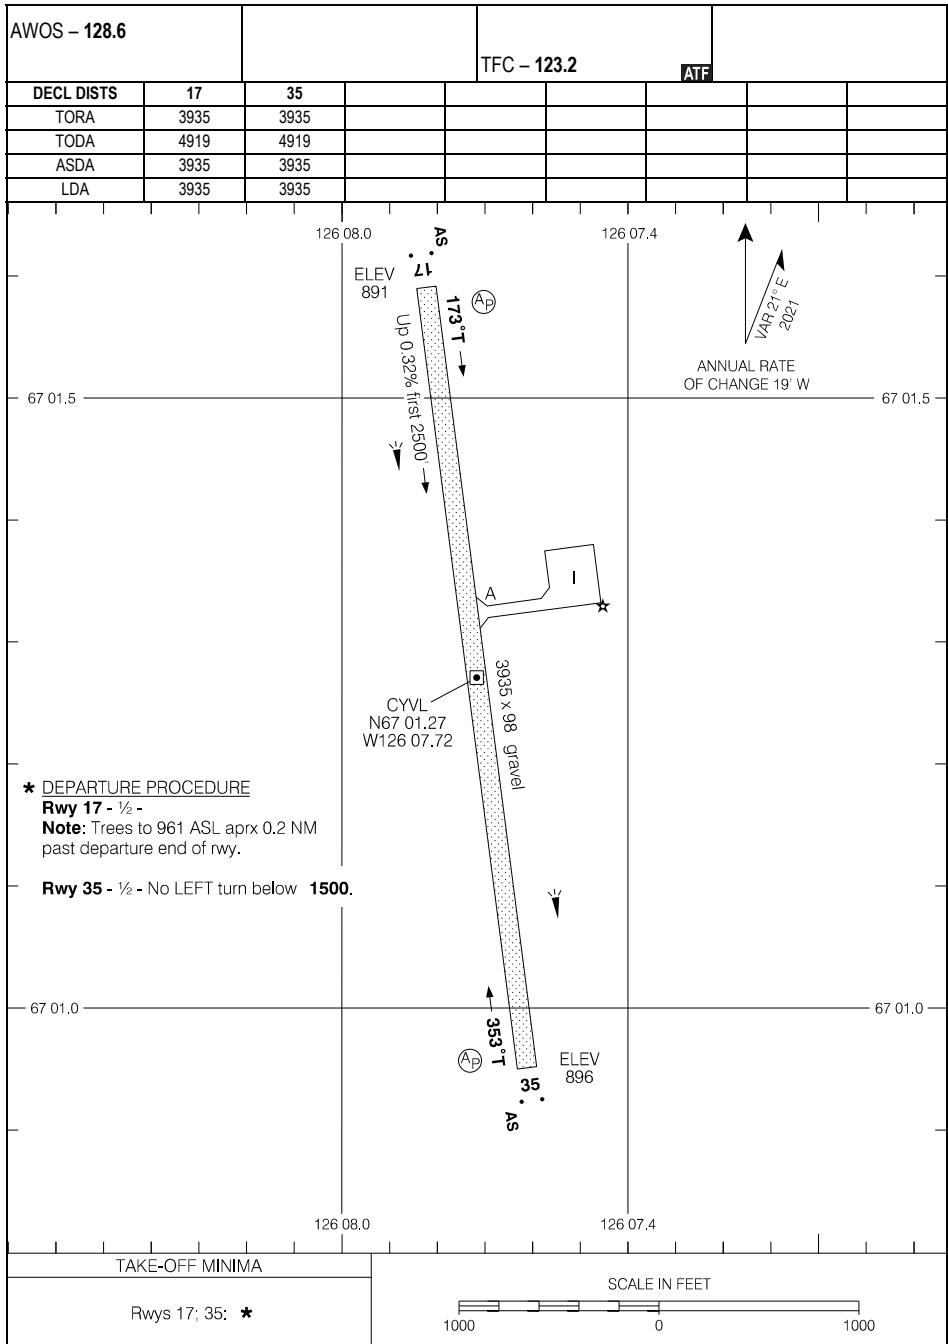

AERODROME CHART

EFF 26 DEC 24


CYVL

CYVL-AD

CYZS-AD

CORAL HARBOUR, NU
CYZS

AERODROME CHART

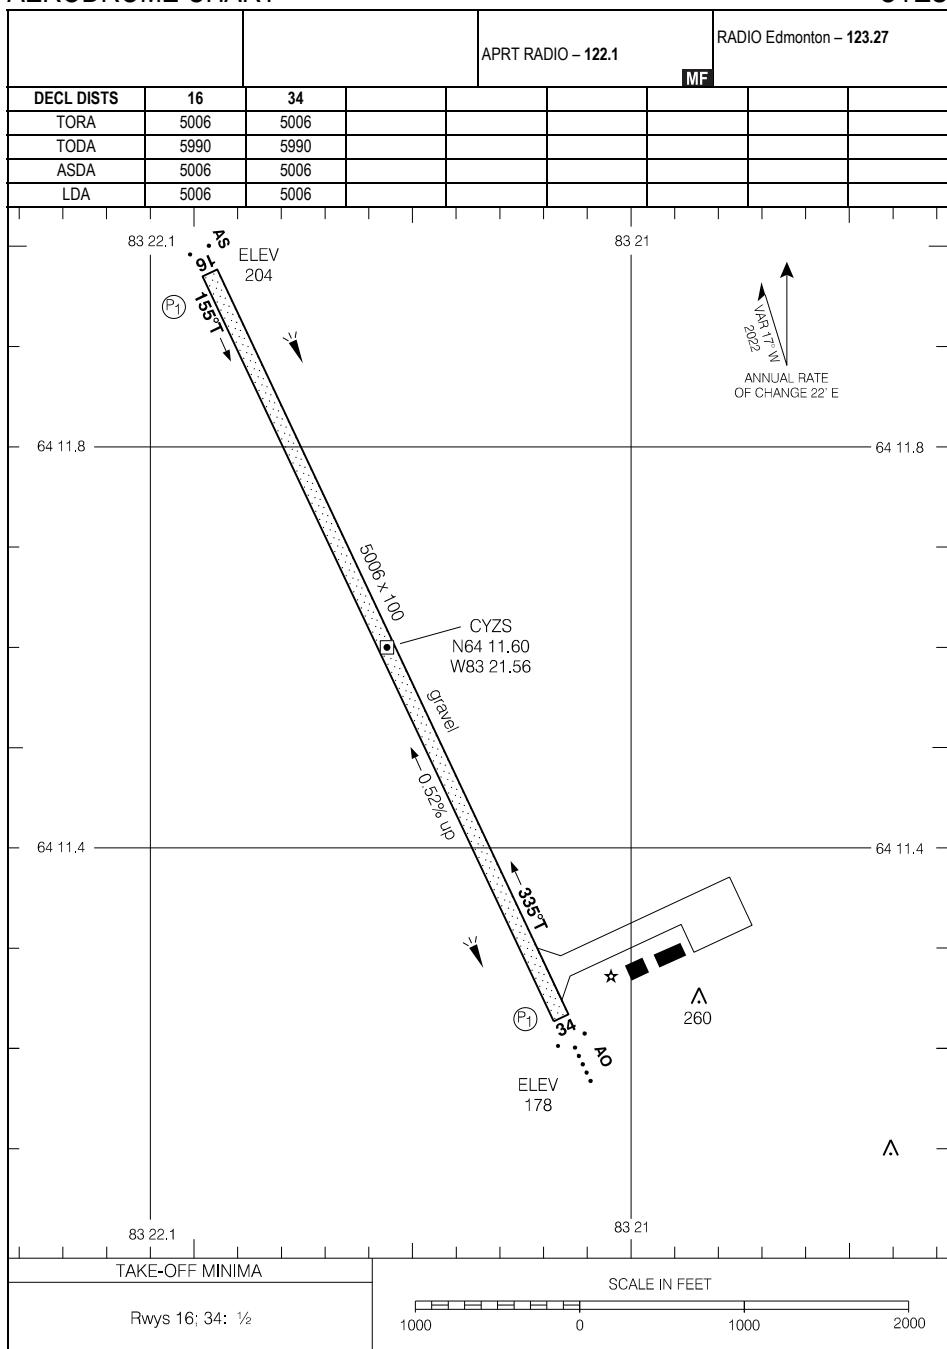

AERODROME CHART

EFF 23 FEB 23


CYZS-AD

CYZS

CYDA-AD

DAWSON CITY, YT
CYDA

AERODROME CHART

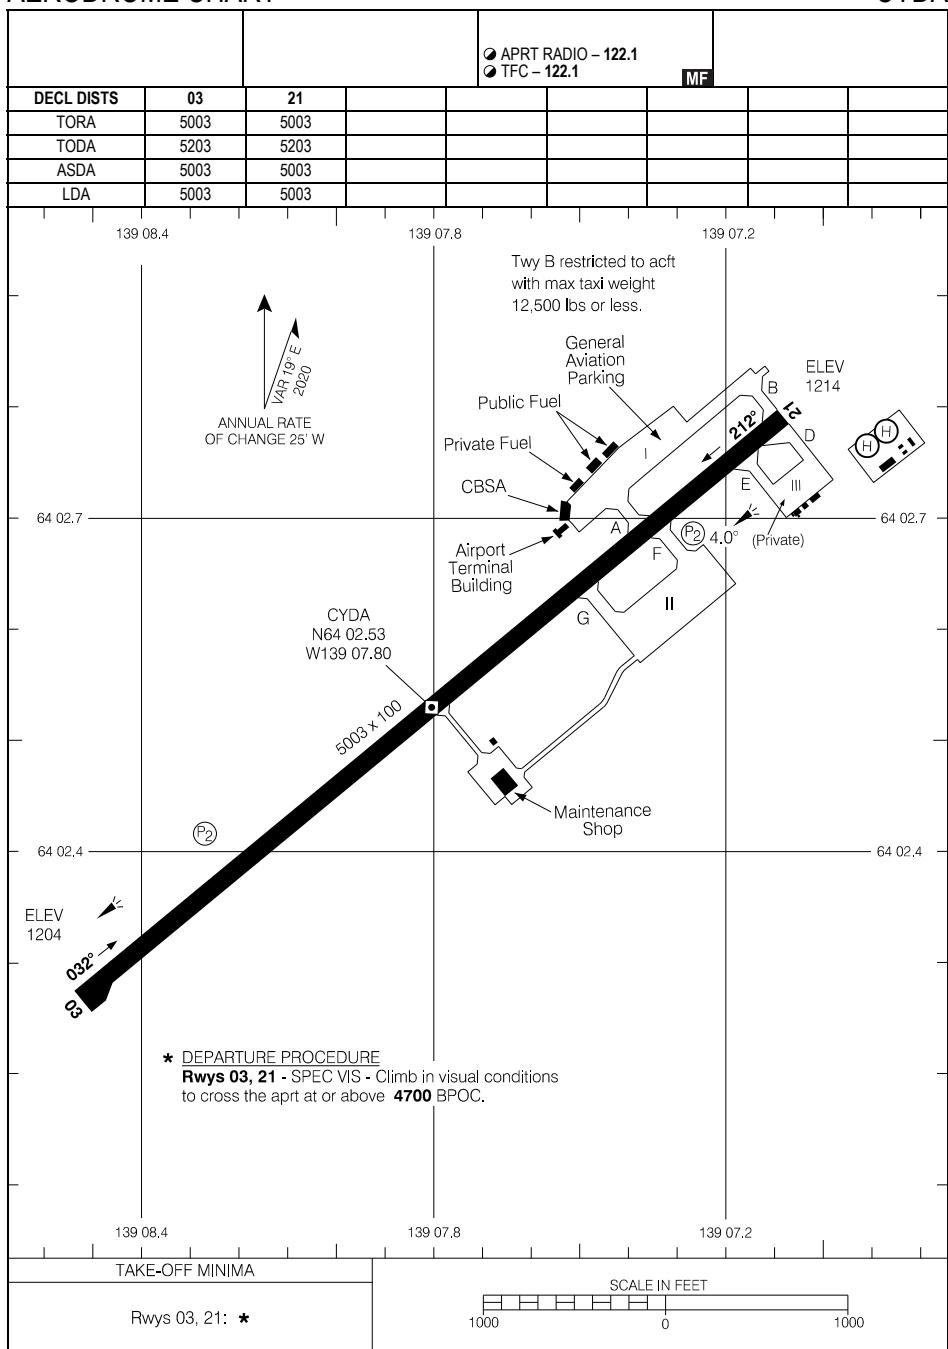

AERODROME CHART

EFF 23 FEB 23


CYDA-AD

CYDA

CYWJ-AD

DÉLINE, NT
CYWJ

AERODROME CHART

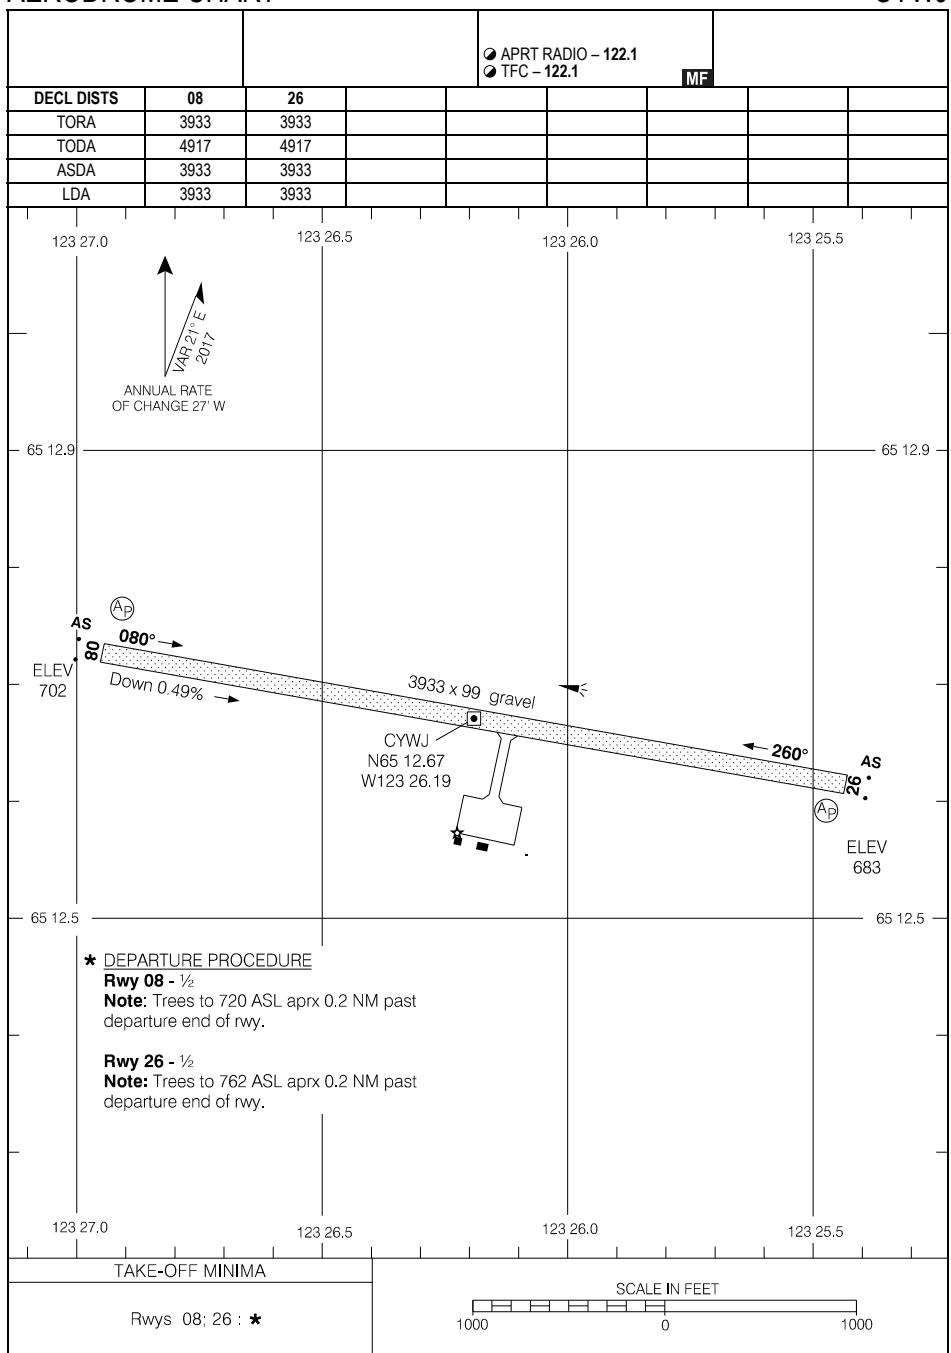

AERODROME CHART

EFF 2 DEC 21


CYWJ

CYWJ-AD

CDK2-AD

DIAVIK, NT
CDK2

AERODROME CHART

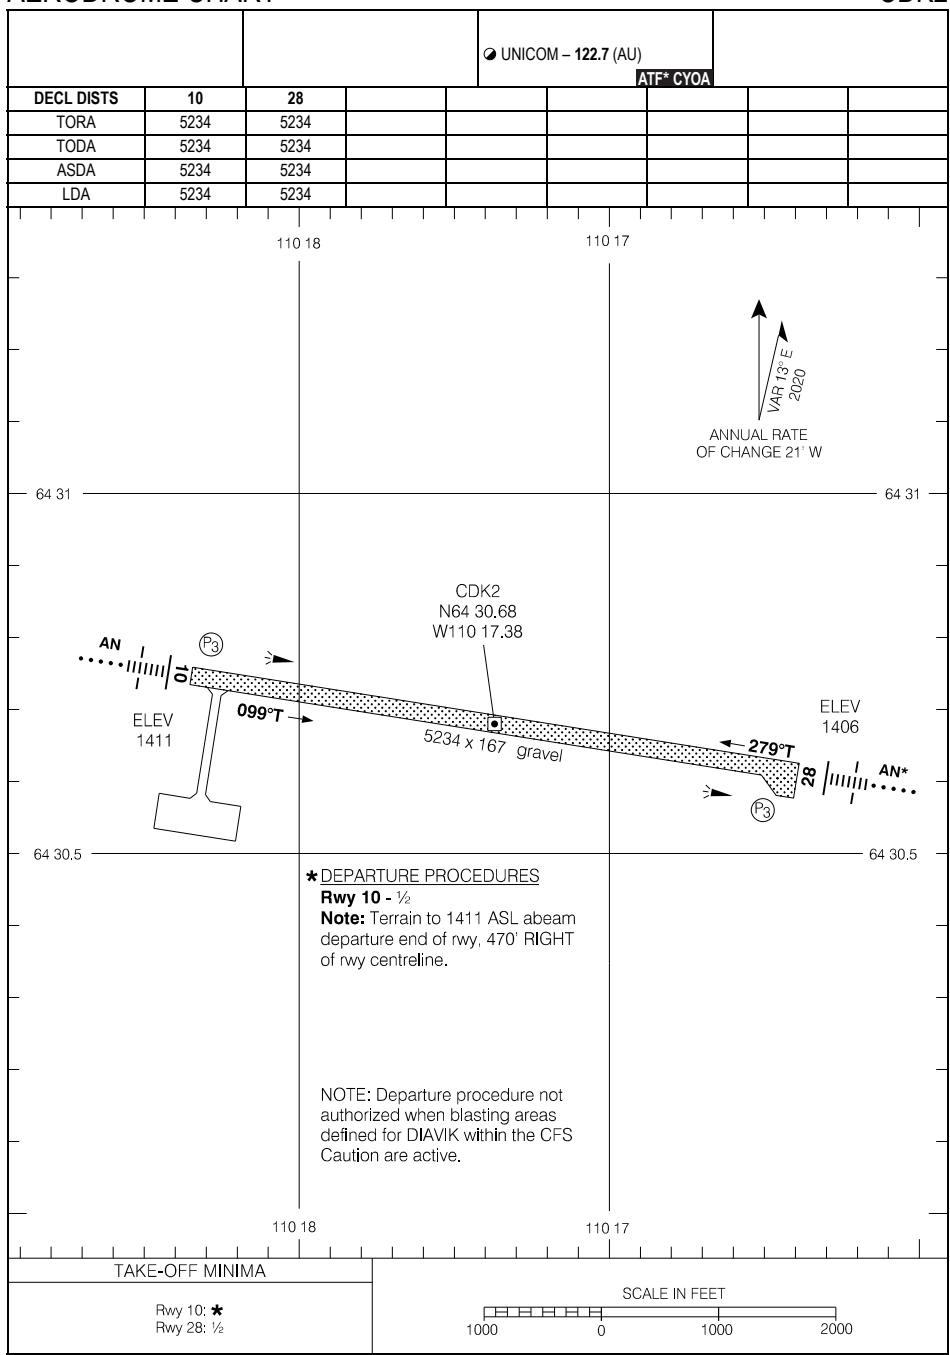


AERODROME CHART

EFF 16 MAY 24

CDK2

CDK2-AD

AERODROME CHART

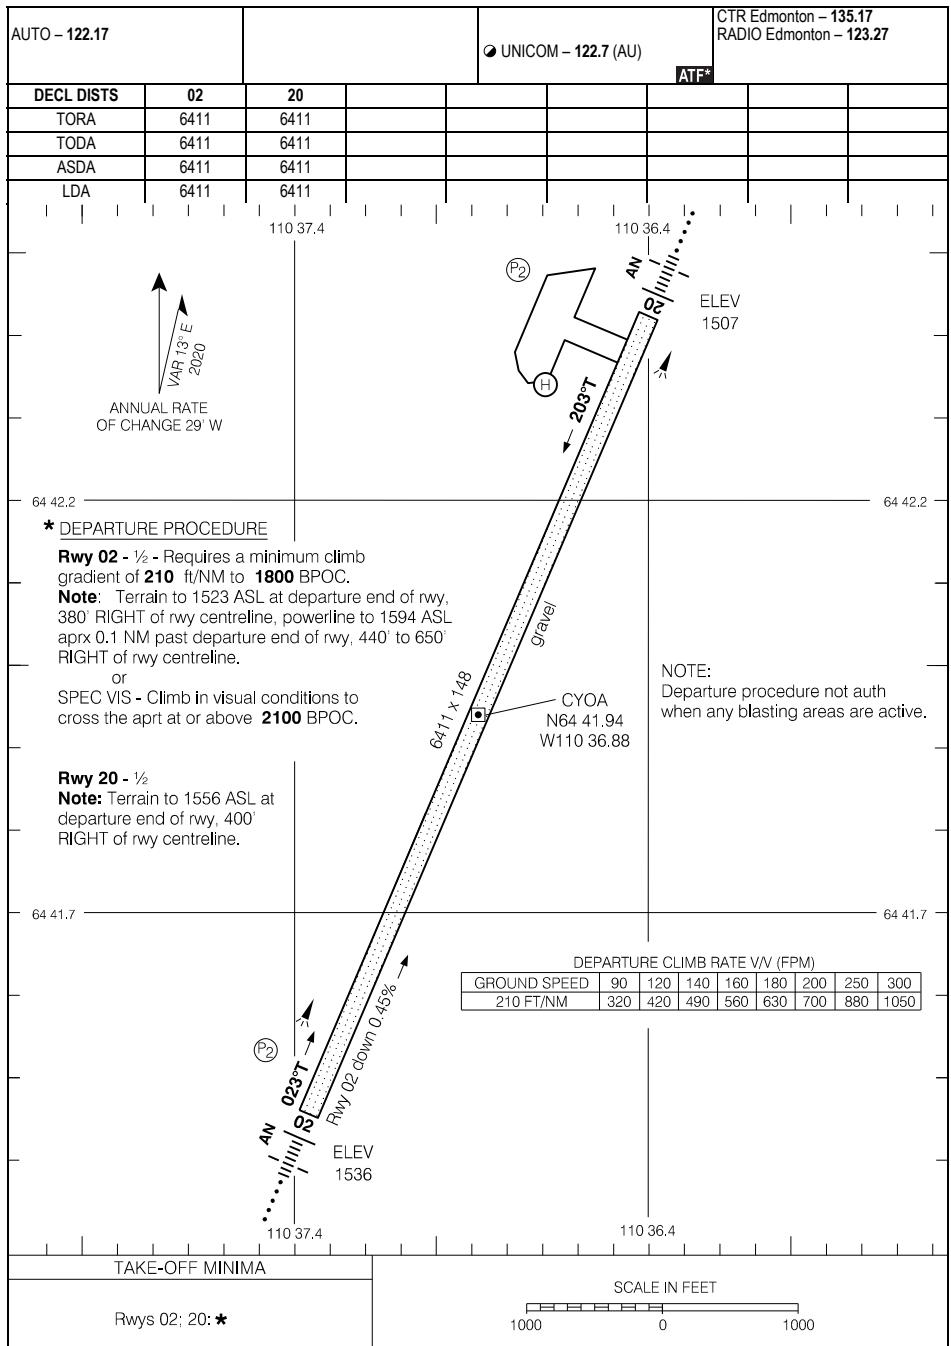

AERODROME CHART

EFF 16 MAY 24

CYOA


CYEU-AD

EUREKA, NU
CYEU

AERODROME CHART

			● UNICOM – 122.8 (AU)	
DECL DISTS	10	28		ATF
TORA	4802	4802		
TODA	4802	4802		
ASDA	4802	4802		
LDA	4802	4802		

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

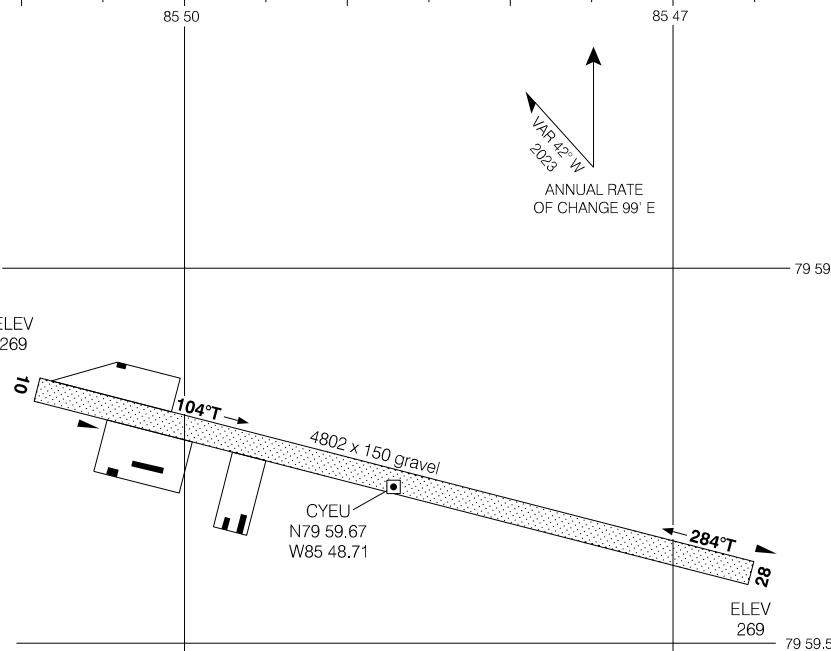

Rwy strength & cond subject to seasonal & climatic var. Acft 65,000 lbs and over PPR.

* DEPARTURE PROCEDURE

Rwy 10 - $\frac{1}{6}$ - Requires a minimum climb gradient of 380 ft/NM to 1700' Climb between hdg 160°T CW to 284°T to 4900' BPOC.
or
SPEC VIS - Climb in visual conditions to cross the apt at or above 3000' BPOC.

Rwy 28 - SPEC VIS - Climb in visual conditions to cross the apt at or above 3000 BPOC.

DEPARTURE CLIMB RATE V/FPM								
GROUND SPEED	90	120	140	160	180	200	250	300
380 FT/NM	570	760	890	1020	1140	1270	1590	1900

85 50

TAKE-OFF MINIMA

SCALE IN FEET

*

A horizontal number line starting at -1000 and ending at 2000. The line is marked with tick marks at intervals of 100. The labels 1000, 0, 1000, and 2000 are placed below the line at their respective positions.


AERODROME CHART

EFF 5 OCT 23

CYEU

CYFLU-AD

AERODROME CHART

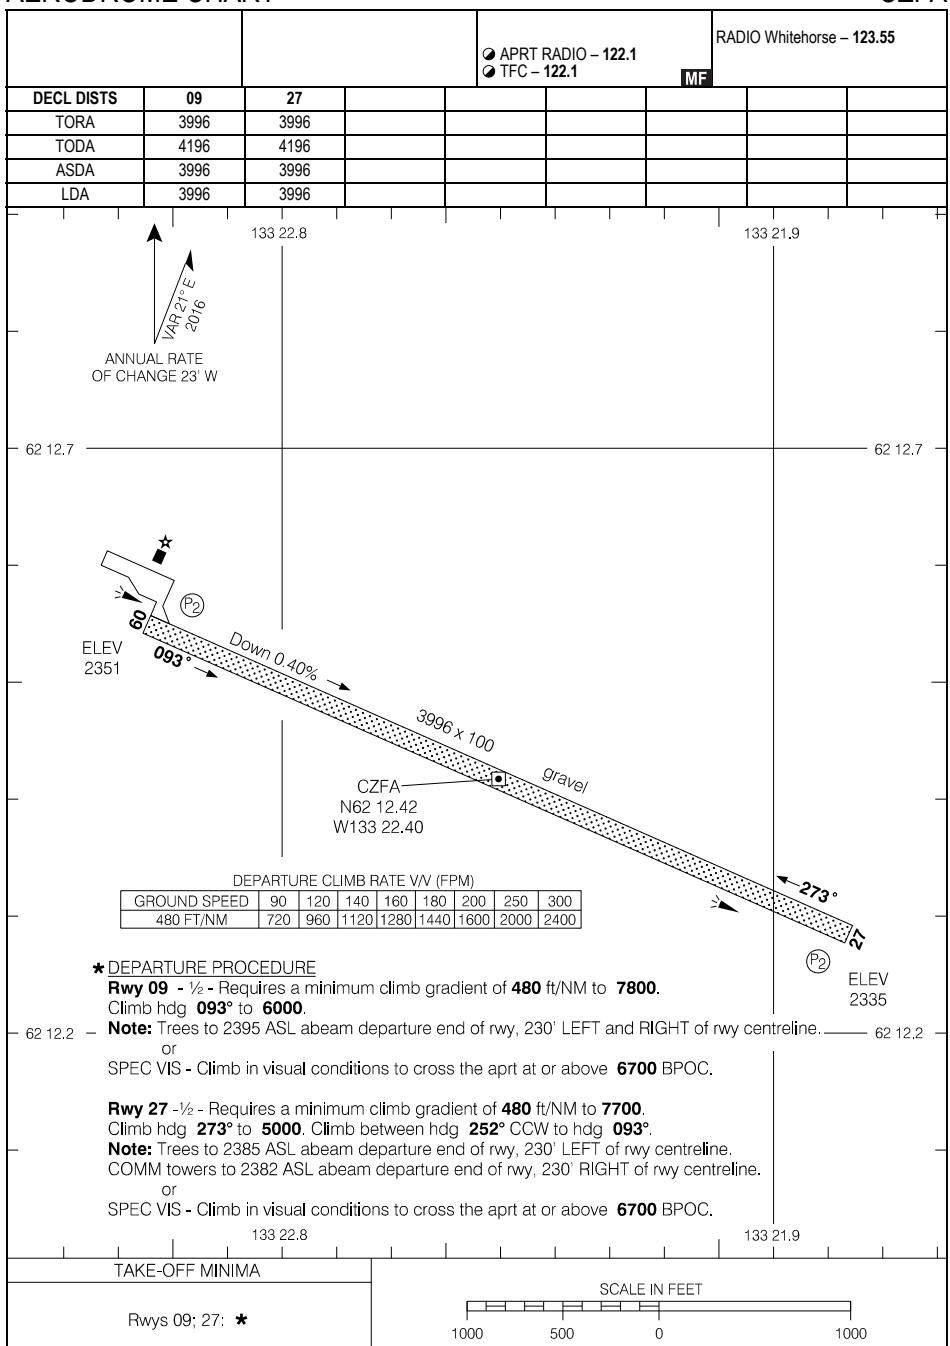

AERODROME CHART


EFF 5 OCT 23

CZFA

CYGH-AD

FORT GOOD HOPE, NT
CYGH

AERODROME CHART

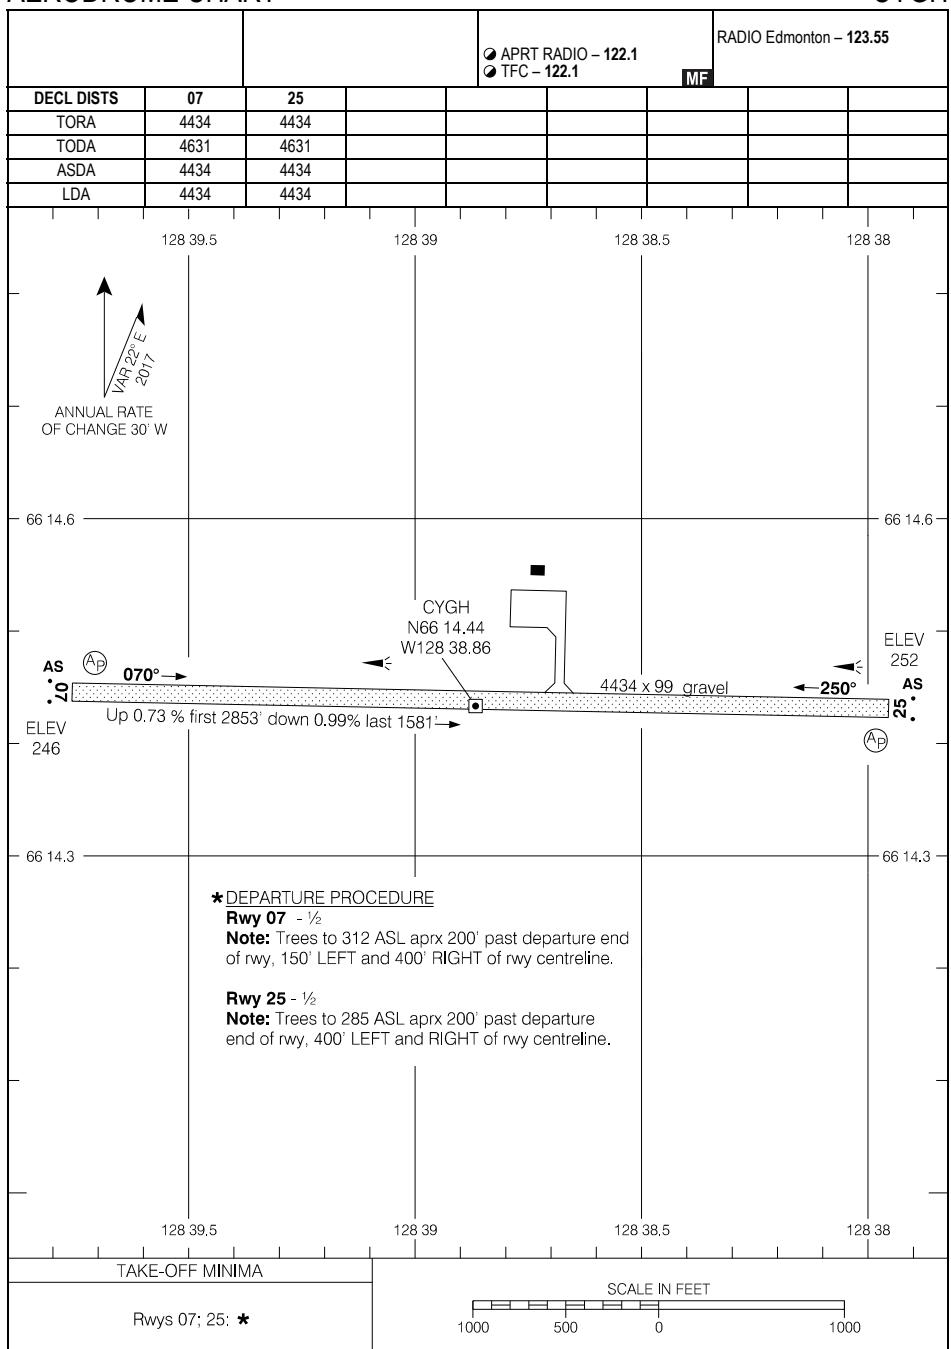

AERODROME CHART

EFF 25 JAN 24


CYGH-AD

CYGH

CYJF-AD

FORT LIARD, NT
CYJF

AERODROME CHART

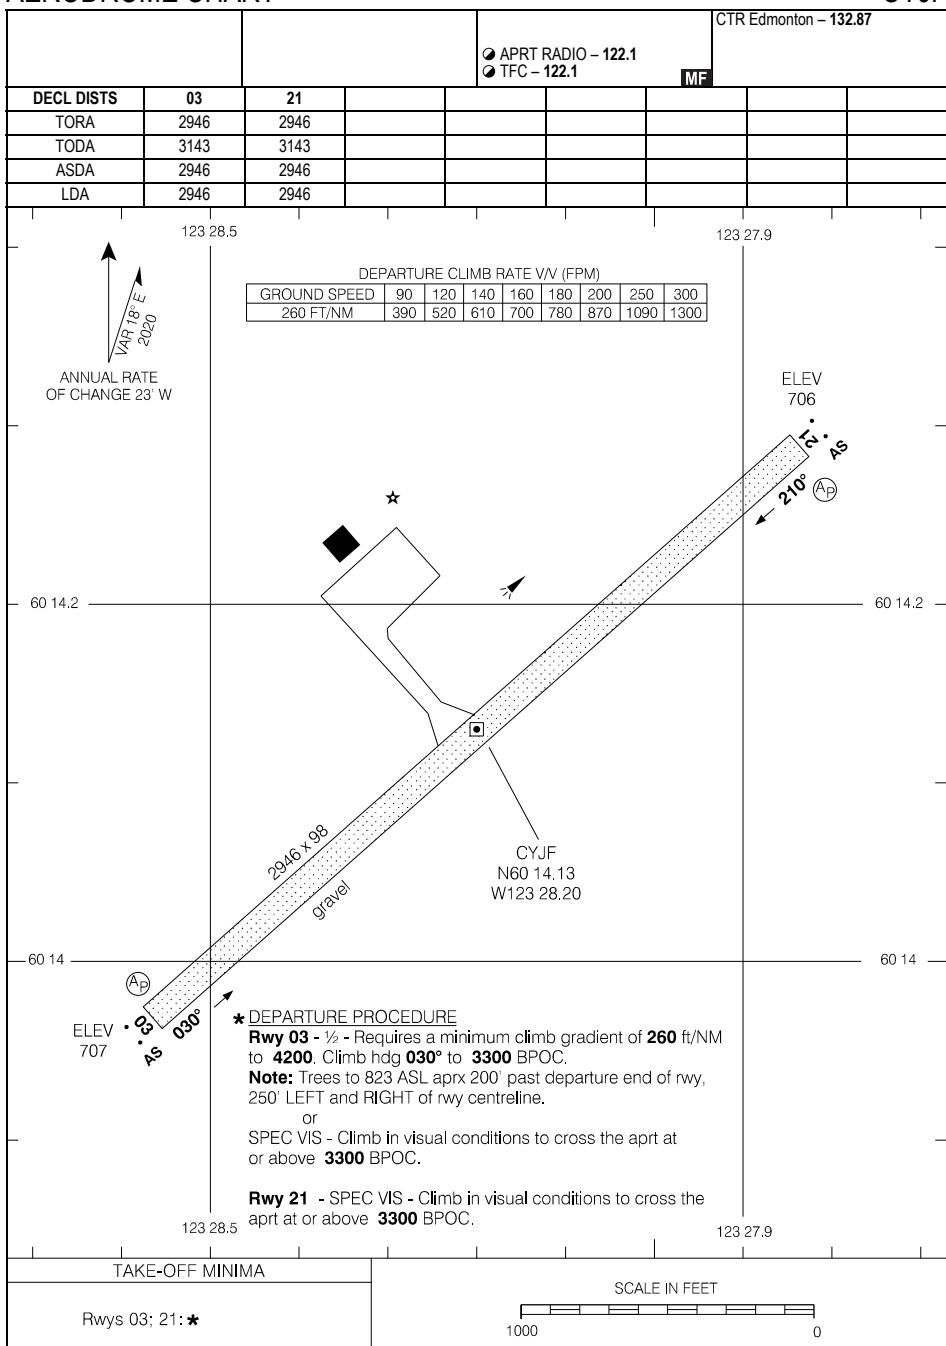

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 16 MAY 24


CYJF

CYJF-AD

CZFM-AD

FORT MCPHERSON, NT
CZFM

AERODROME CHART

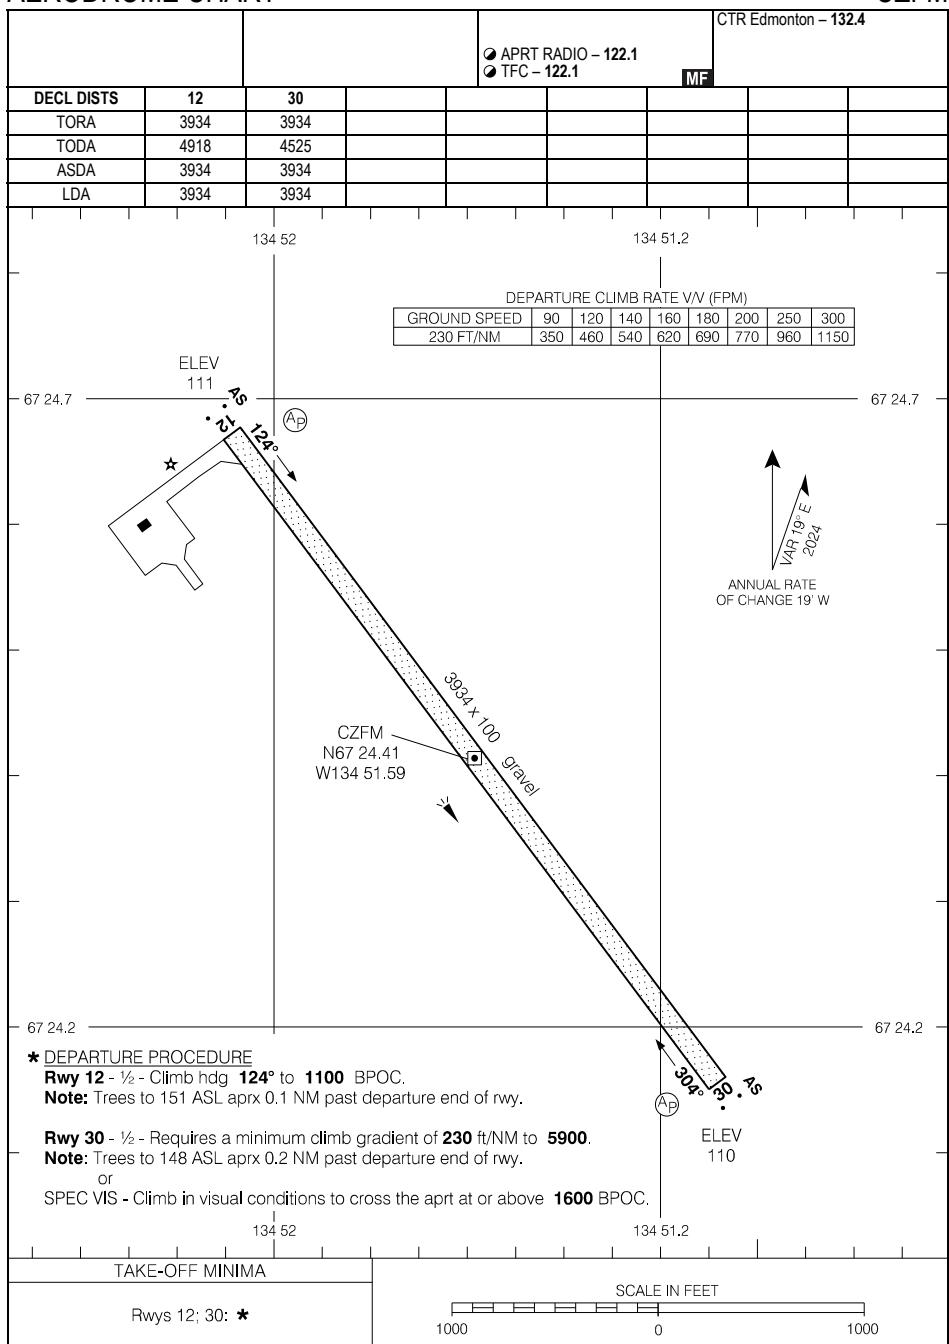

AERODROME CHART

EFF 26 DEC 24


CZFM

CZFM-AD

CYJP-AD

FORT PROVIDENCE, NT
CYJP

AERODROME CHART

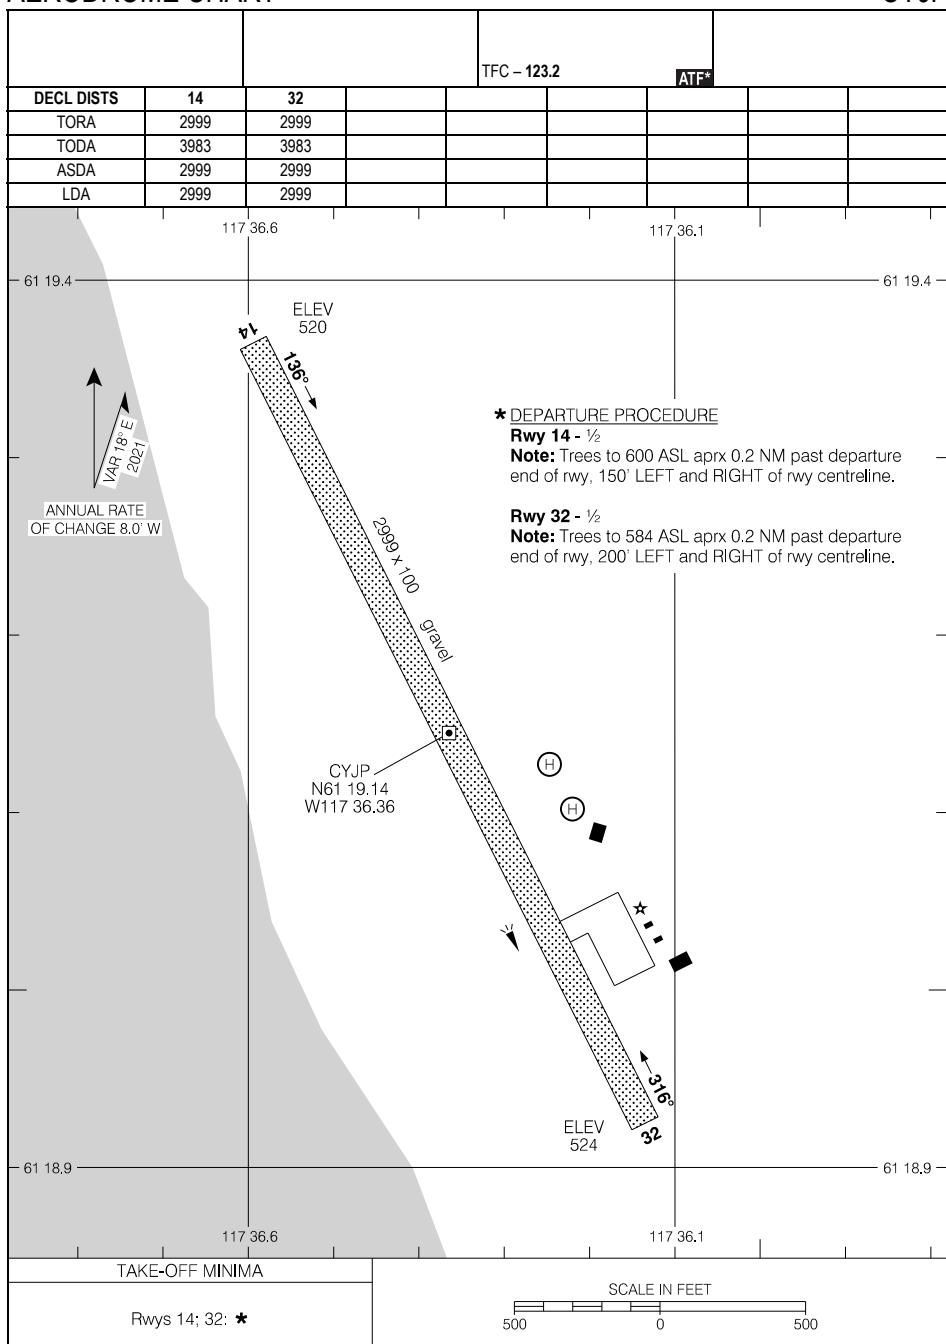

AERODROME CHART

EFF 12 AUG 21


CYJP-AD

CYJP

CYFR-AD

FORT RESOLUTION, NT
CYFR

AERODROME CHART

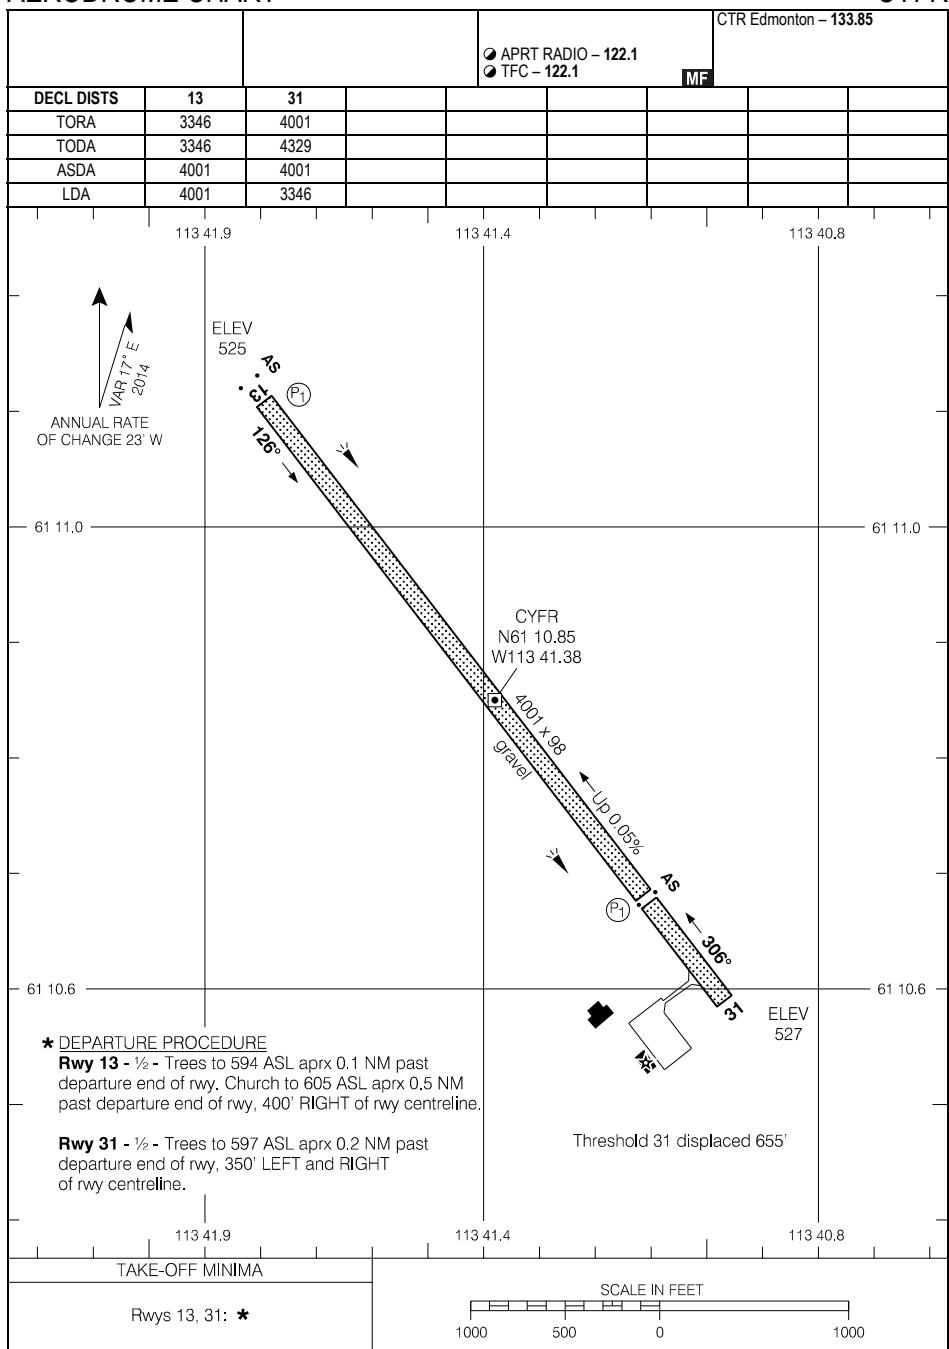


AERODROME CHART

EFF 11 JUL 24

CYFR

CYFR-AD

AERODROME CHART

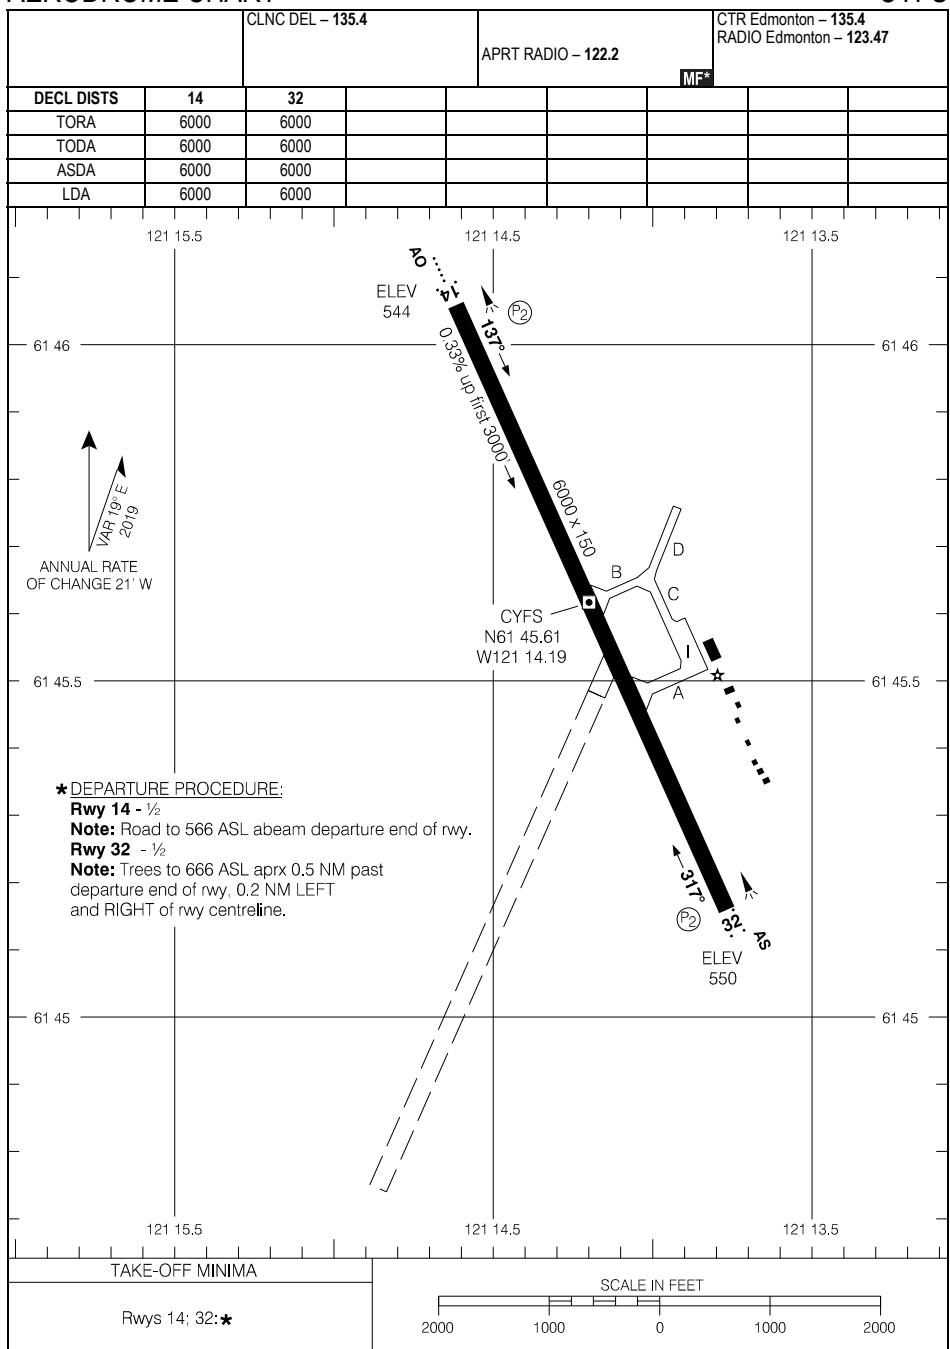

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART


EFF 12 JUN 25

CYFS

CYSM-AD

FORT SMITH, NT
CYSM

AERODROME CHART

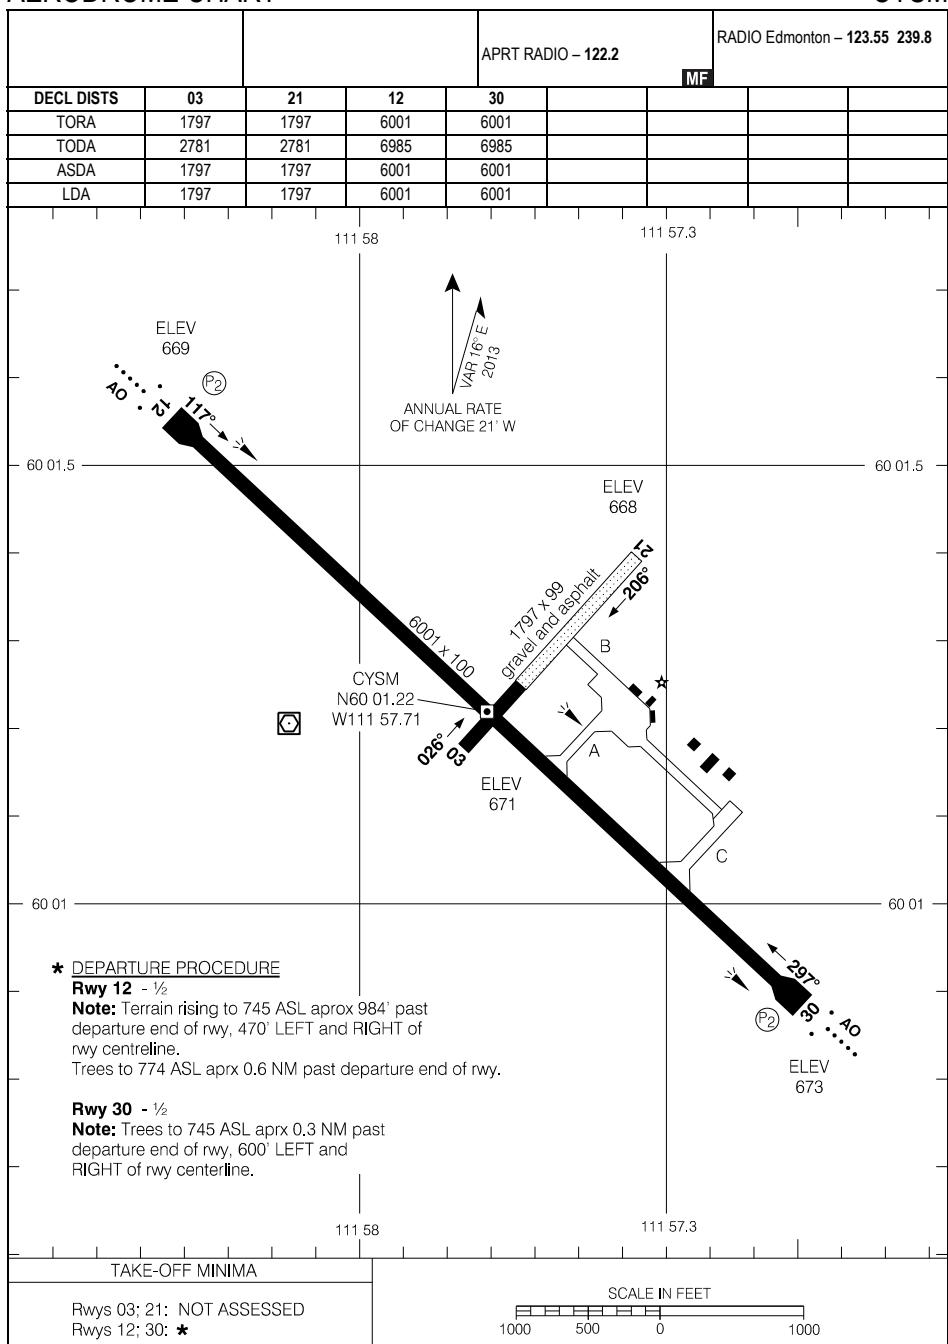

AERODROME CHART

EFF 10 AUG 23

CYSM-AD

CYSM

CGK2-AD

GAHCHO KUE, NT
CGK2

AERODROME CHART

● AWOS – 122.55				● UNICOM – 123.35 (AU)			
DECL DISTS	06	24				ATF	
TORA	5311	5311					
TODA	6295	6295					
ASDA	5505	5508					
LDA	5311	5311					

109 09.5

109 07.7

ANNUAL RATE OF CHANGE 21' W

201° 14'E

24%

ELEV 1422

P2

240° T

5311 x 148 gravel

CGK2
N63 26.12
W109 08.68

060° T

Departure not auth when blasting area active.
CAUTION: Terrain to 1805 ASL 1.2 NM west of aerodrome.

EV 07

Source of Canadian Civil Aeronaical Data: © 2020 NAV CANADA All rights reserved.

* DEPARTURE PROCEDURE

Rwy 06 - 1/2

Note: Terrain to 1441 ASL 0.2 NM past departure end of rwy, 330' RIGHT of rwy centerline. Terrain to 1457 ASL 0.3 NM past departure end of rwy, 200' RIGHT of rwy centreline.

Rwy 24 - 1/2 - Climb hdg 240° T to 2200 BPOC.

Note: Terrain to 1424 ASL 0.2 NM past departure end of rwy, 530' LEFT of rwy centerline.

109 09.5

109 07.7

TAKE-OFF MINIMA

SCALE IN FEET

Rwys 06, 24: *

1000 0 1000

AERODROME CHART

EFF 16 MAY 24


CGK2

CGK2-AD

CYRA-AD

GAMETI/RAE LAKES, NT
CYRA

AERODROME CHART

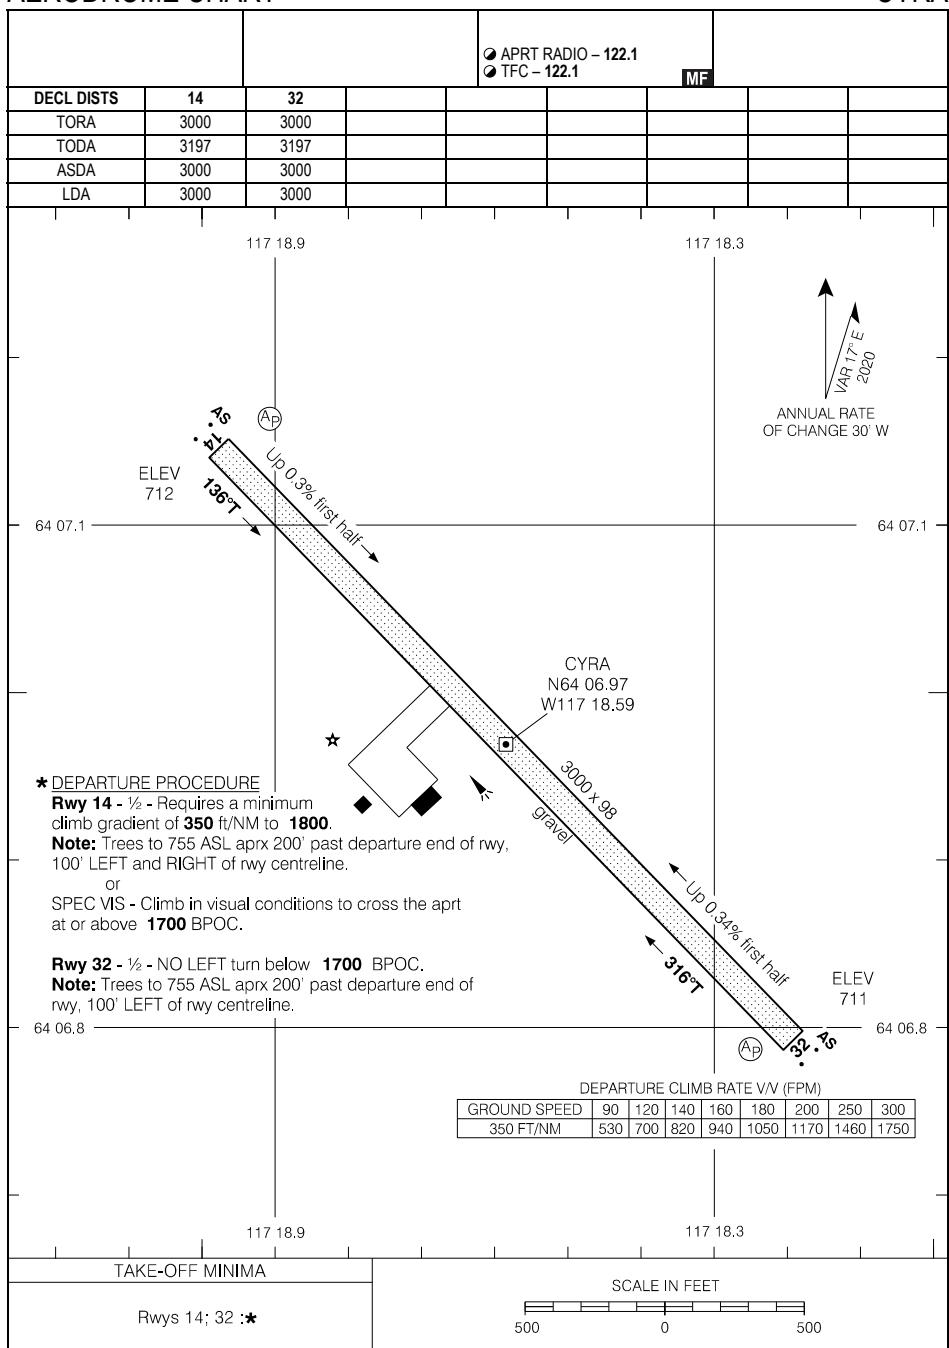


AERODROME CHART

EFF 20 FEB 25

CYRA-AD

CYRA

AERODROME CHART

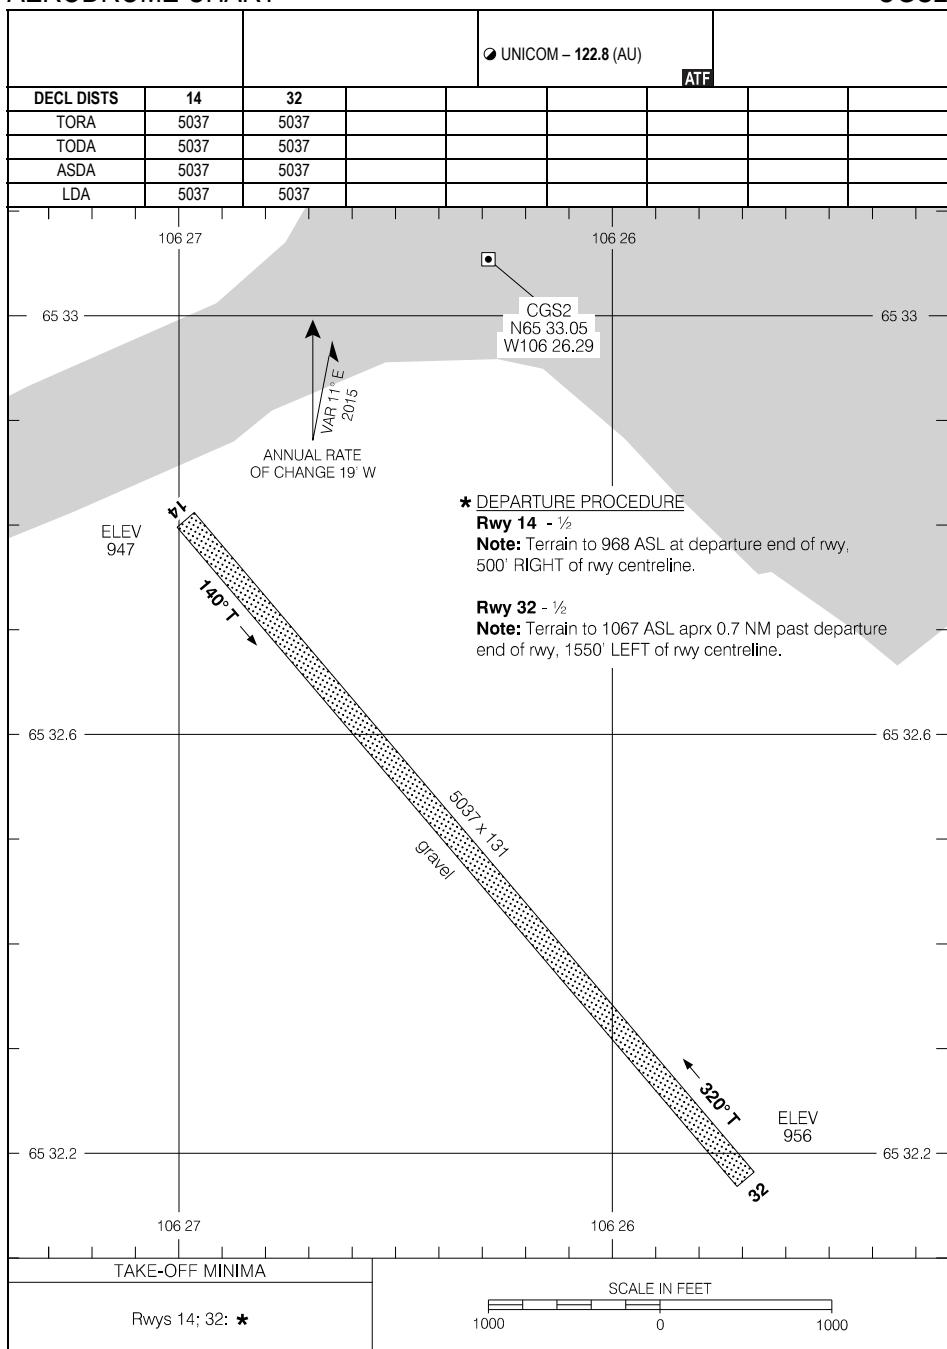

AERODROME CHART


EFF 26 DEC 24

CGS2

CYHK-AD

GJOA HAVEN, NU
CYHK

AERODROME CHART

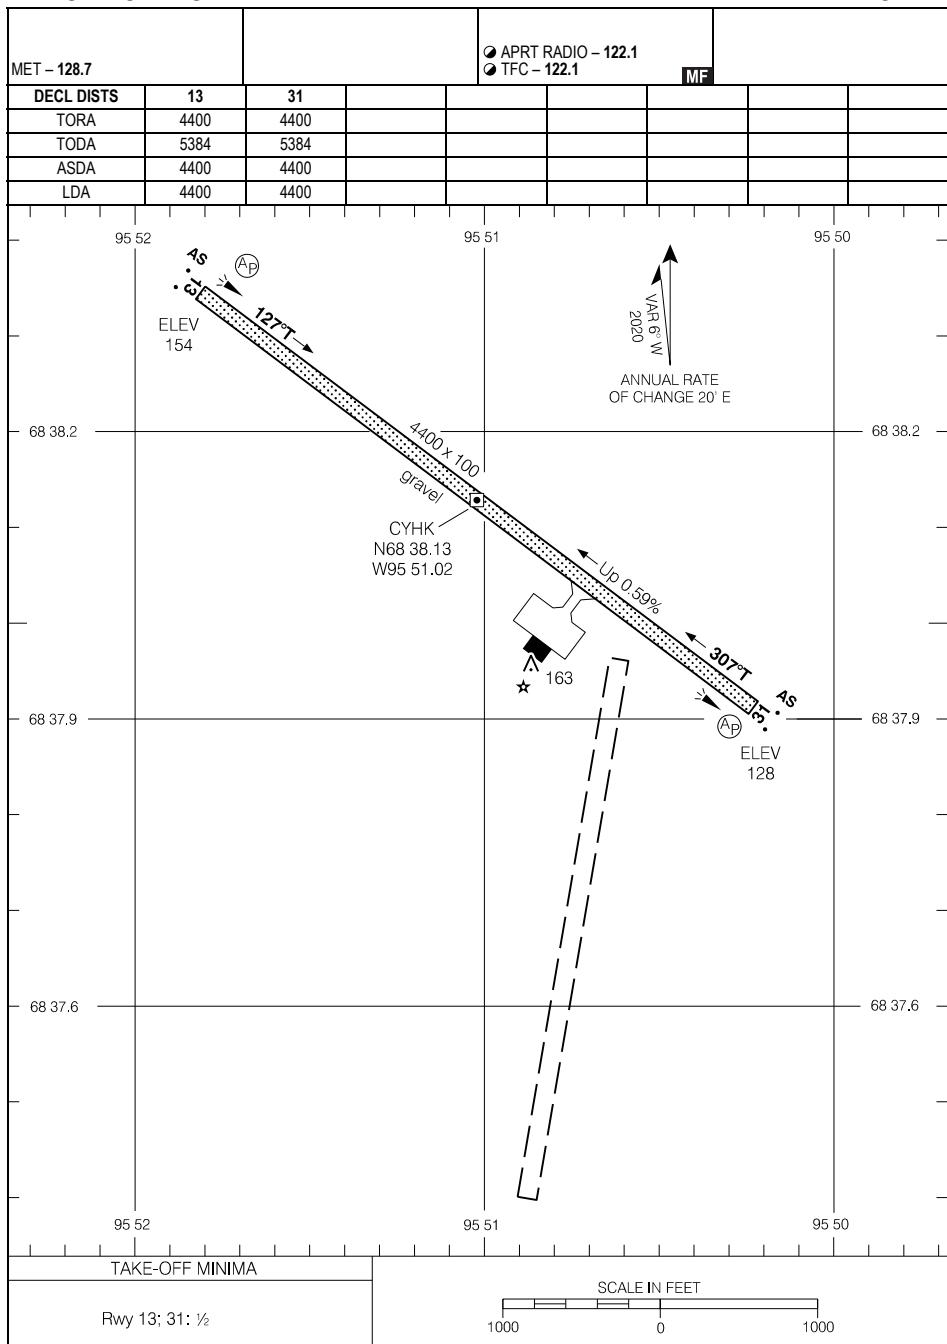

AERODROME CHART

EFF 3 NOV 22

CYHK-AD


CYHK

CYHY-AD

HAY RIVER/MERLYN CARTER AIRPORT, NT
CYHY

AERODROME CHART

	CLNC DEL – 133.85			APRT RADIO – 122.3	MF	CTR Edmonton – 133.85 RADIO Edmonton – 123.27
DECL DISTS	14	32	05	23		
TORA	6000	6000	4001	4001		
TODA	6000	6984	4985	4985		
ASDA	6000	6000	4001	4001		
LDA	6000	6000	4001	4001		

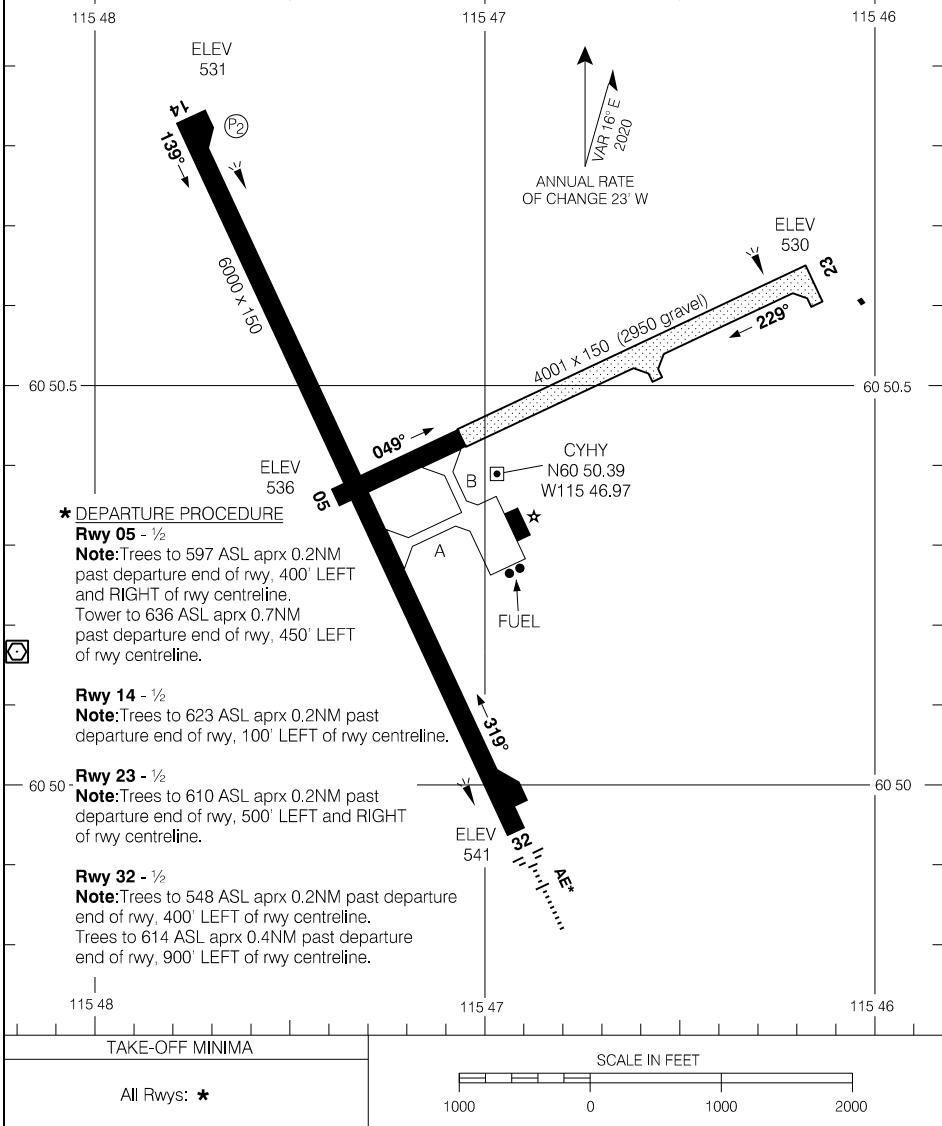

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 17 APR 25


CYHY

CYHY-AD

CYGT-AD

IGLOOLIK, NU
CYGT

AERODROME CHART

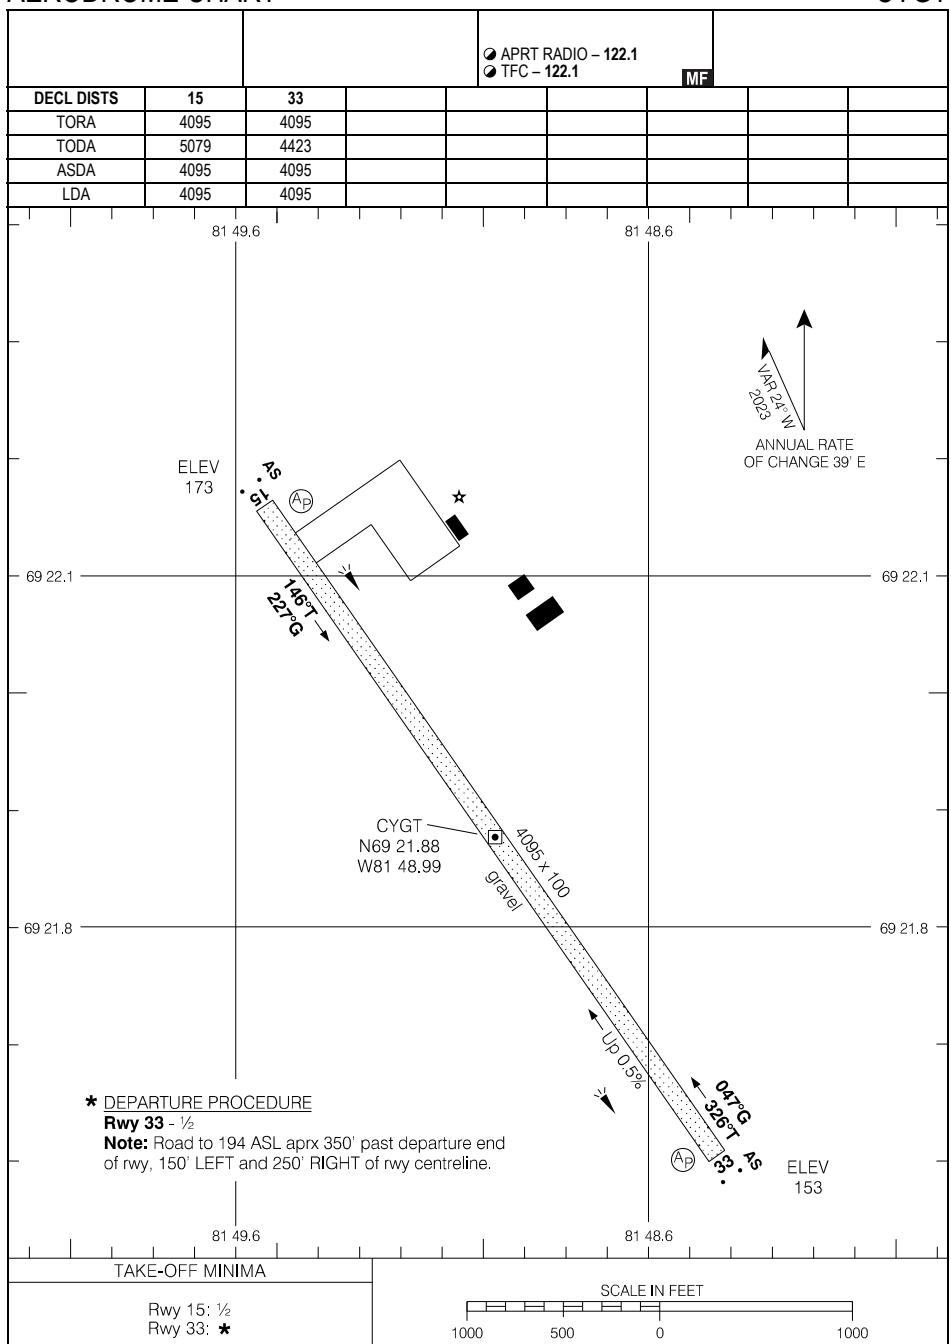

AERODROME CHART

EFF 5 OCT 23


CYGT

CYGT-AD

CYEV-AD

INUVIK (MIKE ZUBKO), NT
CYEV

AERODROME CHART

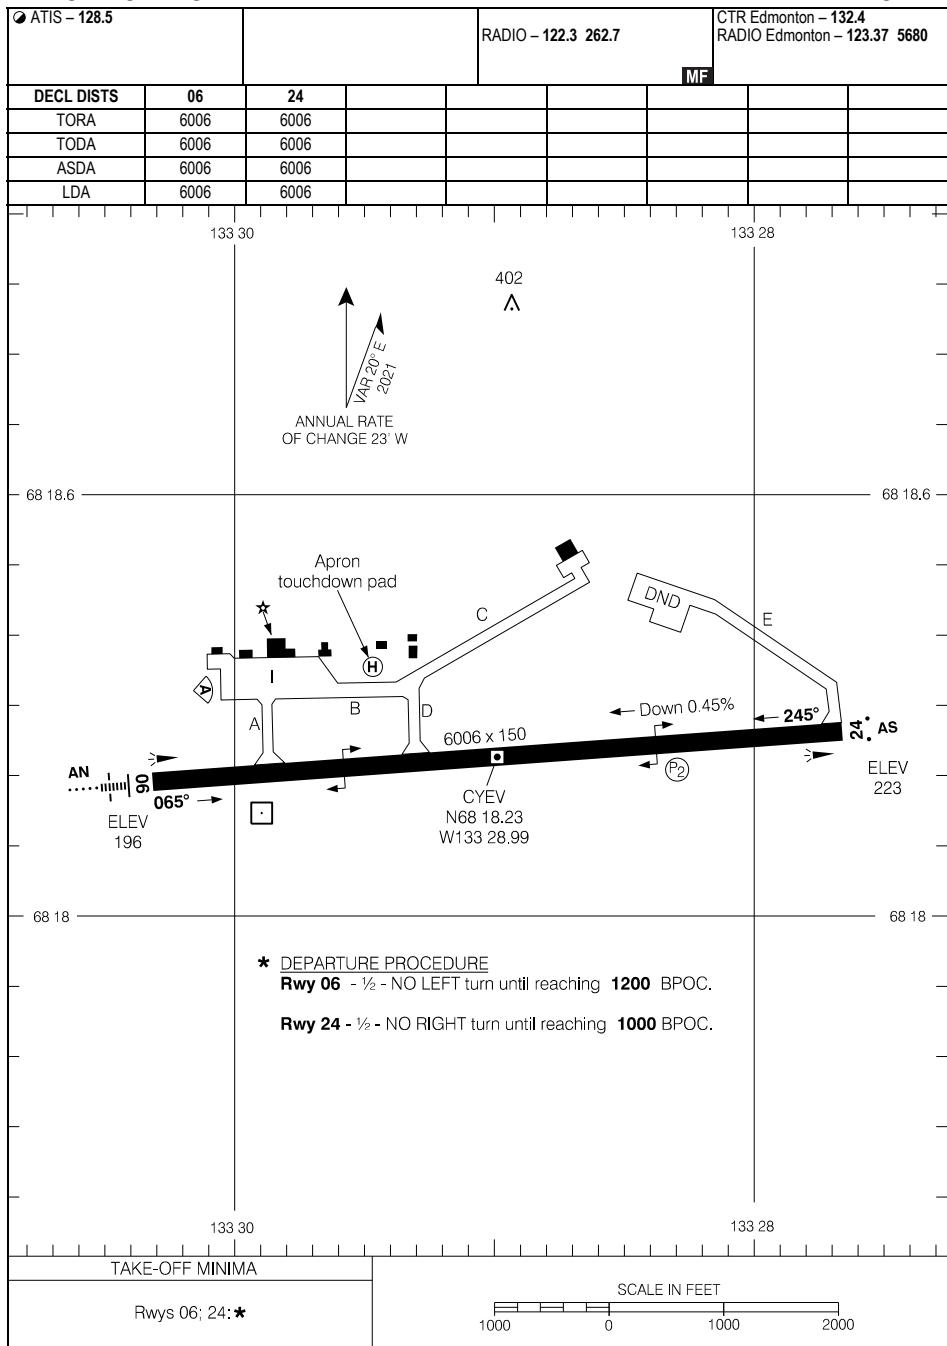

AERODROME CHART

EFF 20 FEB 25

CYEV-AD

CYEV

AERODROME CHART (AI)

ADDITIONAL INFORMATION


- Pre-taxi clearance is available for up to 1 hr prior to departure. Pilots will receive clearance validation or an amended clearance when ready to taxi. Pilots must ensure that they have received clearance validation prior to take off.
- Expect ALL IFR departures to be assigned a SID that corresponds to the requested departure runway. Pilots are to be familiar with both the ALREX and ITRUS SIDs in case of a short notice change in the operational runway.
- Transient operators should familiarize themselves with receiving aerodrome advisory services as opposed to an aerodrome control service. Aerodrome advisory services (AAS) are primarily intended for the arrival and departure phases of a flight to an aerodrome within a Mandatory Frequency (MF) area, and for transit through an MF area, served by a Flight service station (FSS). AAS is provided on the MF. Mandatory reports by aircraft on the MF are critical for the FSS to be able to provide effective air traffic information. Additional details regarding AAS and MF are available within the TC AIM.

AERODROME CHART (AI)

EFF 11 JUL 24

CYFB

AERODROME CHART

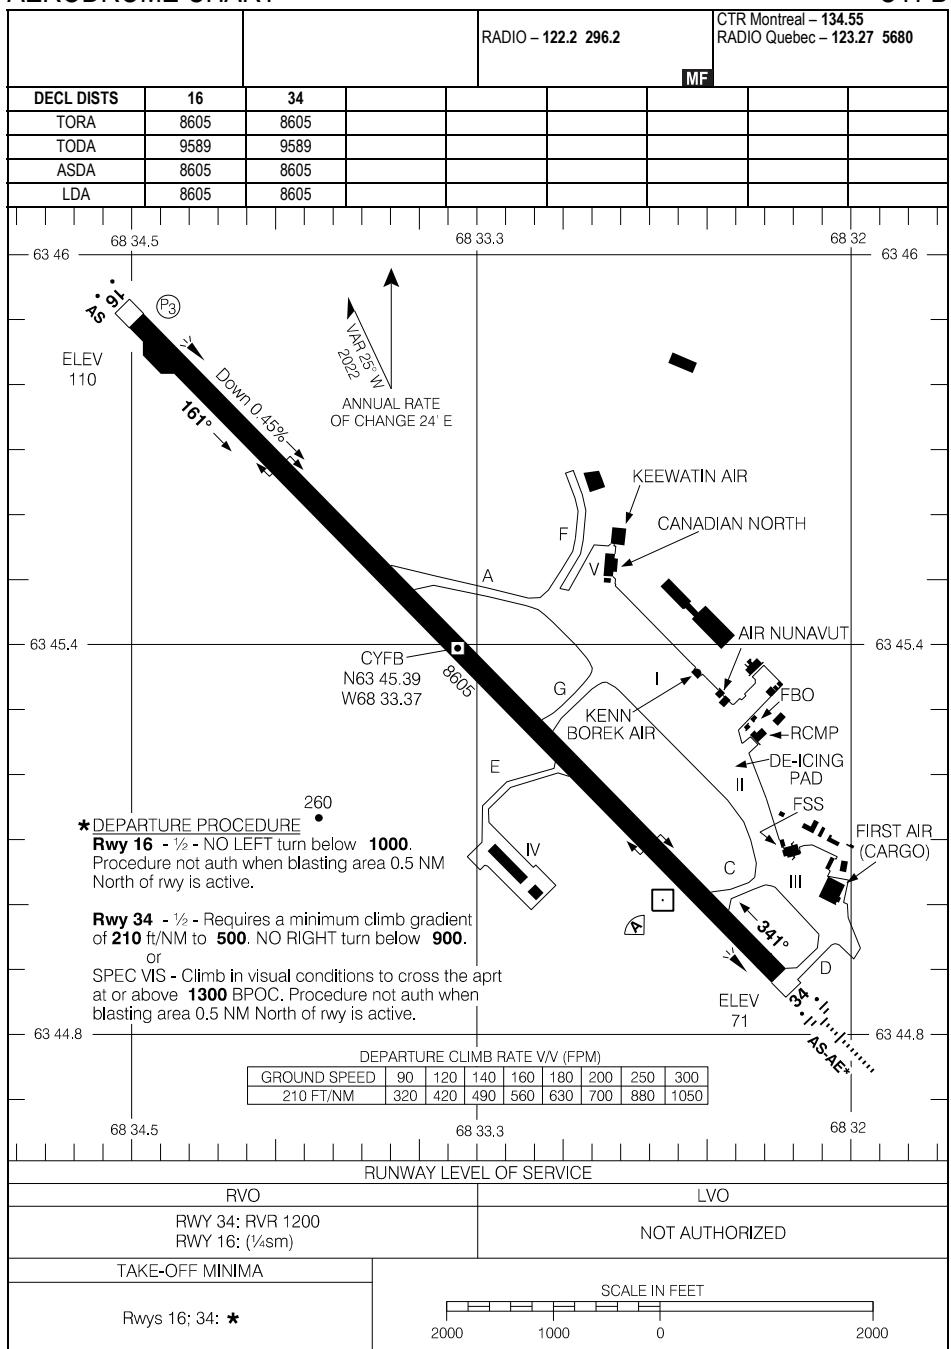

AERODROME CHART


EFF 17 APR 25

CYFB

CET9-AD

JEAN MARIE RIVER, NT
CTR Edmonton - 135.4
CET9

AERODROME CHART

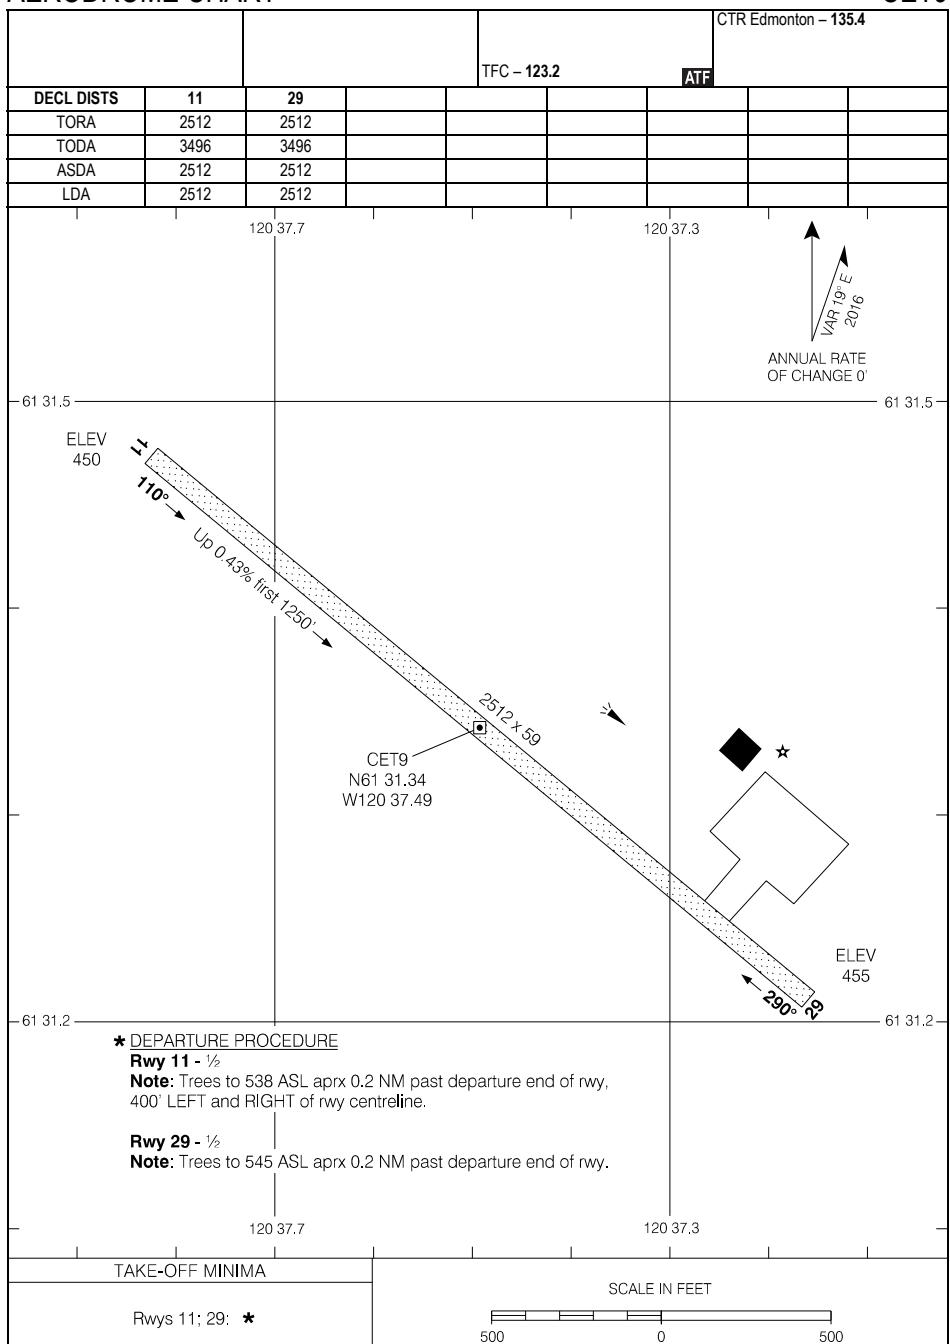

AERODROME CHART

EFF 15 JUN 23


CET9

CET9-AD

CYLC-AD

KIMMIRUT, NU
CYLC

AERODROME CHART

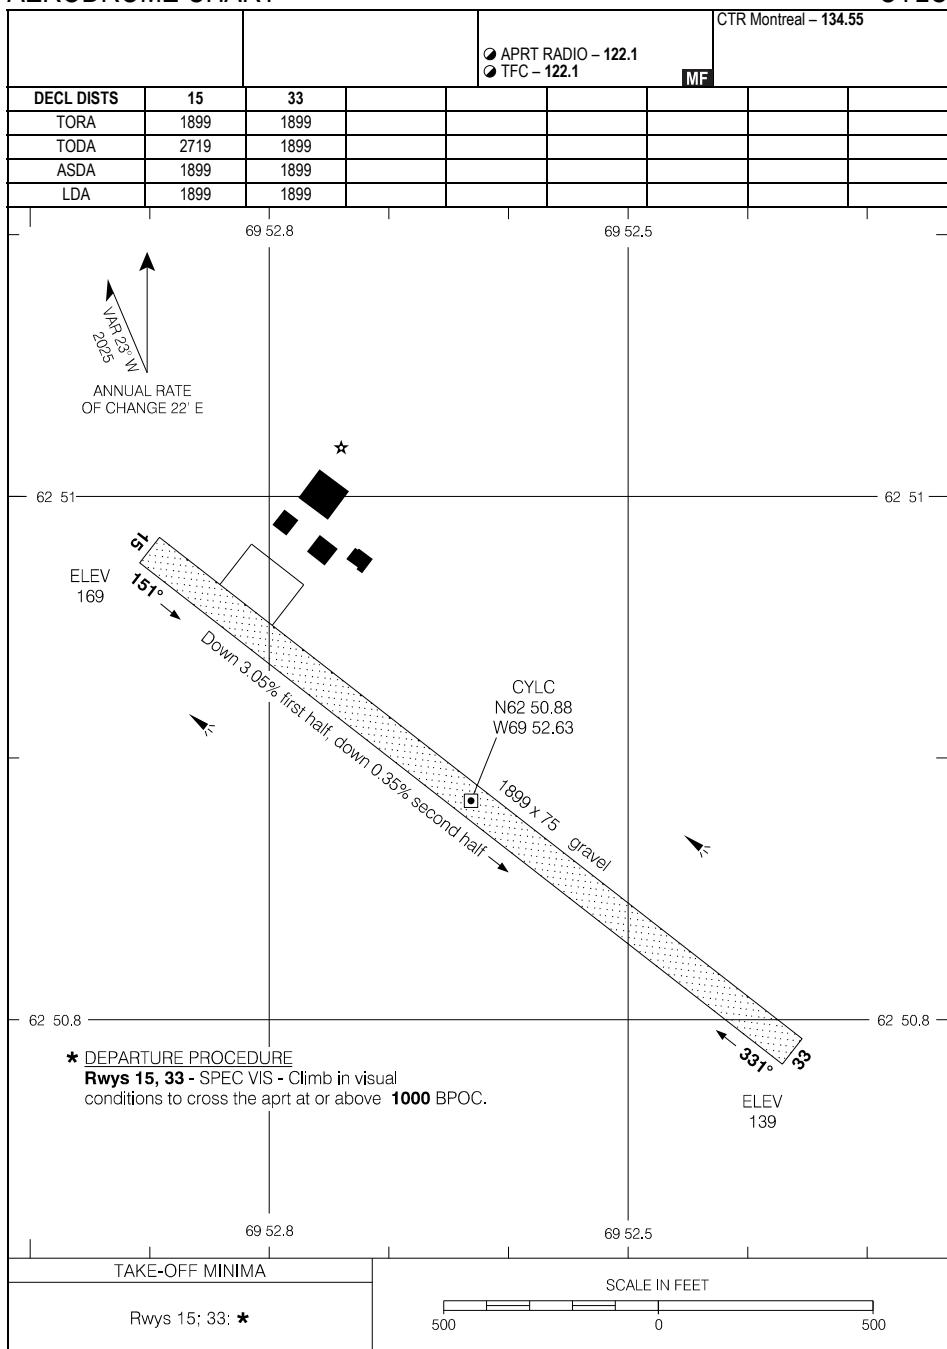


AERODROME CHART

EFF 20 FEB 25

CYLC

CYLC-AD


AERODROME CHART

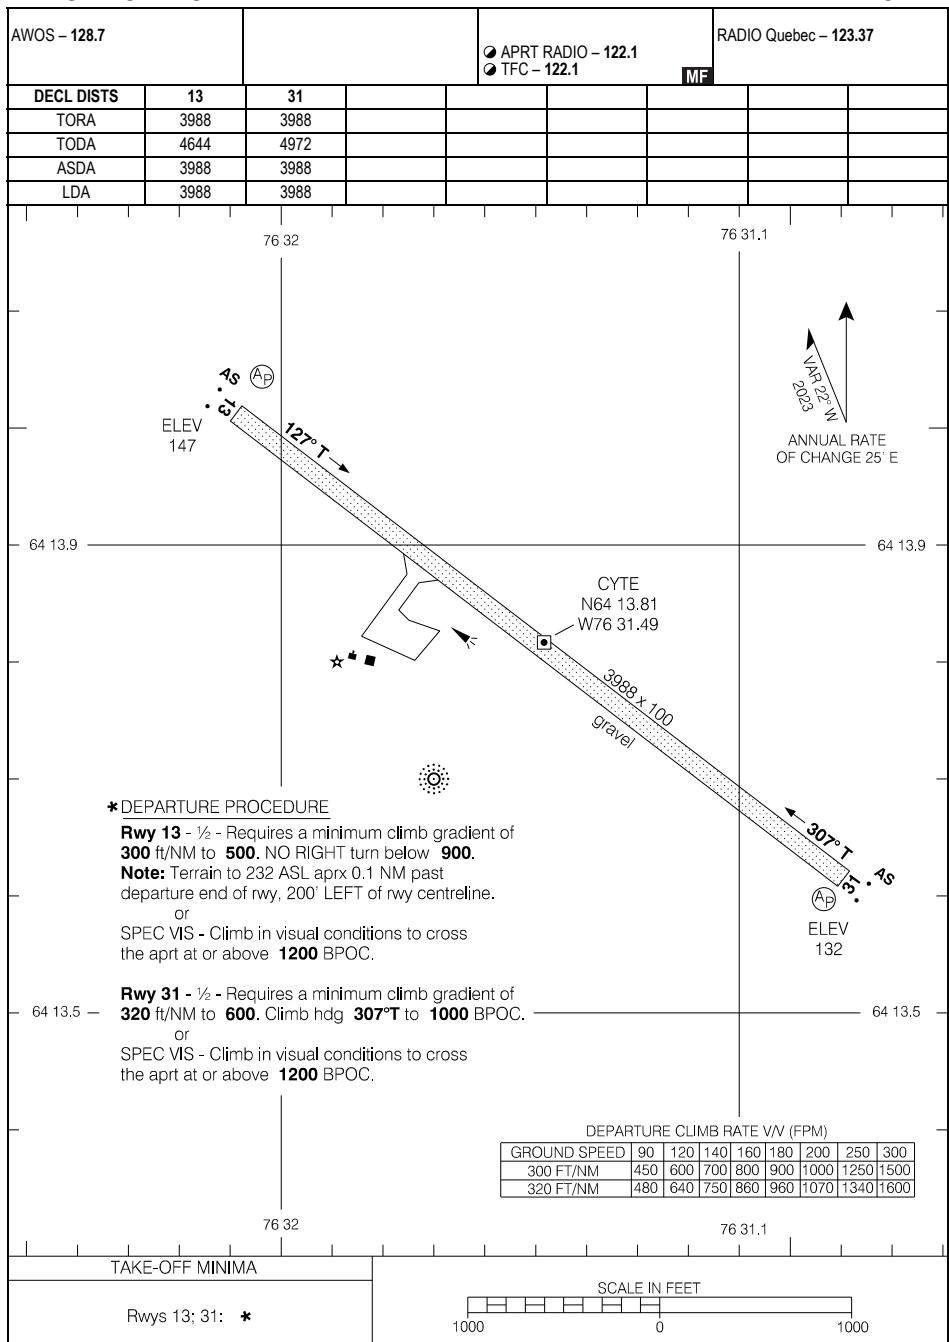

CYBB-AD

KUGAARUK, NU
CYBB

AERODROME CHART

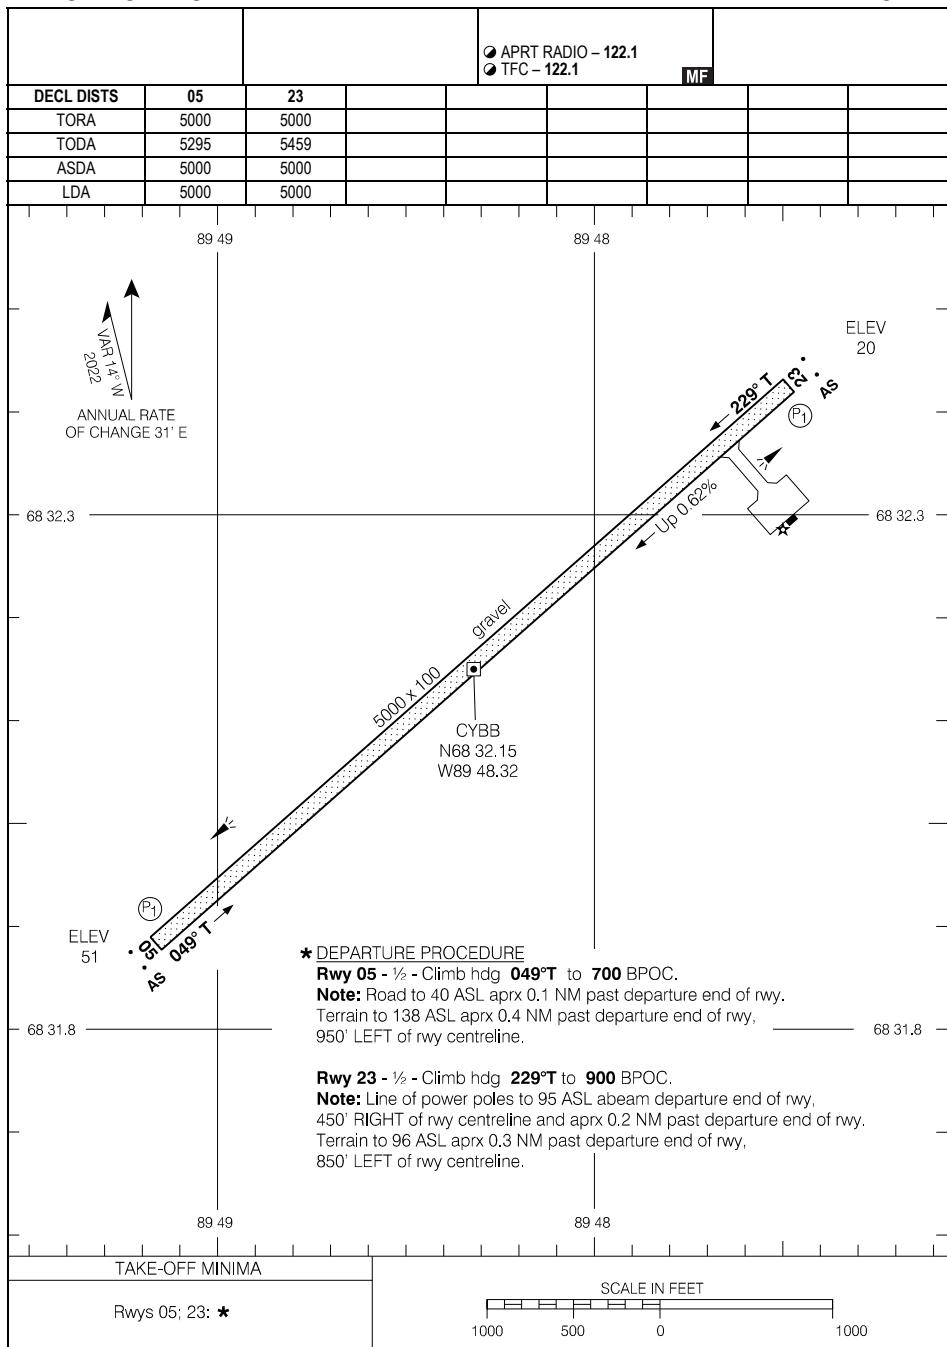

AERODROME CHART

EFF 29 DEC 22


CYBB-AD

CYBB

CYCO-AD

KUGLUKTUK, NU
CYCO

AERODROME CHART

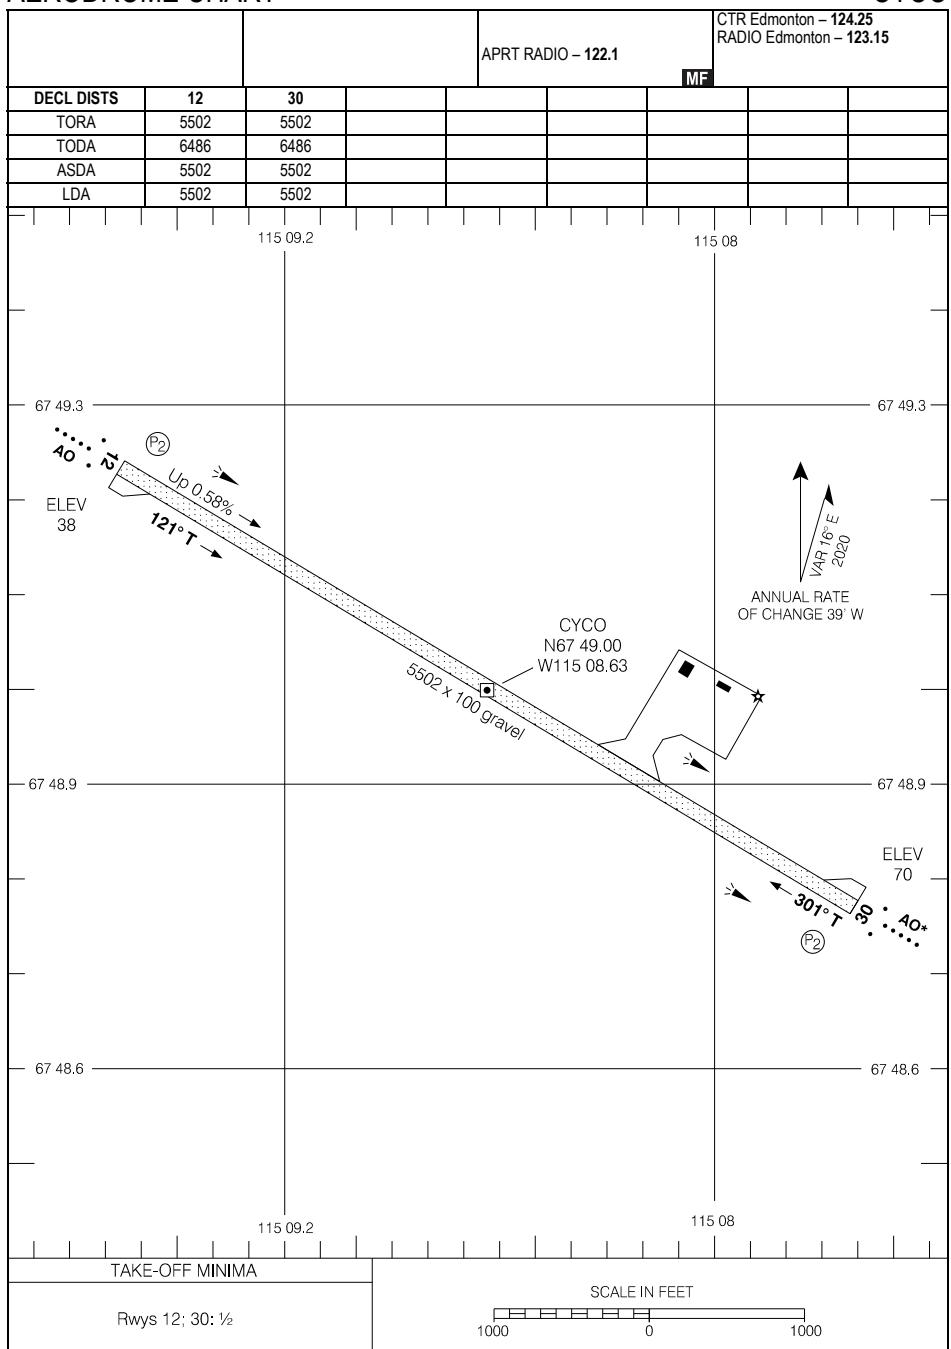

AERODROME CHART

EFF 30 NOV 23


CYCO

CYCO-AD

CYLK-AD

LUTSELK'E, NT
CYLK

AERODROME CHART

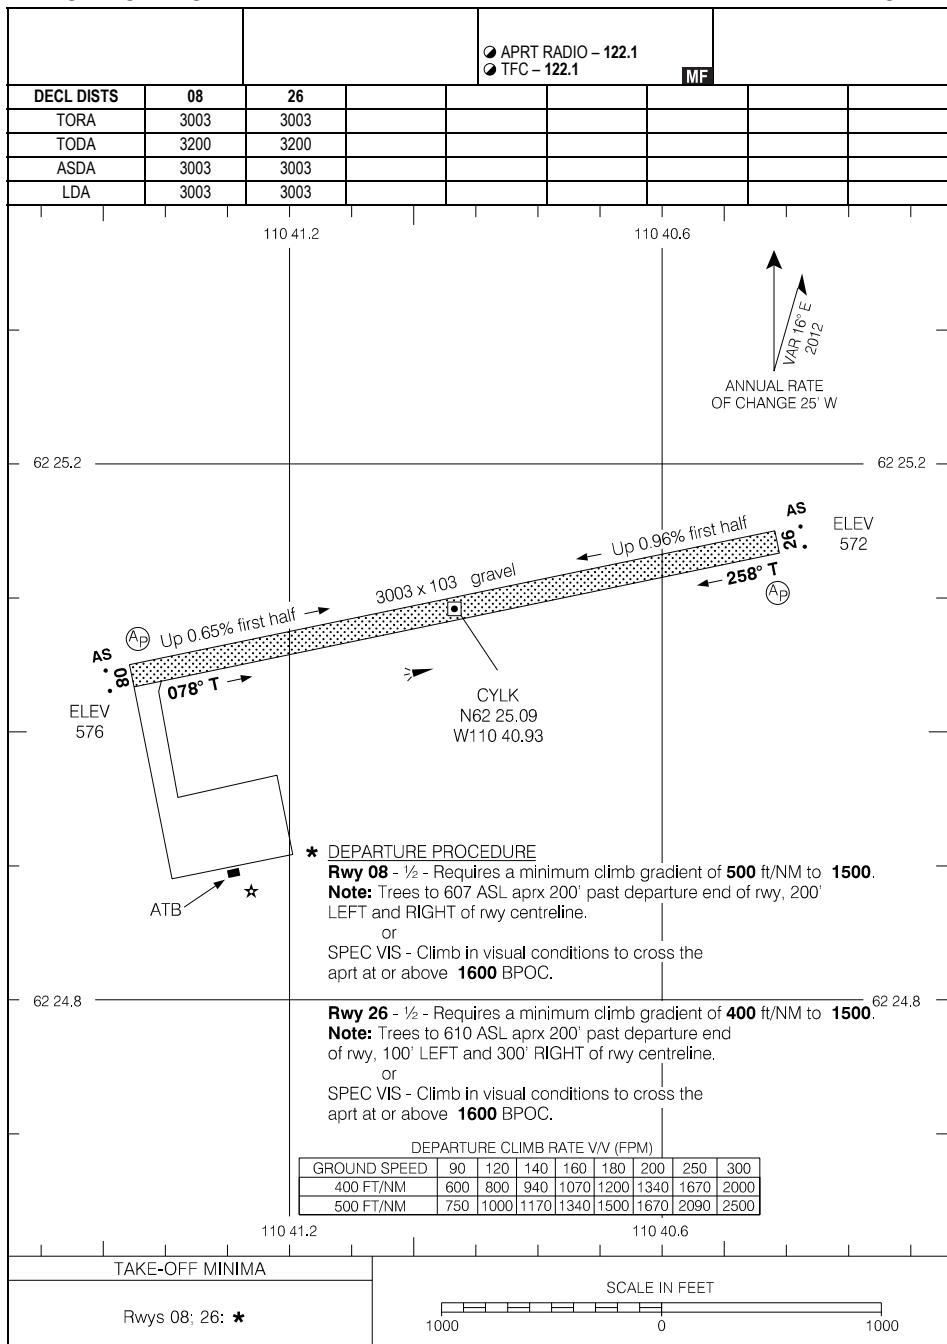


AERODROME CHART

EFF 7 AUG 25

CYLK-AD

CYLK

AERODROME CHART

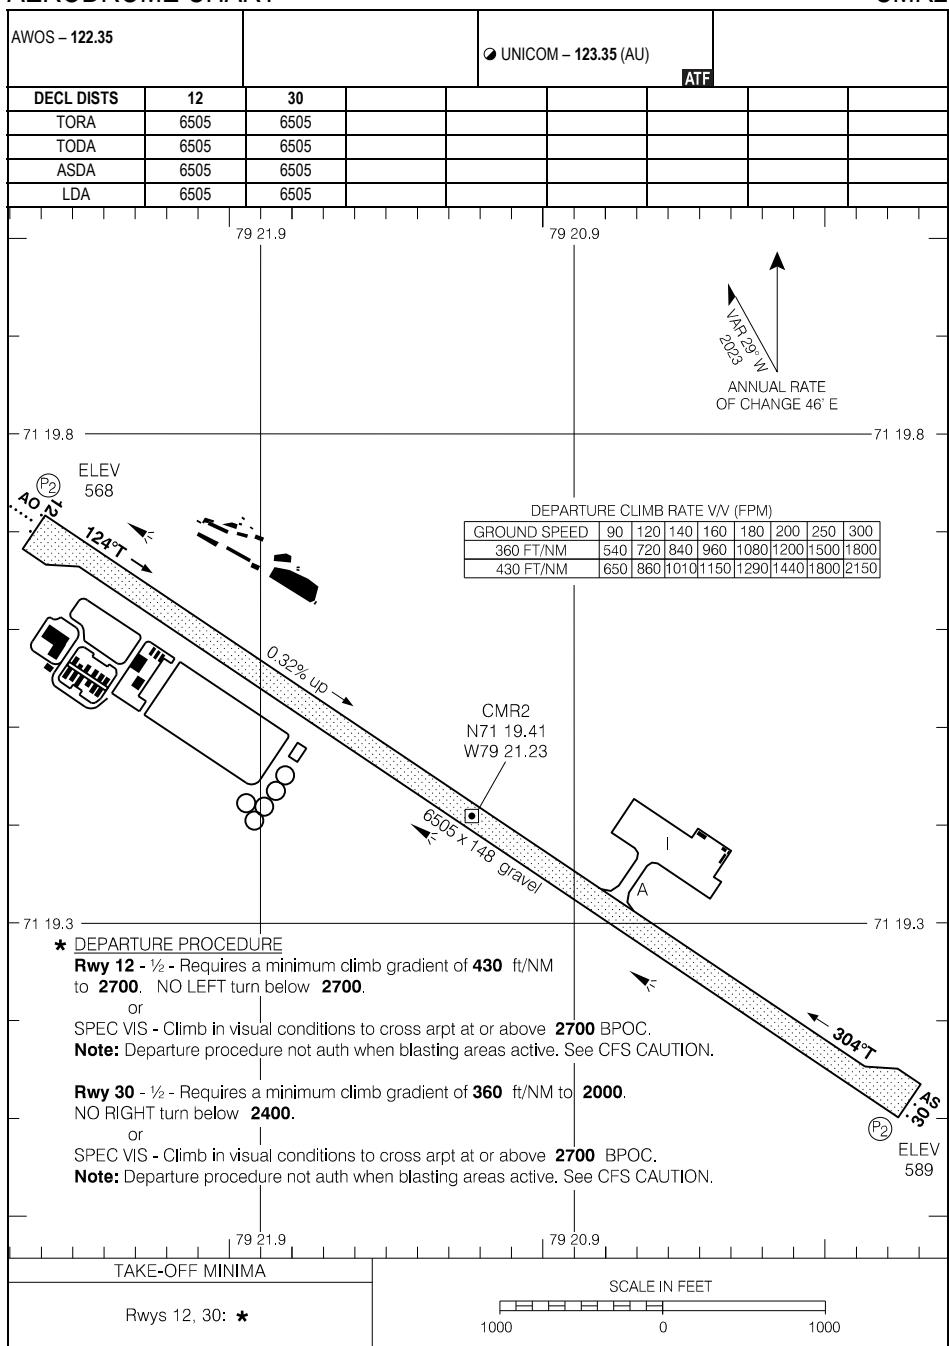


AERODROME CHART

EFF 20 APR 23

CMR2

AERODROME CHART

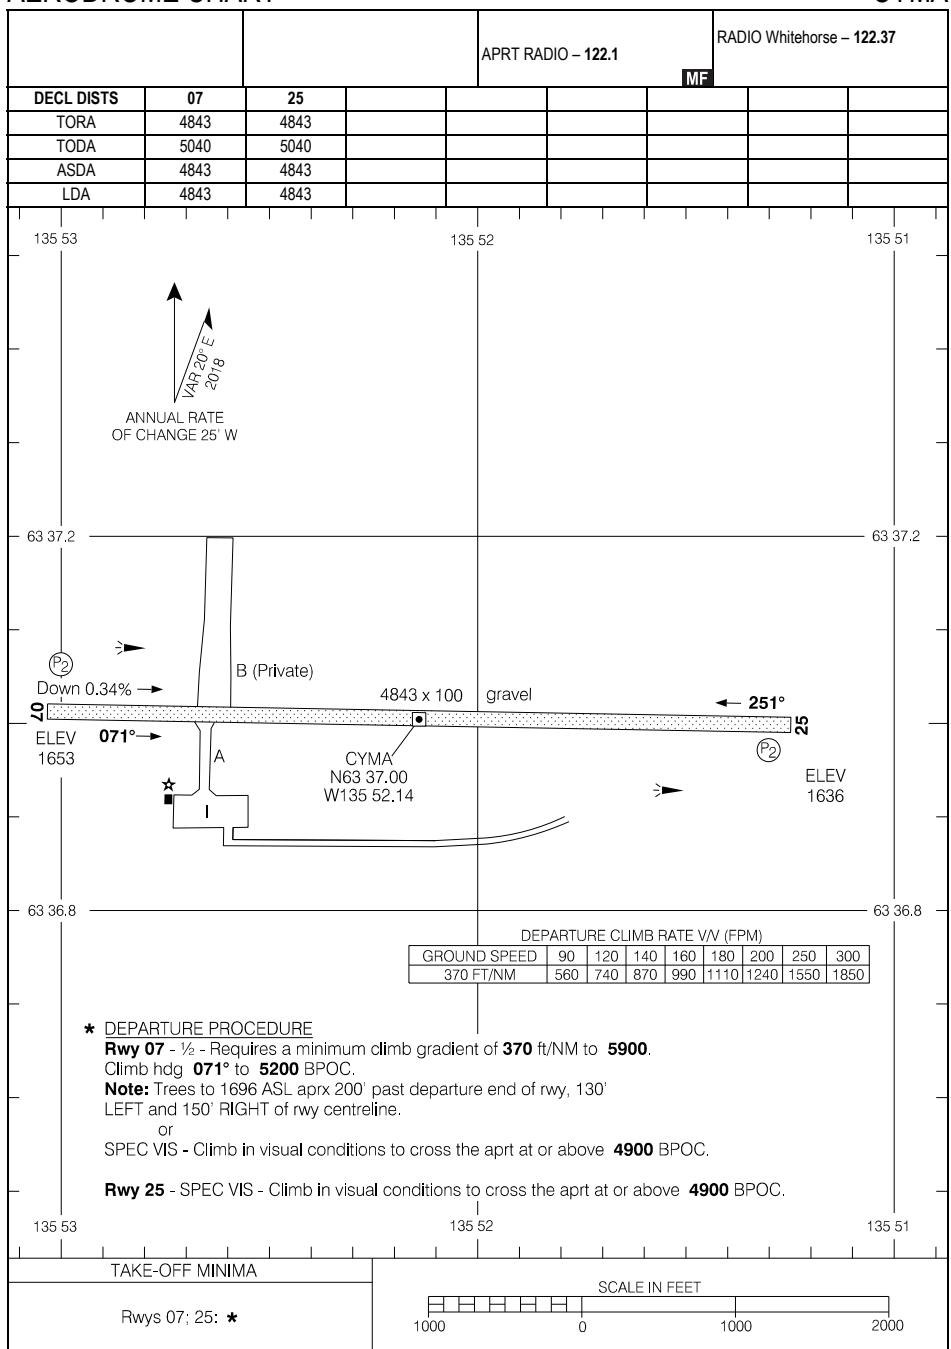

AERODROME CHART


EFF 10 AUG 23

CYMA

CBD6-AD

NAHANNI BUTTE, NT
CBD6

AERODROME CHART

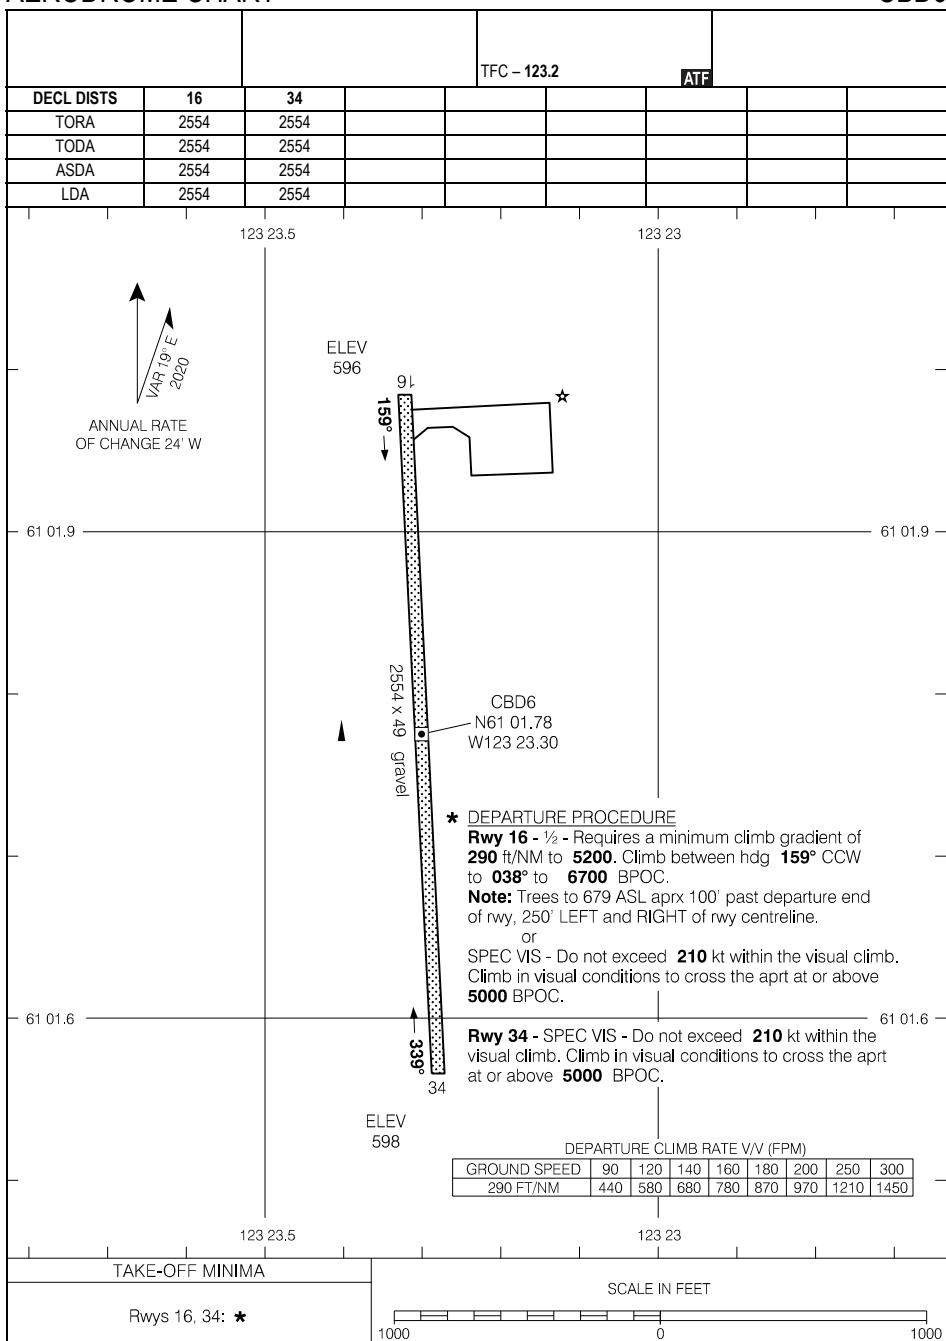

AERODROME CHART

EFF 8 SEP 22


CBD6

CBD6-AD

CYUT-AD

NAUJAAT, NU
CYUT

AERODROME CHART

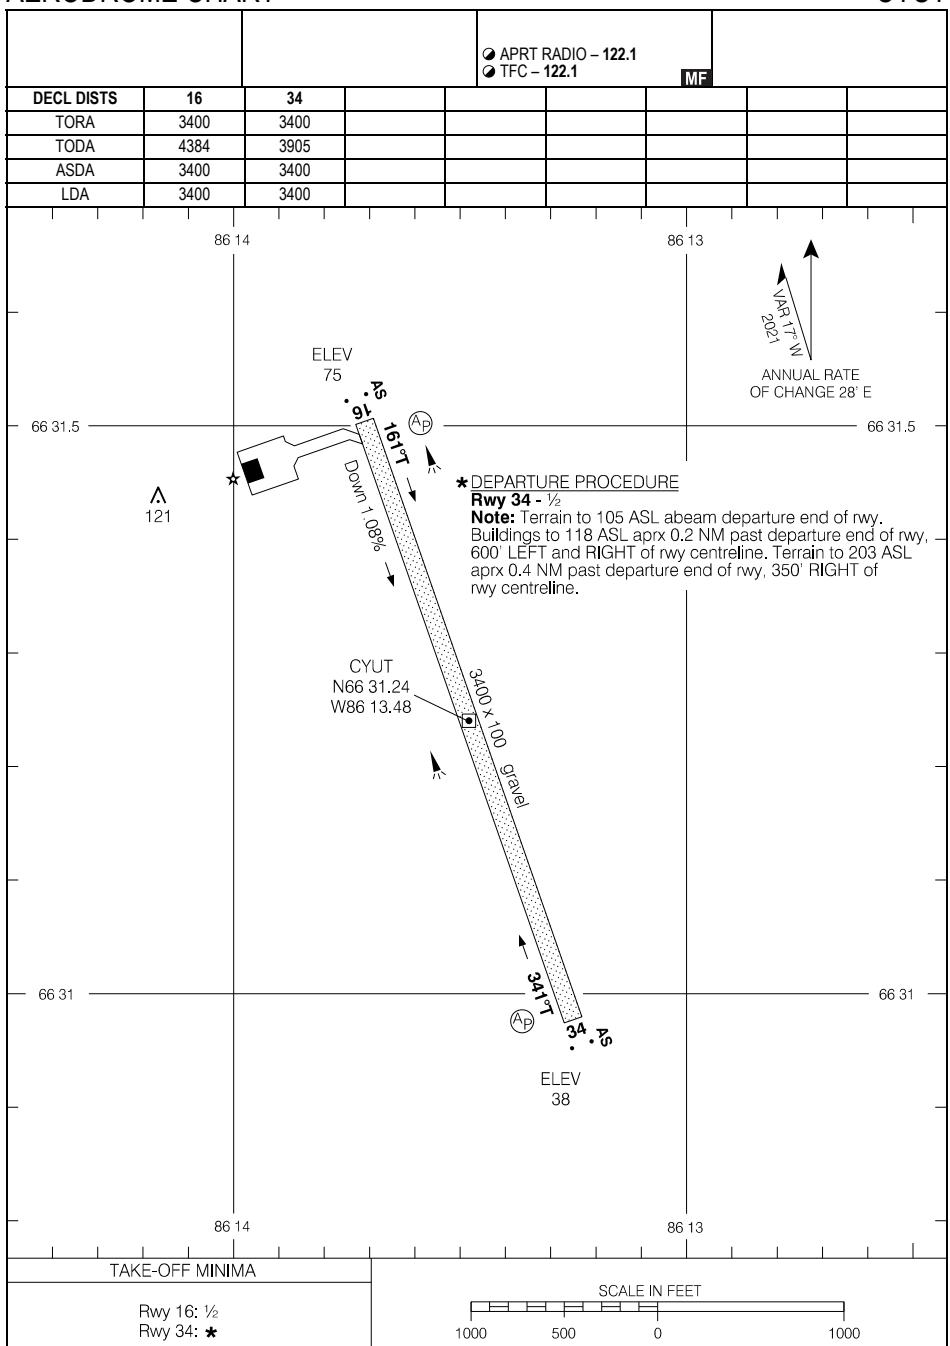

AERODROME CHART

EFF 20 APR 23


CYUT-AD

CYUT

CYVQ-AD

NORMAN WELLS, NT
CYVQ

AERODROME CHART

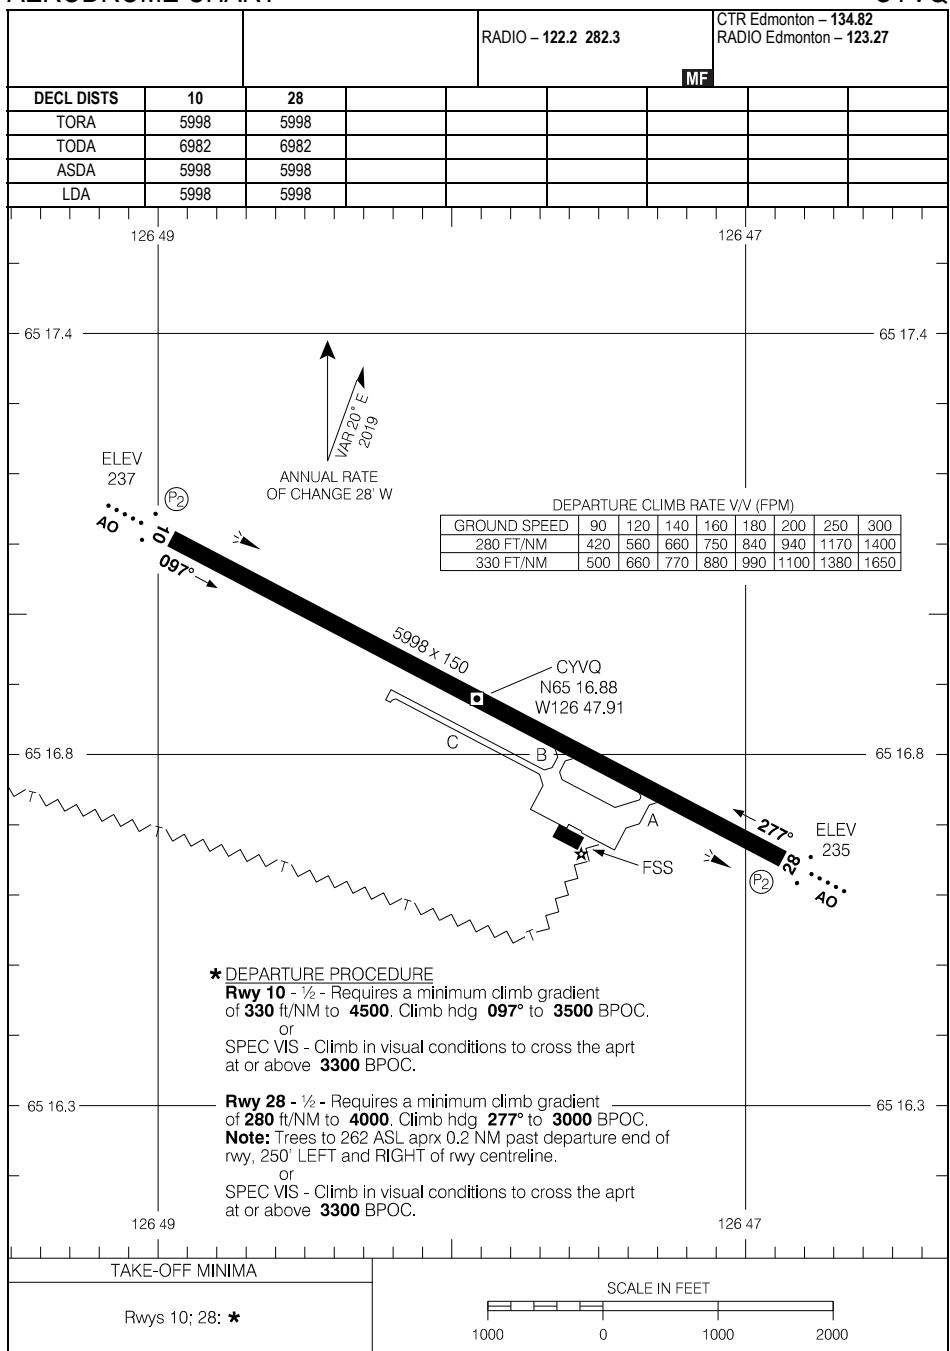


AERODROME CHART

EFF 14 JUL 22

CYVQ-AD

CYVQ

AERODROME CHART

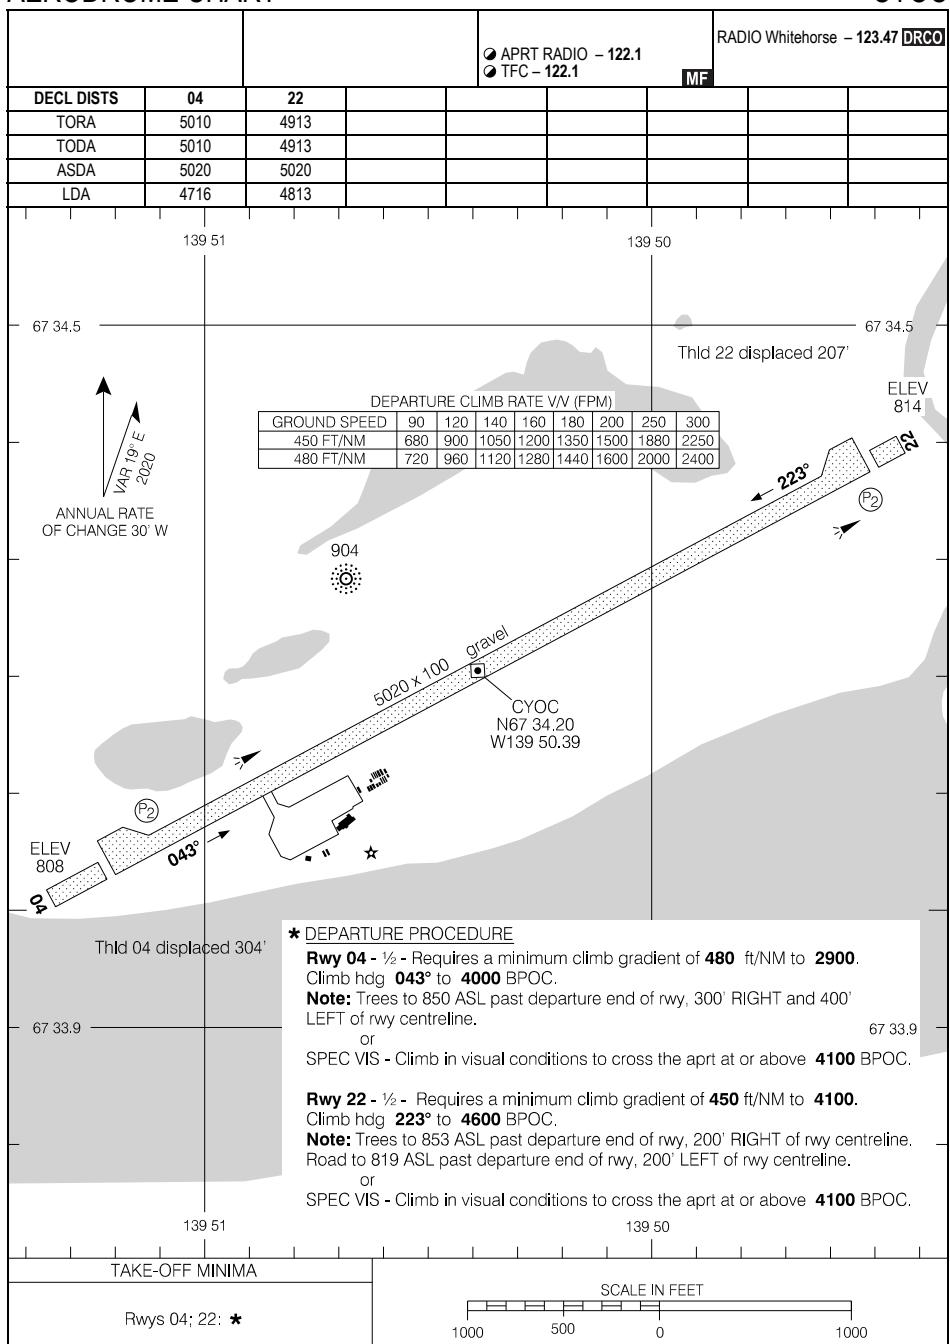

AERODROME CHART


EFF 26 DEC 24

CYOC

CYXP-AD

PANGNIRTUNG, NU
CYXP

AERODROME CHART

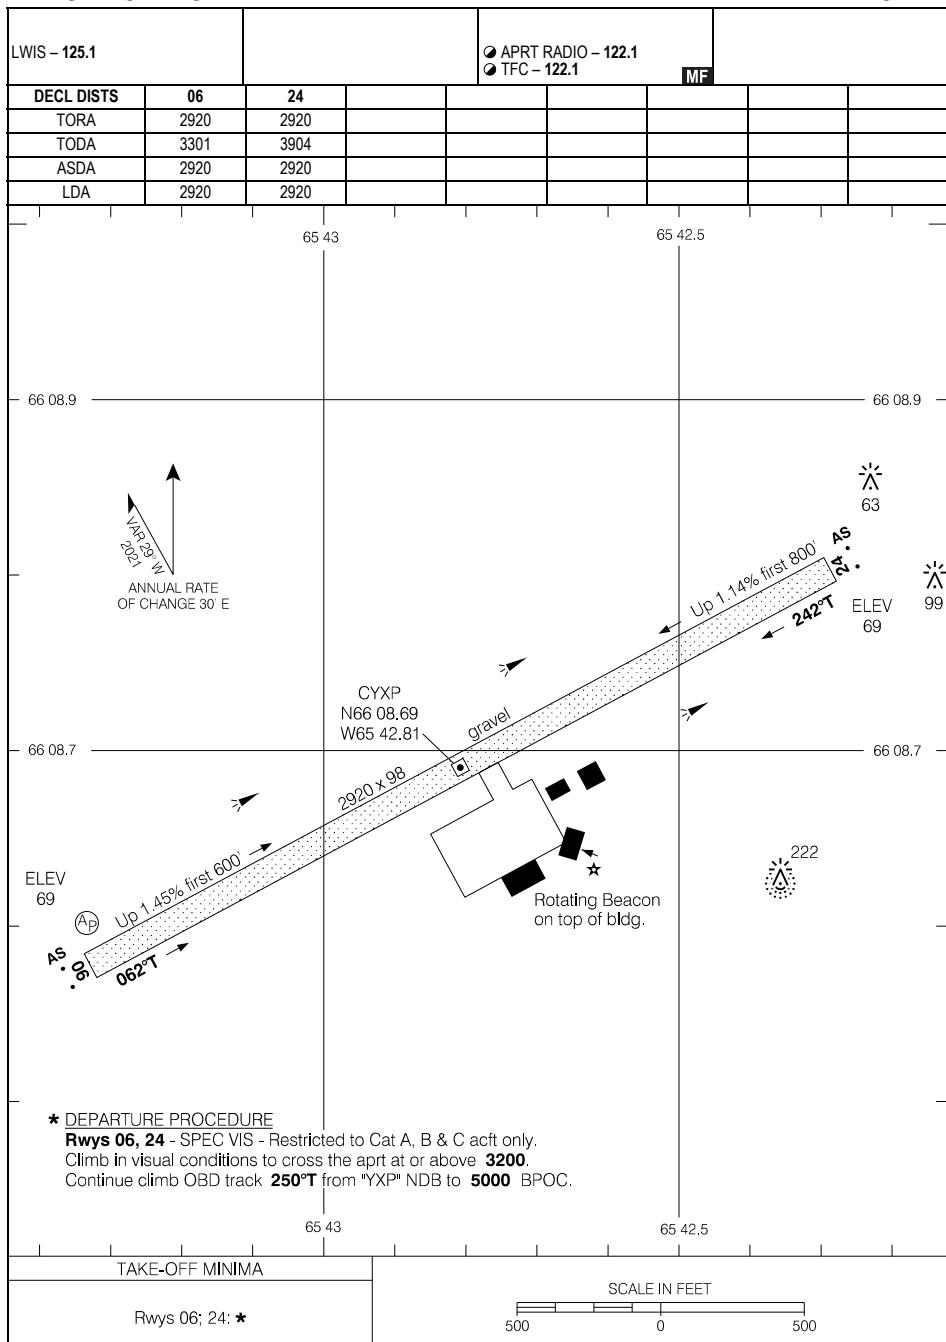

AERODROME CHART

EFF 10 AUG 23


CYXP

CYXP-AD

CYPC-AD

PAULATUK (NORA ALIQATCHIALUK RUBEN), NT
CYPC

AERODROME CHART

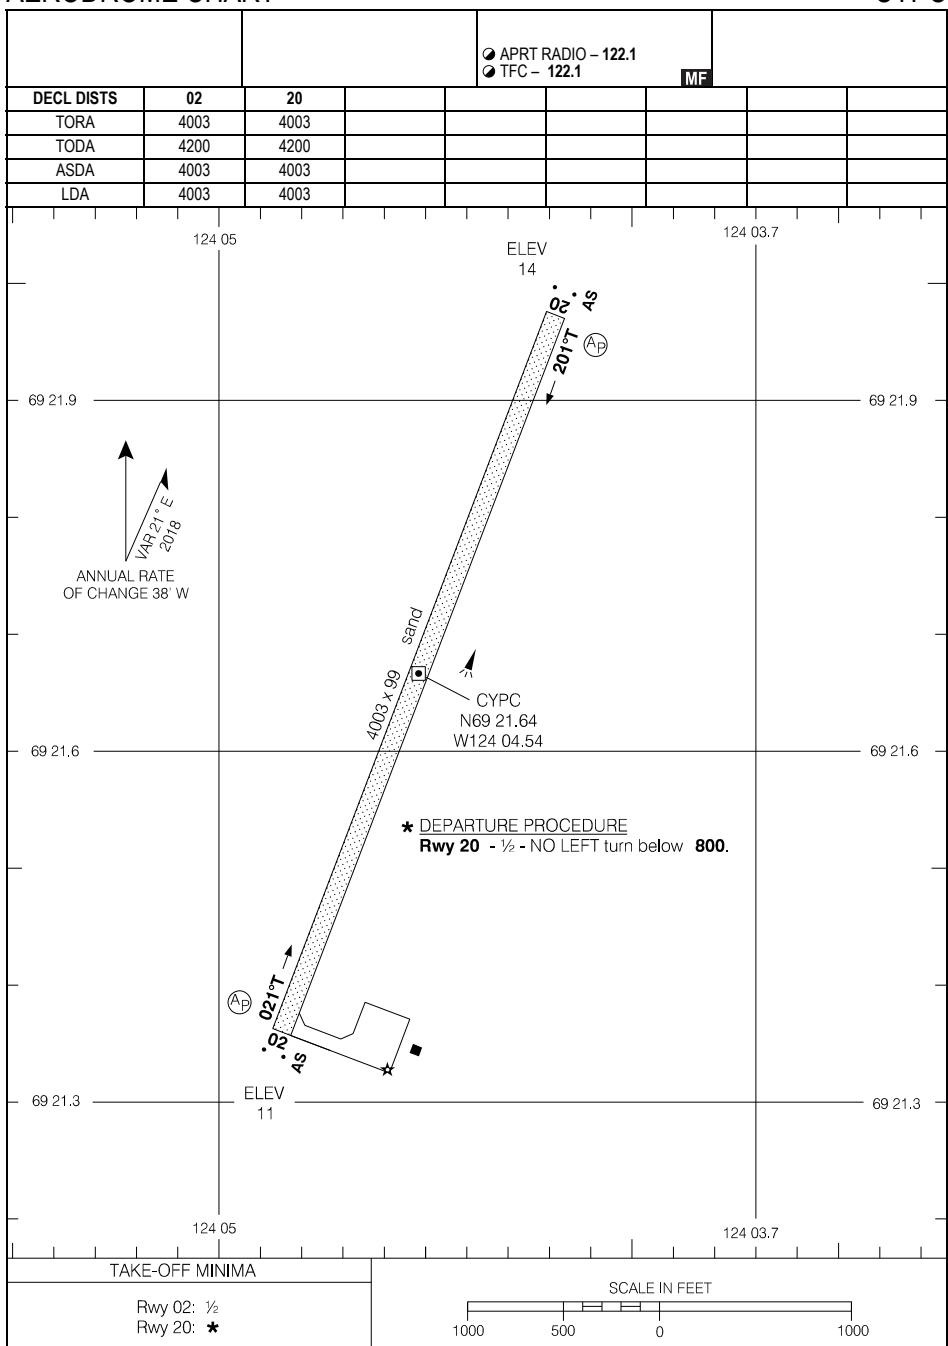

AERODROME CHART

EFF 7 OCT 21


CYPC-AD

CYPC

CYIO-AD

POND INLET, NU
CYIO

AERODROME CHART

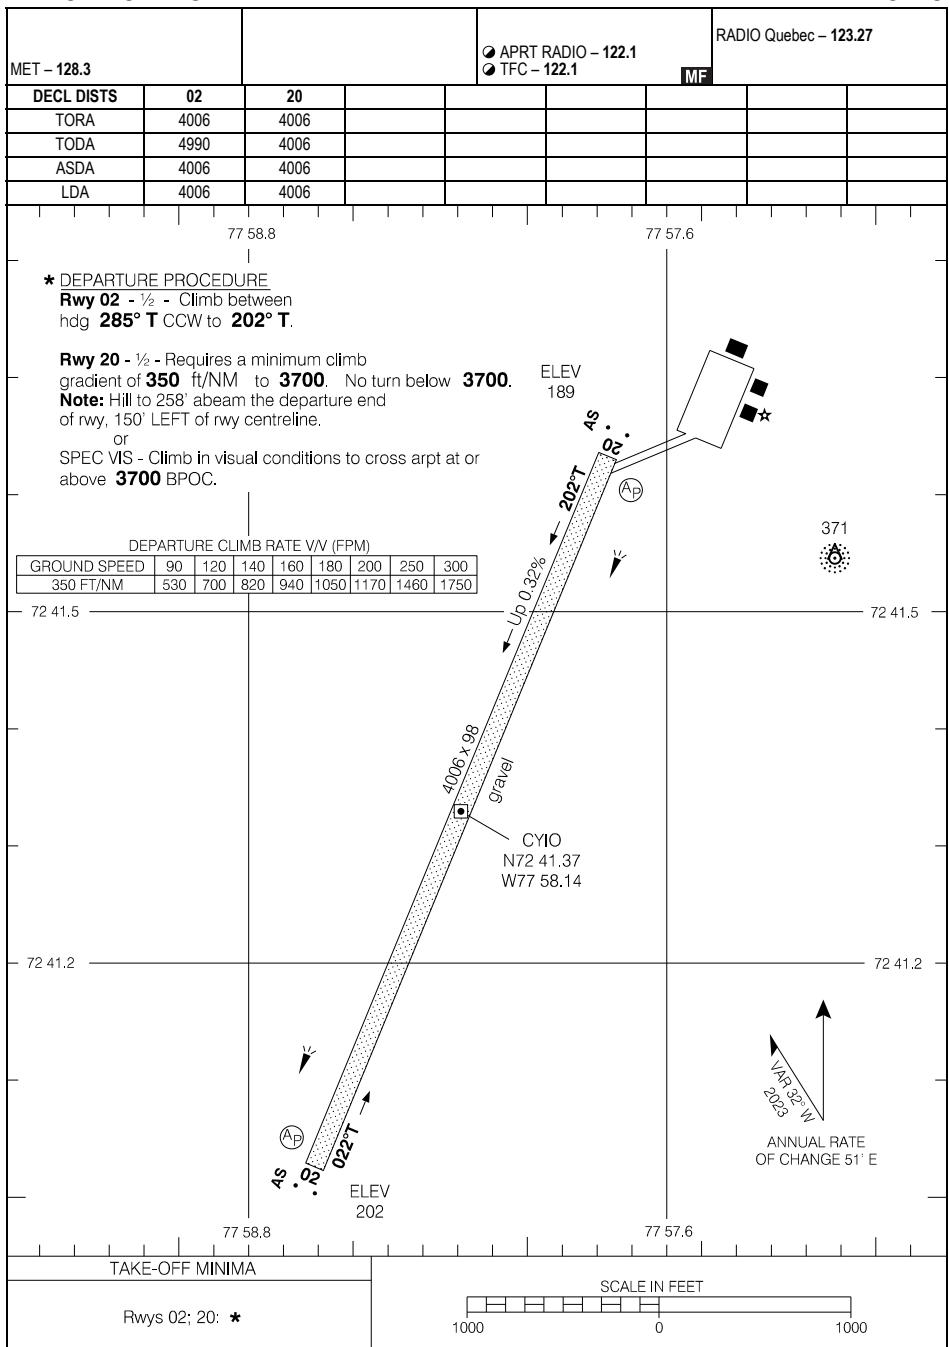

AERODROME CHART

EFF 20 FEB 25


CYIO-AD

CYIO

CYVM-AD

QIKIQTARJUAQ, NU
CYVM

AERODROME CHART

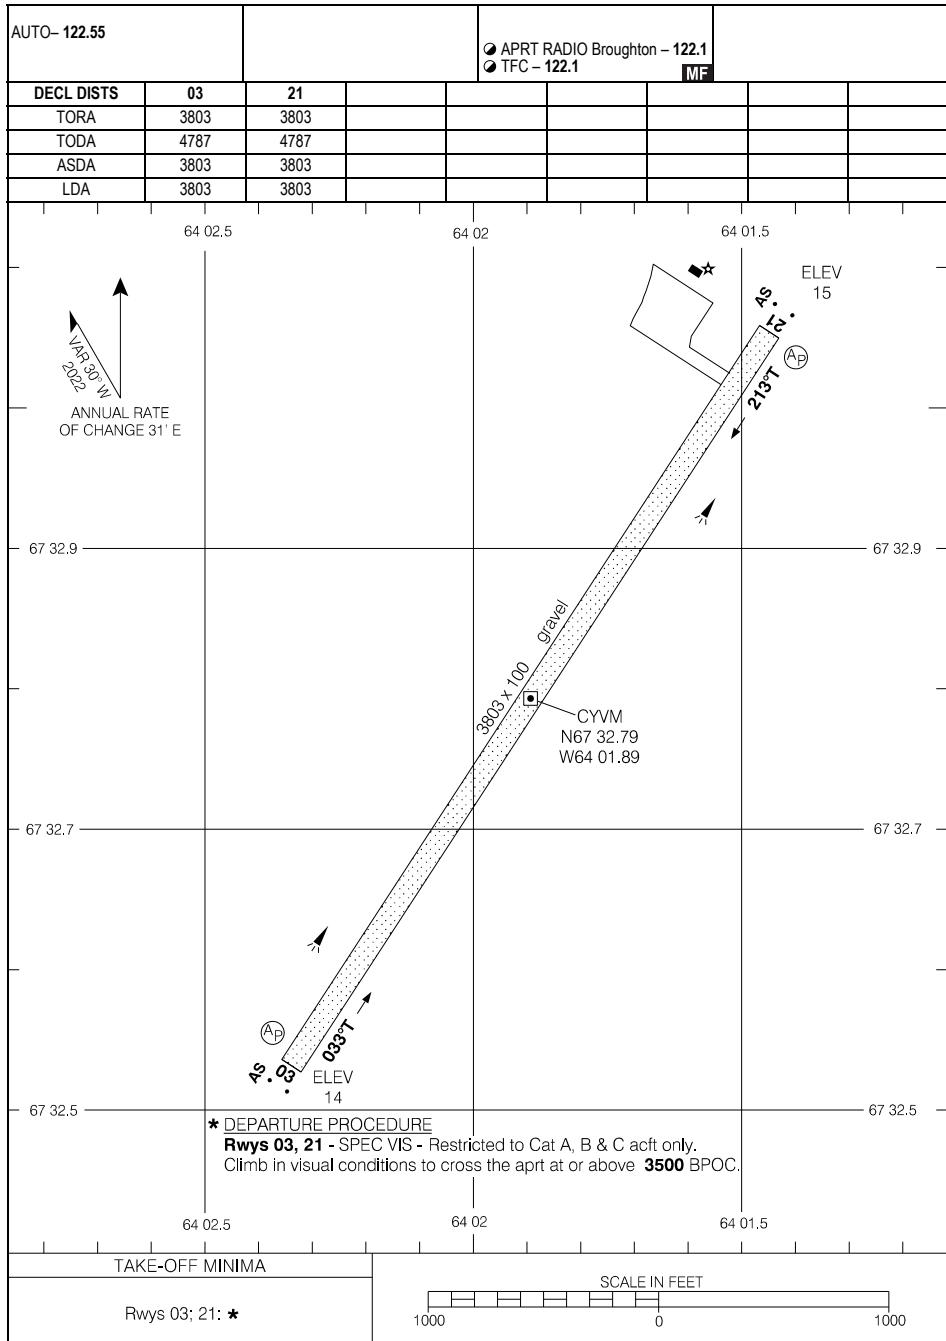

AERODROME CHART

EFF 29 DEC 22


CYVM-AD

CYVM

CYRT-AD

RANKIN INLET, NU
CYRT

AERODROME CHART

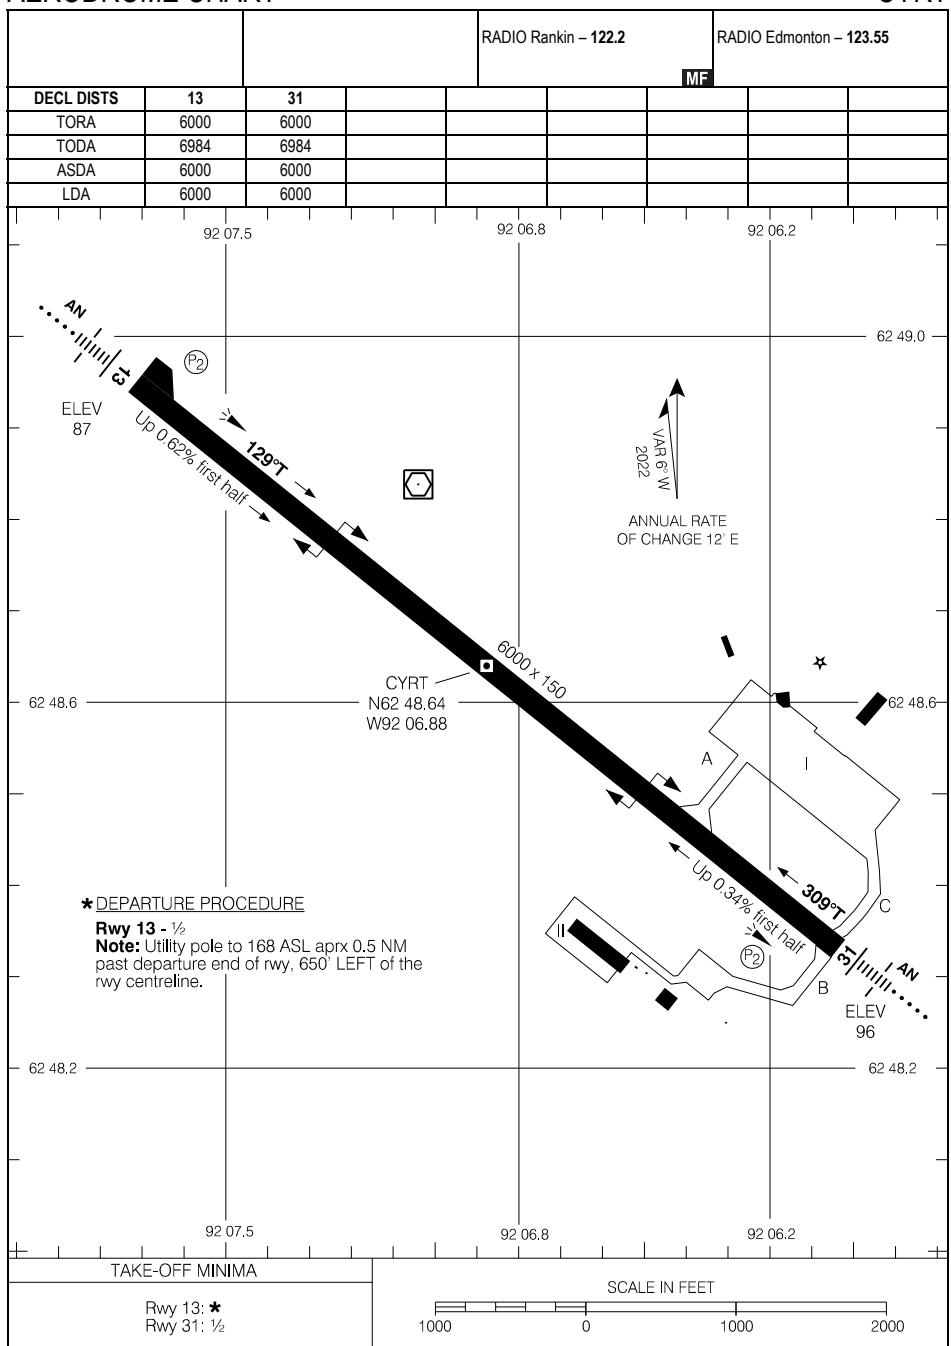

AERODROME CHART

EFF 7 AUG 25


CYRT-AD

CYRT

CYRB-AD

RESOLUTE BAY, NU
CYRB

AERODROME CHART

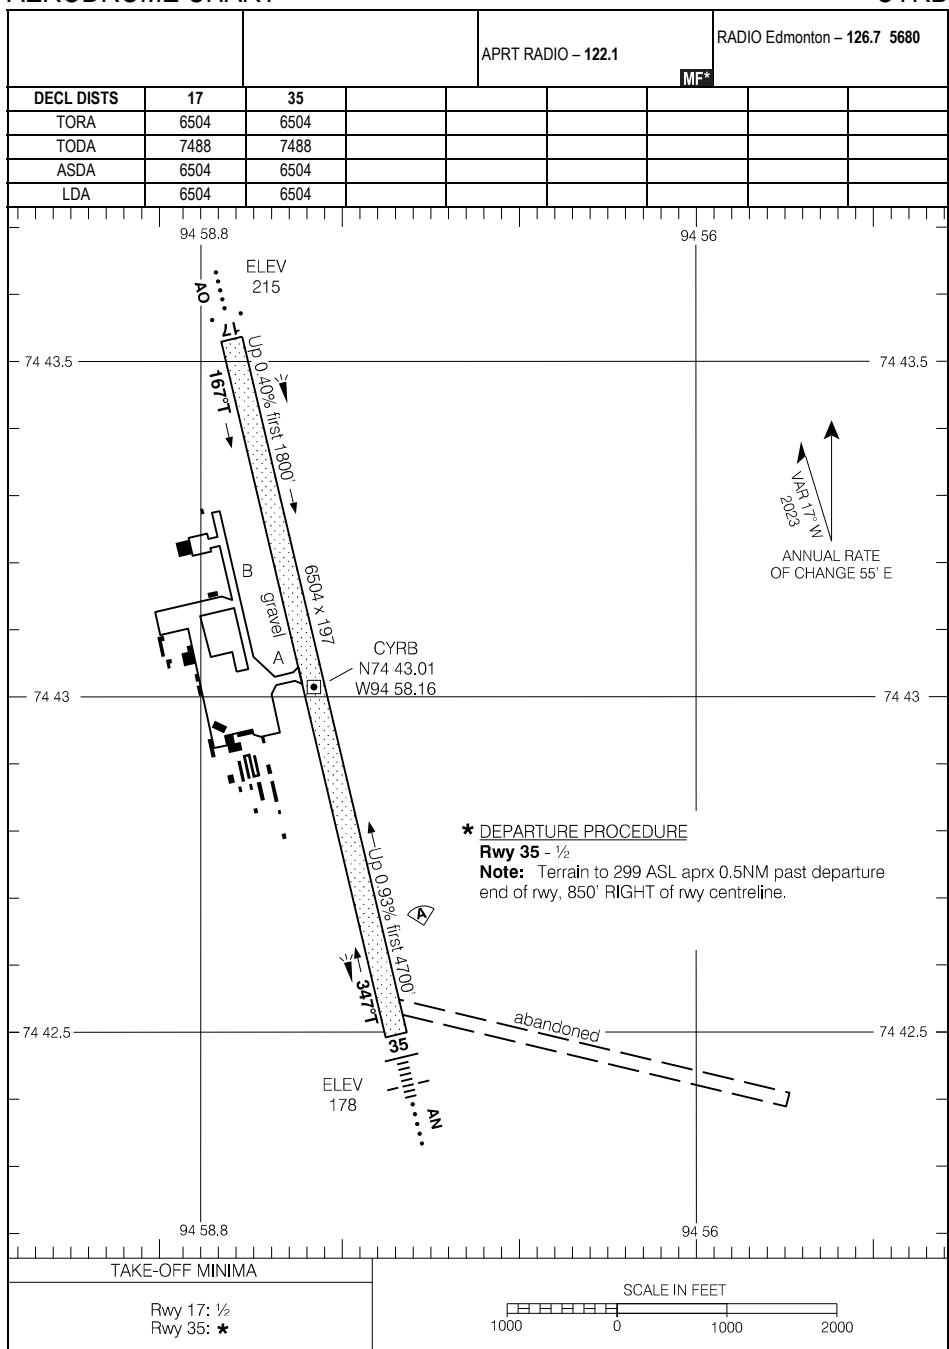

AERODROME CHART


EFF 5 OCT 23

CYRB-AD

CYRB

AERODROME CHART

CYSY-AD
SACHS HARBOUR (DAVID NASOGALUAK JR. SAARYUAQ), NT
CYSY

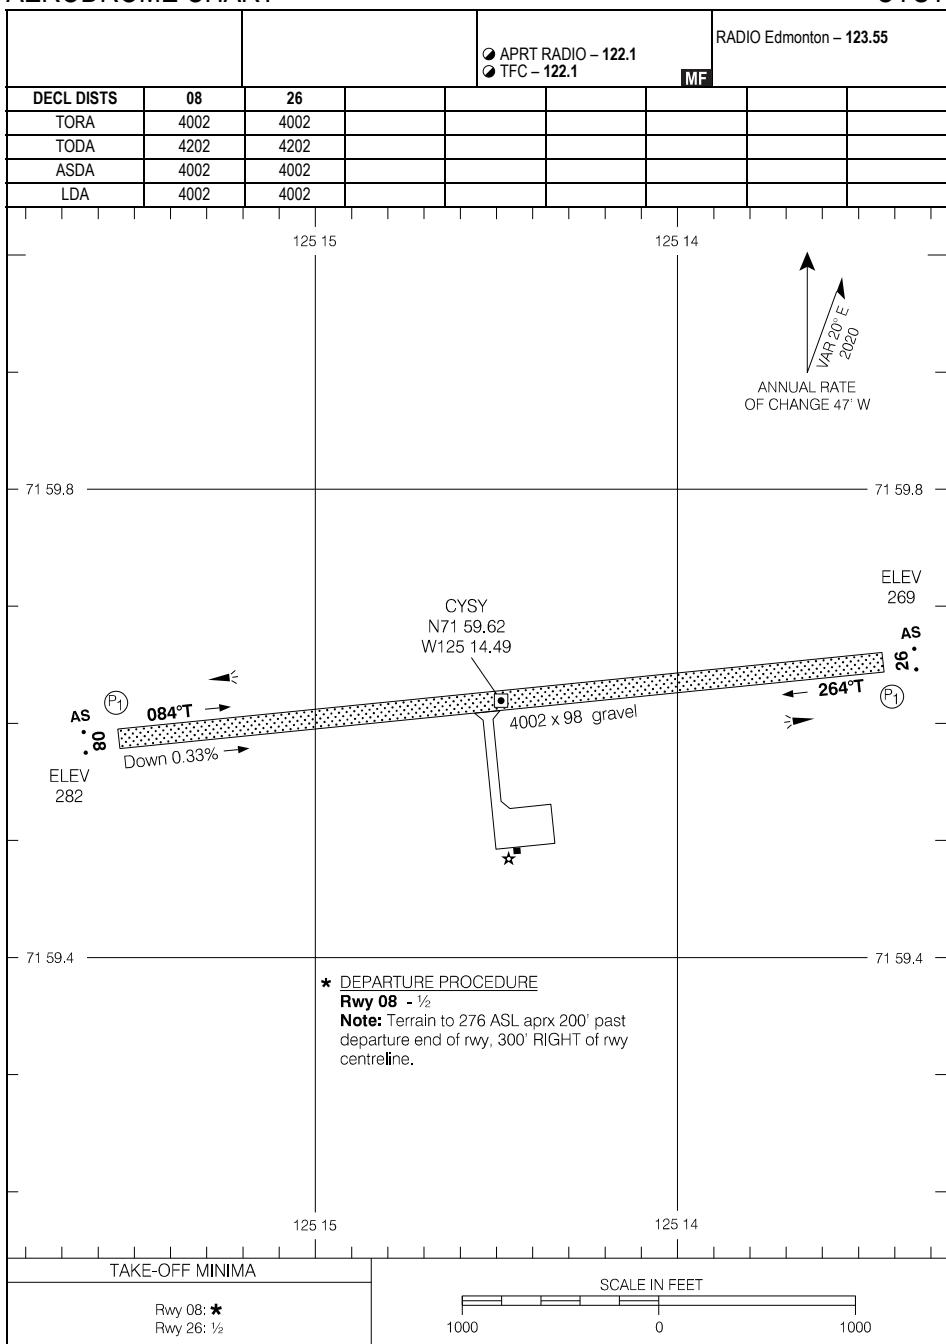

AERODROME CHART


EFF 7 OCT 21

CYSY-AD

CYSK-AD

SANIKILUAQ, NU
CYSK

AERODROME CHART

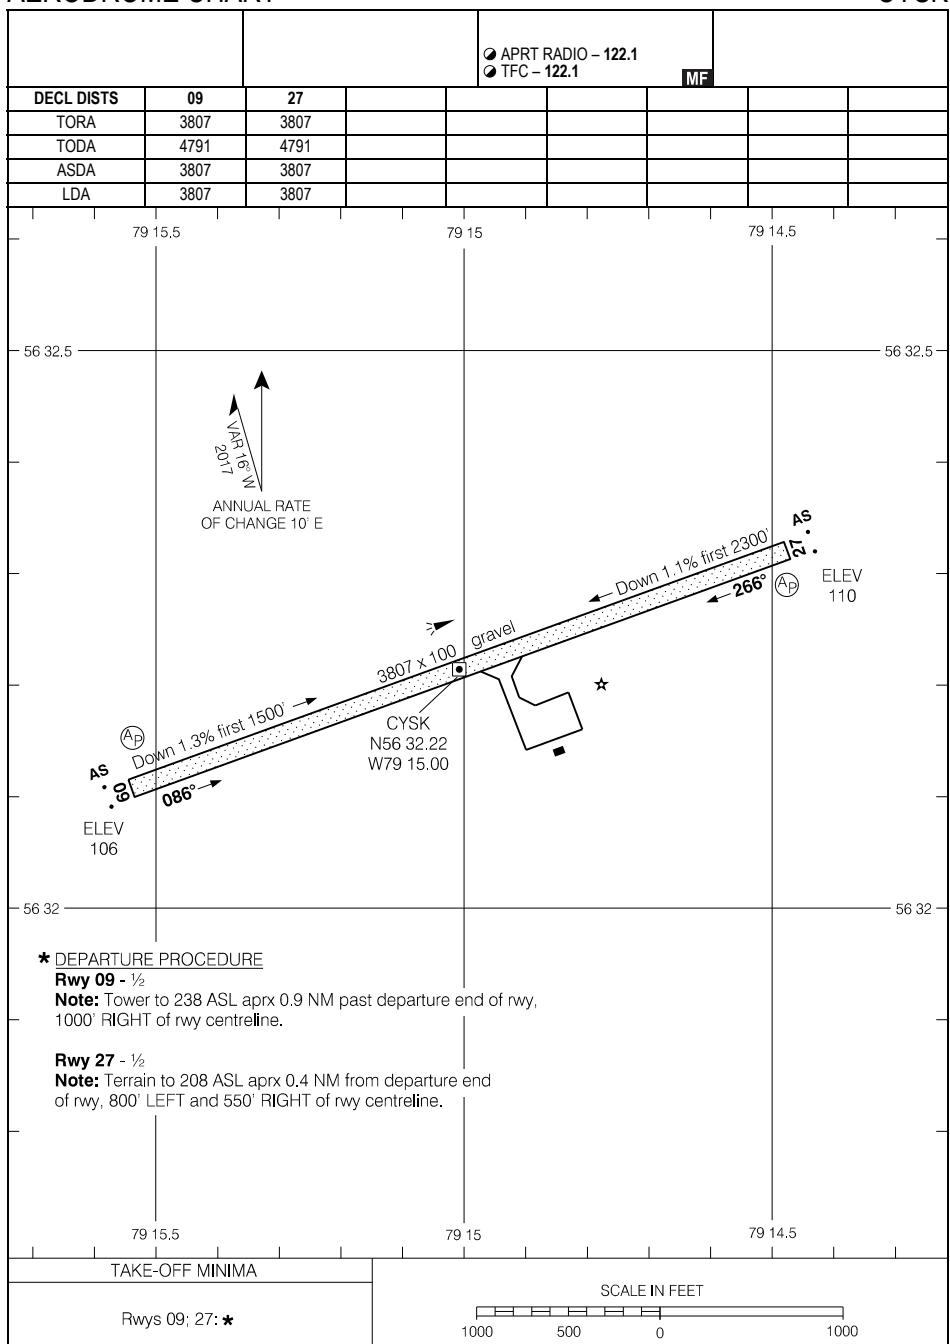

AERODROME CHART

EFF 15 JUN 23

CYSK-AD

CYSK


CYUX-AD

SANIRAJAK AIRPORT, NU
CYUX

AERODROME CHART

AWOS – 128.7				<input checked="" type="radio"/> APRT RADIO – 122.2 <input checked="" type="radio"/> TFC – 122.2		RADIO Edmonton – 123.27	
DECL DISTS	12	30				MF	
TORA	5410	5410					
TODA	5610	6394					
ASDA	5410	5410					
LDA	5410	5218					

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

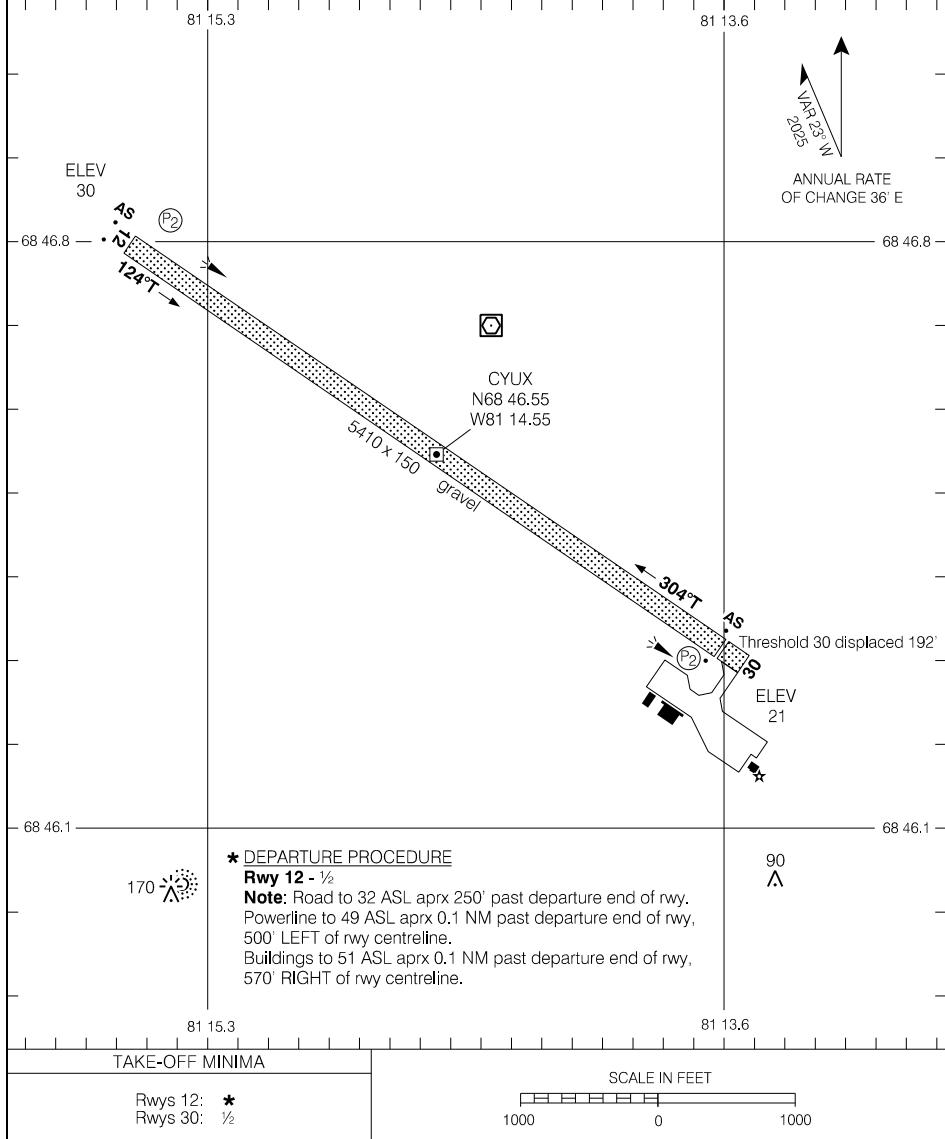

AERODROME CHART

EFF 7 AUG 25


CYUX-AD

CYUX

CYYH-AD

TALOYOAK, NU
CYYH

AERODROME CHART

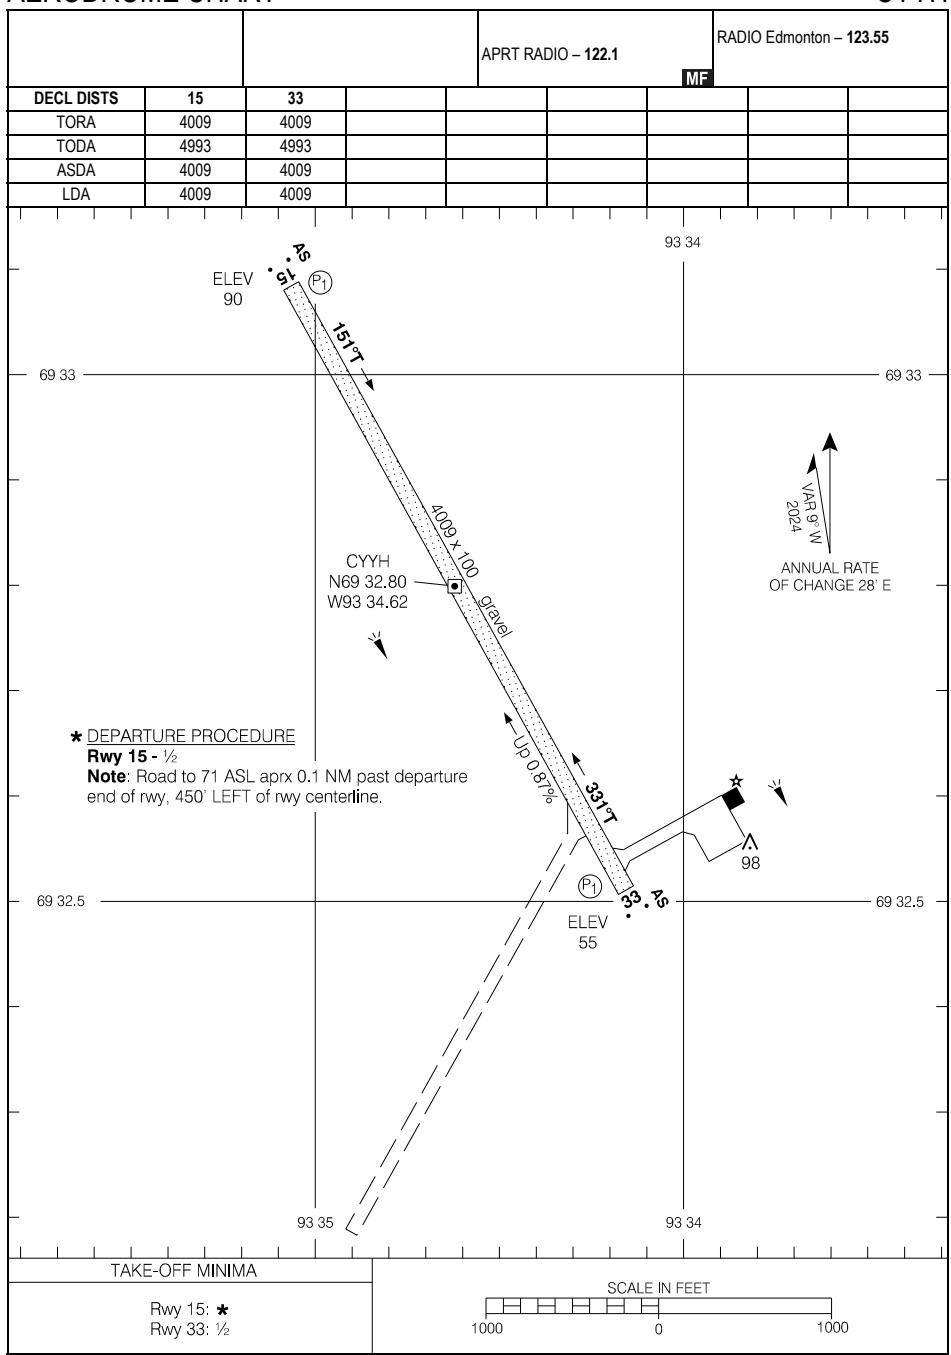

AERODROME CHART

EFF 26 DEC 24


CYYH-AD

CYYH

CYZW-AD

TESLIN, YT
CYZW

AERODROME CHART

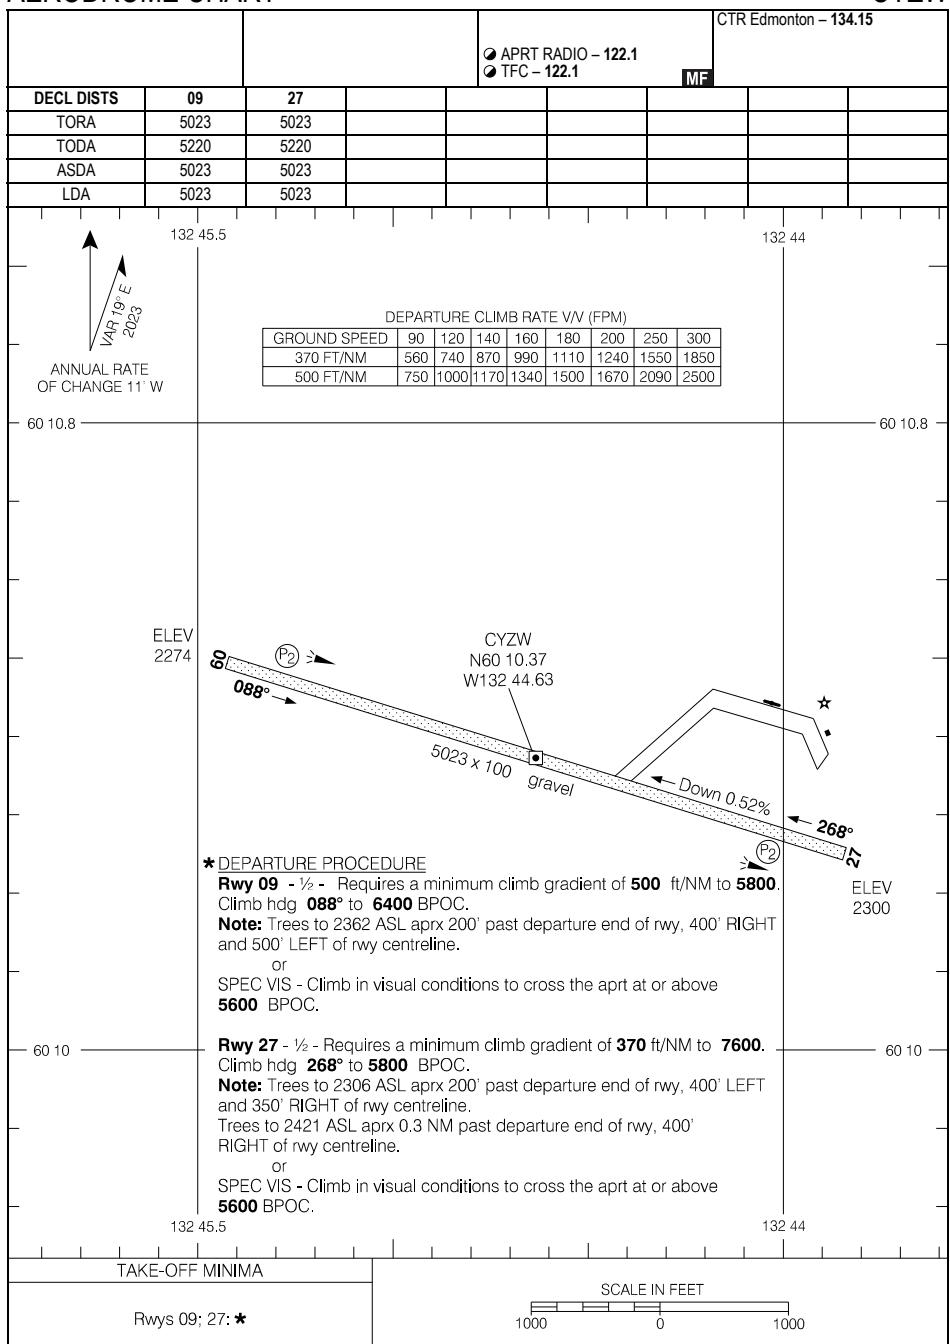

AERODROME CHART

EFF 16 MAY 24


CYZW-AD

CYZW

CYUB-AD

TUKTOYAKTUK/JAMES GRUBEN, NT
CYUB

AERODROME CHART

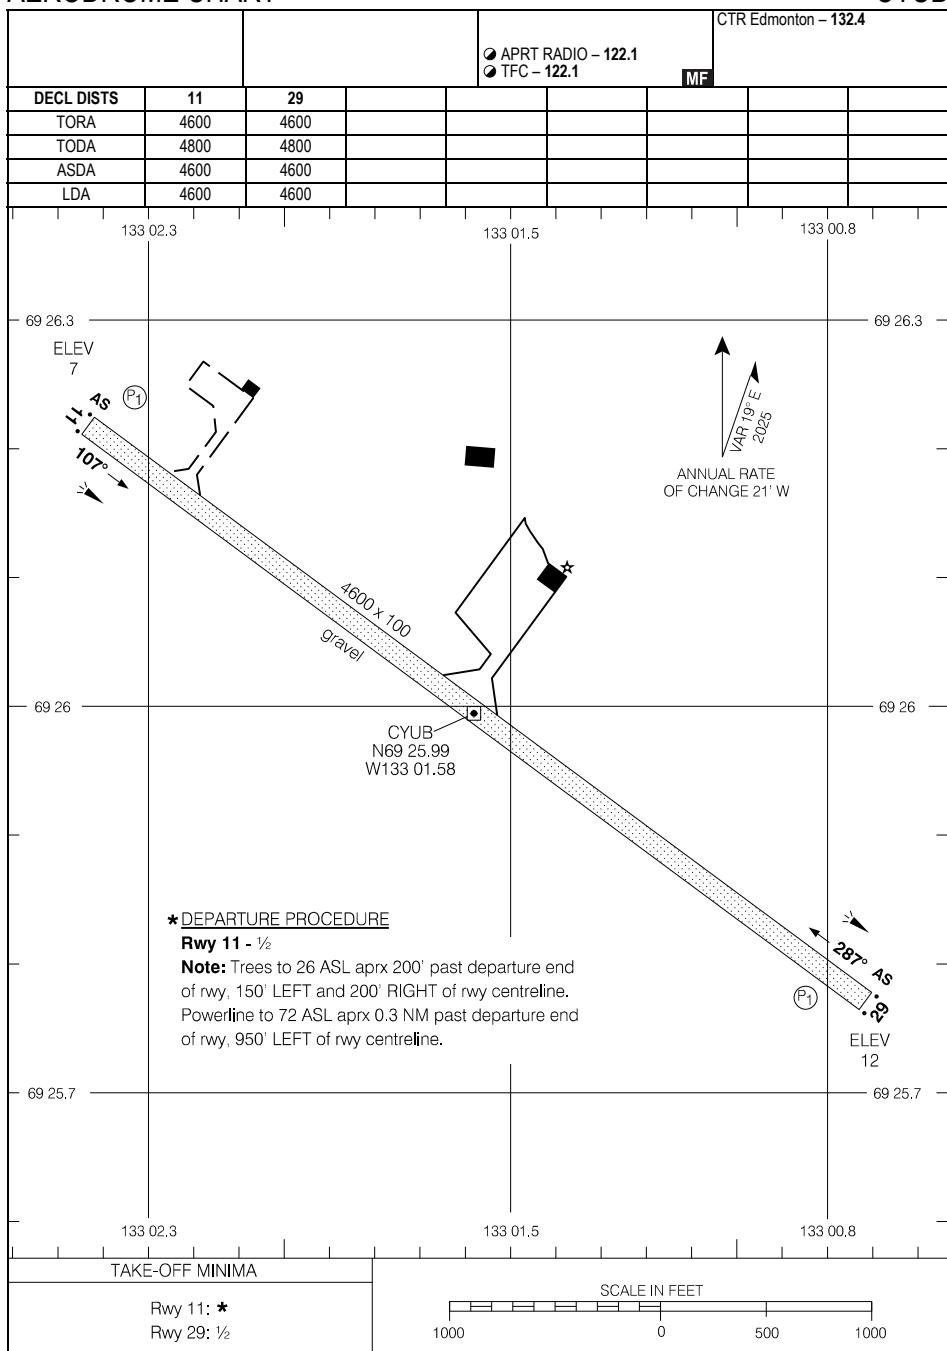

AERODROME CHART

EFF 17 APR 25


CYUB-AD

CYUB

CZFN-AD

TULITA, NT
CZFN

AERODROME CHART

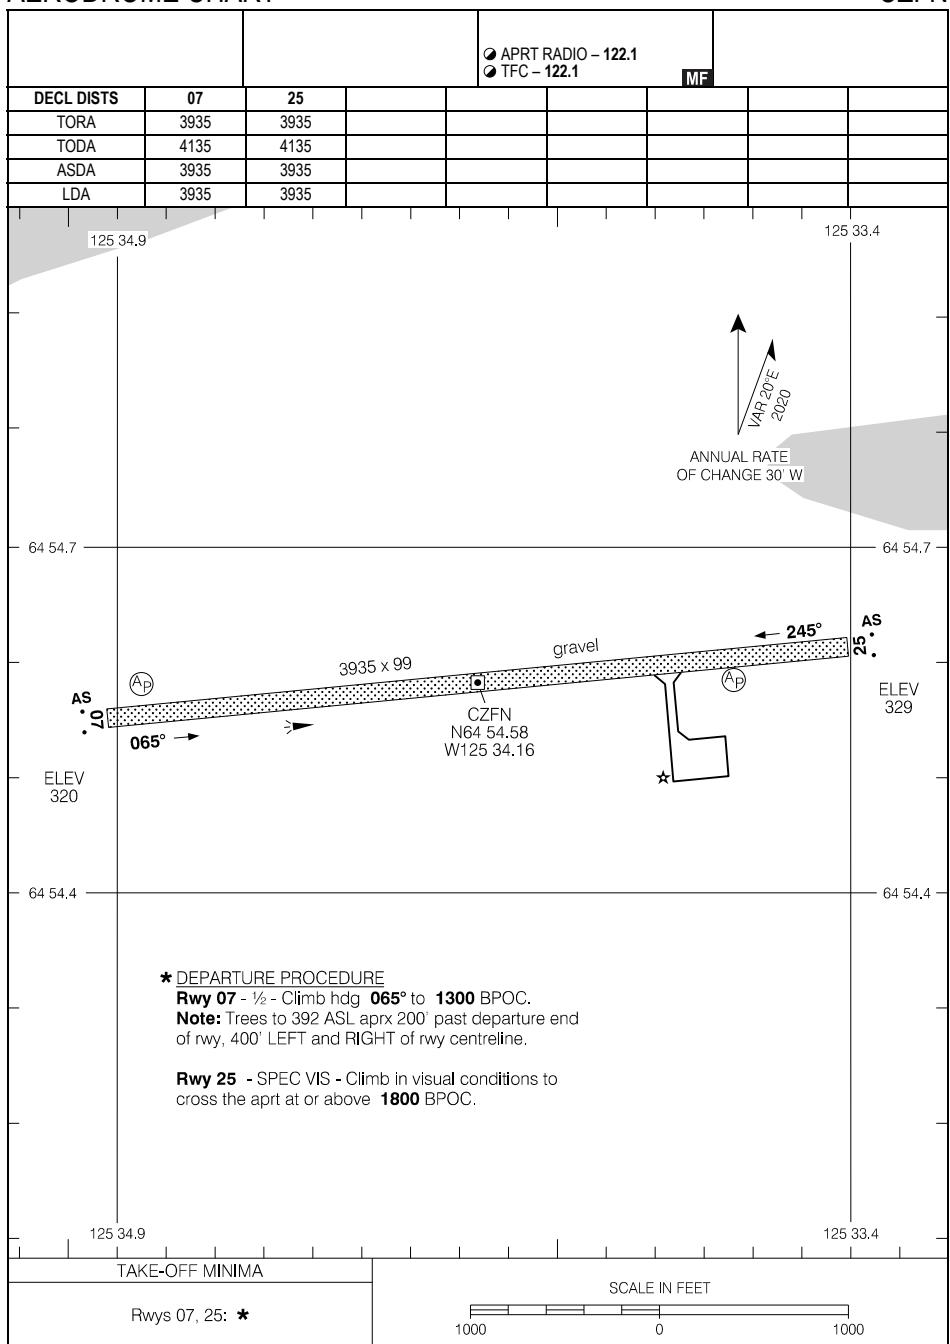

AERODROME CHART

EFF 2 DEC 21


CZFN

CZFN-AD

CYHI-AD

ULUKHAKTOK, NT
CYHI

AERODROME CHART

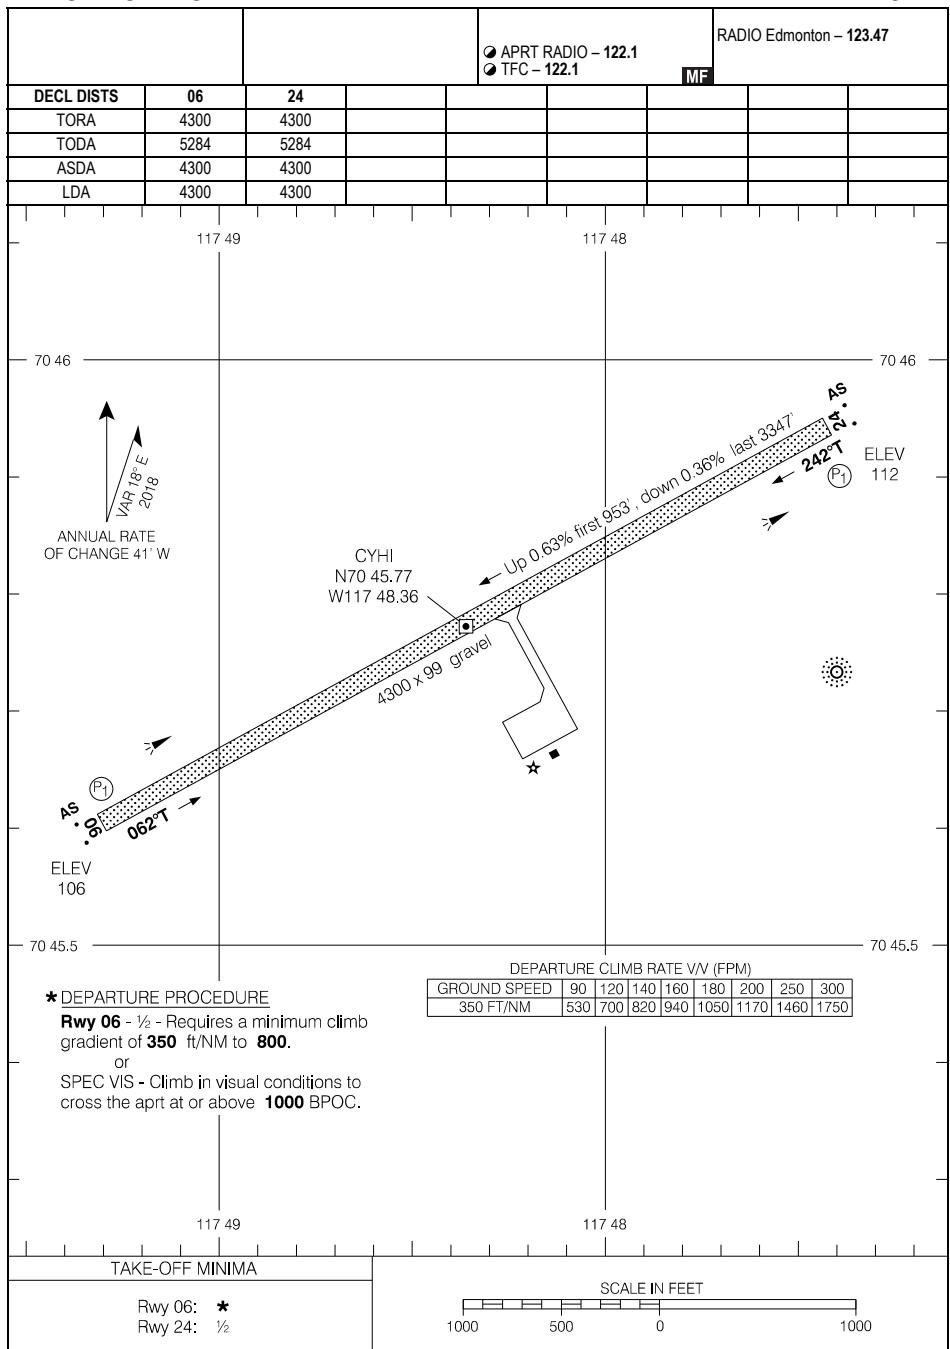

AERODROME CHART

EFF 30 NOV 23


CYHI

CYHI-AD

CYQH-AD

WATSON LAKE, YT
CYQH

AERODROME CHART

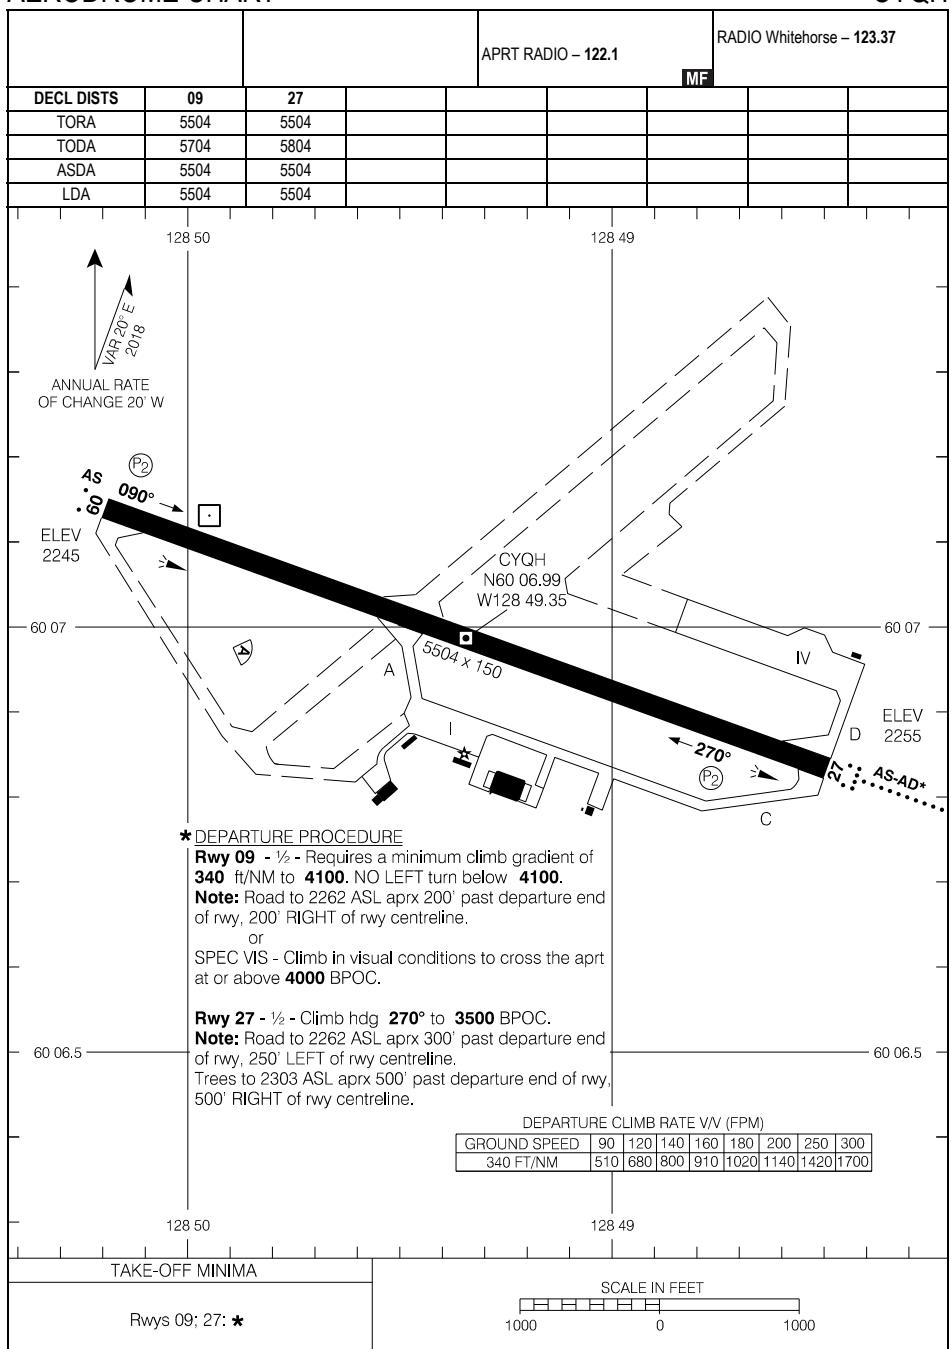

AERODROME CHART

EFF 7 OCT 21

CYQH-AD

CYQH


CYWE-AD

WEKWEETI, NT
CYWE

AERODROME CHART

AWOS - 128.7				TFC - 123.2		ATF	
DECL DISTS	13	31					
TORA	2999	2999					
TODA	3196	3196					
ASDA	2999	2999					
LDA	2999	2999					

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

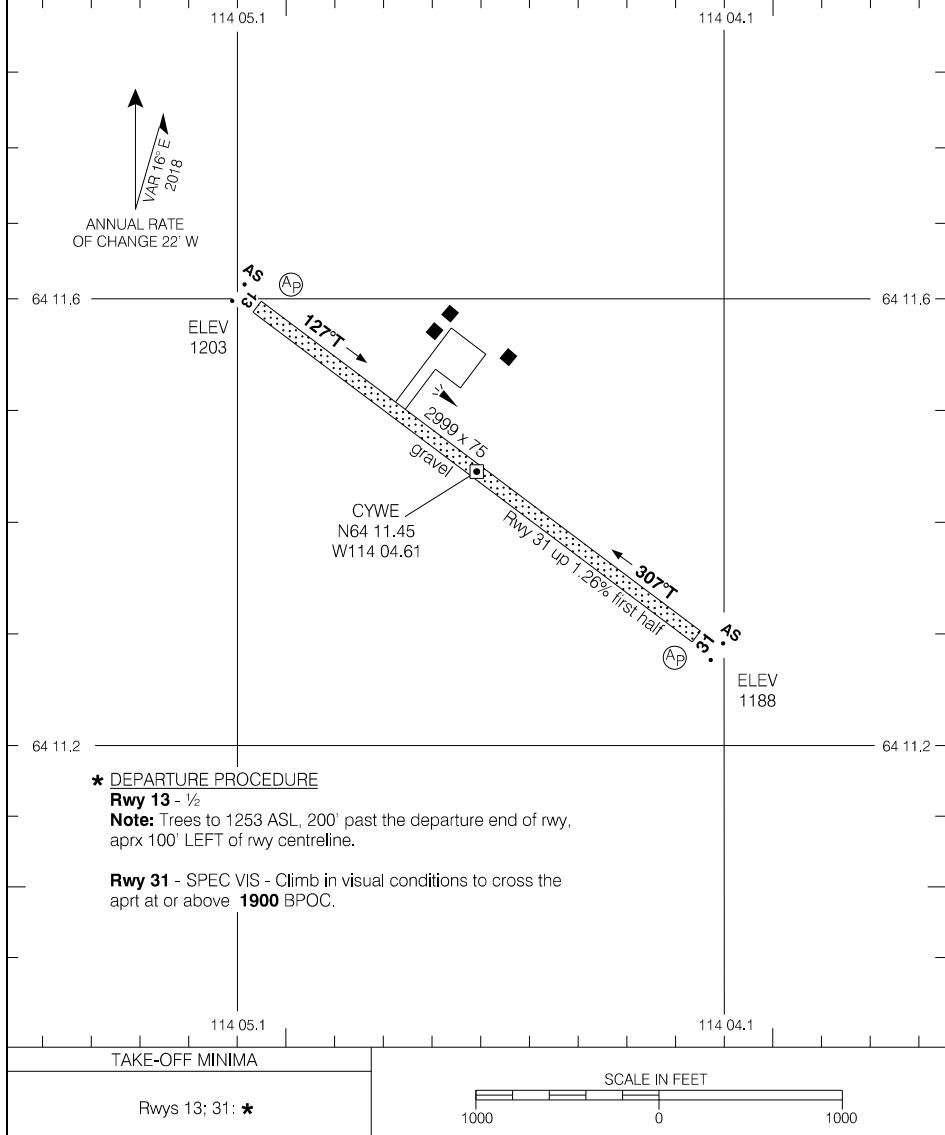

AERODROME CHART

EFF 10 AUG 23

CYWE-AD


CYXN-AD

WHALE COVE, NU
CYXN

AERODROME CHART

				<input checked="" type="radio"/> APRT RADIO – 122.1			
		<input checked="" type="radio"/> TFC – 122.1		MF			
DECL DISTS	15	33					
TORA	3937	3937					
TODA	3937	3937					
ASDA	3937	3937					
LDA	3937	3937					

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

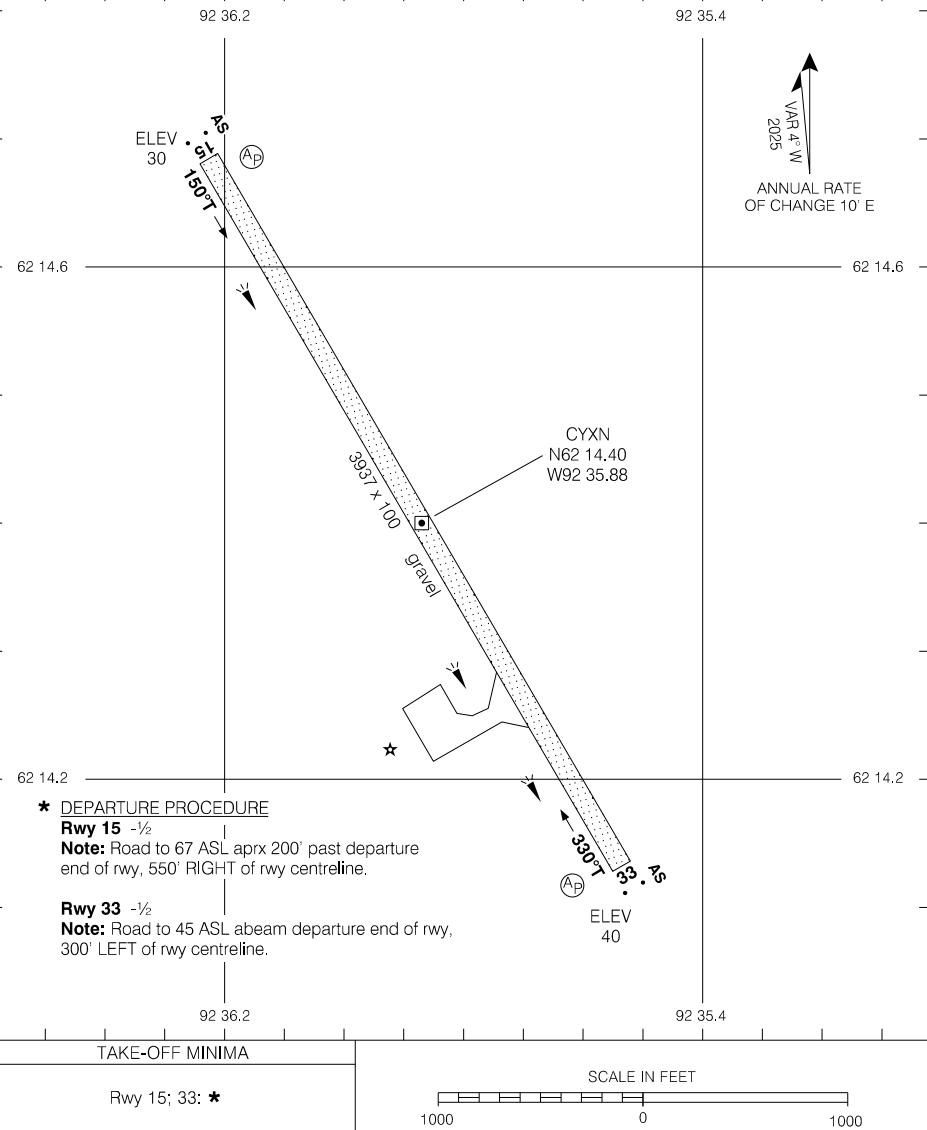

AERODROME CHART

EFF 7 AUG 25

CYXN

CYXN-AD

AERODROME CHART

TFC - 123.2

ATF

DECL DISTS	10	28					
TORA	2991	2991					
TODA	3188	3188					
ASDA	2991	2991					
LDA	2991	2991					

117 15.1

117 14.4

63 08.1

ELEV
878

AS

AP

100°

2991 x 99

CEM3
N63 07.91
W117 14.76

gravel

VFR 28° E
28° WANNUAL RATE
OF CHANGE 28° WAS
APELEV
882

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

63 07.7

63 07.7

*** DEPARTURE PROCEDURE****Rwy 10 - ½**

Note: Trees up to 978 ASL aprx 200' past departure end of rwy,
200' LEFT and 100' RIGHT of rwy centreline.

Rwy 28 - ½

Note: Trees up to 928 ASL aprx 200' past departure end of rwy,
350' LEFT and 150' RIGHT of rwy centreline.

Tower up to 1016 ASL aprx 0.8 NM past departure end of rwy,
0.3 NM RIGHT of rwy centreline.

117 15.1

117 14.4

TAKE-OFF MINIMA

Rwys 10; 28: *

SCALE IN FEET

1000 0 1000

AERODROME CHART

EFF 30 NOV 23


CEM3

CYXY-AD

WHITEHORSE/ERIK NIELSEN INTL, YT

CYXY

AERODROME CHART

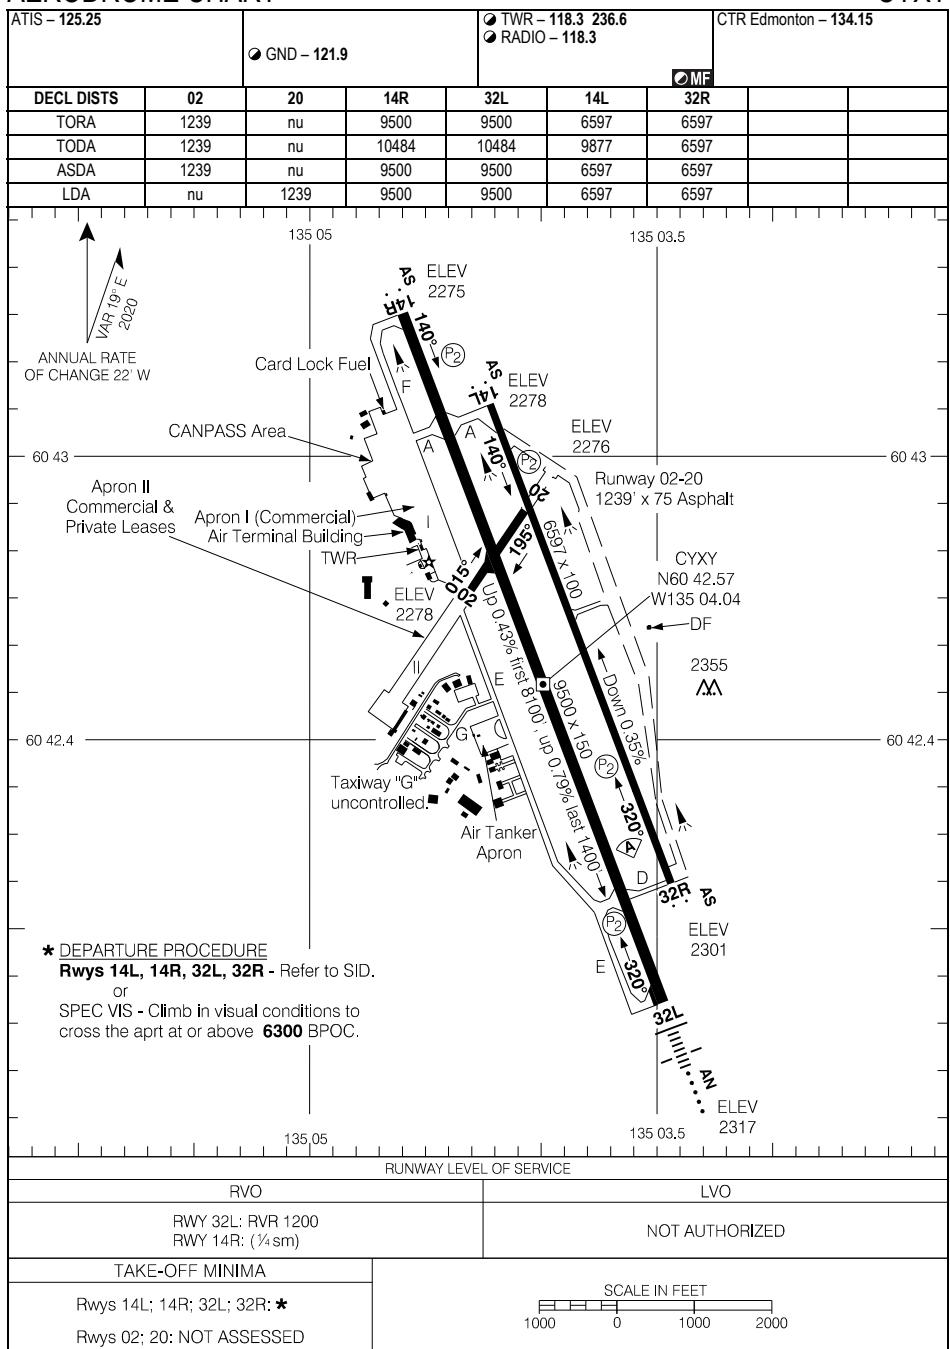

AERODROME CHART

EFF 7 AUG 25


CYXY-AD

CYXY

CYWY-AD

WRIGLEY, NT
CYWY

AERODROME CHART

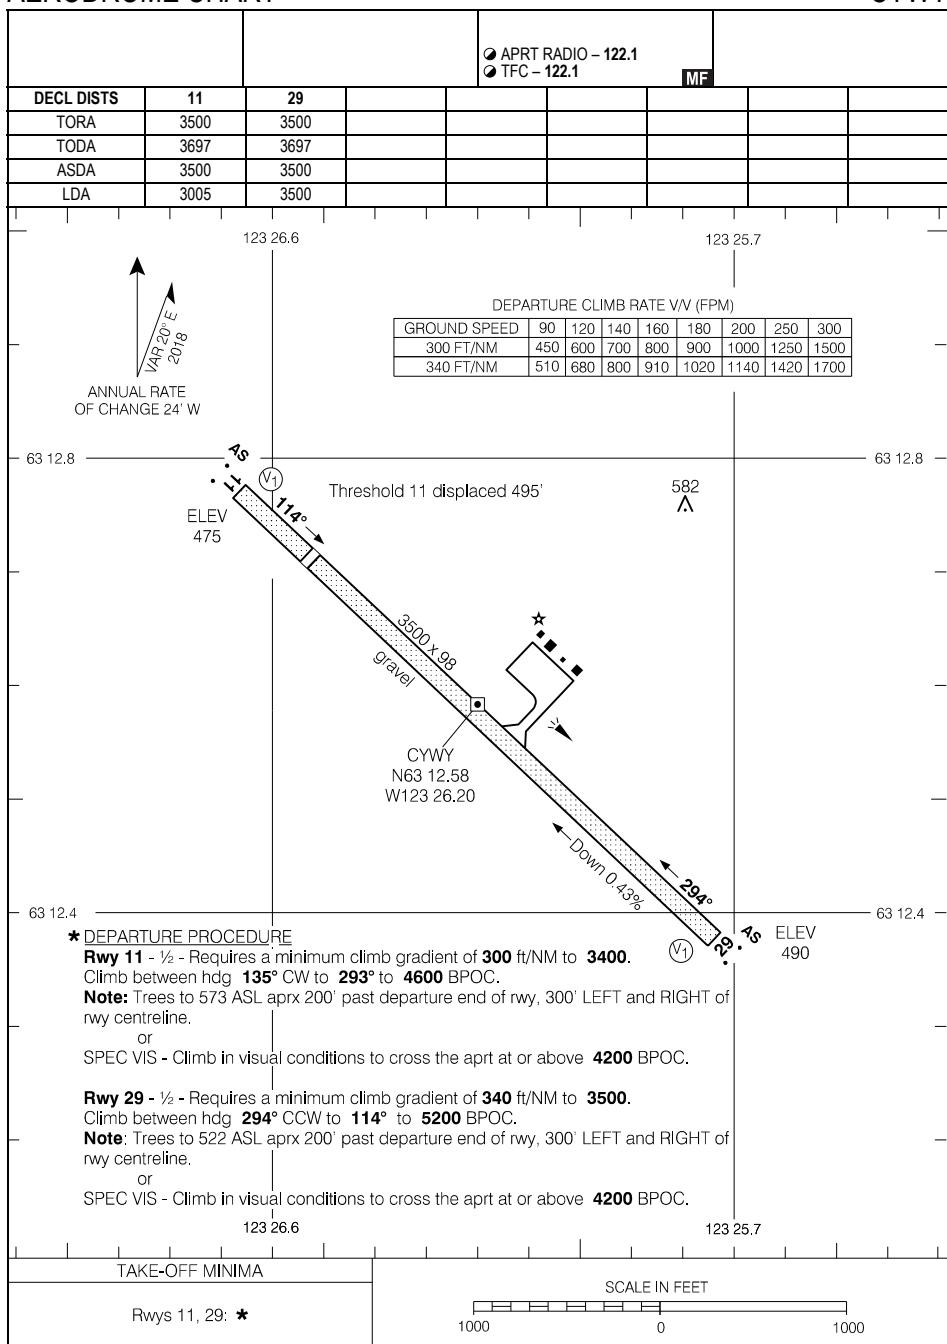

AERODROME CHART

EFF 20 FEB 25


CYWY-AD

CYWY

CYZF-AD

YELLOWKNIFE, NT
CYZF

AERODROME CHART

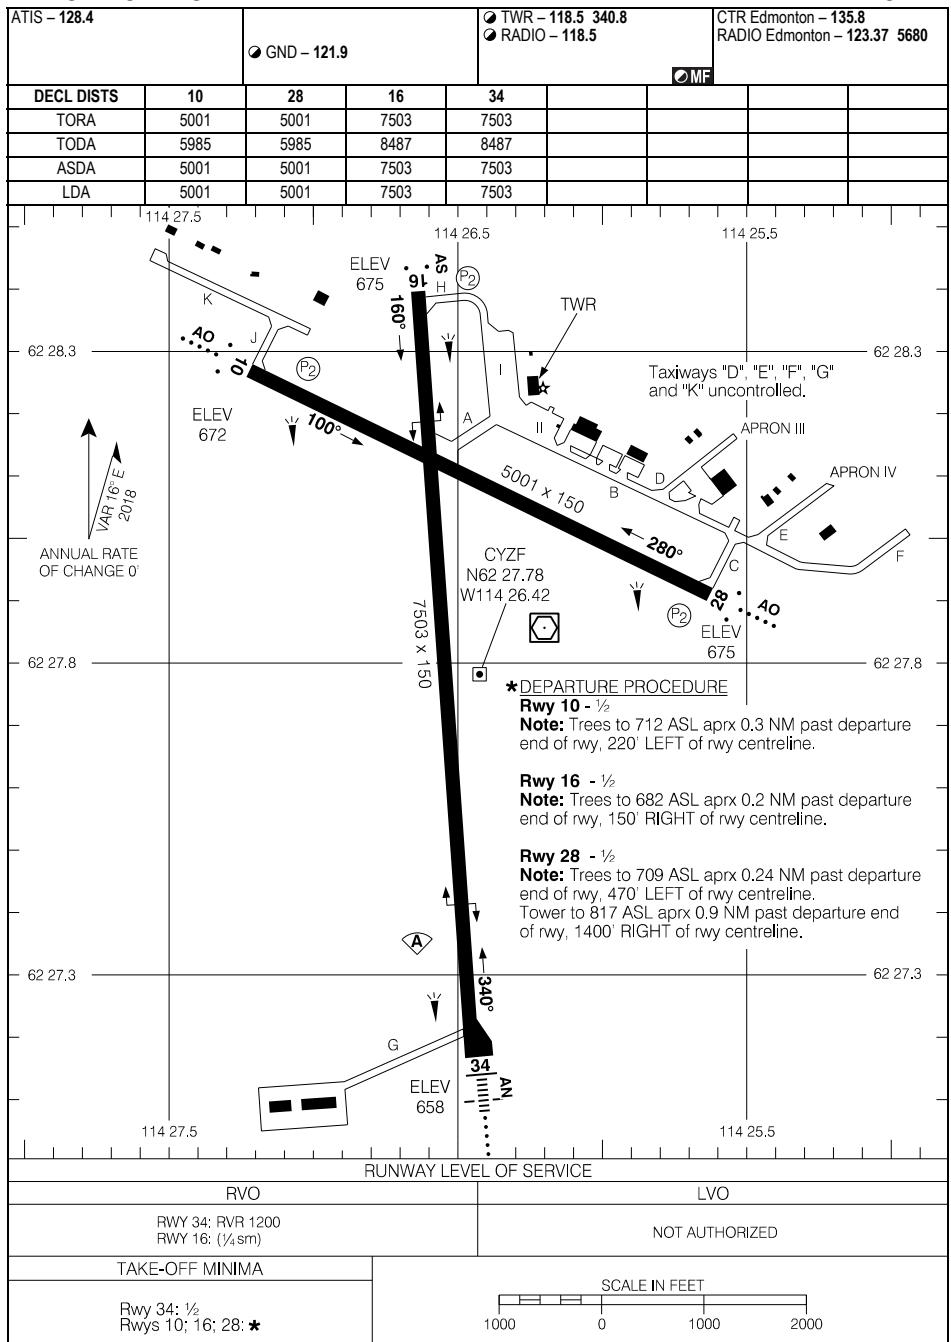

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 10 AUG 23


CYZF-AD

CYZF

CYXX-AD

ABBOTSFORD, BC
CYXX

AERODROME CHART

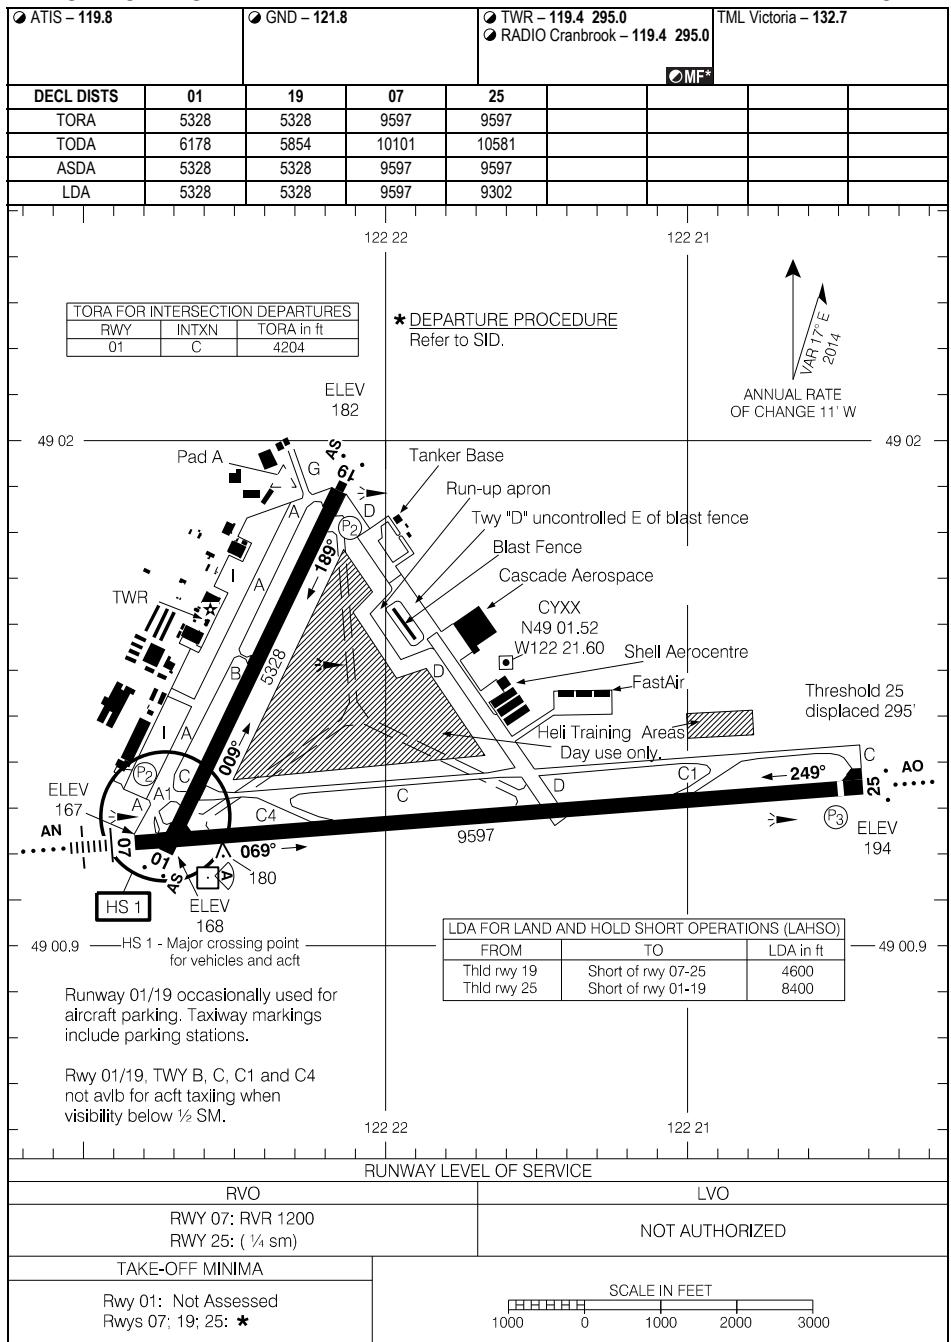

AERODROME CHART

EFF 20 FEB 25


CYXX

CYXX-AD

CAJ4-AD

ANAHIM LAKE, BC
CAJ4

AERODROME CHART

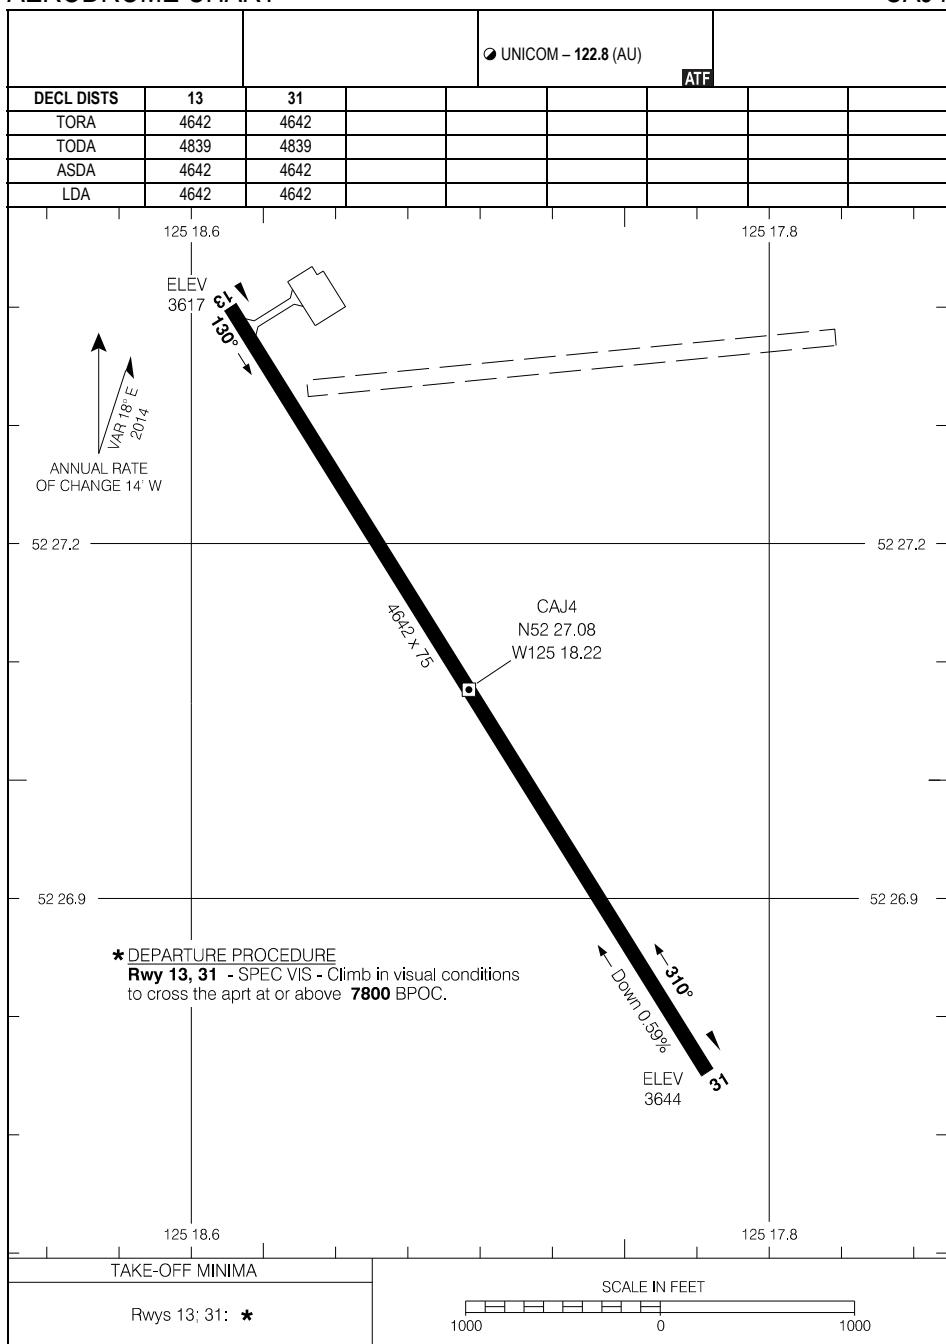

AERODROME CHART

EFF 14 JUL 22


CAJ4-AD

CAJ4

CBBC-AD

BELLA BELLA (CAMPBELL ISLAND), BC
CBBC

AERODROME CHART

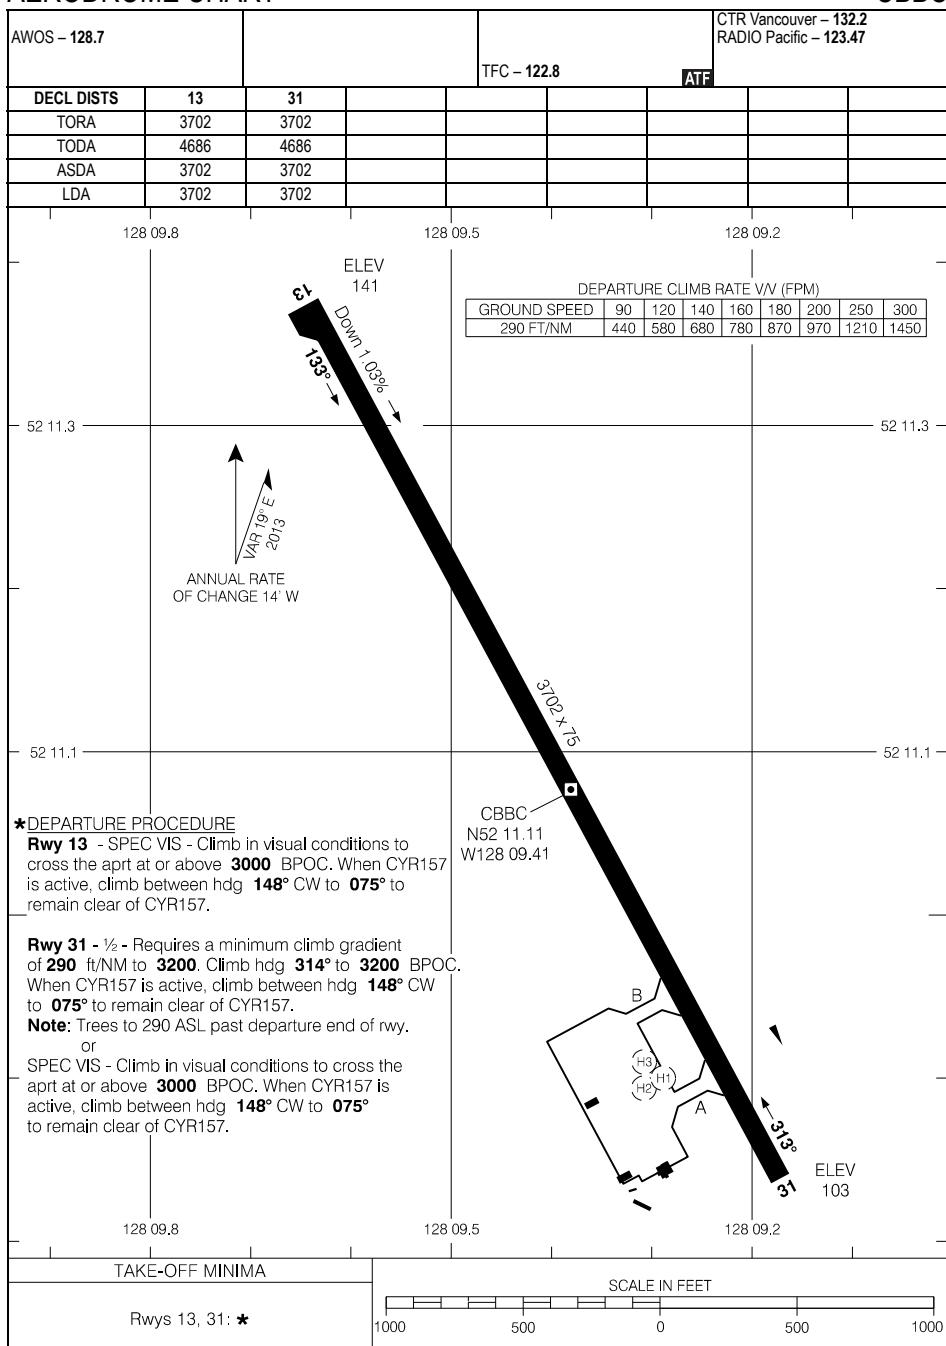

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA. All rights reserved

AERODROME CHART

EFF 10 SEP 20


CBBC-AD

CBBC

CYBL-AD

CAMPBELL RIVER, BC
CYBL

AERODROME CHART

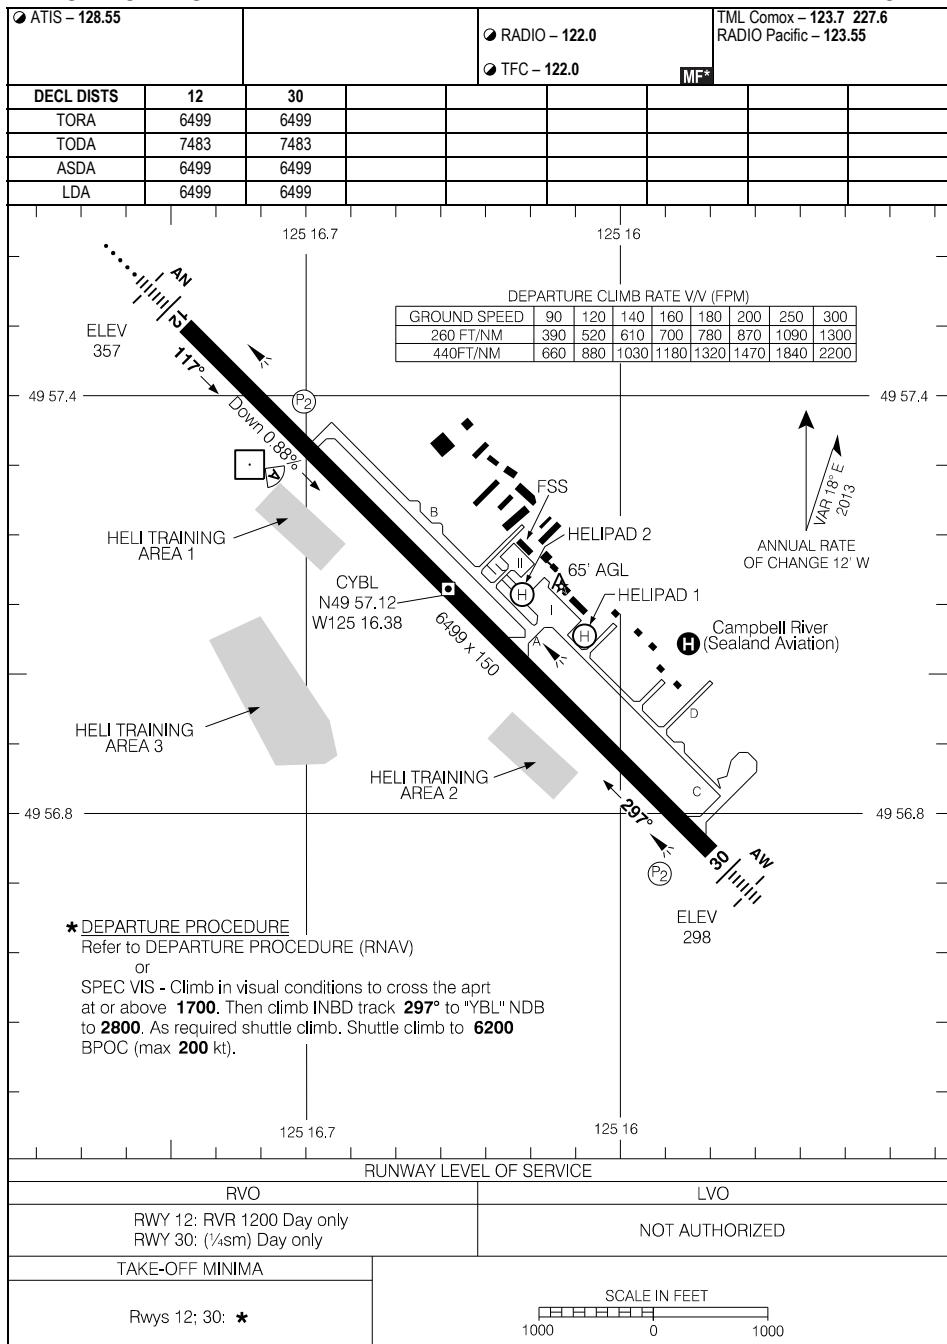

AERODROME CHART

EFF 26 DEC 24


CYBL-AD

CYBL

CYCG-AD

CASTLEGAR/WEST KOOTENAY REGIONAL, BC
CYCG

AERODROME CHART

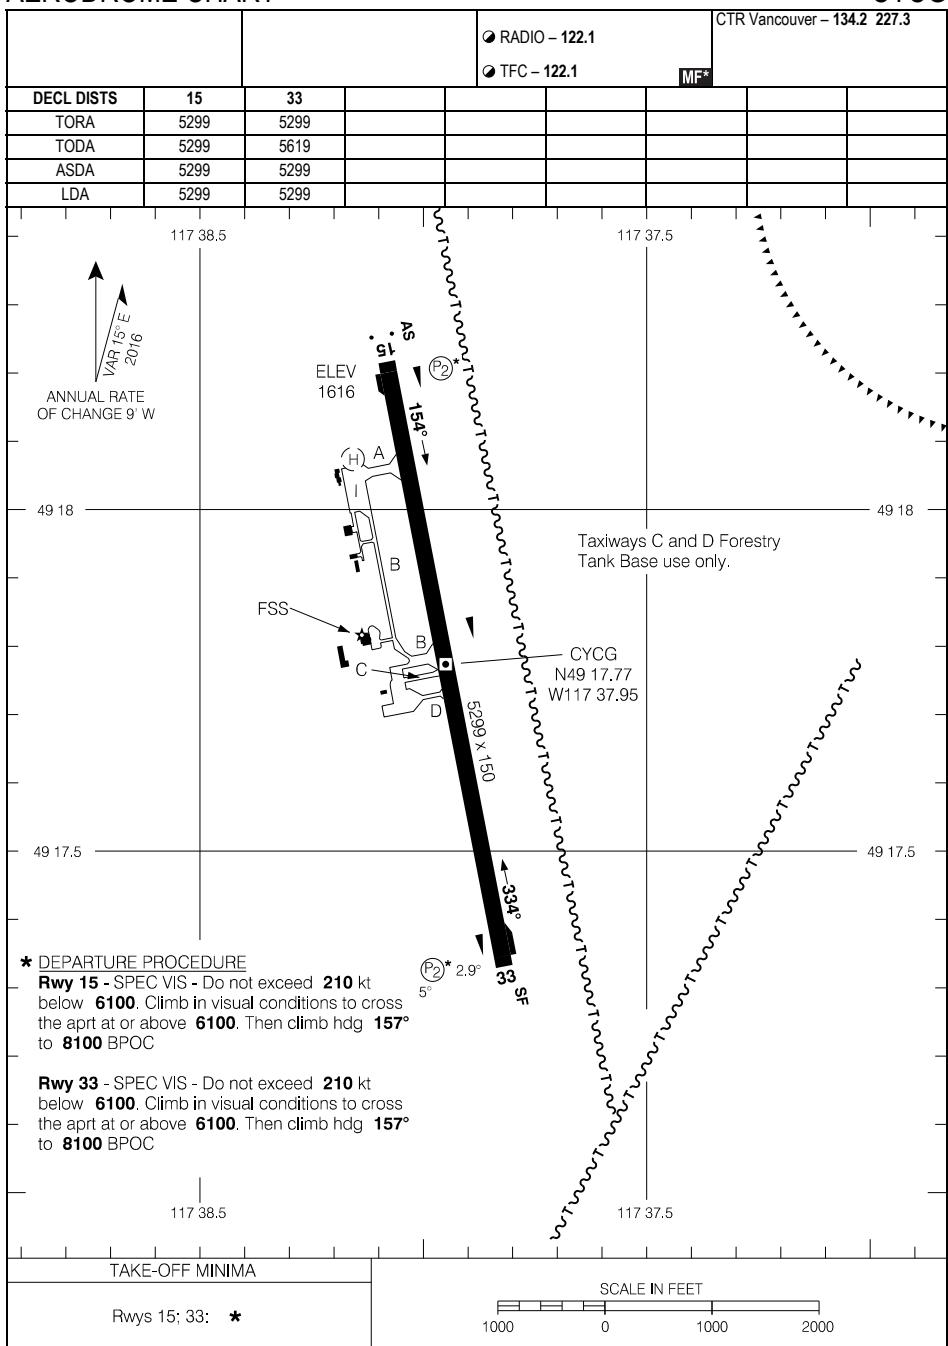

AERODROME CHART

EFF 11 JUL 24


CYCG

CYCG-AD

CYQQ-AD

COMOX, BC
CYQQ

AERODROME CHART (DND)

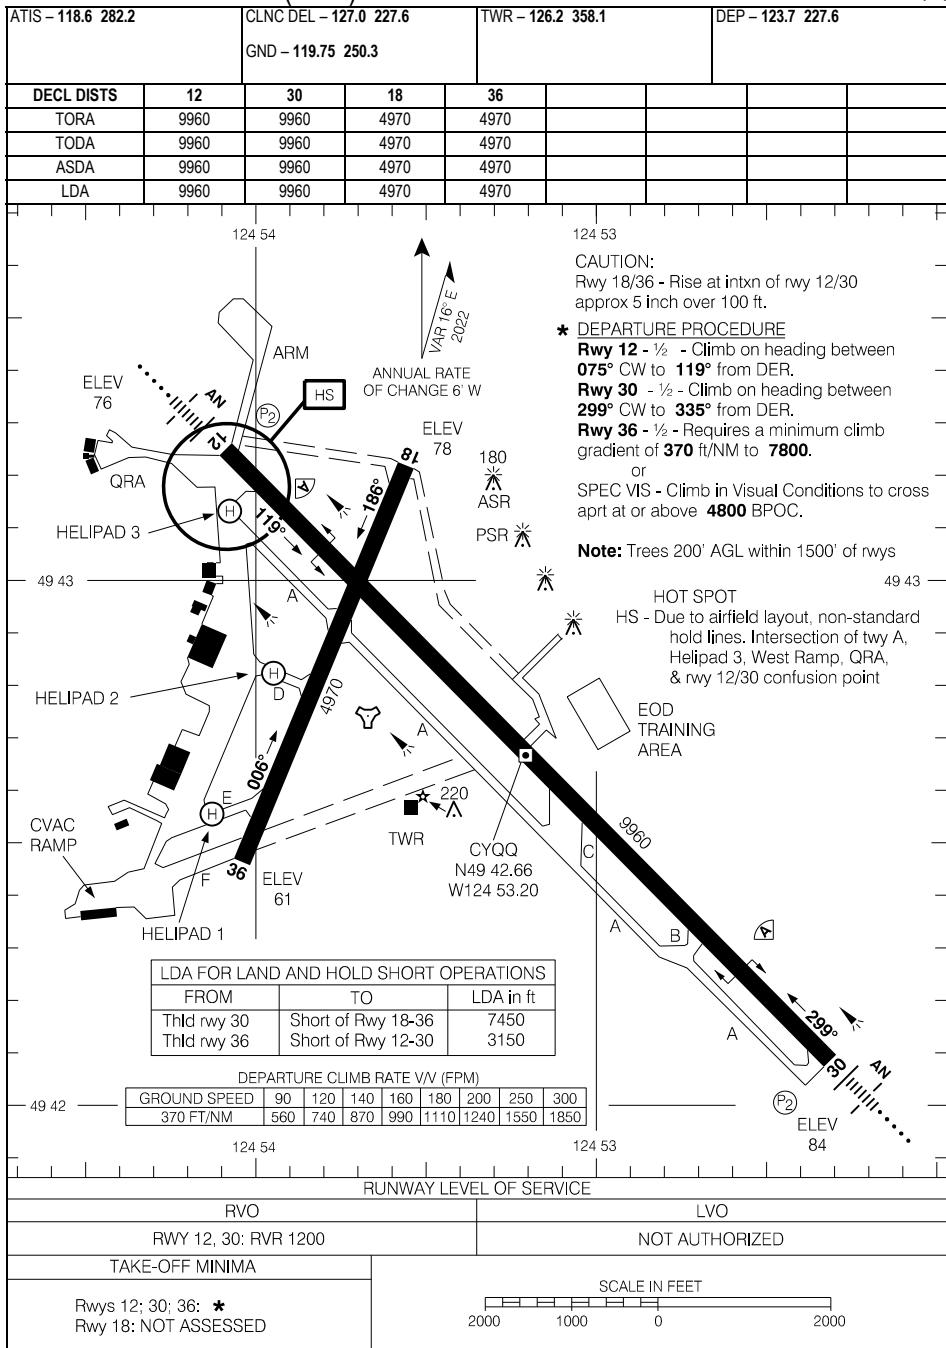

AERODROME CHART (DND)

EFF 5 OCT 23


CYQQ

CYQQ-AD

CYXC-AD

CRANBROOK/CANADIAN ROCKIES, BC
CYXC

AERODROME CHART

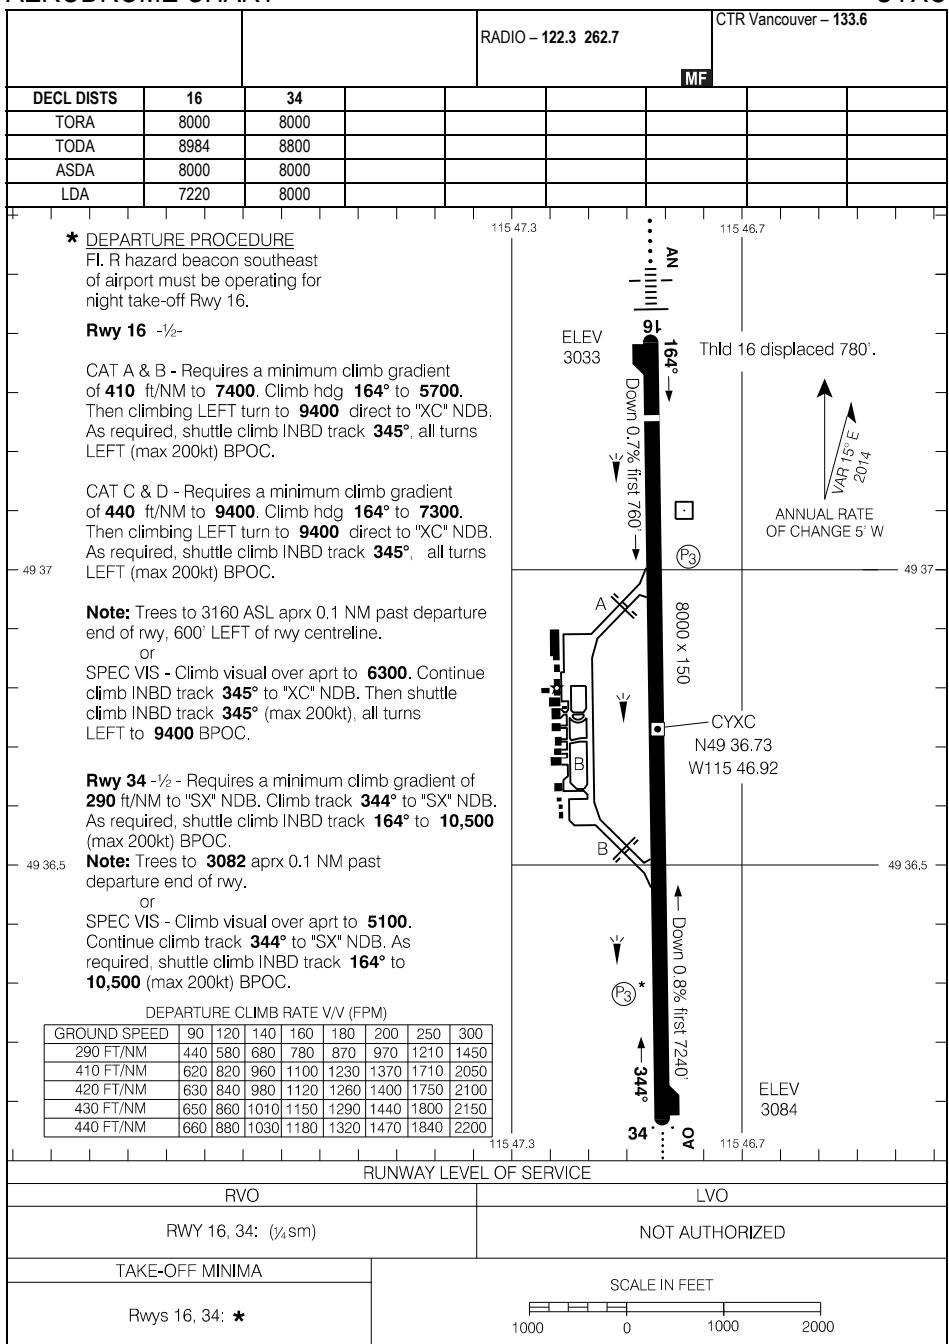

AERODROME CHART

EFF 12 JUN 25

CYXC-AD

CYXC


CAJ3-AD

CRESTON, BC
CAJ3

AERODROME CHART

LWIS – 129.17				UNICOM – 122.8		CTR Vancouver – 133.6	
						ATF	
DECL DISTS	15	33					
TORA	3944	3944					
TODA	3944	3944					
ASDA	3944	3944					
LDA	3944	3944					

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

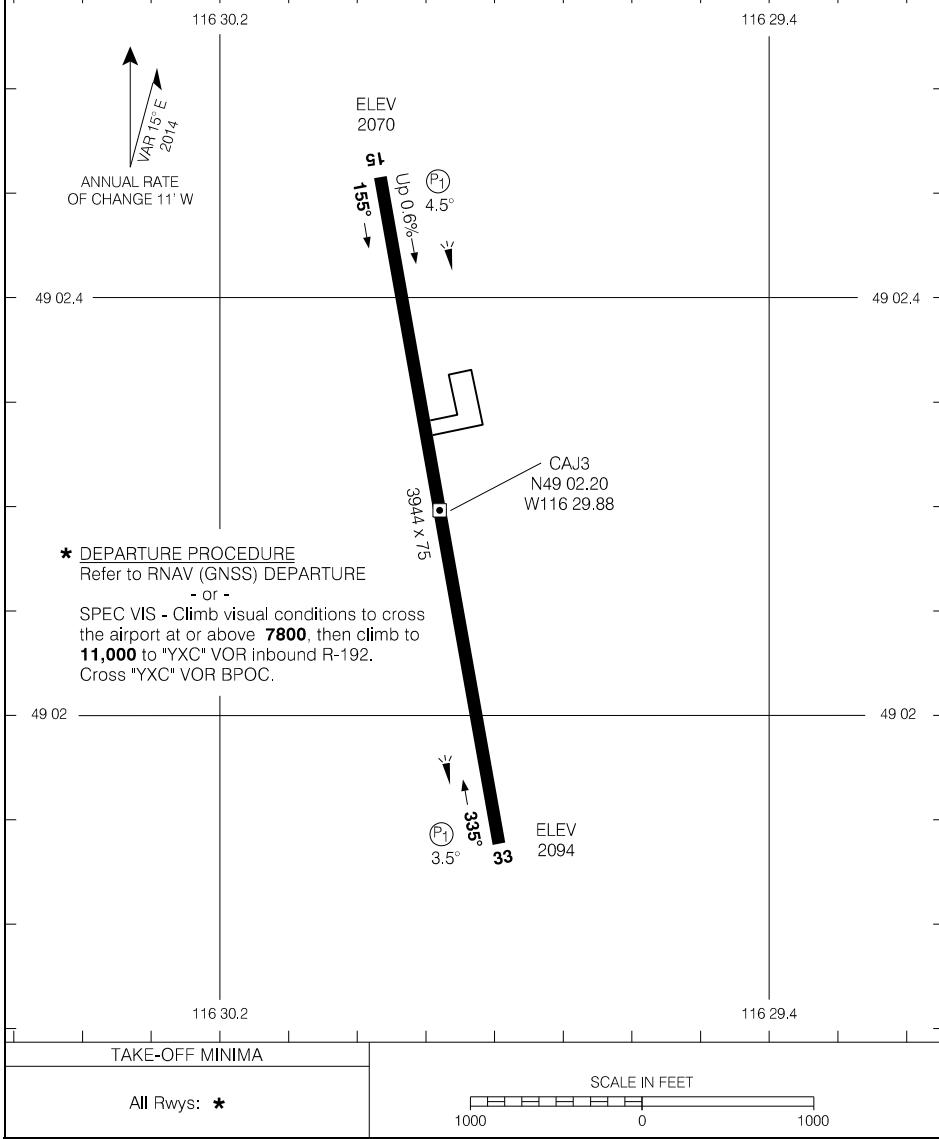

AERODROME CHART

EFF 17 APR 25


CAJ3

CAJ3-AD

CYDQ-AD

DAWSON CREEK, BC
CYDQ

AERODROME CHART

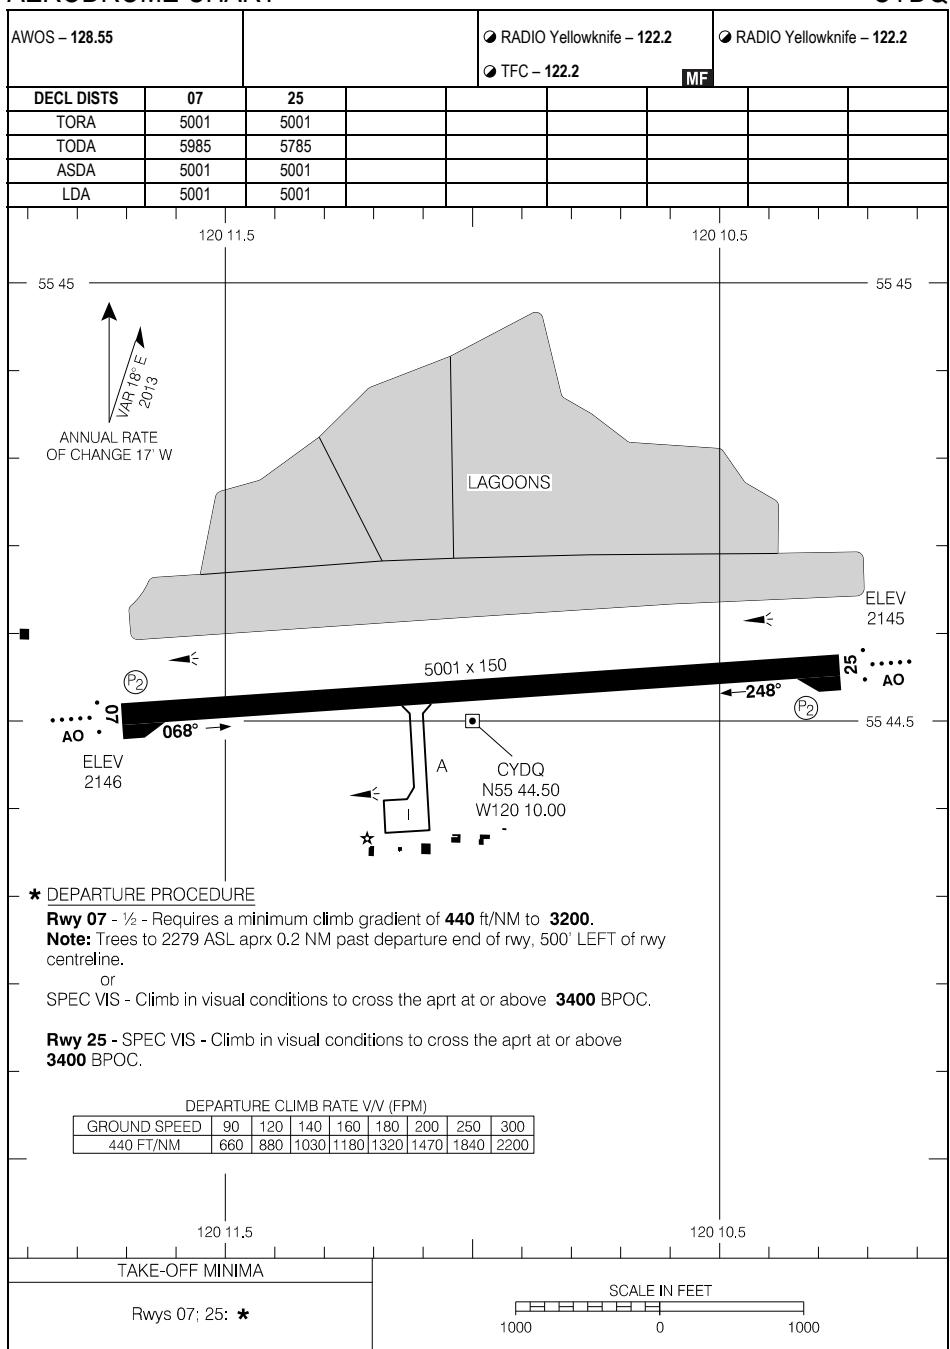

AERODROME CHART

EFF 11 JUL 24

CYDQ-AD

CYDQ

CYCZ-AD

FAIRMONT HOT SPRINGS, BC
CYCZ

AERODROME CHART

AUTO - 122.97

TFC - 123.2

ATE

ETR Vancouver - 133.6

ATP						
DECL DISTS	16	34				
TORA	6005	6005				
TODA	6005	6005				
ASDA	6005	6005				
LDA	6005	5184				

ANNUAL RATE
OF CHANGE 12% W

ELEV 2637 PAPI Rwy 16 offset 12° right.


* DEPARTURE PROCEDURE

Refer to SID

or

Rwys 16, 34 - SPEC VIS -Climb in visual conditions to cross the aprt at or above 9500 BPOC

Up 0.4% →
 CYCZ
 N50 19.81
 W115 52.4

Threshold 34 displaced 821'  336°
ELEV 2661 34

TAKE-OFF MINIMA

SCALE IN FEET

A horizontal number line starting at -1000, passing through 0, and ending at 1000. The line is marked with tick marks every 100 units.

AERODROME CHART

EFF 20 FEB 25

CYCZ


CYCZ-AD

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CYYE-AD

FORT NELSON, BC
CYYE

AERODROME CHART

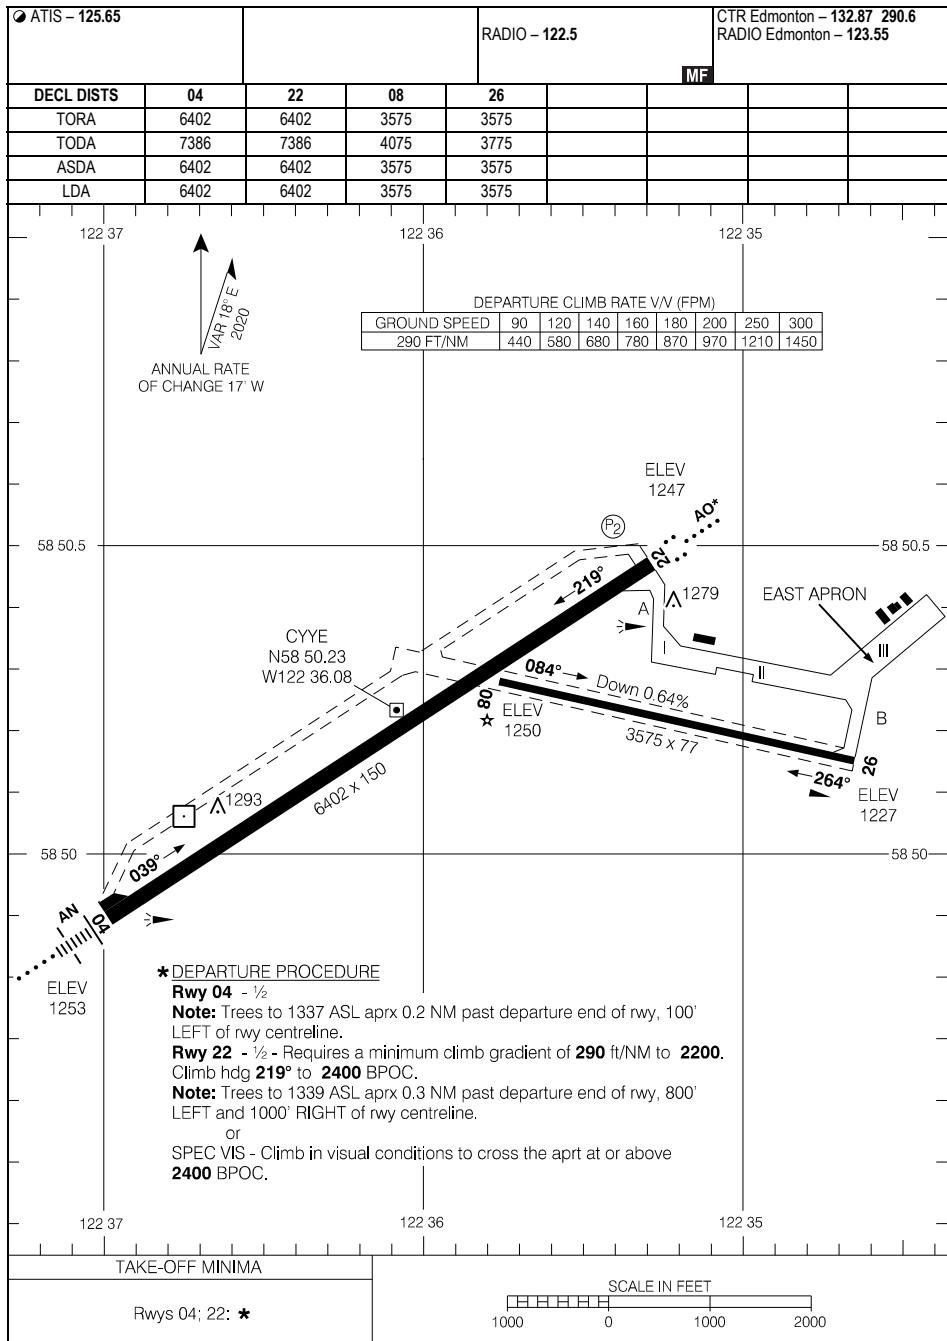

AERODROME CHART

EFF 7 AUG 25


CYYE-AD

CYYE

CYXJ-AD

FORT ST. JOHN, BC
CYXJ

AERODROME CHART

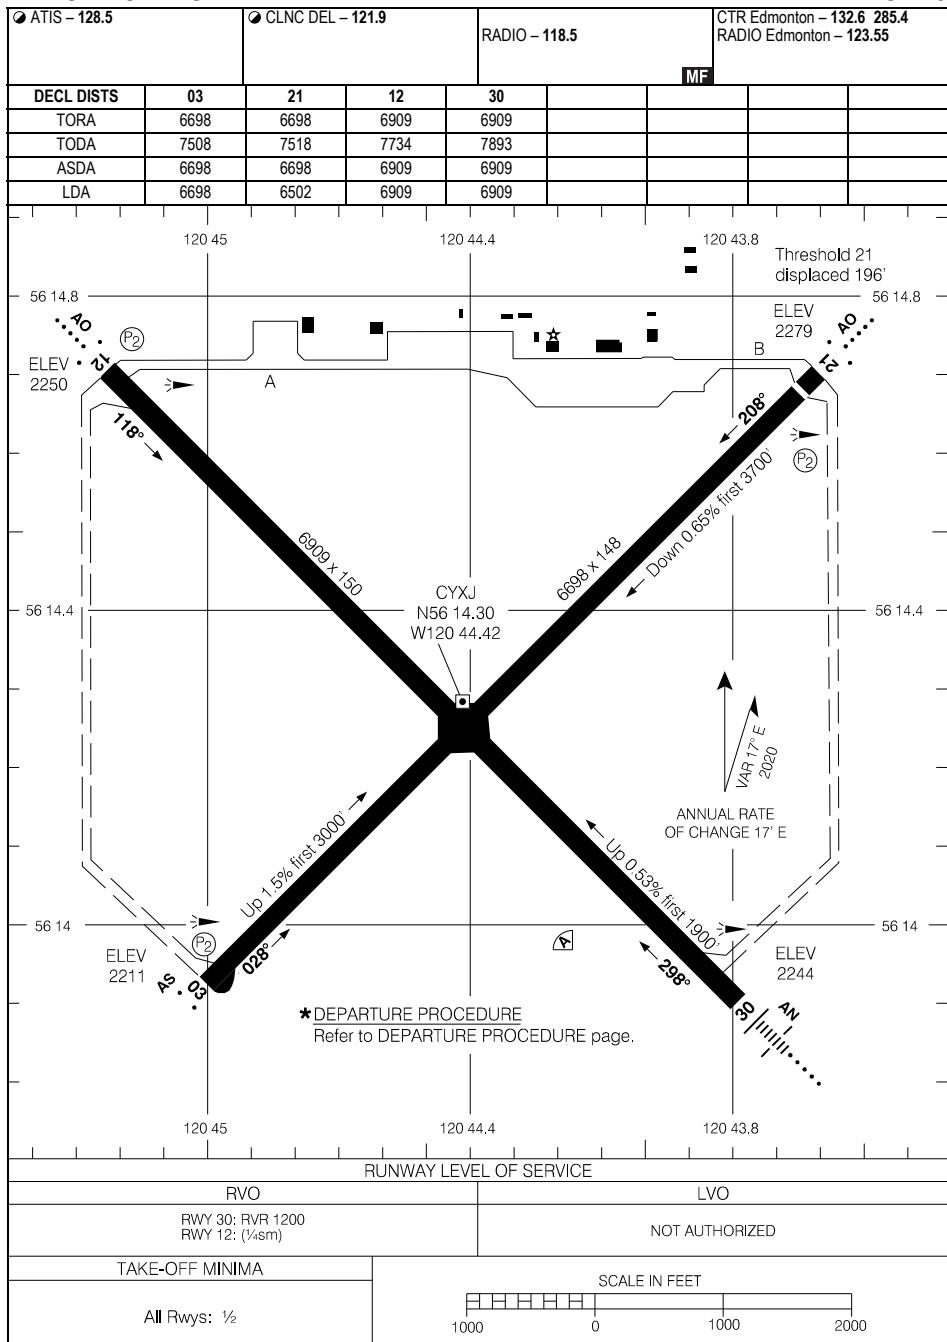

AERODROME CHART

EFF 25 JAN 24


CYXJ

CYXJ-AD

CYGE-AD

GOLDEN, BC
CYGE

AERODROME CHART

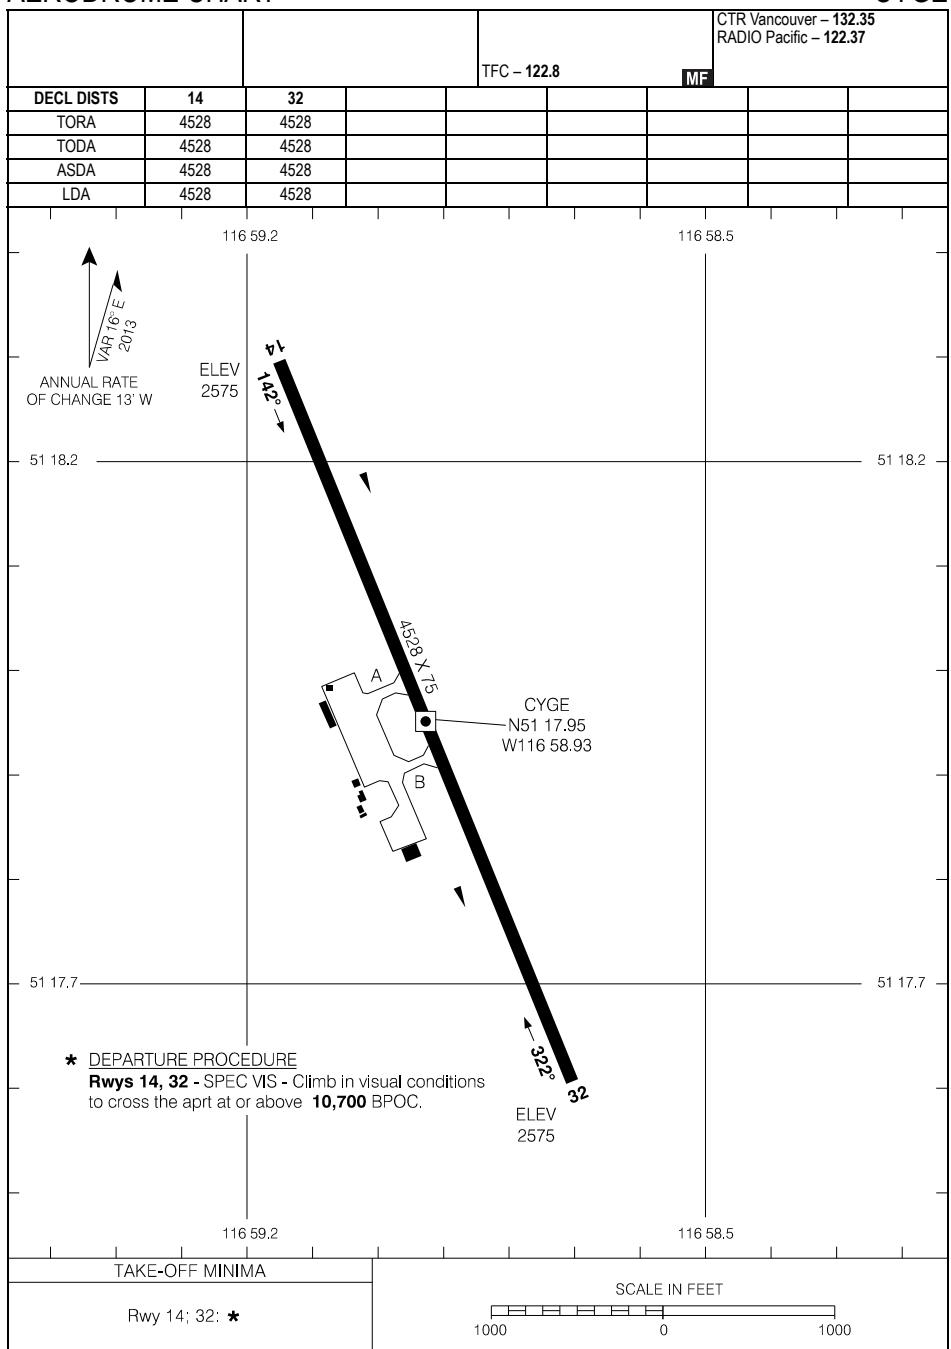

AERODROME CHART

EFF 27 JAN 22


CYGE

CYGE-AD

CZGF-AD

GRAND FORKS, BC
CZGF

AERODROME CHART

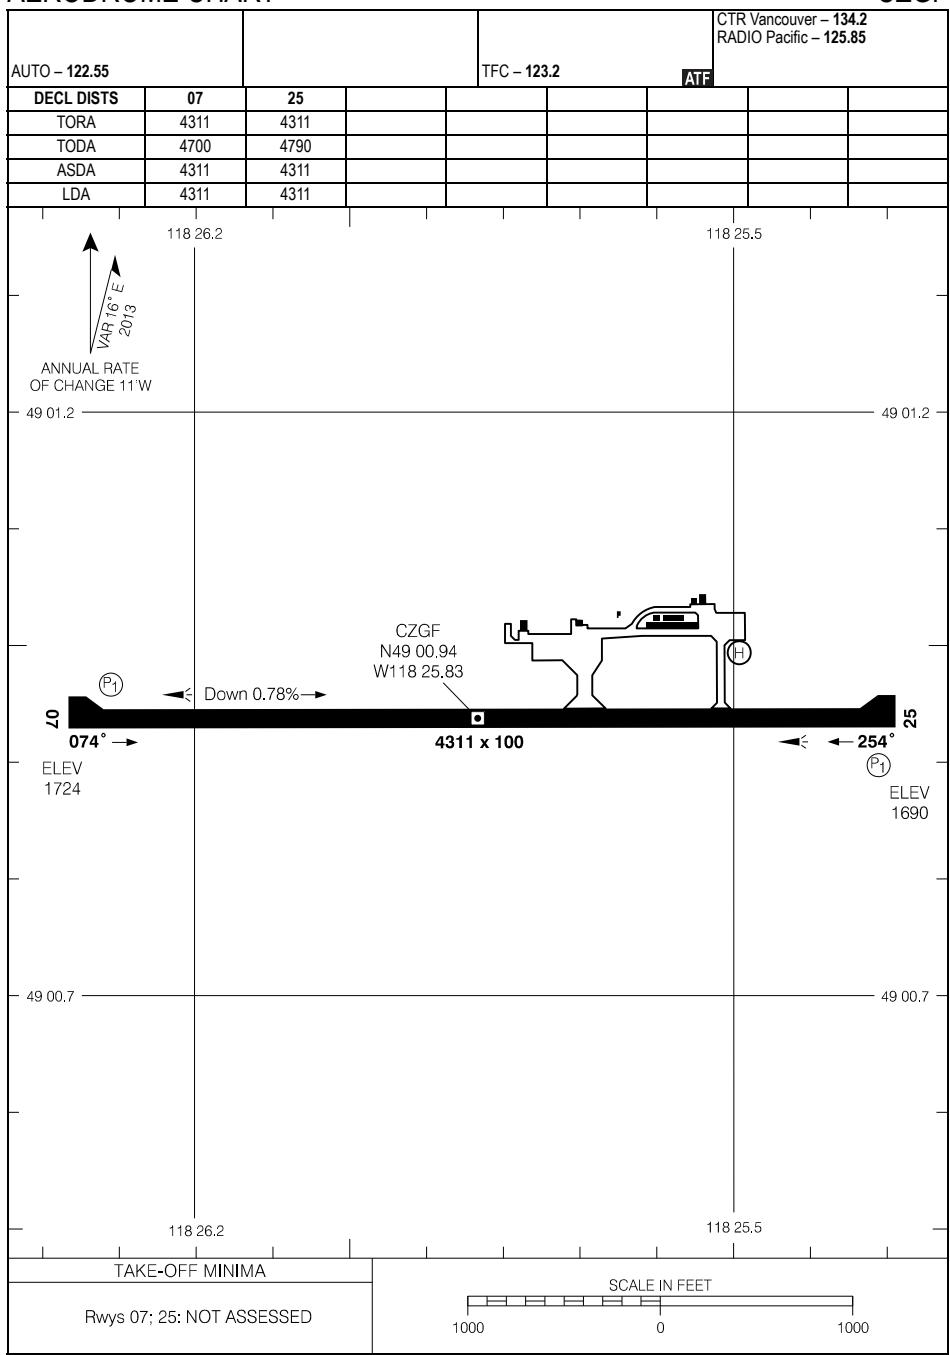

AERODROME CHART

EFF 10 SEP 20


CZGF

CZGF-AD

CYKA-AD

KAMLOOPS, BC
CYKA

AERODROME CHART

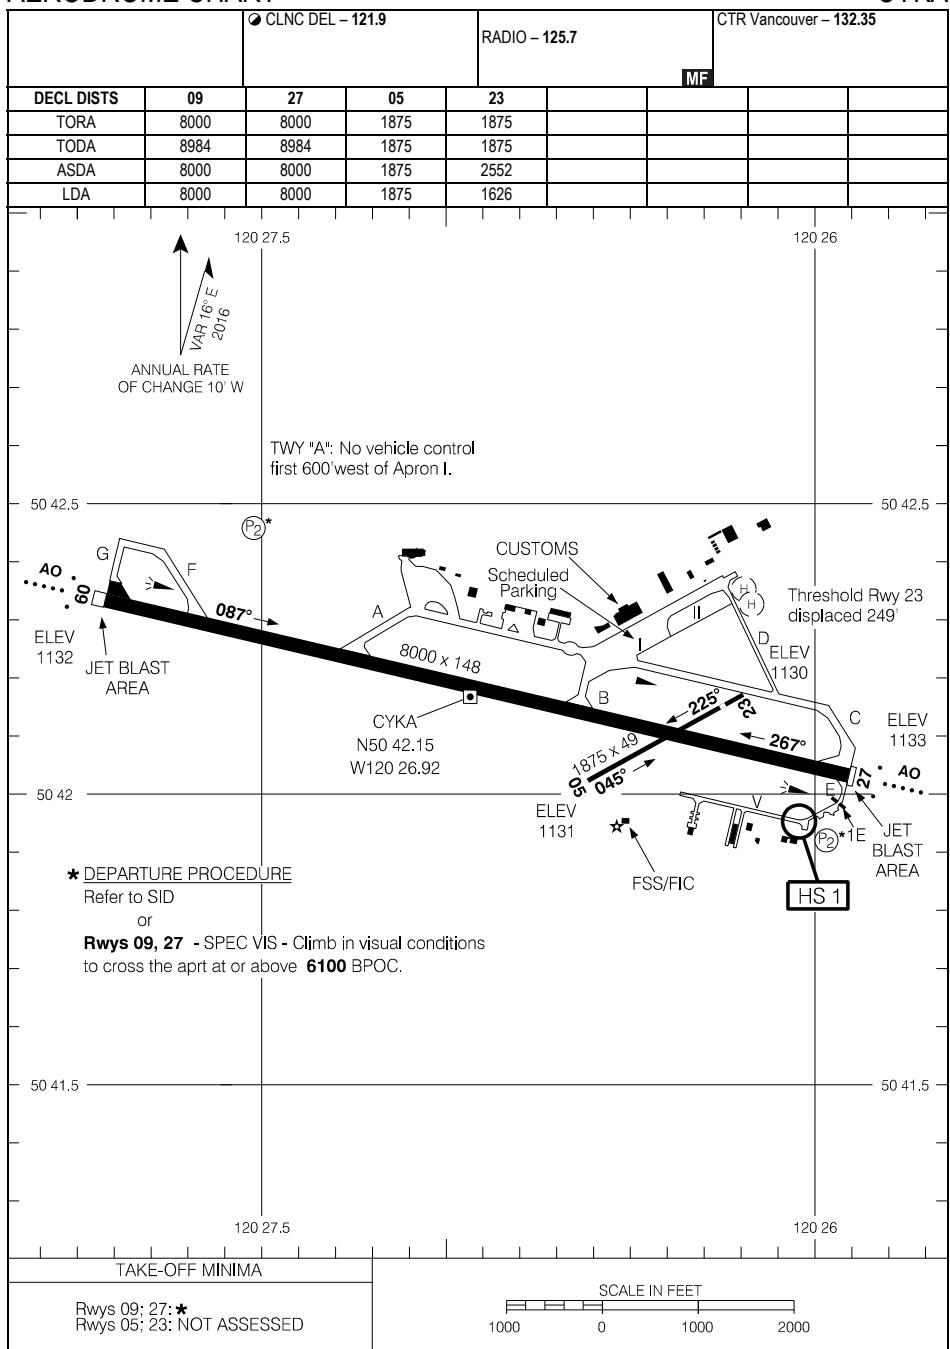

AERODROME CHART

EFF 20 FEB 25


CYKA-AD

CYKA

CYKA-APD-1

KAMLOOPS, BC
CYKA

PARKING AREAS

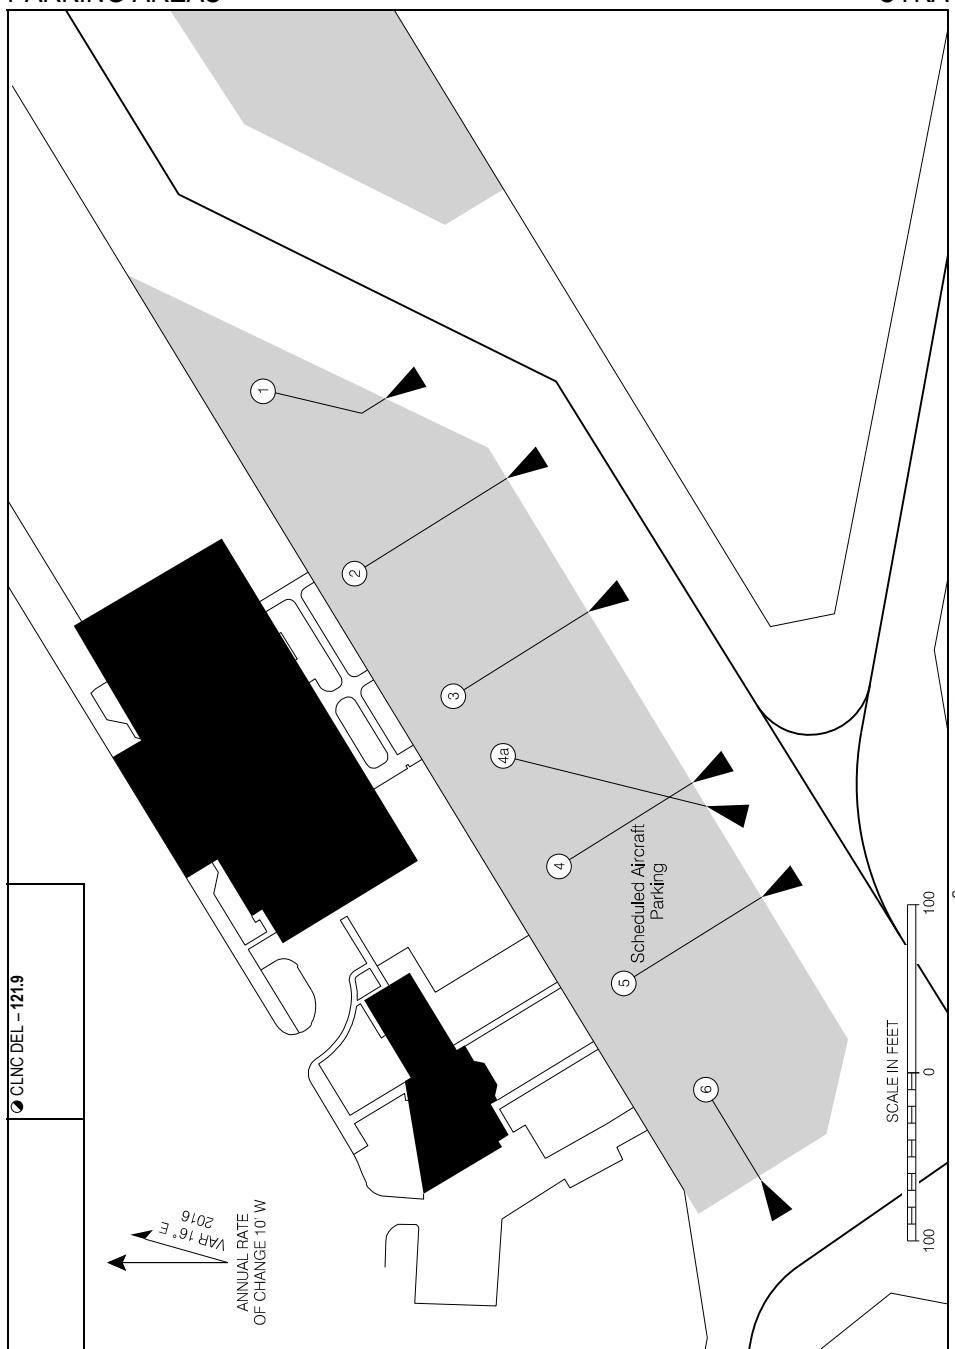

PARKING AREAS

EFF 5 SEP 24

CYKA-APD-1

PARKING AREAS

Aircraft Parking Position


Position	Coordinates	Position	Coordinates
1	504218.39N 1202625.48W	4A	504216.53N 1202630.20W
2	504217.50N 1202627.71W	5	504215.62N 1202633.07W
3	504216.91N 1202629.39W	6	504215.03N 1202634.55W
4	504216.14N 1202631.59W		

PARKING AREAS

EFF 16 JUL 20

CYKA

AERODROME CHART

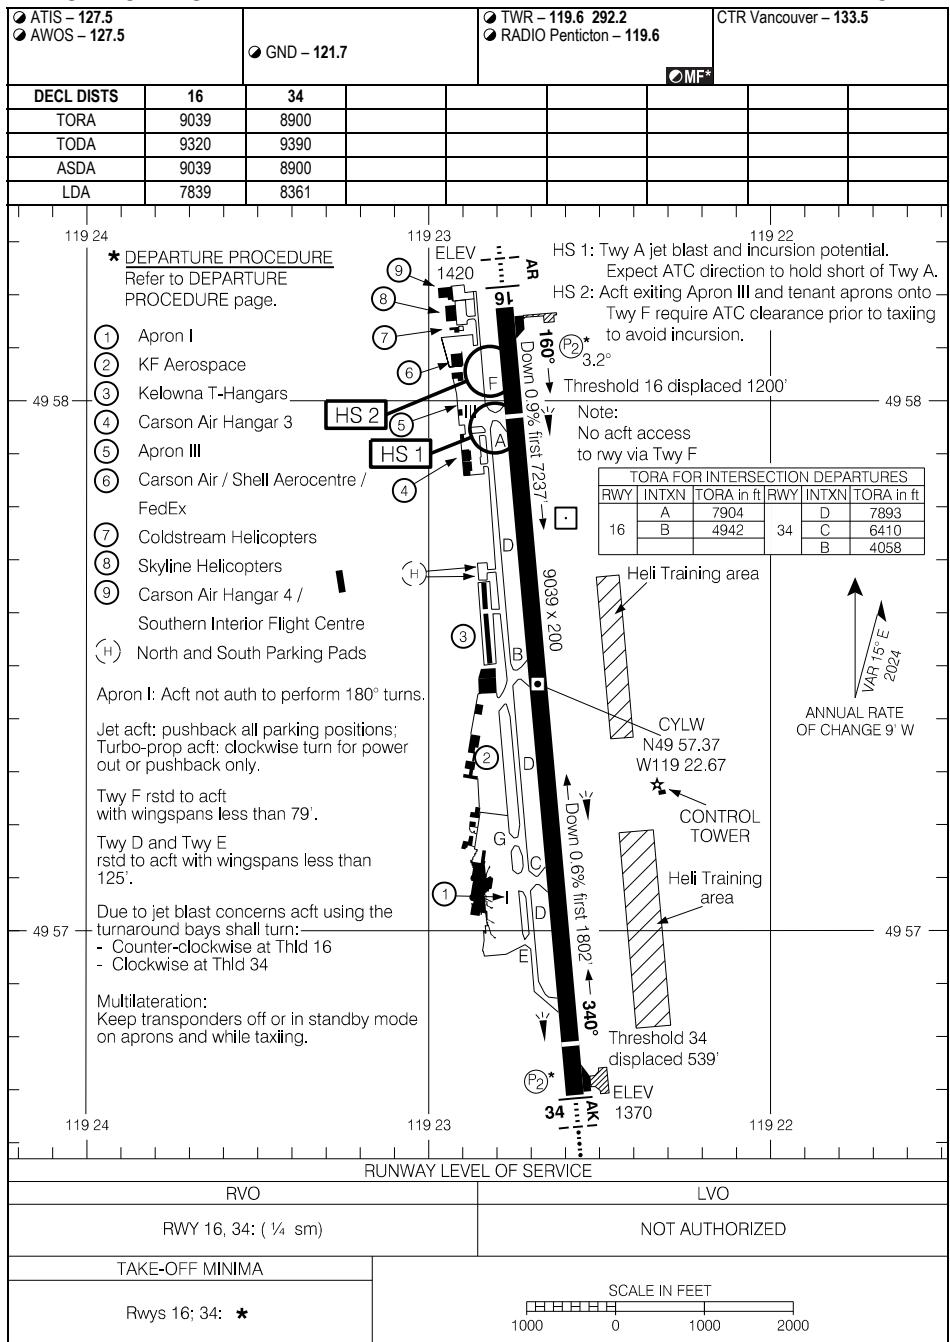

AERODROME CHART

EFF 17 APR 25

PARKING AREAS (APRON I)

● ATIS - 127.5
● AWOS - 127.5

● GND - 121.7

16

ANNUAL RATE
OF CHANGE 9' W

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA. All rights reserved

- (1)
- (2)
- (3)
- (4)
- (5)
- (6)
- (7)
- (8)
- (9)
- (10)

Apron I

CYLW-APD-1

Note:

Jet acft: pushback all parking positions;
Turbo-prop acft: clockwise turn for power
out or pushback only.

Multilateration:

Keep transponders off or in standby mode
on aprons and while taxiing.

Acft not auth to perform 180° turns.

SCALE IN FEET
250 0 250

PARKING AREAS (APRON I)

EFF 11 JUL 24

CYLW


PARKING AREAS (APRON III)

● ATIS - 127.5
● AWOS - 127.5

● GND - 121.7

Note:
Apron III: Parking for commercial operators and aircraft over 12,500 lb 3 hr PPR.
Contact OPR 250-807-4350.
Ground handling/marshalling mandatory.
Towing/push back may be required.
Pilots cautioned to minimize thrust as potential jetblast damage to adjacent acft and property.

Rwy 16-34

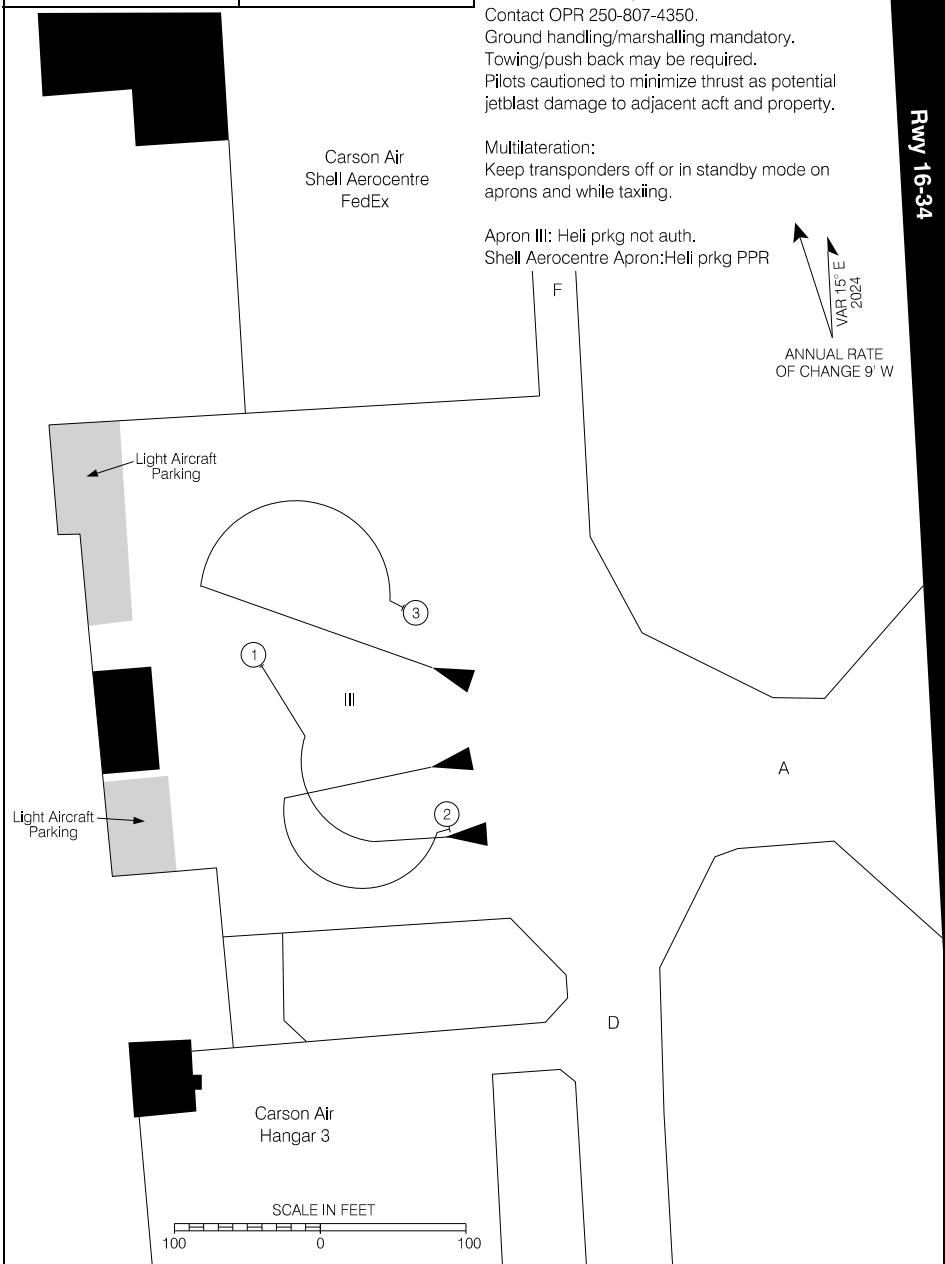

PARKING AREAS (APRON III)


EFF 21 MAR 24

CYLW

CYNJ-AD

LANGLEY REGIONAL, BC
CYNJ

AERODROME CHART

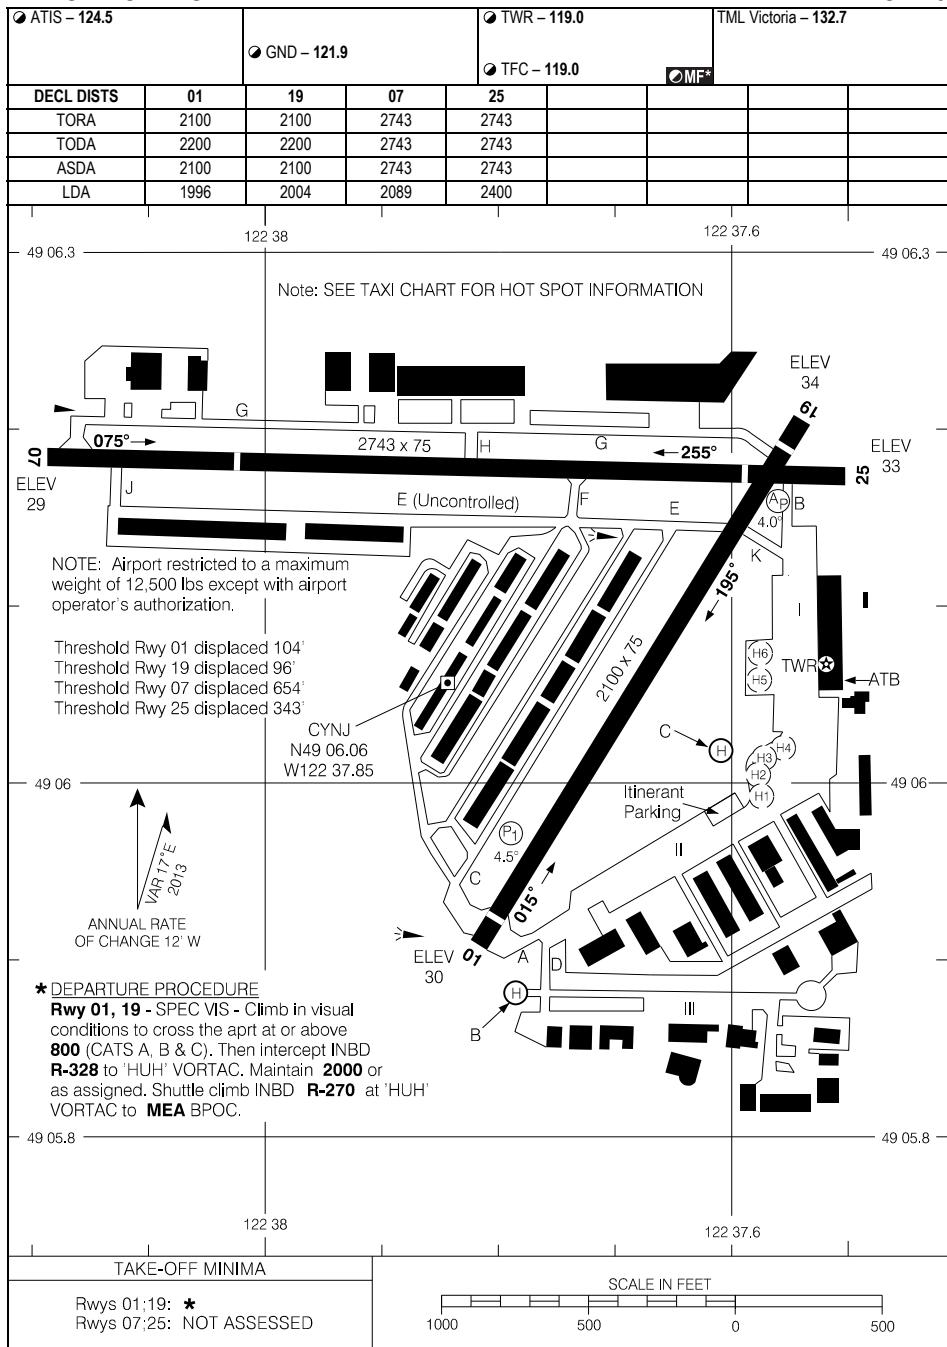


AERODROME CHART

EFF 8 SEP 22

CYNJ-AD

CYNJ

TAXI CHART

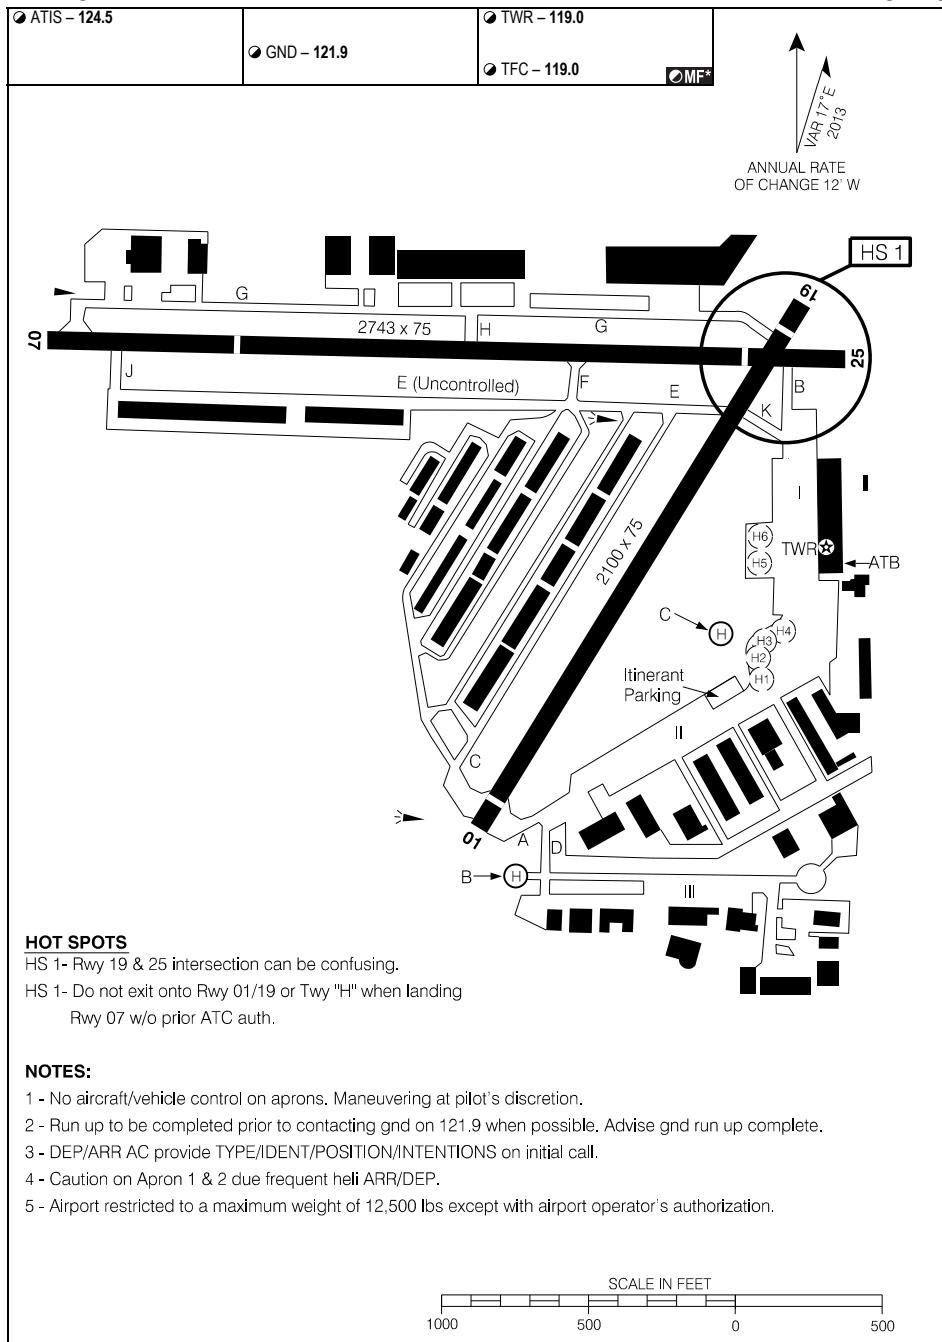

TAXI CHART

EFF 8 SEP 22

CYZY-AD

MACKENZIE, BC
CYZY


AERODROME CHART

AWOS – 127.7

TFC - 123.5

RADIO Pacific - 123.47

DECL DISTS	17	35							IMF
TORA	5033	5033							
TODA	6017	5033							
ASDA	5233	5233							
LDA	5033	5033							

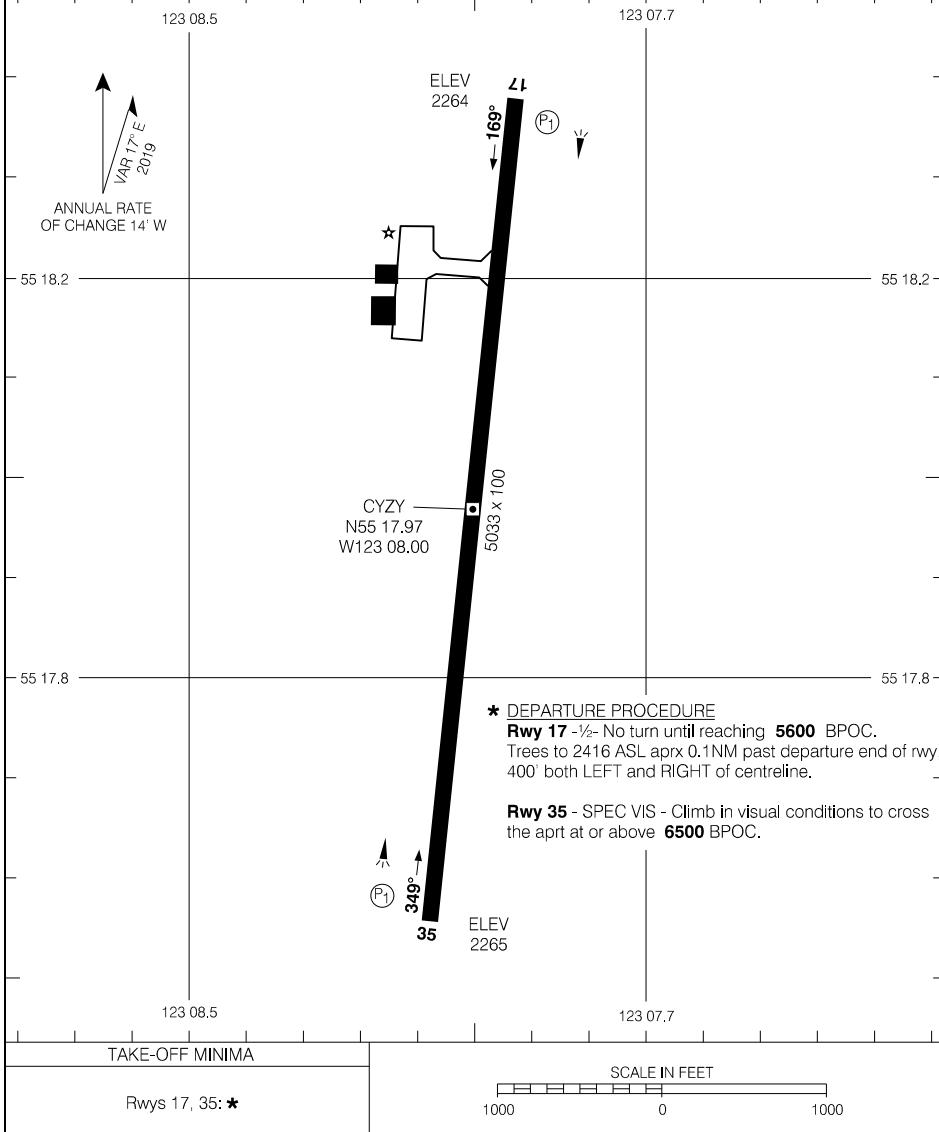

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 30 JAN 20

CYZY

CYZY-AD

CZMT-AD

MASSET, BC
CZMT

AERODROME CHART

				● UNICOM – 122.7	CTR Vancouver – 133.67
DECL DISTS	13	31			MF
TORA	4924	4924			
TODA	4924	4924			
ASDA	4924	4924			
LDA	4924	4674			

132 07.8

132 07

* DEPARTURE PROCEDURE

Rwy 13 - 1/2 - Requires a minimum climb gradient of **310 ft/NM** to **500**.
Climb between hdg **108° CCW** to **309°** to **2600 BPOC**.

Note: Building to 52 ASL aprx 0.1 NM past departure end of rwy, 400' LEFT of centreline. Trees to 156 ASL abeam departure end of rwy, 550' LEFT and 650' RIGHT of rwy centreline and aprx 0.2 NM past departure end of rwy.

SPEC VIS - Climb in visual conditions to cross apt at or above **900** BPOC.

54 01.9

Rwy 31 - 1/2

Note: Trees to 87 ASL aprx 200' past departure end of rwy, 350' LEFT of rwy centreline.

ANNUAL RATE
OF CHANGE 15' W

CZMT
N54 01.63
W132 07.50

4924 + 100

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

DEPARTURE CLIMB RATE VA (FPM)

DEPARTURE CLIMB RATE V/S (FPM)								
GROUND SPEED	90	120	140	160	180	200	250	300
310 FT/NM	470	620	730	830	930	1040	1300	1550

132 07 8

132 07

Rwys 13; 31: *

SCALE IN FEET


AFRODROME CHART

EFF 12 JUN 25

GZMT

CZMT-AD

AERODROME CHART

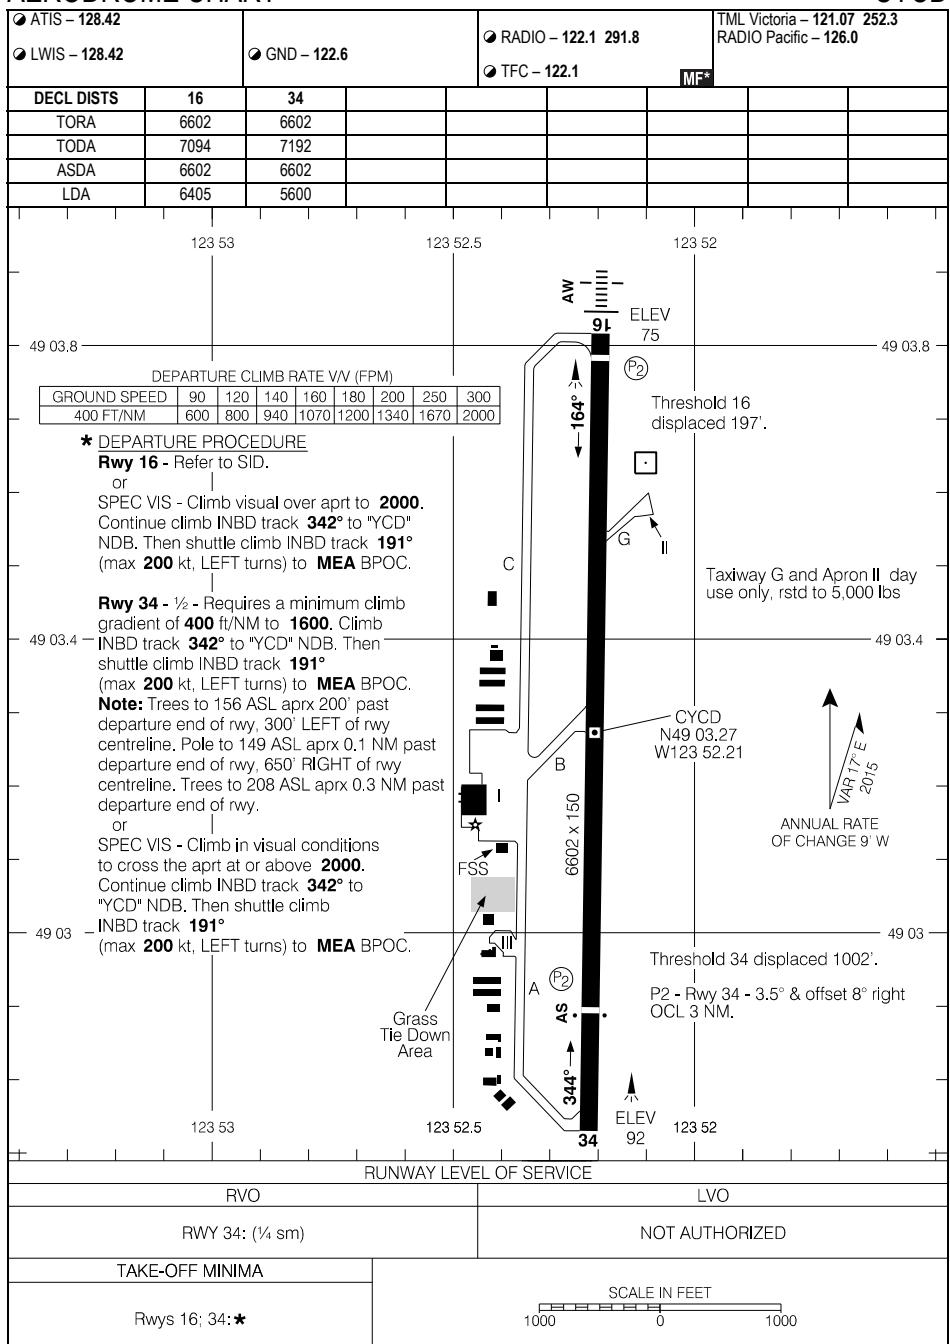

AERODROME CHART


EFF 26 DEC 24

CYCD

CDH5-HP

NANAIMO/NANAIMO HARBOUR HELIPORT, BC
CDH5

HELIPORT CHART

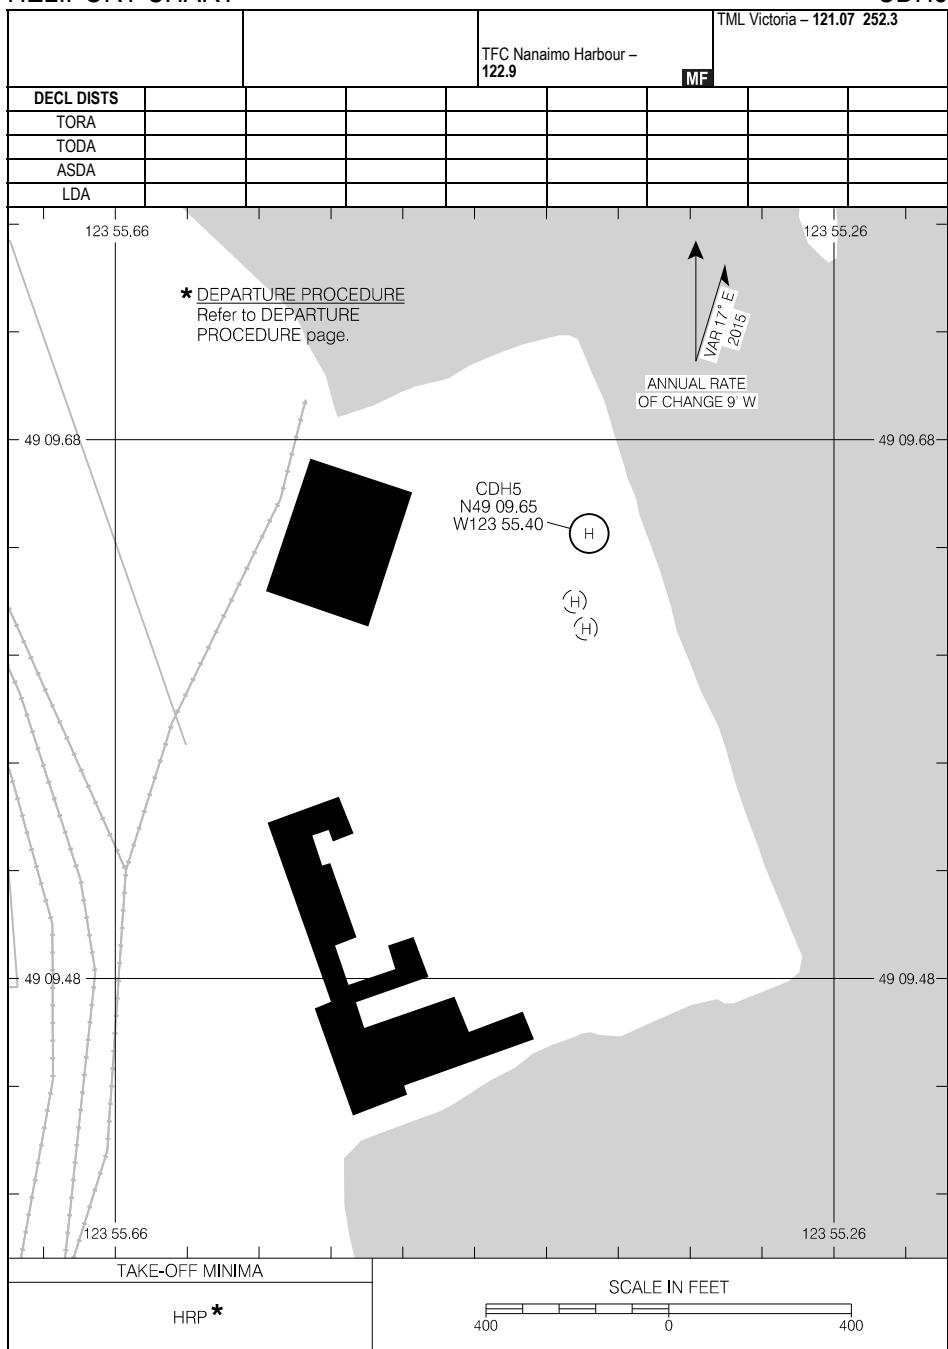

HELIPORT CHART

EFF 17 APR 25


CDH5

CDH5-HP

CYYF-AD

PENTICTON, BC
CYYF

AERODROME CHART

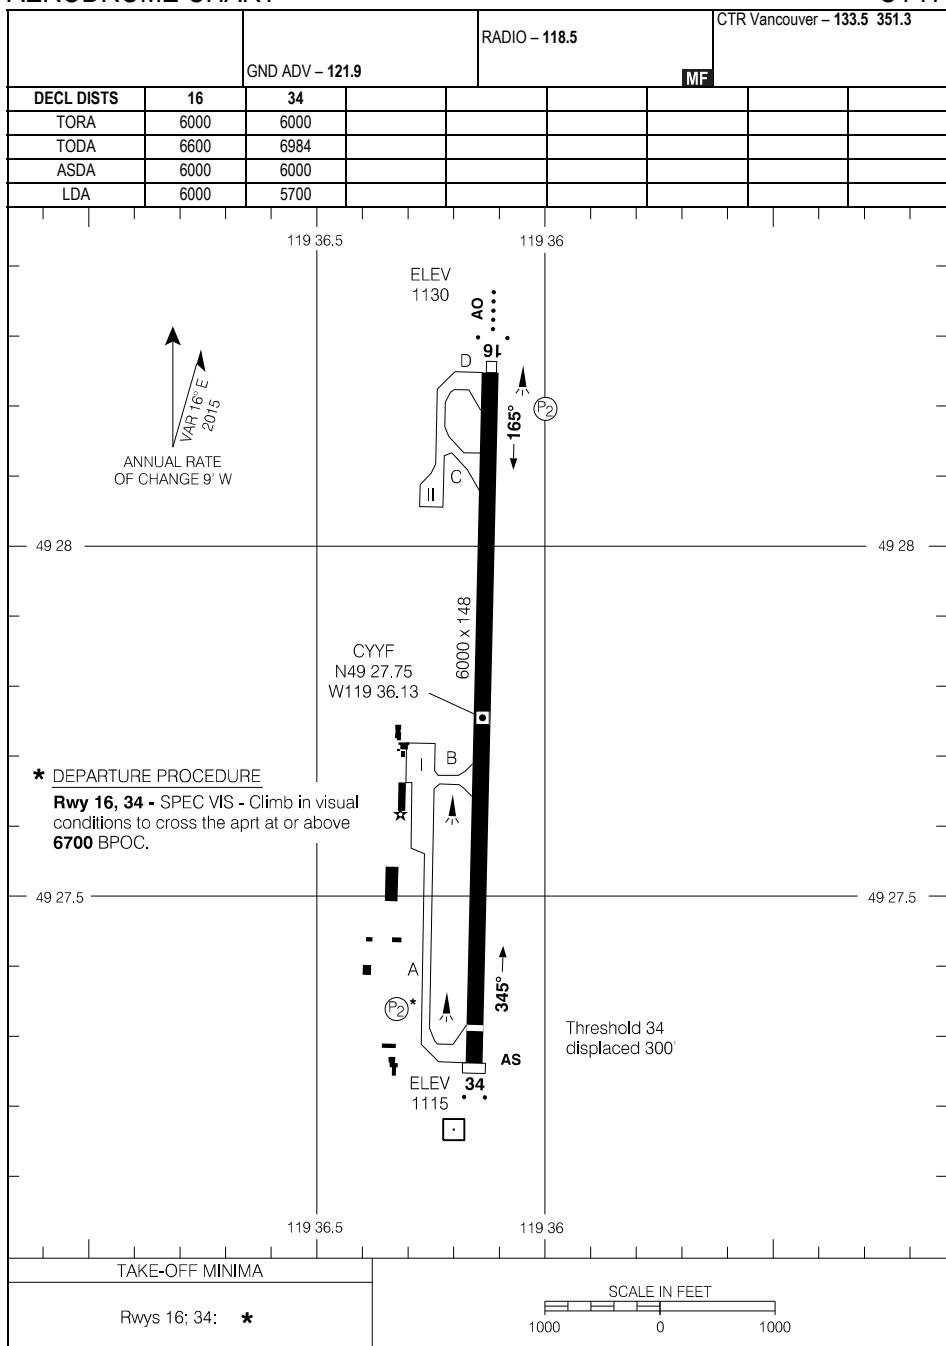

AERODROME CHART

EFF 26 DEC 24


CYYF-AD

CYYF

CYPK-AD

PITT MEADOWS, BC
CYPK

AERODROME CHART

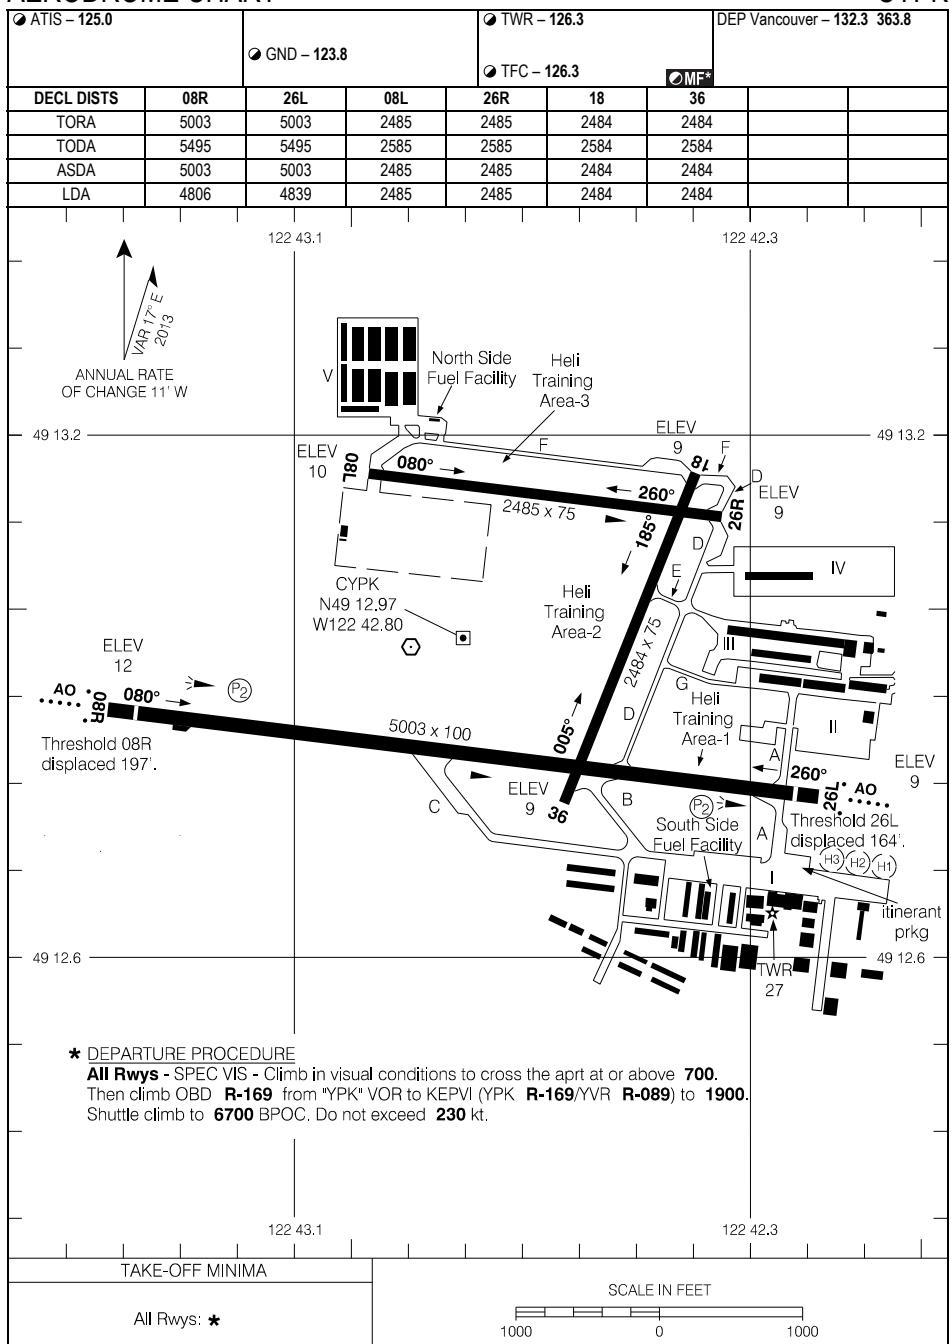

AERODROME CHART

EFF 5 OCT 23

CYPK-AD

CYPK

CBS8-AD


PORT ALBERNI (ALBERNI VALLEY REGIONAL), BC

CBS8

AERODROME CHART

								TML Comox - 123.7
								TFC - 123.0
								ATF
DECL DISTS	12	30						
TORA	5000	5000						
TODA	5000	5000						
ASDA	5000	5000						
LDA	5000	5000						

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

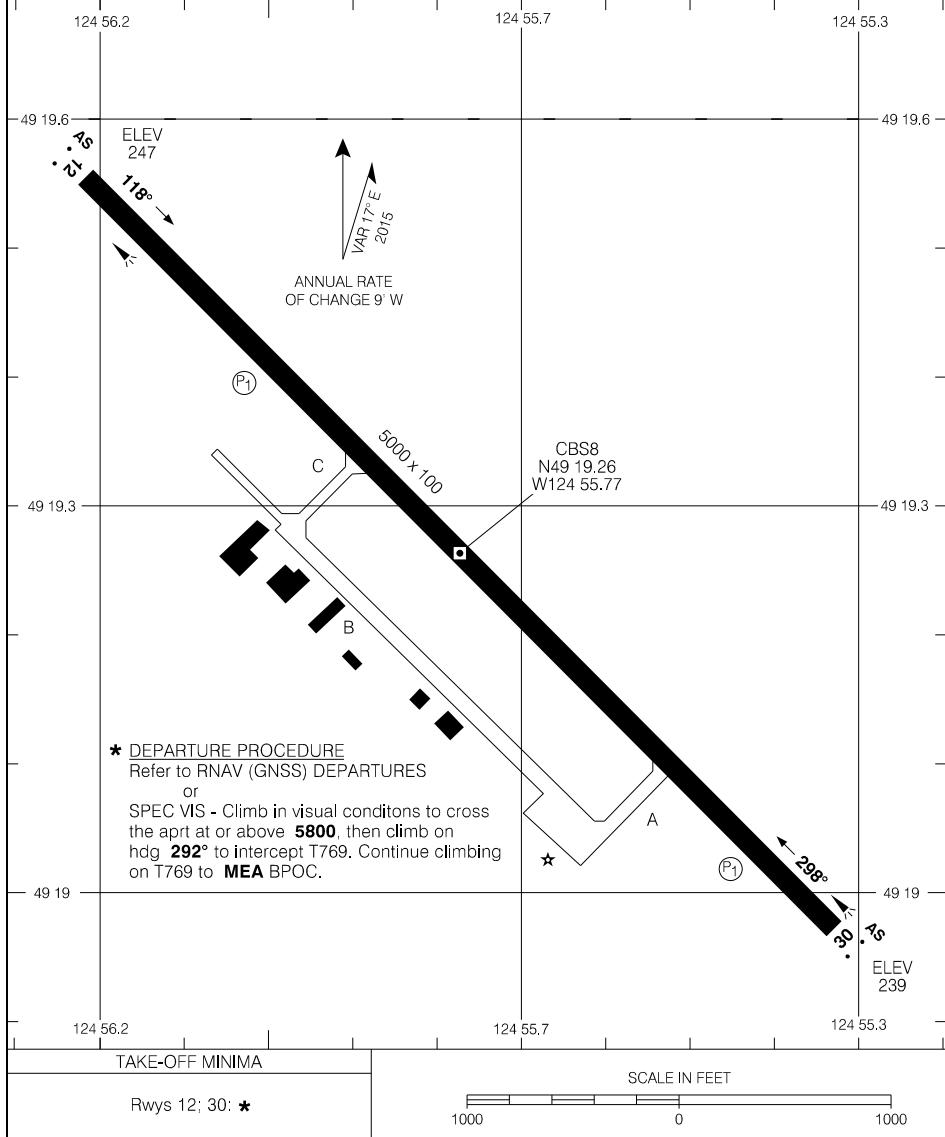

AERODROME CHART

EFF 5 SEP 24

CBS8

CBS8-AD

CYKT-AD

PORT HARDY, BC
CYZT

AERODROME CHART

				RADIO Hardy – 122.2			CTR Vancouver – 132.2 266.3	
DECL DISTS		08	26	11	29	16	34	MF*
TORA	4000	4000	4999	4999	3984	3984		
TODA	4902	4000	5983	5819	3984	4476		
ASDA	4000	4000	4999	4999	3984	3984		
LDA	4000	4000	4999	4999	3984	2493		

MF*

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

RUNWAY LEVEL OF SERVICE

RVO	LVO
RWY 29: ($\frac{1}{4}$ sm)	NOT AUTHORIZED

TAKE-OFF MINIMA

Rwys 08, 34: NOT ASSESSED
Rwys 11, 16, 26, 29: *

SCALE IN FEET

1000 0 1000

AERODROME CHART

EFF 16 MAY 24


CY7T-AD

CYzt

CYPW-AD

POWELL RIVER, BC
CYPW

AERODROME CHART

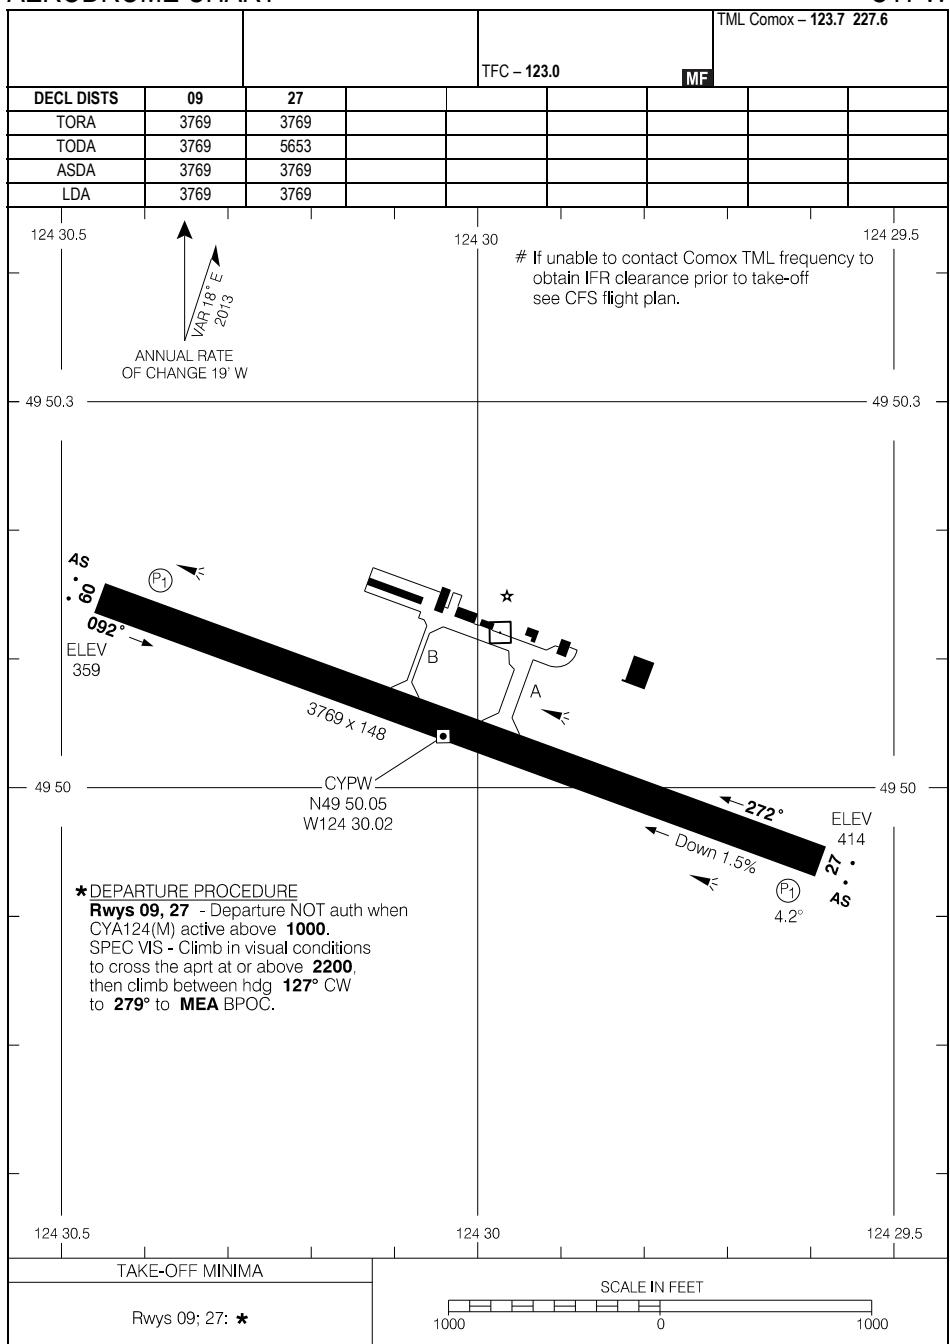

AERODROME CHART

EFF 12 JUN 25


CYPW-AD

CYPW

CYXS-AD

PRINCE GEORGE, BC
CYXS

AERODROME CHART

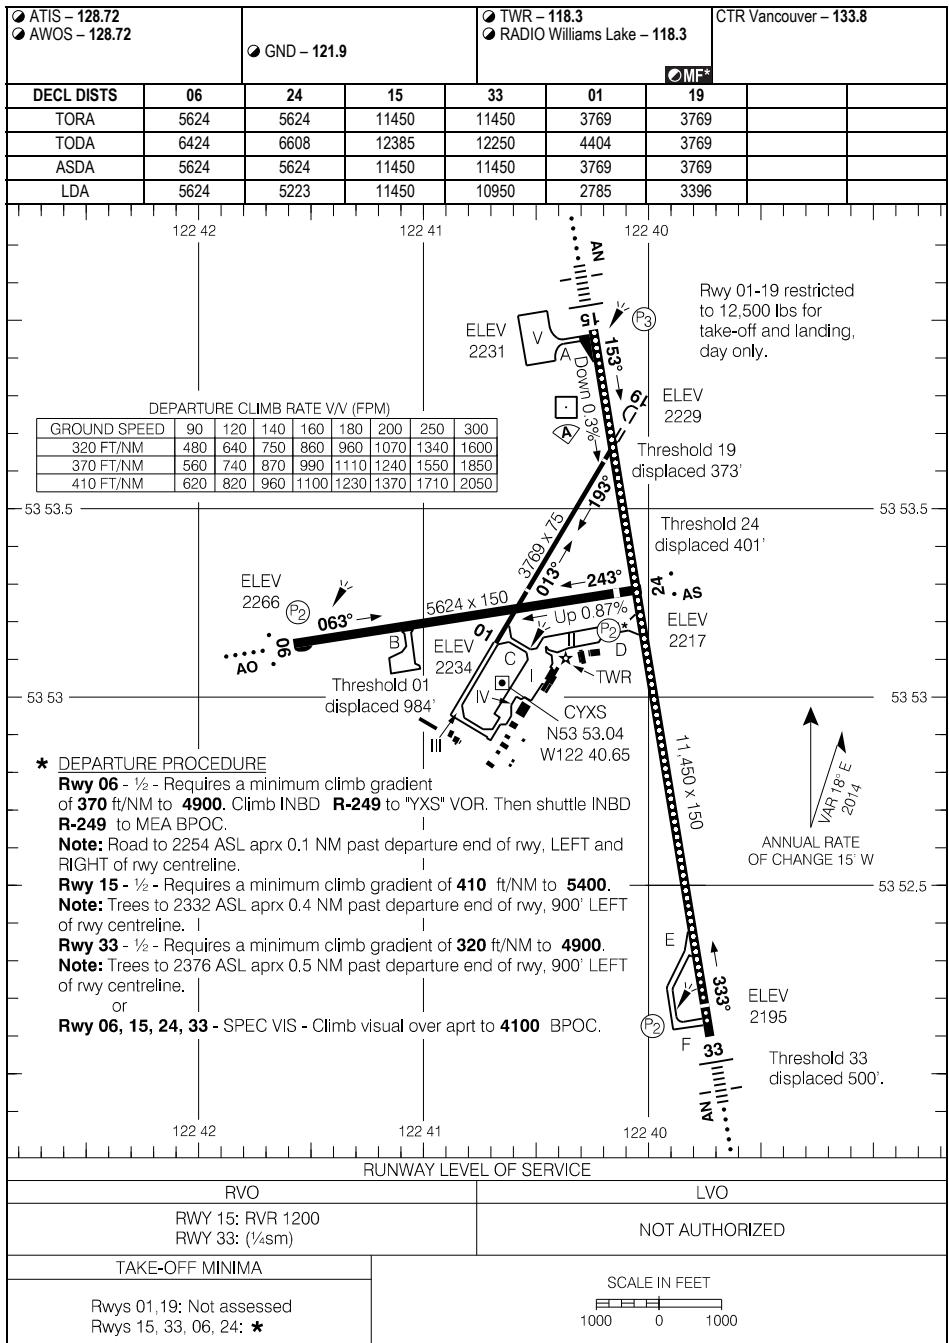

AERODROME CHART

EFF 23 FEB 23


CYXS-AD

CYXS

CYPR-AD

PRINCE RUPERT, BC
CYPR

AERODROME CHART

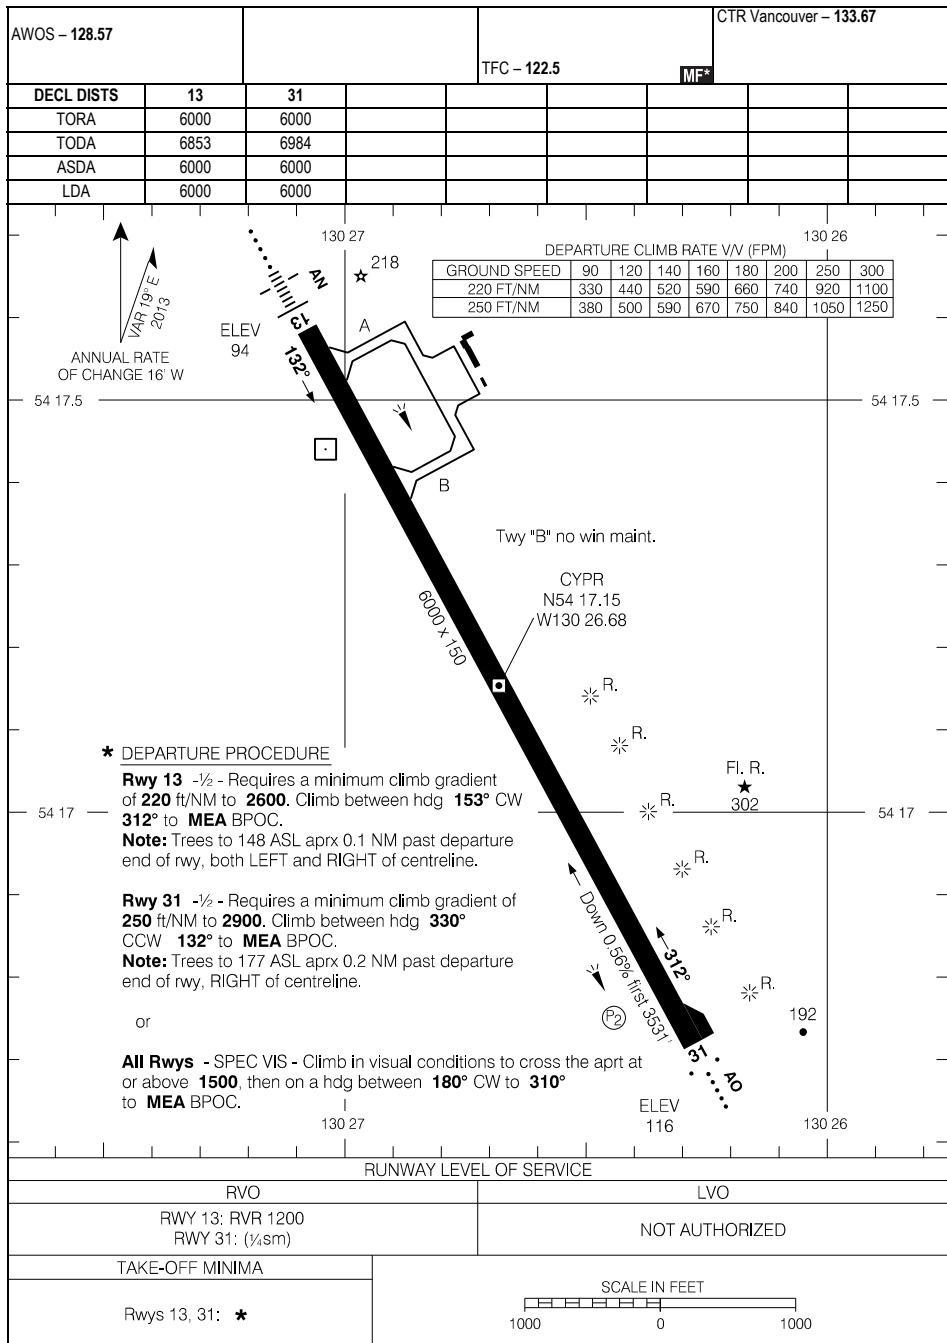

AERODROME CHART

EFF 25 JAN 24


CYPR-AD

CYPR

CYDC-AD

PRINCETON, BC
CYDC

AERODROME CHART

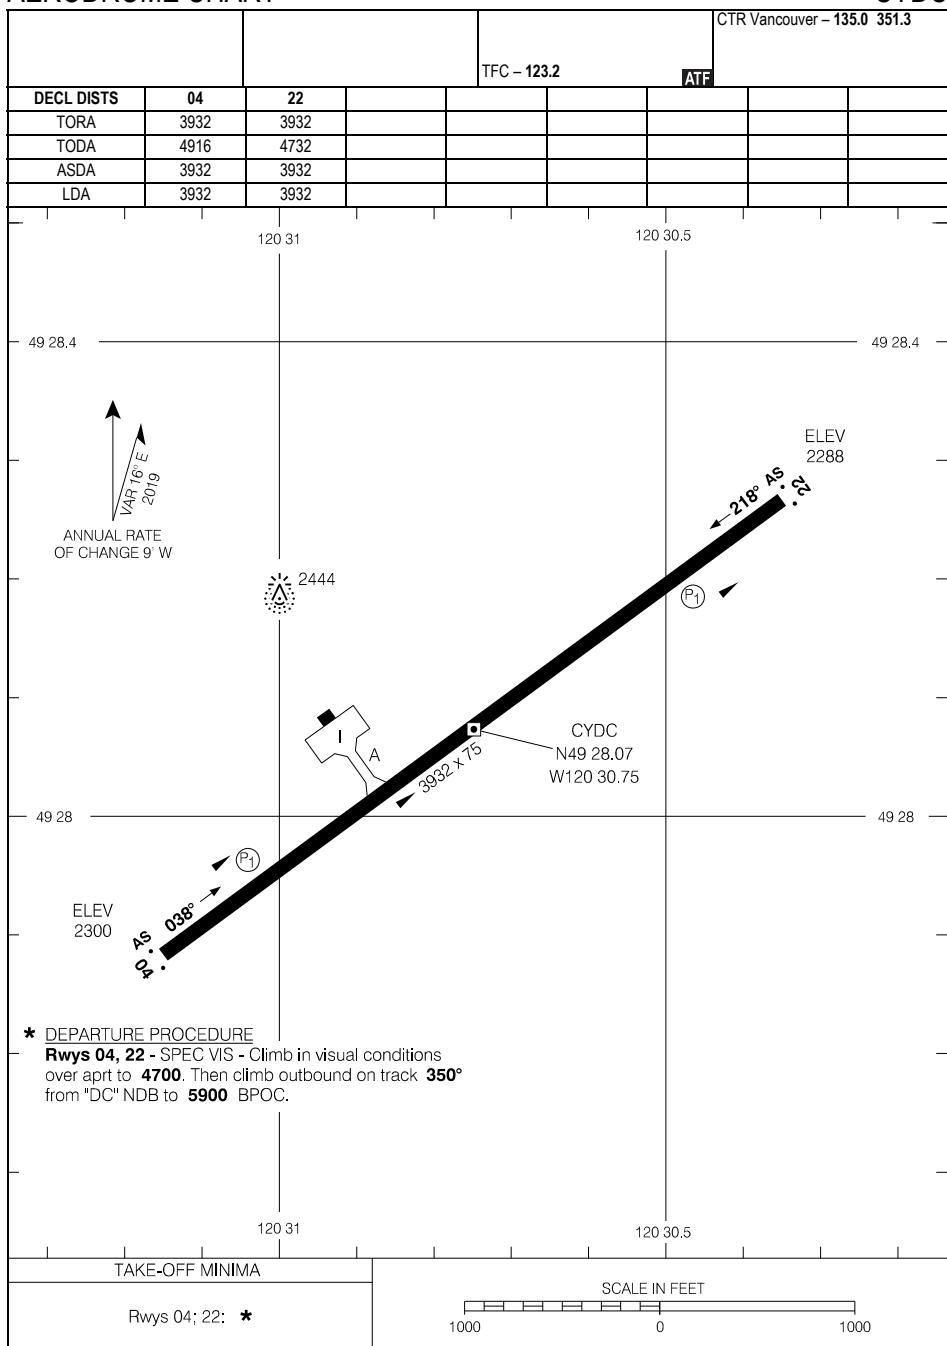

AERODROME CHART

EFF 31 OCT 24


CYDC

CYDC-AD

CAT4-AD

QUALICUM BEACH, BC
CAT4

AERODROME CHART

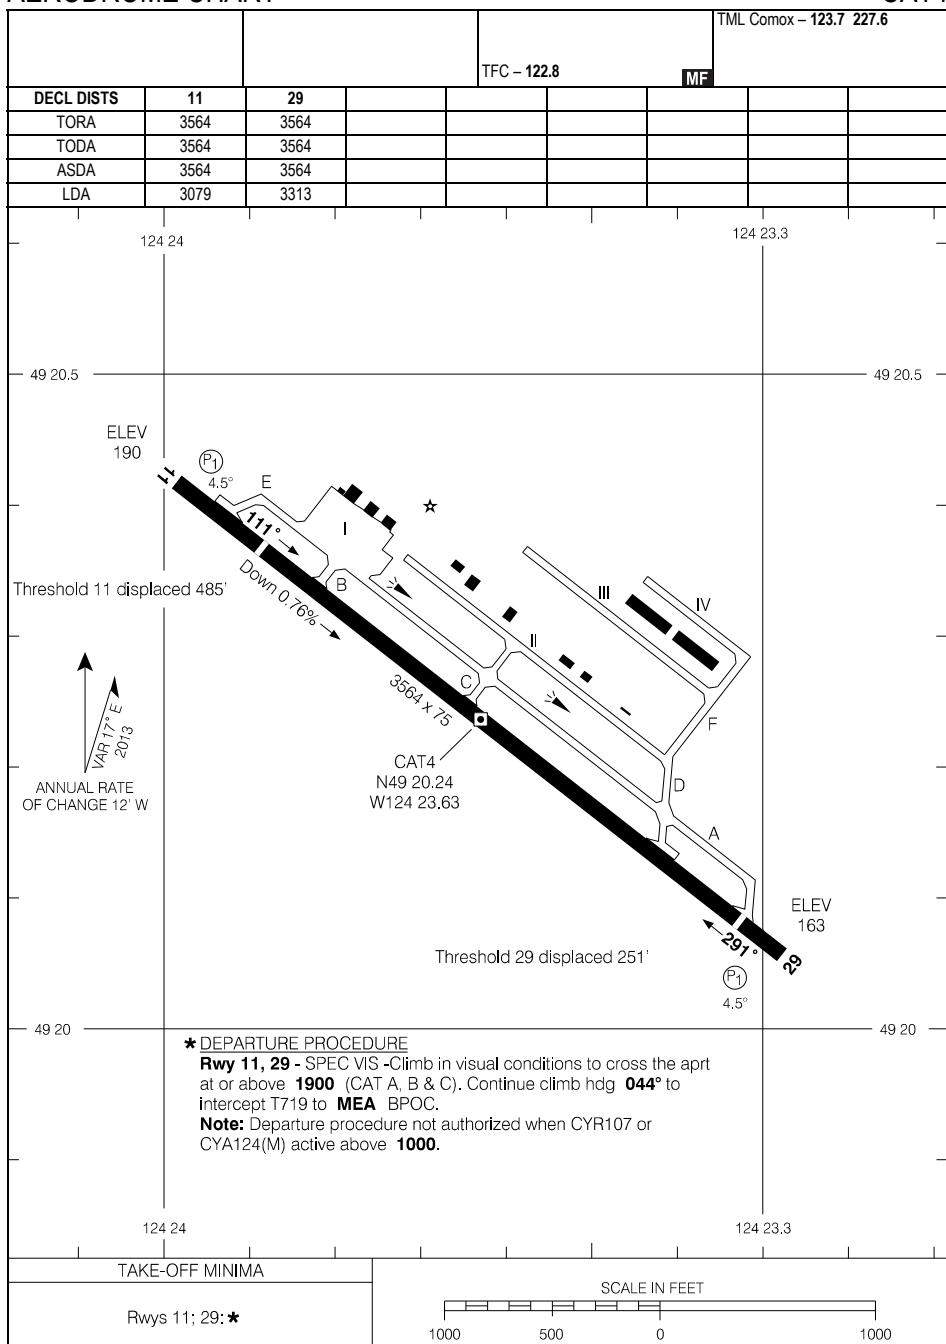

AERODROME CHART

EFF 21 MAR 24


CAT4-AD

CAT4

CYQZ-AD

QUESNEL, BC
CYQZ

AERODROME CHART

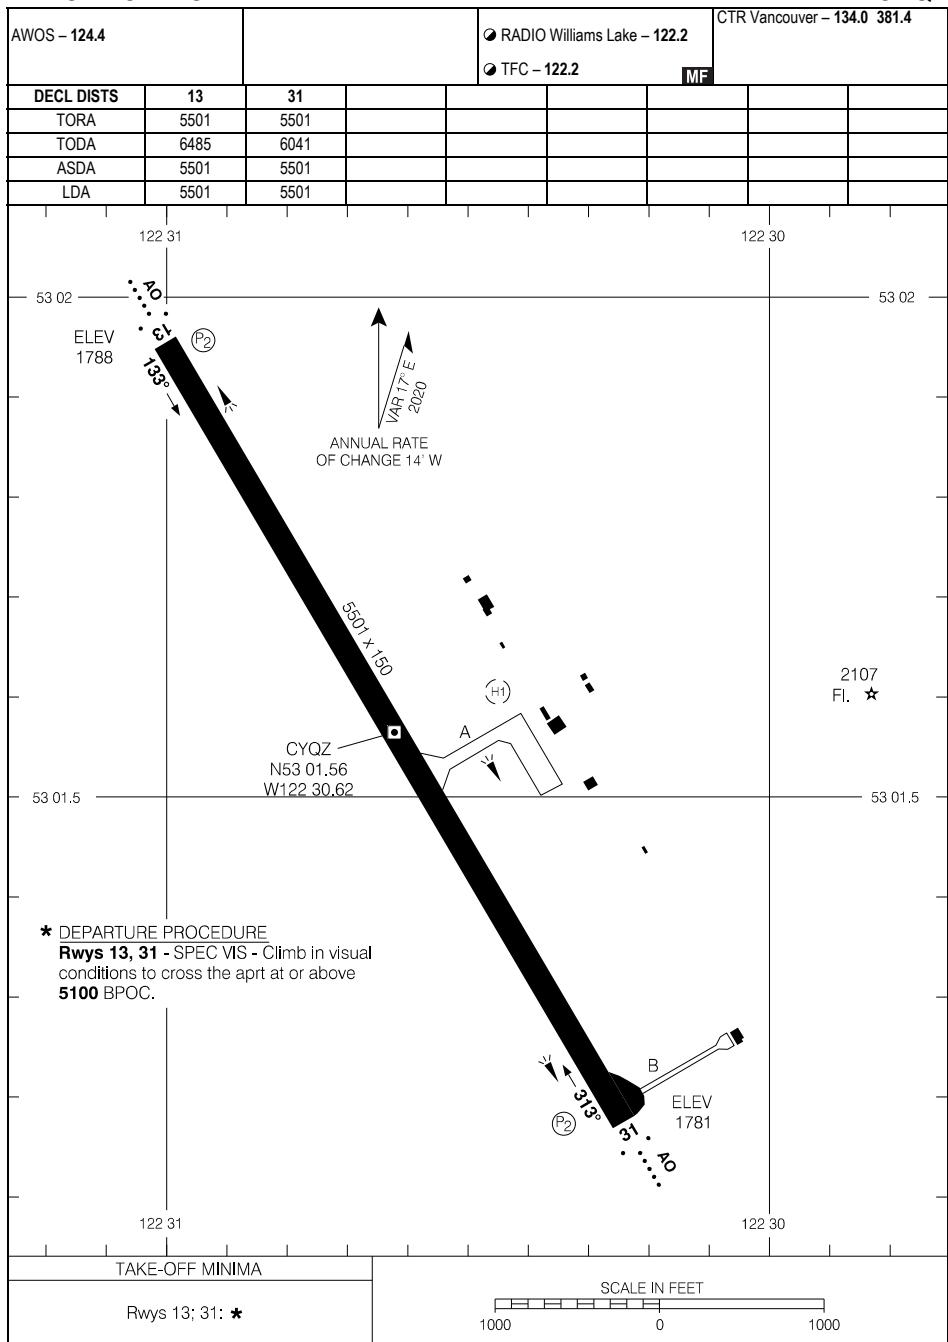

AERODROME CHART

EFF 20 APR 23


CYQZ

CYQZ-AD

CYZP-AD

SANDSPIT, BC
CYZP

AERODROME CHART

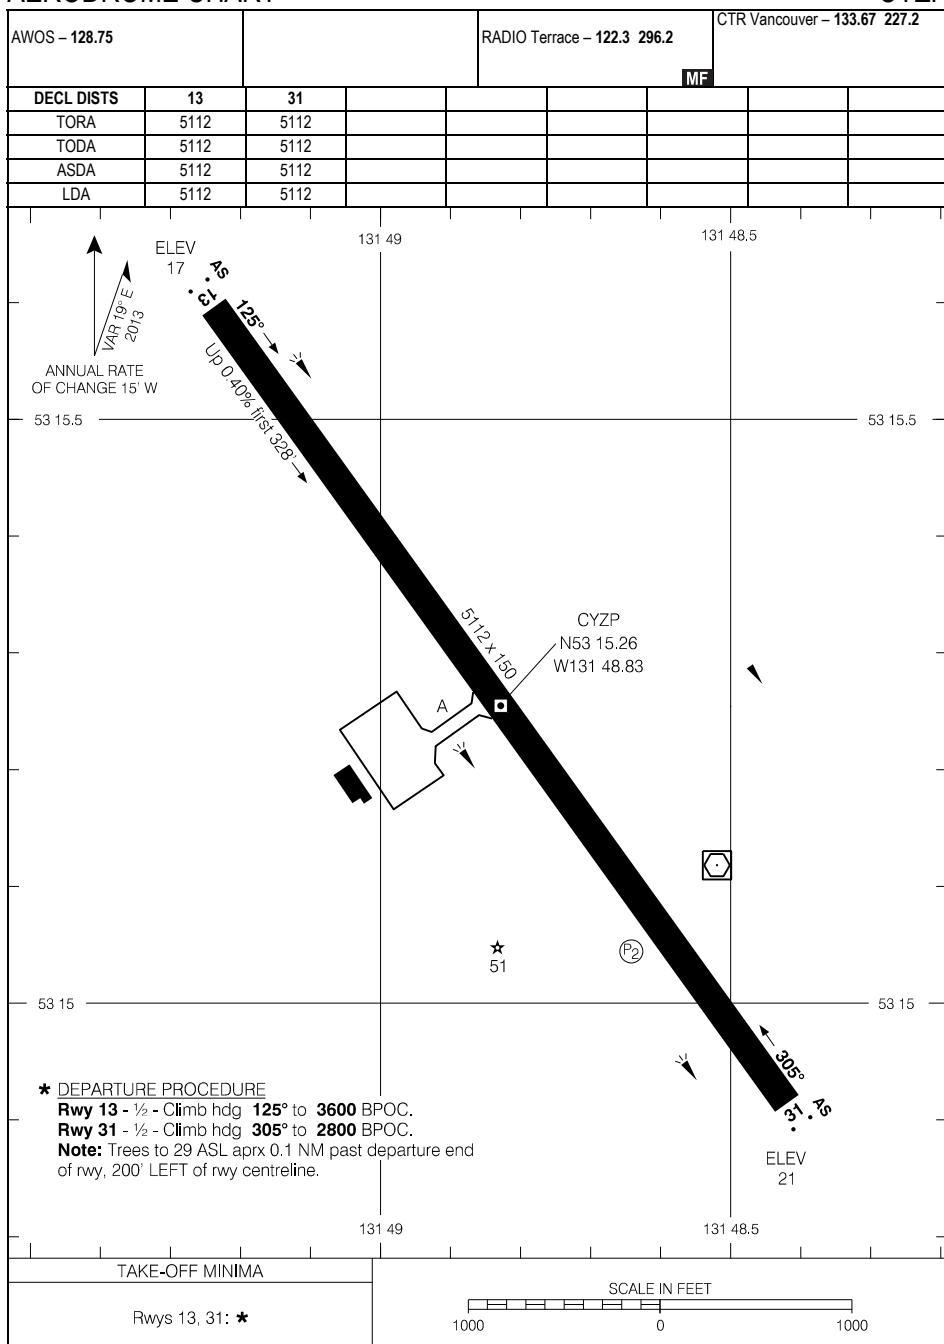

AERODROME CHART

EFF 20 FEB 25


CYZP-AD

CYZP

CYYD-AD

SMITHERS, BC
CYYD

AERODROME CHART

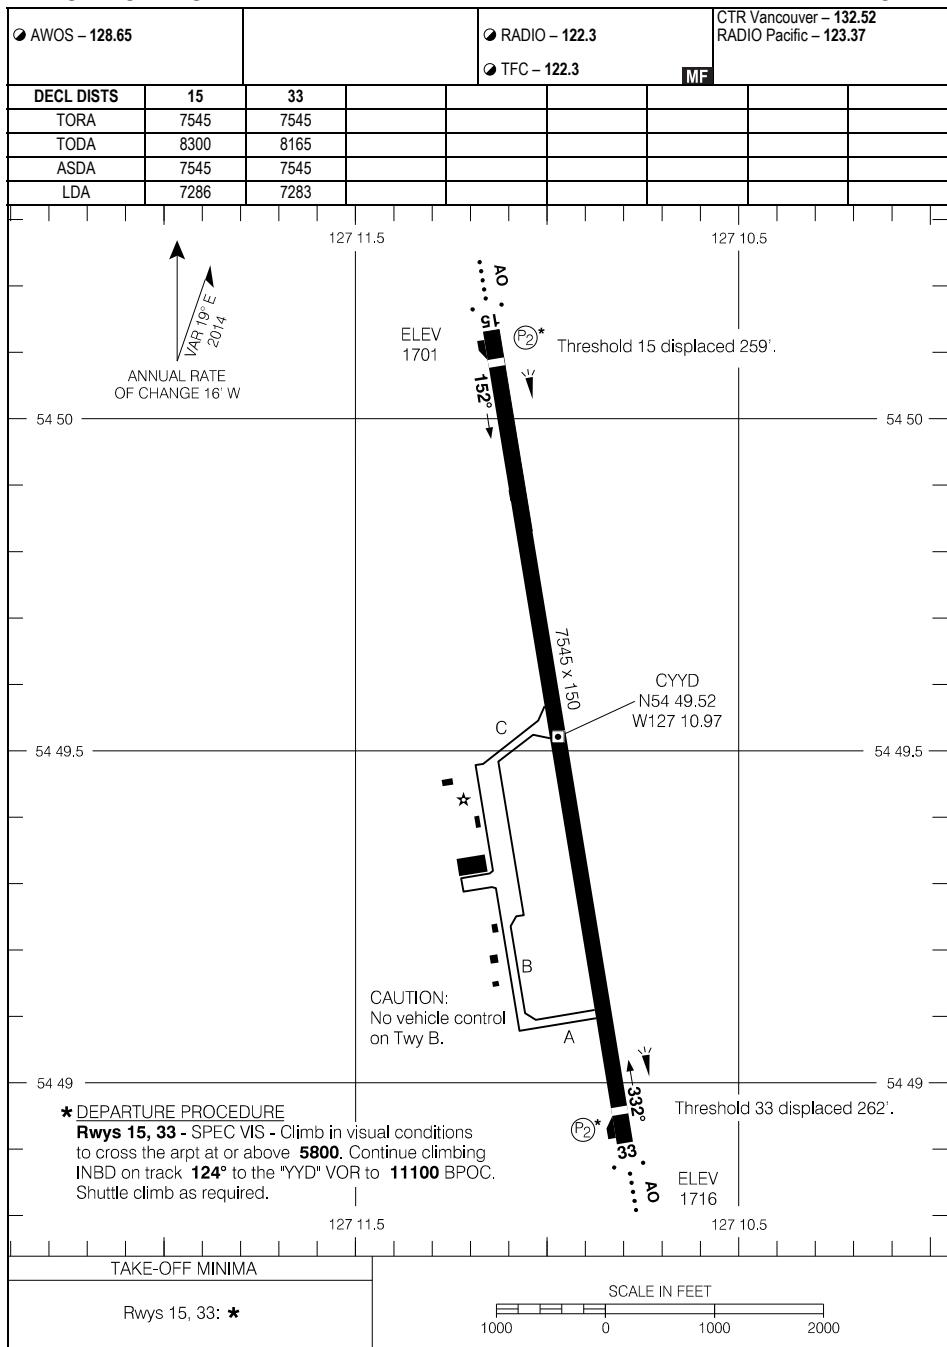

AERODROME CHART

EFF 20 APR 23


CYYD-AD

CYYD

CSR6-HP

SONORA RESORT, BC
CSR6

HELIPORT CHART

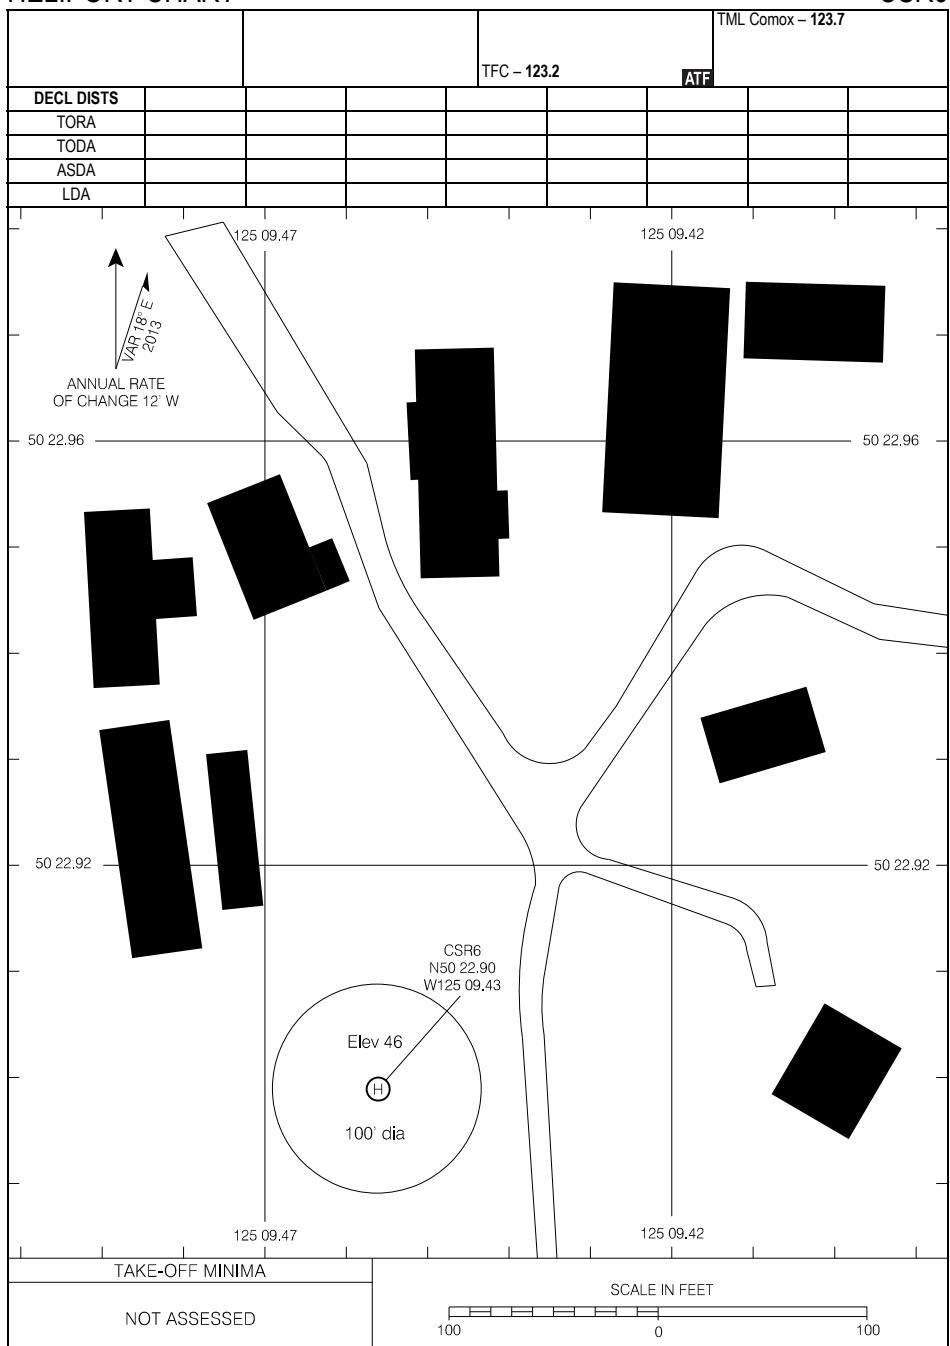

HELIPORT CHART

EFF 7 OCT 21

CSR6-HP


CSR6

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CZML-AD

SOUTH CARIBOO/108 MILE, BC
CZML

AERODROME CHART

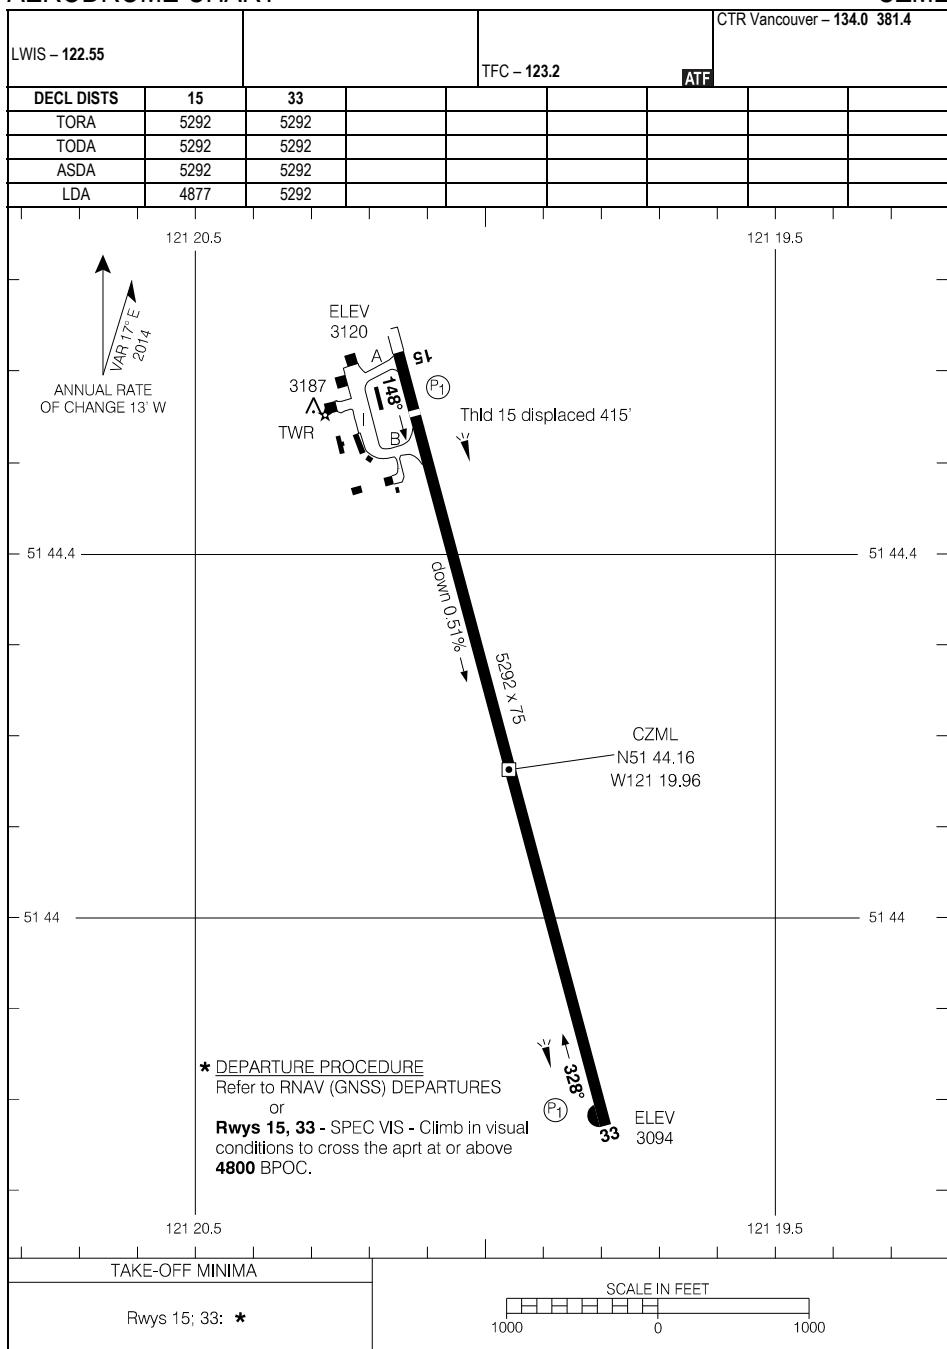

AERODROME CHART

EFF 7 AUG 25

CZML

CZML-AD


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CYSW-AD

SPARWOOD/ELK VALLEY, BC

CYSW

AERODROME CHART

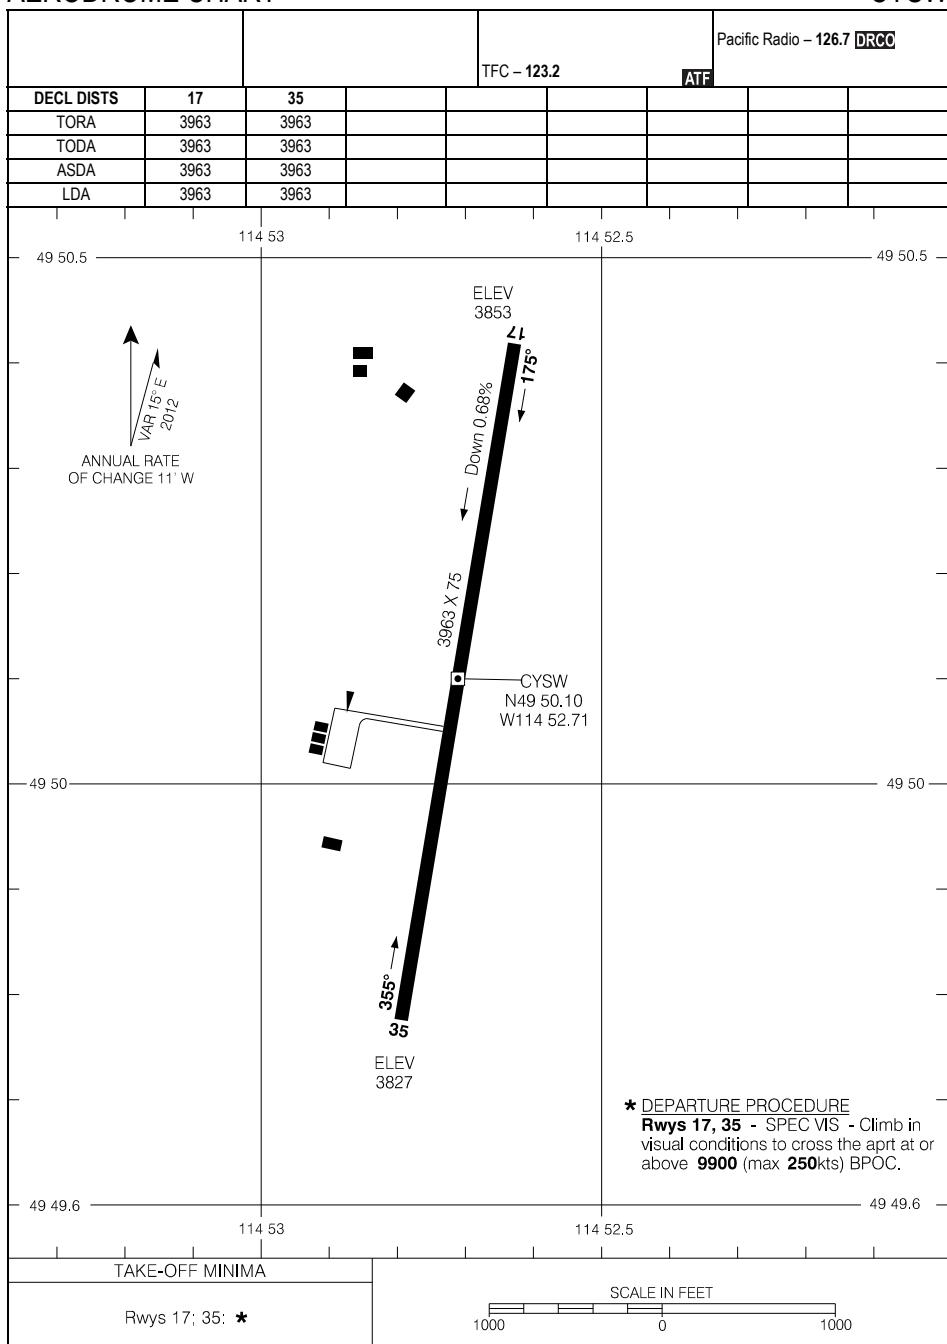

AERODROME CHART

EFF 5 OCT 23


CYSW-AD

CYSW

CYXT-AD

TERRACE, BC
CYXT

AERODROME CHART

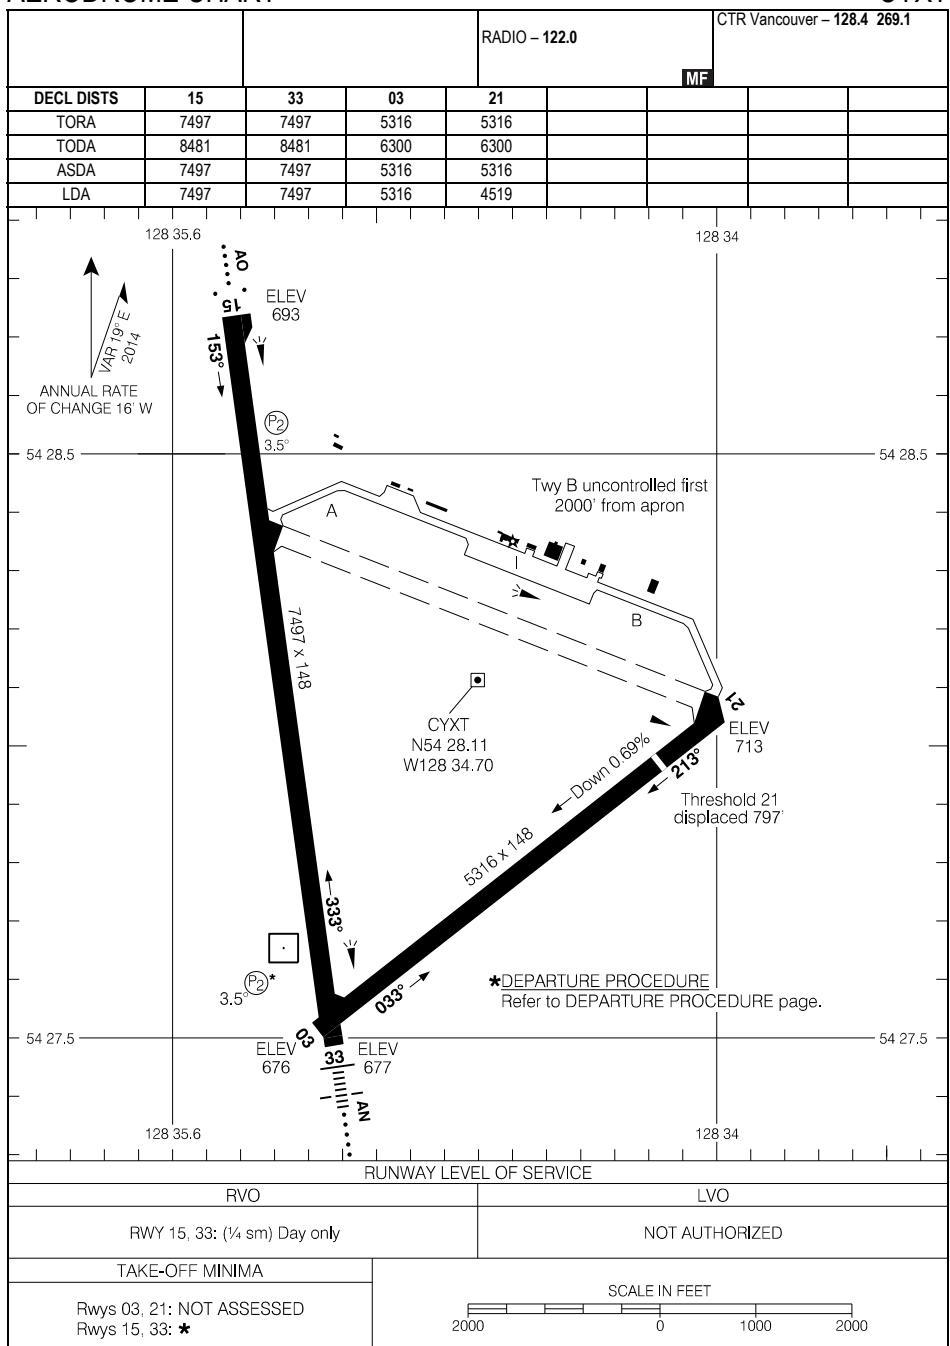

AERODROME CHART

CYXT

EFF 16 MAY 24

CYXT-AD


CYAZ-AD

TOFINO/LONG BEACH, BC
CYAZ

AERODROME CHART

				● RADIO Hardy – 123.25		CTR Vancouver – 132.9 RADIO Pacific – 125.85	
		● TFC – 123.25				MF	
DECL DISTS	07	25	11	29	16	34	
TORA	5000	5000	5000	5000	5000	5000	
TODA	5000	5000	5000	5000	5000	5000	
ASDA	5000	5000	5000	5000	5000	5000	
LDA	4265	4642	4500	5000	4792	4113	

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

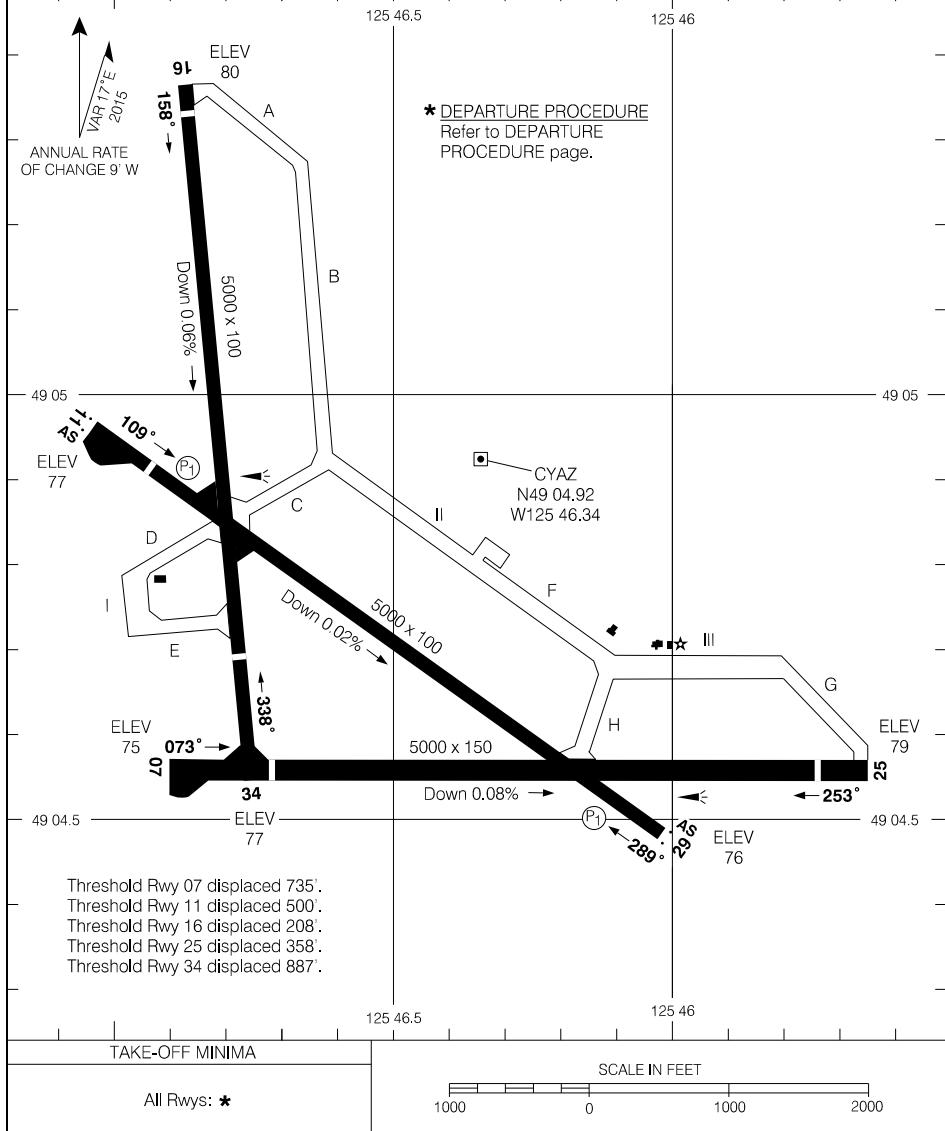

AERODROME CHART

EFF 31 OCT 24


CYAZ

CYAZ-AD

CAD4-AD

TRAIL, BC
CAD4

AERODROME CHART

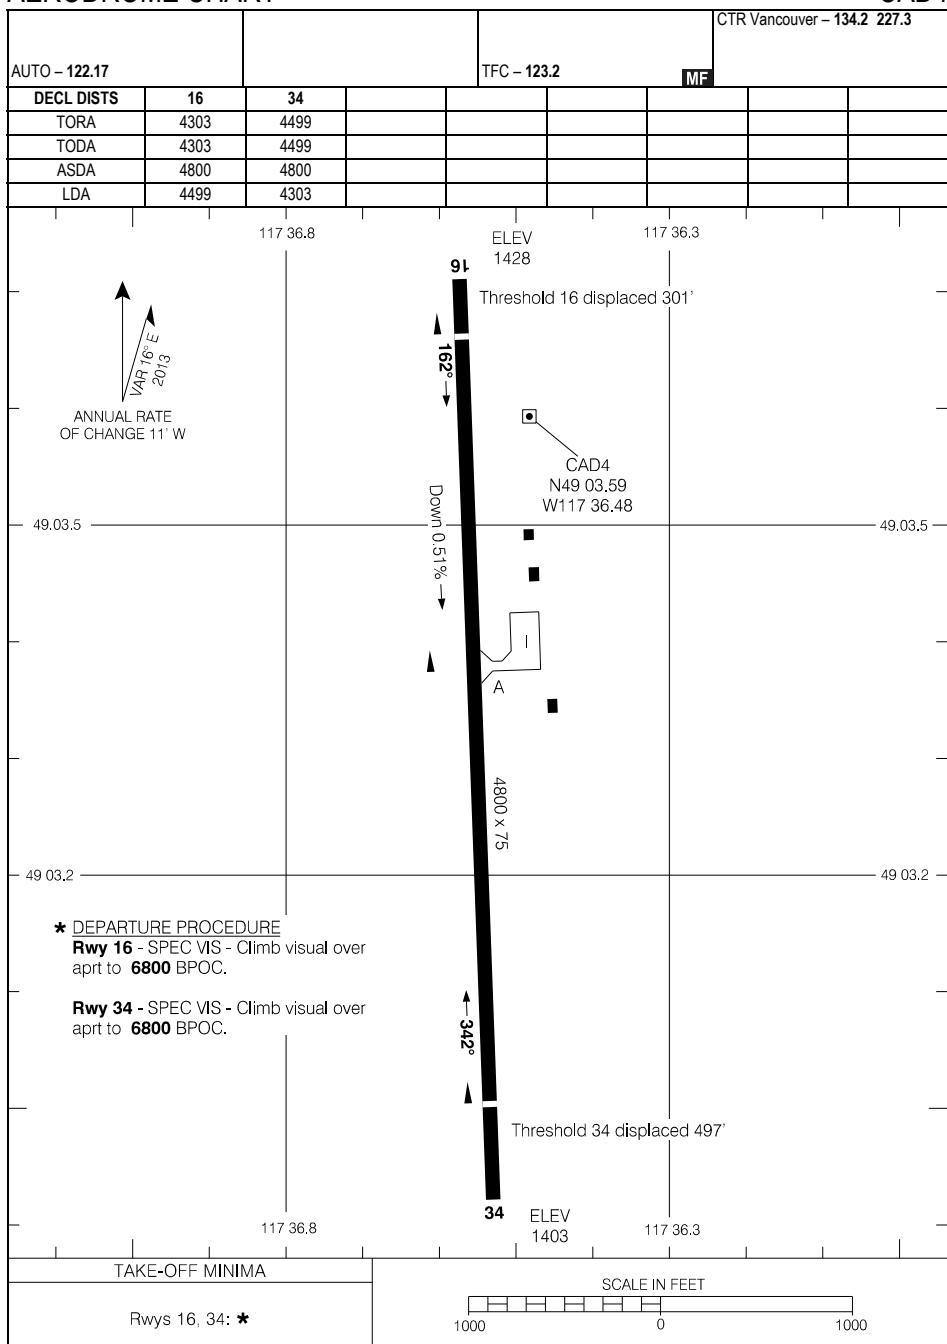

AERODROME CHART

EFF 11 JUL 24

CAD4

CAD4-AD

CYVR-AD

VANCOUVER INTL, BC
CYVR

AERODROME CHART

ATIS – 124.6 CLNC DEL – 121.4 TWR – 118.7 (S) 119.55 (N) 226.5 DEP – 126.12 (N) 132.3 (S) 363.8
GND – 121.7 (S) 127.15 (N) 275.8

DECL DISTS	08R	26L	08L	26R	13	31		
TORA	11500	11493	9941	9941	7300	7300		
TODA	12484	17239	11417	14911	8284	8284		
ASDA	11500	11493	9941	9941	7300	7300		
LDA	10804	10804	9941	9941	7300	7300		

SEE TAXI CHART FOR
TAXIWAY DATA AND NOTES

(3) Rwy Dist To Go signs present on runway 26L/08R.
NOTE: See Taxi Chart for information on Hot Spots

SEE TAXI CHART FOR TAXIWAY DATA AND NOTES

Rwy Dist To Go signs present on runways 26L/08R.

NOTE: See Taxi Chart for information on Hot Spots

ANNUAL RATE OF CHANGE 9°W

VAP 17°E 2015

123 12 ELEV 13 AL P3 083° 780 9,941 263° HS 5 AL ELEV 9

ELEV 8 RAMP RADAR 121' CYVR N49 11.68 W123 10.95 AIRSIDE OPERATIONS BUILDING Bypass

49 12 ELEV 10 AL HS 2 Lima Holding Bay 08R 083° 7300 263° HS 1 ELEV 7

Threshold 08R displaced 696' 51' AGL 12,188' HS 4 P3 305° 31° HS 3 P3 70° 10° ELEV 7

* DEPARTURE PROCEDURE
Rwys 08L, 08R, 13, 26L, 26R, 31 - 1/2
Refer to SID
1200 RVR Take-Off minima requires
1000 RVR for start.

49 11 TORA FOR INTERSECTION DEPARTURES

RWY	INTXN	TORA in ft	RWY	INTXN	TORA in ft
08L	M8	9612	08R	M7/N7	9612
08L	M6	7828	26L	M5	7928

Threshold 26L displaced 689'

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

TORA FOR INTERSECTION DEPARTURES					
RWY	INTXN	TORA in ft	RWY	INTXN	TORA in ft
08L	M8	9612	26R	M7/N7	9612
	M6	7828		M5	7828
	M4	6099		M3	6103
	A6	8800		D7	10804
	L2	8665		D5/A5	10407
	A4	6801		D3	7064
08R	H	5290	26L	H	5580
	E	5104		E	5775
	L4/A	10904			

Multilateration: All fixed wing aircraft and rotorcraft must keep their transponder on at all times when taxiing and/or manoeuvring on the apron. For departures, turn on prior to contacting Ground Control for pushback; for arrivals, remain on until final engine shutdown. Pilots that do not have a transponder code issued by Ground Control must squawl 1000 when taxiing.

RUNWAY LEVEL OF SERVICE

RVO	LVO
WY 08L, 08R, 26L, 26R; RVR 1200	RWY 08L, 08R, 26L, 26R; RVR 600

TAKE-OFF MINIMA

All Rwy's: *

SCALE IN FEET

2000

AERODROME CHART

ALRUD
EEE 12 JUN 25

CVR

CYVR-AD

TAXI CHART

Notes

AGN (ICAO Code)	MAX WINGSPAN	AVAILABLE TAXIWAYS
AGN VI (Code F) & Smaller	Max Wingspan: 79.9m/262.1'	D, D5, D7, D9, DT, H (north of Rwy 08R/26L), J (north of parking position W2), JA, K (west of R), L (west of Rwy 13/31), L4, L6, M ^{NOTE 1} , M5, M6, M7, M9, M10, R, V.
AGN V (Code E) & Smaller	Max Wingspan: 65.0m/213.3'	A (west of Rwy 13/31)* & btwn E and Rwy 13/31, A4*, A6*, D, D1*, D3, D5, D7, D9, DT, DU*, DV, E (north of Rwy 08R/26L)*, E (south of Rwy 08R/26L), H (north of Rwy 08R/26L), H4*, J, JA, JB, JC, K, L, L2*, L4, L6, M, M1*, M2*, M3*, M4, M5, M6, M7, M8, M9, M10, N7, P, Q, R, T, V. *Not avbl for A340-600, A350-900/-1000, B777-300/-300ER, B787-10 only due acft wheelbase.
AGN IV (Code D) & Smaller	Max Wingspan: 52.0m/170.6'	A, A4, A5, A6, AR, C (north of F), D, D1, D3, D5, D7, D9, DR, DS, DT, DU, DV, DY, E, F (west of C), G, H, H2, H4, J, JA, JB, JC, K, L, L2, L4, L6, M, M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, N7, P, Q, R, S, T, V.

Note 1: When acft with wingspan greater than 65.0m/213.3' (A380/B747-8) is on the taxilane btwn Gate 66 & Gate 72, Twy M btwn Twy J and Twy T is avbl to acft with wingspan 52.0m/170.6' (A310/B767) & smaller only.

Rwy 08L Arrivals

Use of reverse thrust is to be avoided or reduced when conditions permit. M1, M3, M5 (rapid exit): Design speed in wet conditions is 50 kt (93 km/h). Reverse turns NOT AUTHORIZED without clearance.

Rwy 08R Arrivals

Acft exiting onto D1, turn north on E, do not stop in Rwy area (See HOT SPOT 4). D1, D3 (rapid exit): Design speed in wet conditions is 50 kt (93 km/h). Reverse turns NOT AUTHORIZED without clearance.

Rwy 13 Departures

Not avbl for acft with wingspan greater than 65.0m/213.3' (A380/B747-8/AN124). Not auth for A340-600, A350-900/-1000, B777-300/-300ER, B787-10.

Rwy 26R Arrivals

Use of reverse thrust is to be avoided or reduced when conditions permit. M2, M4, M6 (rapid exit): Design speed in wet conditions is 50 kt (93 km/h). Reverse turns NOT AUTHORIZED without clearance.

Rwy 26L Arrivals

Turns onto Rwy 31 NOT AUTHORIZED without clearance. Acft exiting onto Rwy 13/31: RIGHT turns onto D avbl to acft with wingspan 52.0m/170.6' (A310/B767) & smaller only. Acft exiting onto H, hold short of D, do not stop in Rwy area (See HOT SPOT 4). Reverse turns NOT AUTHORIZED without clearance.

Rwy 31 Arrivals

Not avbl for acft with wingspan greater than 65.0m/213.3' (A380/B747-8/AN124). Not auth for A340-600, A350-900/-1000, B777-300/-300ER, B787-10.

TAXI CHART

TAXI CHART**Notes****Taxiway Limitations**

All Twys: Discretionary oversteer is required at every intersection for all acft types.

A: Compass Rose: Not avbl SS-SR. Avbl to acft with wingspan 24.1m/79' (SF34) & smaller only.

A2: Avbl to acft with MTOW 50,000lbs (DHC-8 300/Lear 60) & less.

C (south of F): Avbl to acft with wingspan 36.0m/118.1' (A321/B737) & smaller only. Follow me required below RVR 1200, ctc Aprt Ops.

D: CAUTION: Acft cannot safely taxi via Twy D east or west past acft at the Twy D5 or Twy D7 runway holding positions.

D2: Avbl to acft with MTOW 100,000lbs (CRJ-900) & less.

DW: Avbl to acft with wingspan 41.1m/134.8' (B757) & smaller only.

E: Entry & exit at Apron VI avbl to acft with wingspan 60.4m/198.2' (A330-300/B787-9) & smaller only.

F (east of C): Avbl to acft with wingspan 24.9m/81.7' (CRJ-900) & smaller only. Follow me required below RVR 1200, ctc Aprt Ops.

J (southbound): A340, B747 not auth south of Twy K due jet blast (avbl for acft under tow).

L: Entry & exit at Apron VI avbl to acft with wingspan 36.0m/118.1' (A321/B737) & smaller only.

Q: Follow me required below RVR 1200, ctc Aprt Ops.

Turn Restrictions

A (westbound): RIGHT turns onto E avbl to acft with wingspan 24.1m/79.0' & smaller only.

D (eastbound): LEFT turns onto H avbl to acft with wingspan 36.0m/118.1' (A321/B737) & smaller only.

D (westbound): No LEFT turns onto H. No LEFT turns onto D7.

D7: No RIGHT turns onto D.

E (southbound): LEFT turns onto A avbl to acft with wingspan 24.1m/79.0' & smaller only.

H (southbound): No RIGHT turns onto A, L, or H4. RIGHT turns onto D avbl to acft with wingspan 36.0m/118.1' (A321/B737) & smaller only. No LEFT turns onto D1.

H (northbound): No LEFT turns onto V. No RIGHT turns onto D. RIGHT turns onto L avbl to acft with wingspan 36.0m/118.1' (A321/B737) & smaller only.

J (southbound): All acft use min thrust when turning due jet blast.

J (northbound): LEFT turns onto K avbl to acft with wingspan 41.1m/134.8' (B757) & smaller only, due jet blast (avbl for acft under tow).

L: No RIGHT turns onto V.

L4 (northbound): Only acft with a max wingspan of 52.0m/170.6' (e.g. A310/B767) can hold short of L while exiting/crossing Rwy 08R/26L due to acft tail height.

M4: LEFT and RIGHT turns onto M not avbl for A340-600, A350-900/-1000, B777-300/-300ER, B787-10 only, due acft wheelbase.

P: RIGHT turns onto M avbl to acft with wingspan 52.0m/170.6' (A310/B767) & smaller only, due jet blast (avbl for acft under tow).

V: (northbound) No RIGHT turns onto H.

V: (southbound) No LEFT turns onto L.

TAXI CHART

TAXI CHART**Notes****Uncontrolled Taxiways**

C (south of F), F, J (btwn K & L), Q, DR, DS, DT, DU, DV & DW.

Uncontrolled Vehicle Crossings

DS, DT, DU, DV, DY, F, H (north of H4), J, JA, JB, JC, K, N7, P, Q, R, S, T, V.

APU Shutdown Procedure

Acft Auxiliary Power Unit (APU) use shall be limited to 15 min or less in total between on-block time and departure of acft from stands supplied with Ground Power Unit (GPU) and/or preconditioned air, for environmental reasons, if the outside air temperature is between 0 degrees and 20 degrees Celsius.

Acft shall not need to comply with the above limitations on stands not equipped with serviceable GPU and/or preconditioned air or if there are overriding health & safety considerations.

Apron Notes

Apron I, II, III, IV, V, VI, VIII: PPR Airport Ops is required. PPR for all engine astarters or crossbleed starts. Advise ATC if ground crew not present at gate.

Apron I: Avbl to acft with wingspan 24.9m/81.7' (CRJ-900) & smaller only. Hover taxi not auth, heli must ground taxi or be towed.

Apron II: Avbl to acft with wingspan 52.0m/170.6' (A310/B767) & smaller only. Hover taxi not auth, heli must ground taxi or be towed.

Apron III: Avbl to acft with wingspan 36.0m/118.1' (A321/B737) & smaller only. Jets tow in & out. Hover taxi not auth, heli must ground taxi or be towed.

Apron IV: Avbl to acft with wingspan 41.1m/134.8' (B757) & smaller only. Taxilane east of DW avbl to acft with wingspan 32.1m/105.3' (CV-580) & smaller only. Btwn DW & FedEx not auth for taxi below RVR 1200, follow me required, ctc Aprt Ops.

Apron VI (Horseshoe): Taxilanes avbl to acft with wingspan 36.0m/118.1' (A321/B737) & smaller only.

Apron VI (South): Taxilane btwn G & parking position S1 avbl to acft with wingspan 52.0m/170.6' (A310/B767) & smaller only.

Apron VI (South): Taxilane east of parking position S1 avbl to acft with wingspan 60.4m/198.2' (A330-300/B787-9) & smaller only.

Apron VI (North): Travelling eastbound, turns onto P avbl to acft with wingspan 52.0m/170.6' (A310/B767) & smaller only, due jet blast (avbl for acft under tow).

Apron VI (North): When acft with wingspan greater than 65.0m/213.3' (A380/B747-8) is on M btwn J & T, the taxilane between Gate 66 & T is avbl to acft with wingspan 52.0m/170.6' (A310/B767) & smaller only.

Apron VI (East): Bypass taxilane (amber inset lighting) avbl to acft with wingspan 36.0m/118.1' (A321/B737) & smaller only.

Apron VI (East): Simultaneous use of dual taxilanes avbl to acft with wingspan 36.0m/118.1' (A321/B737) & smaller only.

Apron VI (East): Pushbacks from parking positions E1-E3 to west taxilane. Pushbacks from parking positions E10-E19 to south taxilane.

Apron VIII: Avbl to acft with wingspan 52.0m/170.6' (A310/B767) & smaller only.

Btwn Purolator & FedEx Aprons: Avbl to acft with wingspan 17.4m/57.1' (Metro III) & smaller only.

TAXI CHART

EFF 7 AUG 25

CYVR

TAXI CHART

Notes**Hot Spots**

- HS 1: Twy D9 commences beyond the rwy hold line for Rwy 08R/26L on Twy D and Twy DY.
Acft cannot safely taxi via Twy D east or west past acft at the Twy D5 or Twy D7 hold lines.
- HS 2: Twy L6 hold line for Rwy 08R is displaced 166m (545 ft) from rwy edge.
- HS 3: Taxiing to Rwy 08R/26L, acft fail to hold short and incur on Rwy 13/31 on Twy A. Taxiing across Rwy 08R/26L, acft fail to hold short and incur on Rwy 13/31 on Twy E.
- HS 4: Acft taxiing H, southbound, hold line is located 30m (100 ft) back from the standard rwy hold position. Acft exiting onto D1, turn north on E. Do not stop in rwy area.
- HS 5: Twy N7 hold line for Rwy 26R is displaced at intersection of Twy N7 and Apron IX 214m (702 ft) from rwy edge.

TAXI CHART


ATIS - 124.6

CLNC DEL - 121.4

GND = 121.7 (S) 127.15 (N) 275.8

TWR = 118.7 (S) 119.55 (N) 226.5

MJ.Ultarotation: All fixed wing aircraft and rotorcraft must keep their transponder on at all times when taxiing and/or manoeuvring on the aprt. If departing, turn on prior to contacting Ground Control for pushback, or arrivals, remain squawk 1000 when taxiing.

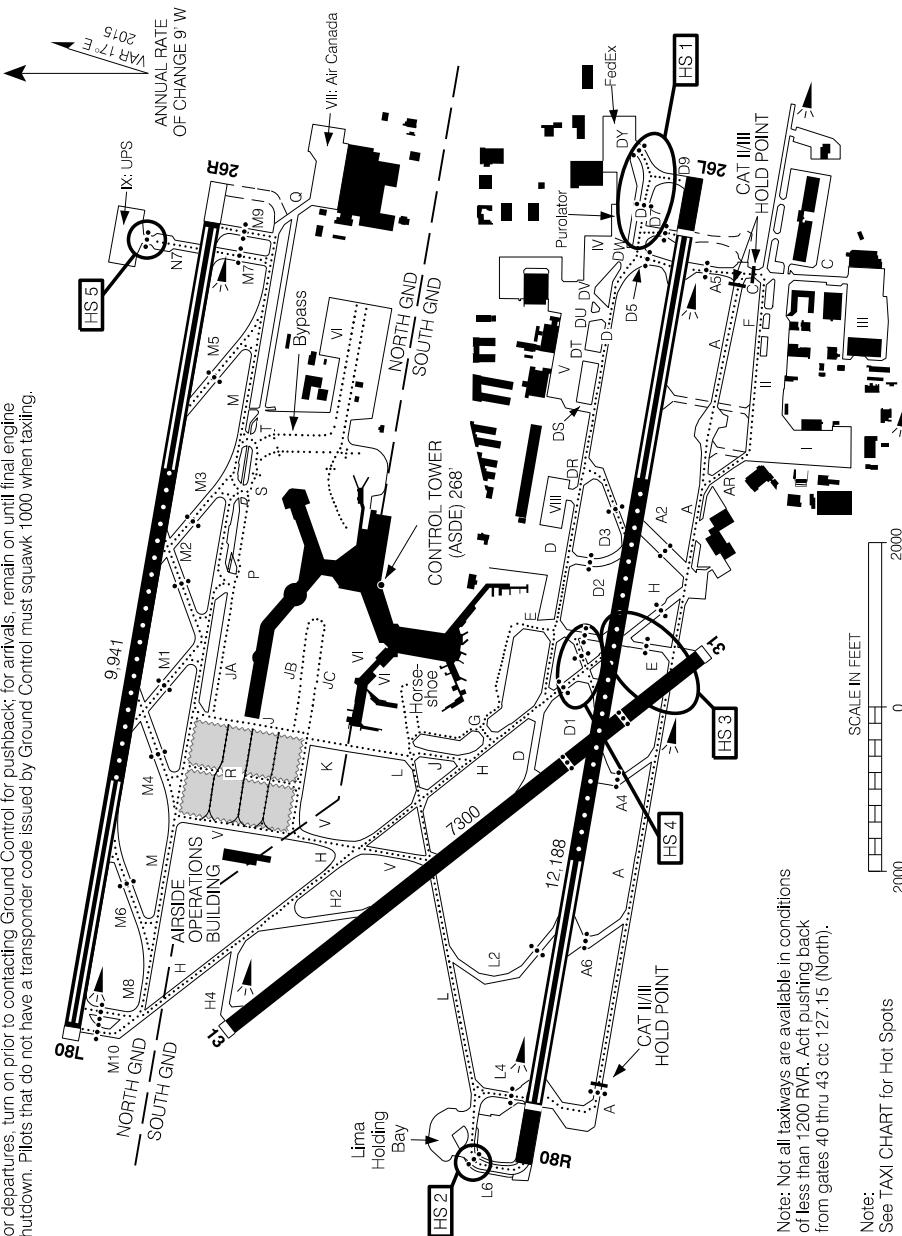

Note: Not all taxiways are available in conditions of less than 1200 RVR. Acft pushing back from gates 40 thru 43 ctc 127.15 (North).

Note:
See TAXI CHART for Hot Spots

CYVR

CODED TAXI ROUTES

Read Back: “Code Route (code) and Assigned Runway”

Monitor tower frequency approaching the hold line of the assigned runway,
unless otherwise instructed by ATC.

Rwy 08R/26L – TWR 118.7 Rwy 08L/26R – TWR 119.55

Code	Taxi Route
Echo	Rwy 08R – E, D, H, hold short L. Rwy 08L – E, D, H, hold short V, contact ground 127.15 (expect taxi via H, M, M10). Rwy 26R – E, D, H, hold short V, contact ground 127.15 (expect taxi via V, M, M9). Rwy 26L – E, D.
Golf	Rwy 08R – G, H, hold short L. Rwy 08L – G, H, hold short V, contact ground 127.15 (expect taxi via H, M, M10). Rwy 26R – G, H, hold short V, contact ground 127.15 (expect taxi via V, M, M9). Rwy 26L – G, H, D.
Juliet-Alfa*	Rwy 08R – JA, J, K, V, hold short H, contact ground 121.7 (expect taxi via V, L, L6). Rwy 08L – JA, J, M, M10. Rwy 26R – JA, J, M, M9. Rwy 26L – JA, J, K, V, hold short H, contact ground 121.7 (expect taxi via H, D).
Juliet-Bravo*	Rwy 08R – JB, J, K, V, hold short H, contact ground 121.7 (expect taxi via V, L, L6). Rwy 08L – JB, J, M, M10. Rwy 26R – JB, J, M, M9. Rwy 26L – JB, J, K, V, hold short H, contact ground 121.7 (expect taxi via H, D).
Juliet-Charlie*	Rwy 08R – JC, K, V, hold short H, contact ground 121.7 (expect taxi via V, L, L6). Rwy 08L – JC, J, M, M10. Rwy 26R – JC, J, M, M9. Rwy 26L – JC, K, V, hold short H, contact ground 121.7 (expect taxi via H, D).
Lima	Rwy 08L – L, H, hold short V, contact ground 127.15 (expect taxi via H, M, M10). Rwy 26R – L, H, hold short V, contact ground 127.15 (expect taxi via V, M, M9). Rwy 26L – L, J, H, D.
Papa*	Rwy 08R – P, M, V, hold short H, contact ground 121.7 (expect taxi via V, L, L6). Rwy 08L – P, M, M10. Rwy 26R – P, M, M9 (avbl to acft with wingspan 52.0m (170.6') & smaller only). Rwy 26L – P, M, V, hold short H, contact ground 121.7 (expect taxi via H, D).
Sierra	Rwy 08R – S, M, V, hold short H, contact ground 121.7 (expect taxi via V, L, L6). Rwy 08L – P, M, M10. Rwy 26R – P, M, M9 (avbl to acft with wingspan 52.0m (170.6') & smaller only). Rwy 26L – S, M, V, hold short H, contact ground 121.7 (expect taxi via H, D).
Tango*	Rwy 08R – T, M, V, hold short H, contact ground 121.7 (expect taxi via V, L, L6). Rwy 08L – T, M, M10. Rwy 26R – T, M, M9 Rwy 26L – T, M, V, hold short H, contact ground 121.7 (expect taxi via H, D).

*A340-600, A350-900/-1000, B777-300/-300ER, B787-10 Taxi Routes.

CODED TAXI ROUTES

LOW VISIBILITY PROCEDURES

Low Visibility Procedures (RVR less than 1200 to 600 ft)

Application

These procedures apply to ground movements of aircraft arriving and departing under low visibility conditions. Arrivals and departures below RVR 600 are not authorized. When weather conditions indicate visibility below RVR 1200 is imminent, procedures will be implemented restricting aircraft and vehicle operations on the movement area. The following message will be added to the ATIS broadcast: "Low visibility procedures in effect for <name of applicable runway>".

General

Taxi Routes

Low Visibility Taxi Routes are equipped with green inset centerline lighting. Some taxiway/taxiway intersections have been identified with three inset yellow centerline lights. Midfield crossings of 08R/26L are not permitted during low visibility operations.

Airport Surface Detection Equipment (ASDE)

Ground radar is used to monitor the position of aircraft operating on the manoeuvring area. In the event of an ASDE failure, ATC may suspend, restrict or terminate low visibility operations.

Departures

The primary runways for departure are 08R/26L. Yellow flashing runway guard lights (wig-wags) and stop bars are installed abeam each hold line. Intersection take-offs are not permitted.

Sequencing of Aircraft Ground Movements for Take-off

Do not request start, push back or call for taxi clearance until the reported RVR is greater than:

Aircraft/Pilot Take-off Minima	Minimum RVR for Start
1200 RVR	1000 RVR
600 RVR	600 RVR

SMGCS Rwy 08L/26R and 08R/26L

Runway/taxiway intersections are equipped with yellow flashing runway guard lights and stop bars consisting of red inset lights and red elevated lights located at the taxi hold position.

At runway entry points, M10, M8, M7, M9, N7, L4, L6, D, D5, D7, DY, A5 and A, when the red stop bar lights are illuminated, green lead-on lights beyond the stop bar are extinguished. When ATC issues a clearance to proceed onto the runway, the red stop bar lights will be extinguished and the green lead-on lights beyond the stop bar will be illuminated. The stop bar is reset automatically as the aircraft moves onto the runway.

"AT NO TIME SHALL A PILOT CROSS AN ILLUMINATED RED STOP BAR"

Arrivals

The primary runways for arrival are 08L/26R.

Plan to exit on the centerline lighted rapid exit taxiways and proceed beyond the alternating green and yellow centerline lights to the taxi intersection lights to ensure the aircraft is clear of the runway and the ILS sensitive area.


LOW VISIBILITY PROCEDURES

LOW VISIBILITY TAXI CHART

LAND RWY 08L/08R, DEPART RWY 08L/08R (RVR LESS THAN 1200 TO 600 FT)

VANCOUVER INT'L, BC

CYVR

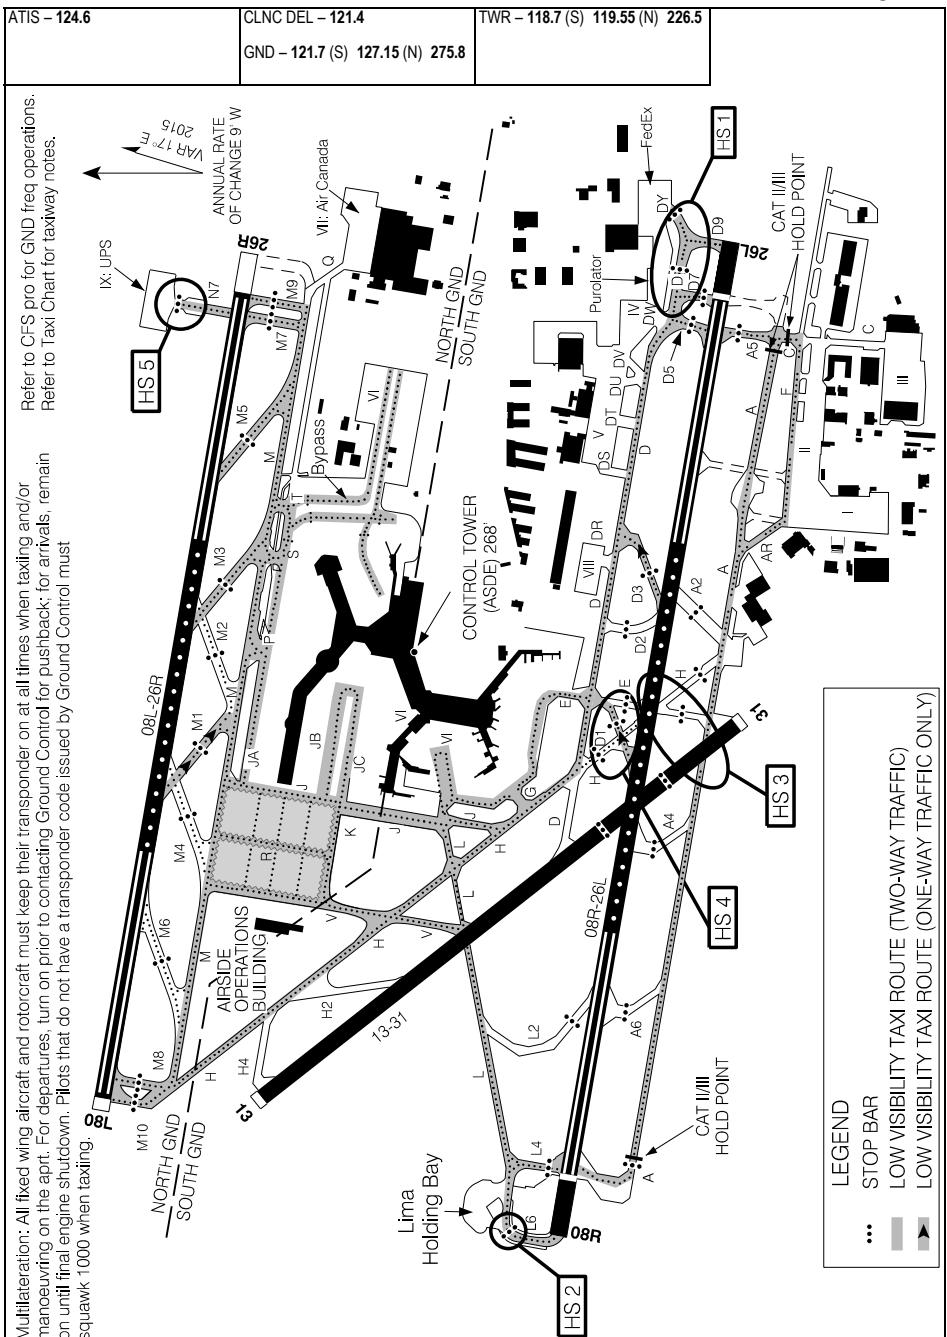

LAND RWY 08L/08R, DEPART RWY 08L/08R (RVR LESS THAN 1200 TO 600 FT)


LOW VISIBILITY TAXI CHART

LOW VISIBILITY TAXI CHART

LAND RWY 26L/26R, DEPART RWY 26L/26R (RVR LESS THAN 1200 TO 600 FT)

VANCOUVER INT'L, BC

CYVR

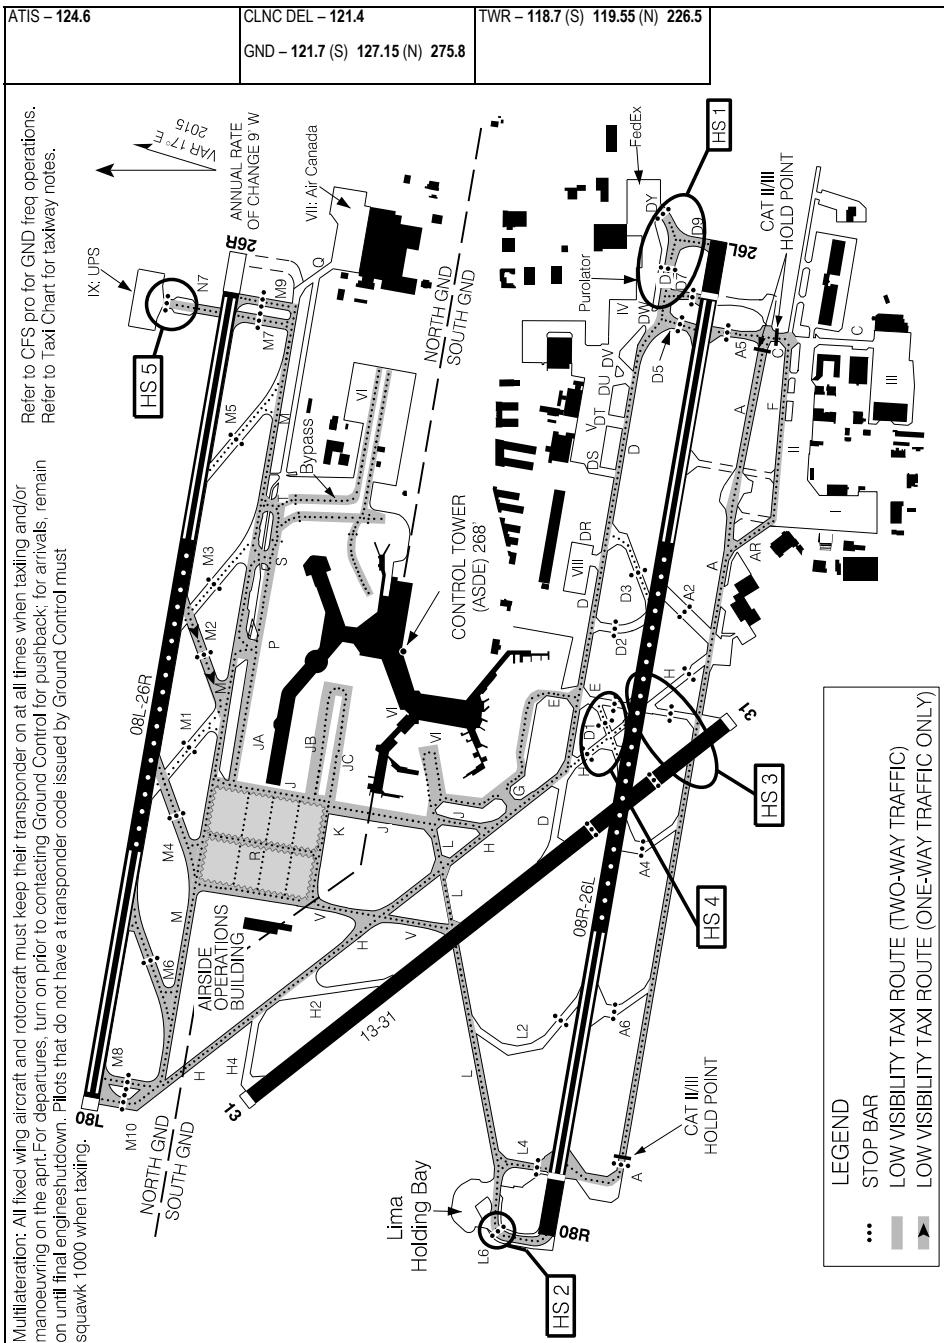

DE-ICING GENERAL**Overview**

West Pads is the Central De-Icing Facility (CDF) and handles de-icing for all aircraft excluding South Terminal aircraft capable of utilizing the Ground Run-Up Enclosure (GRE) which is the South De-Icing Facility.

West Pads (CDF)

1. Thirty (30) min prior to pushback or taxi, advise "VANCOUVER DE-ICE" on 129.95 and advise, "ACFT DE-ICING REQUIRED".
2. When requesting pushback, ctc Ground Control on assigned frequency and advise, "ACFT DE-ICING REQUIRED". Ground Control will issue taxi instructions to the West Pads (CDF).
3. Aircraft queuing into CDF is on W12 via Twy V or on Twy R via Twy M/Twy K. When instructed by Ground Control, ctc "PAD CONTROL" 131.975.
4. Follow "PAD CONTROL" instructions to de-icing bay, stop with nose gear positioned on the yellow STOP BAR with brakes set.
5. Once aircraft is in final stop position, brakes are set and aircraft configured for de-icing, ctc "ICEMAN" on 130.700 and advise, "BRAKES SET, ACFT CONFIGURED, READY TO DE-ICE". At this time, pass along any specific fluid and/or treatment requirements.
6. After de-icing is completed and the aircraft has been inspected, "ICEMAN" will provide post-treatment information.
7. When advised by "ICEMAN", ctc "PAD CONTROL" on 131.975 for exit instructions.
8. When advised by "PAD CONTROL", ctc Ground Control on assigned frequency for taxi instructions.

UNDER NO CIRCUMSTANCES MAY THE AIRCRAFT BE MOVED BEFORE PAD CONTROL ADVISES THAT THE AIRCRAFT IS CLEARED TO TAXI OUT OF THE BAY.

West Pads (CDF) De-Icing Bay Capacity:

W1 & W3: Maximum wingspan 36.0m (118.1'), AMBER inset lighting;

W2: Maximum wingspan 65.0m (213.3'), GREEN inset lighting;

W4: Maximum wingspan 36.0m (118.1'), AMBER inset lighting;

W5: Maximum wingspan 65.0m (213.3'), GREEN inset lighting;

W6: Maximum wingspan 24.9m (81.7'), AMBER inset lighting;

W7 & W9: Maximum wingspan 36.0m (118.1'), AMBER inset lighting;

W8: Maximum wingspan 65.0m (213.3'), GREEN inset lighting;

W11 & W13: Maximum wingspan 36.0m (118.1'), AMBER inset lighting;

W12: Maximum wingspan 79.9m (262.1'), GREEN inset lighting;

W15: Maximum wingspan 65.0m (213.3'), GREEN inset lighting;

W17 & W19: Maximum wingspan 36.0m (118.1'), AMBER inset lighting;

W18: Maximum wingspan 79.9m (262.1'), GREEN inset lighting.

DE-ICING GENERAL

Ground Run-up Enclosure (GRE)

Operators must receive an orientation for the GRE facility prior to use.

Crews may contact the "VANCOUVER DE-ICE" or call Aeromag Operations at (604) 278-1901 to schedule de-icing up to 120 minutes prior to departure. Information required: aircraft type, flight number/call sign, and the type(s) of fluids required. Parking position 2A, on Apron I, is the only staging position for the facility. Aircraft waiting to use the GRE must remain on their aprons until 2A becomes available.

"ICEMAN" will advise if engines should be running during de-icing.

Entry Procedure

1. Before contacting Ground Control for taxi, contact "ICEMAN" 130.925 for position in de-icing queue.
2. When "ICEMAN" approves access to either the staging position (2A) or GRE, contact Ground Control on assigned frequency for taxi.
3. Proceed as instructed by "ICEMAN". CAUTION: DO NOT enter GRE until instructed by "ICEMAN".
4. Advise "ICEMAN" 130.925 when stopped in the GRE.

De-Icing Procedure

5. Contact "ICEMAN" 130.925 to confirm brakes set, aircraft configured, engines idle, and provide fluid requirements.
6. After de-icing is complete and the aircraft has been inspected, "ICEMAN" will provide posttreatment information.

Exit Procedure

7. When ready to taxi contact "ICEMAN" 130.925 for instructions.
8. When advised by "ICEMAN", ctc Ground Control on assigned frequency for taxi instructions.

GRE De-Icing Capacity:

The largest aircraft that can access the GRE via taxilane on Apron II are:

Propellers (power in/out): Maximum wingspan: 28.9m (94.8') (DH8-Q400 and smaller)

Jets (power in/out): Maximum wingspan: 21.6m (70.9') (Dassault Falcon 900 with winglets and smaller)

Jets (tow in, power out)*: Maximum wingspan: 28.9m (94.8') (Global Express)

***Note:** Tow in may be unavailable when snow cannot be fully cleared from the GRE.


CYVR-GM-4C

CENTRAL DE-ICING FACILITY

VANCOUVER INTL, BC
CYVR

ATIS - 124.6

DE-ICE - 129.95
GND - 121.7 (S) 127.15 (N)
PAD CTL - 131.97
ICEMAN - 130.7

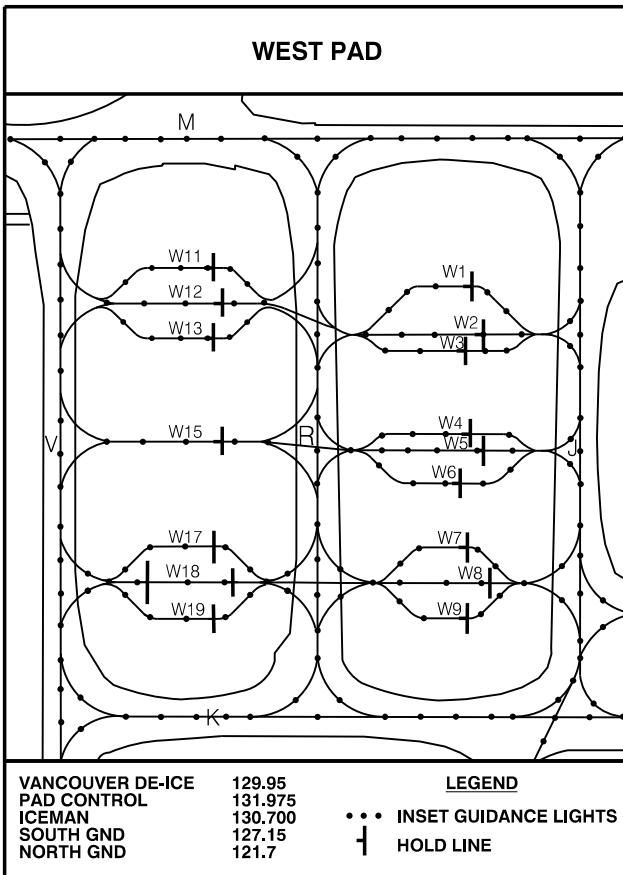

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CENTRAL DE-ICING FACILITY




EFF 25 JAN 24

CYVR-GM-4C

CYVR

SOUTH DE-ICING FACILITY (GRE)

ATTIS - 124.6

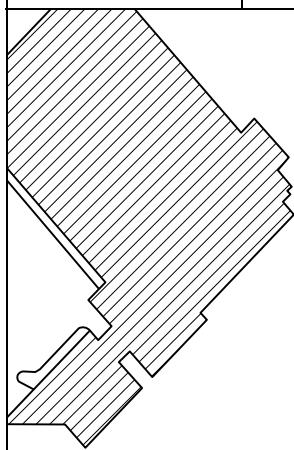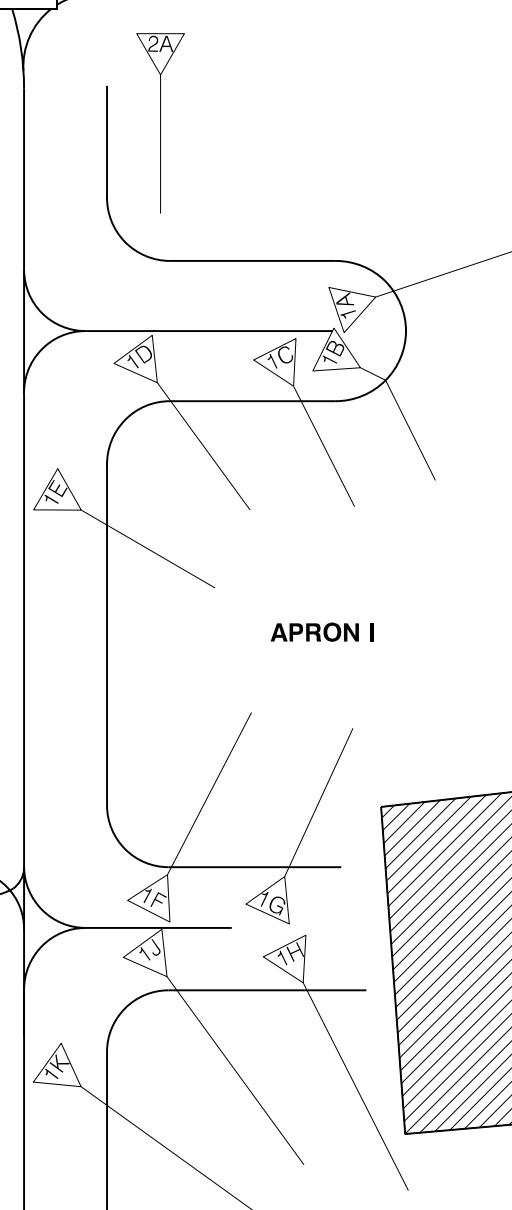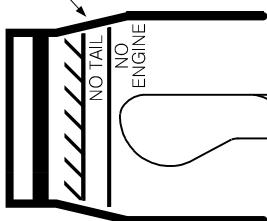
DE-ICE - 129.95
GND - 121.7 (S) 127.15 (N)
ICEMAN - 130.92ICEMAN 130.925
SOUTH GROUND 121.7GROUND RUN-UP
ENCLOSURE

SOUTH DE-ICING FACILITY (GRE)

EFF 16 MAY 24


CYVR

PARKING AREAS

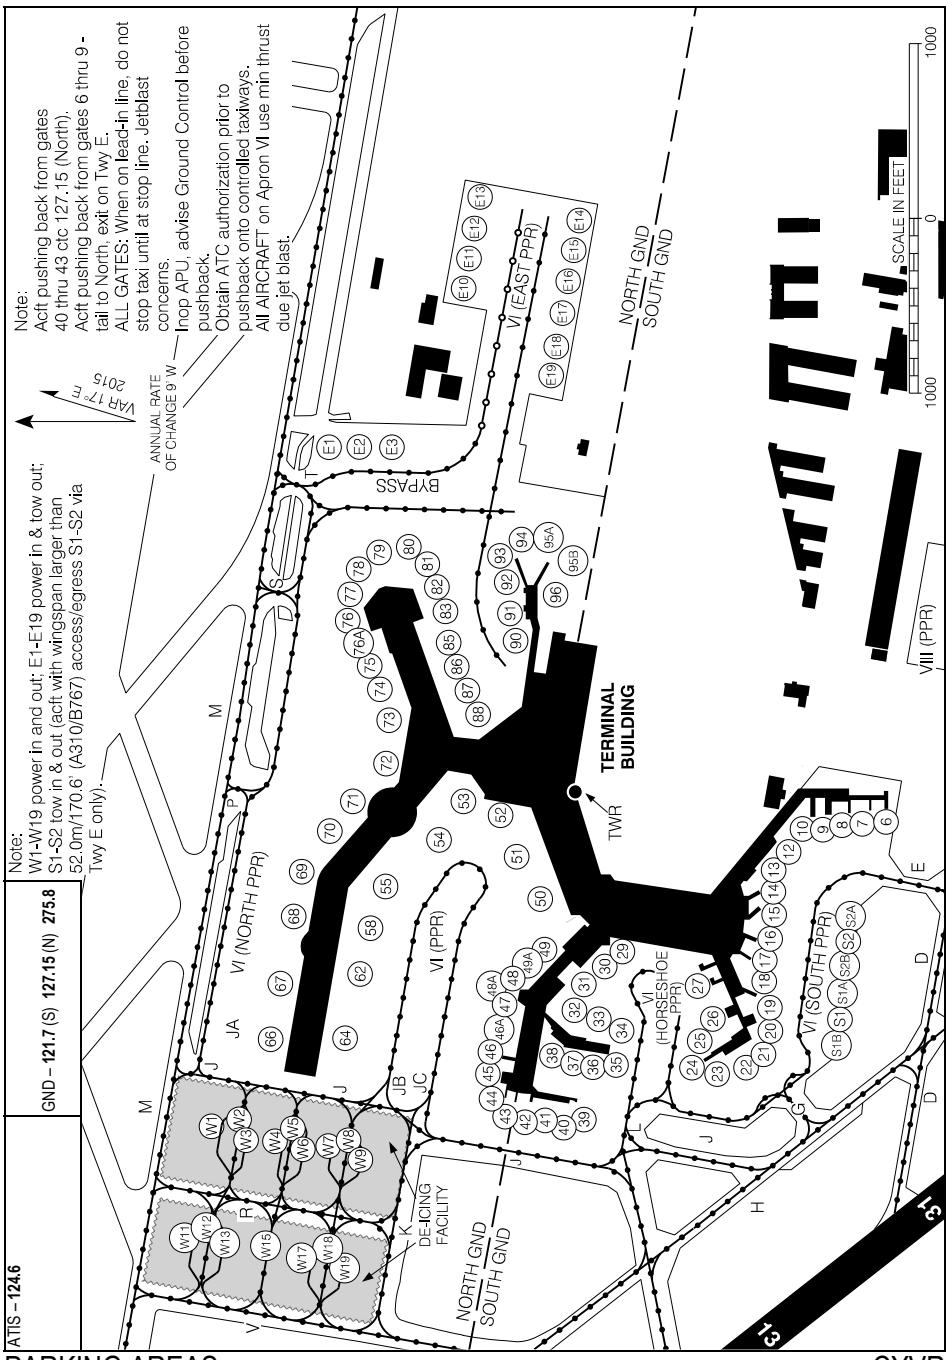


EFF 11 JUL 24


START BOXES

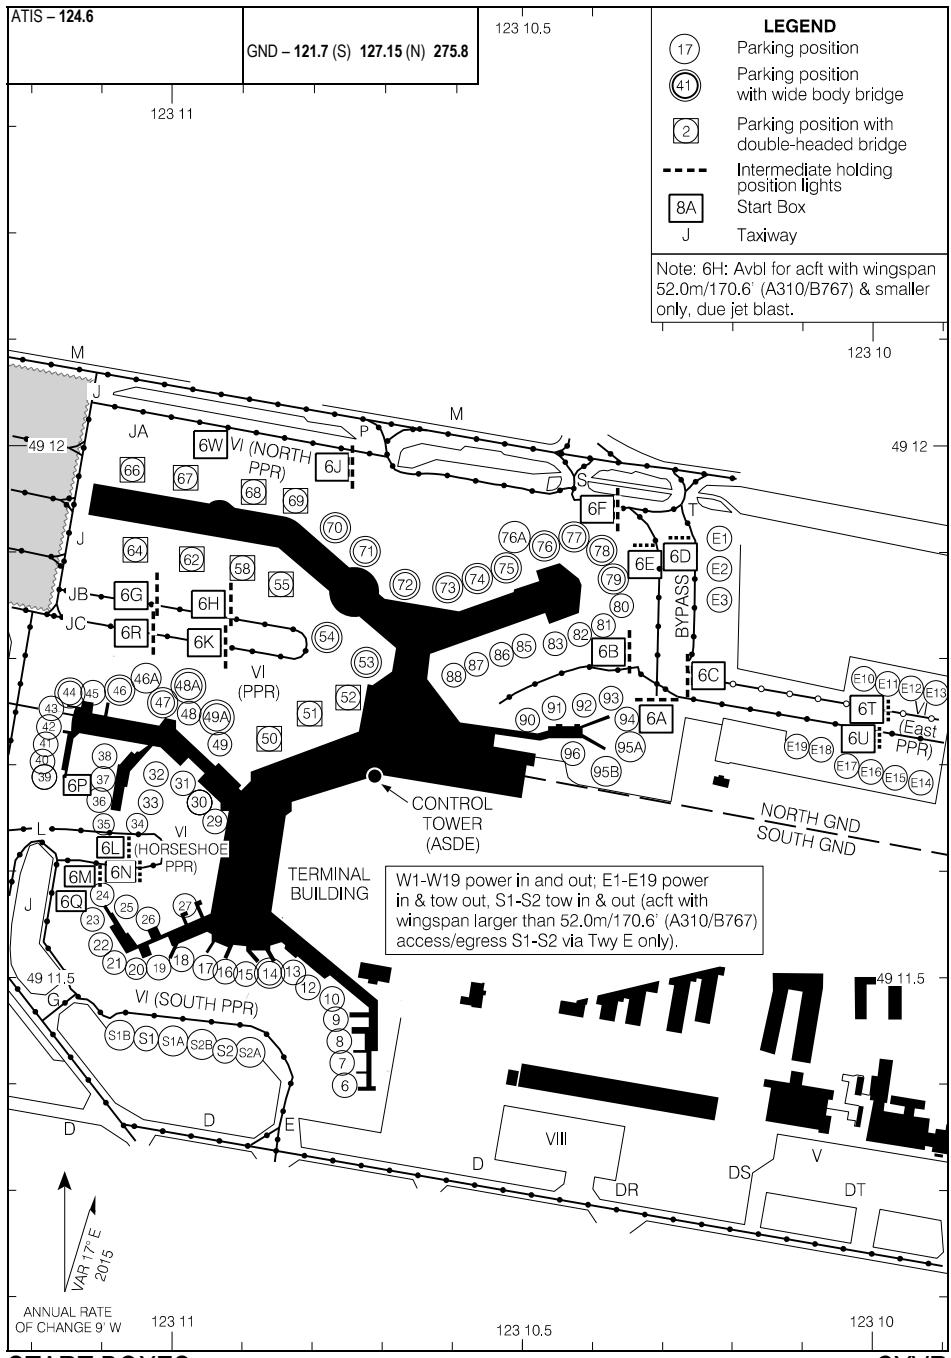

PARKING AREAS (COMMON USE CARGO)

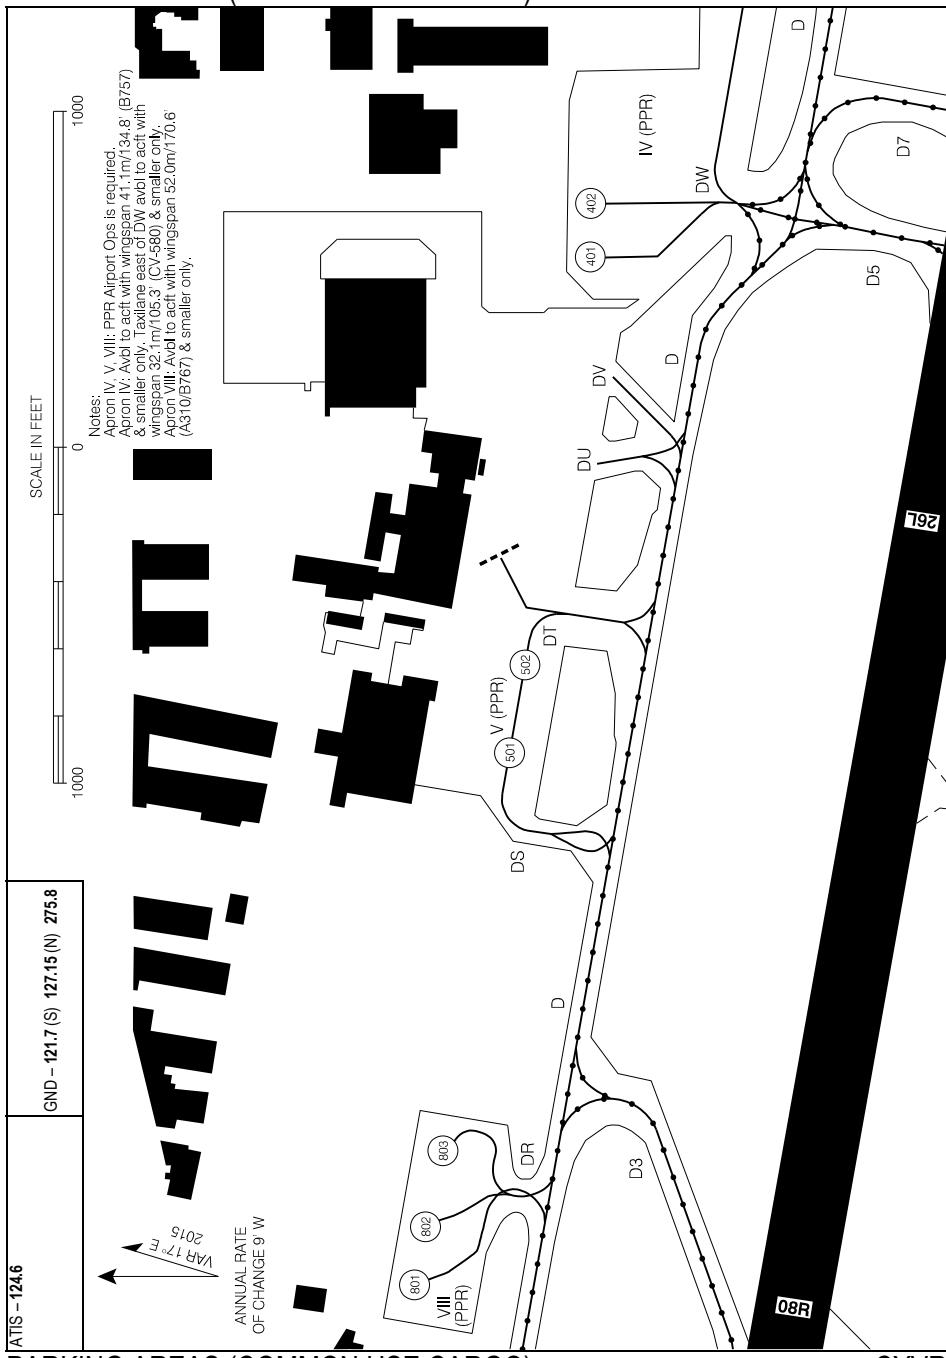

PARKING AREAS (SOUTH TERMINAL)

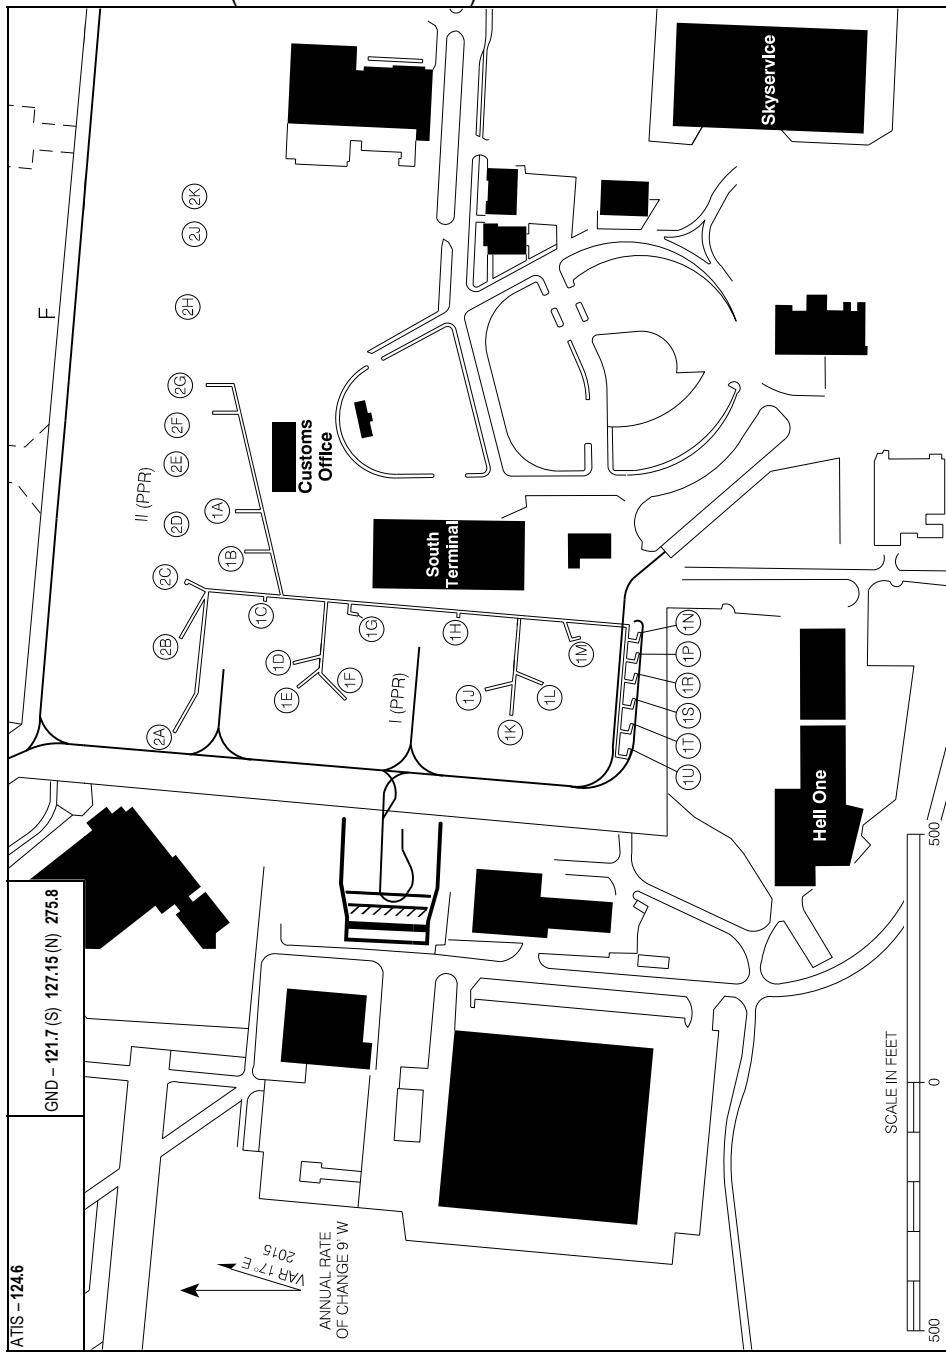


EFF 12 JUN 25

CZBB-AD

VANCOUVER/BOUNDARY BAY, BC
CZBB

AERODROME CHART

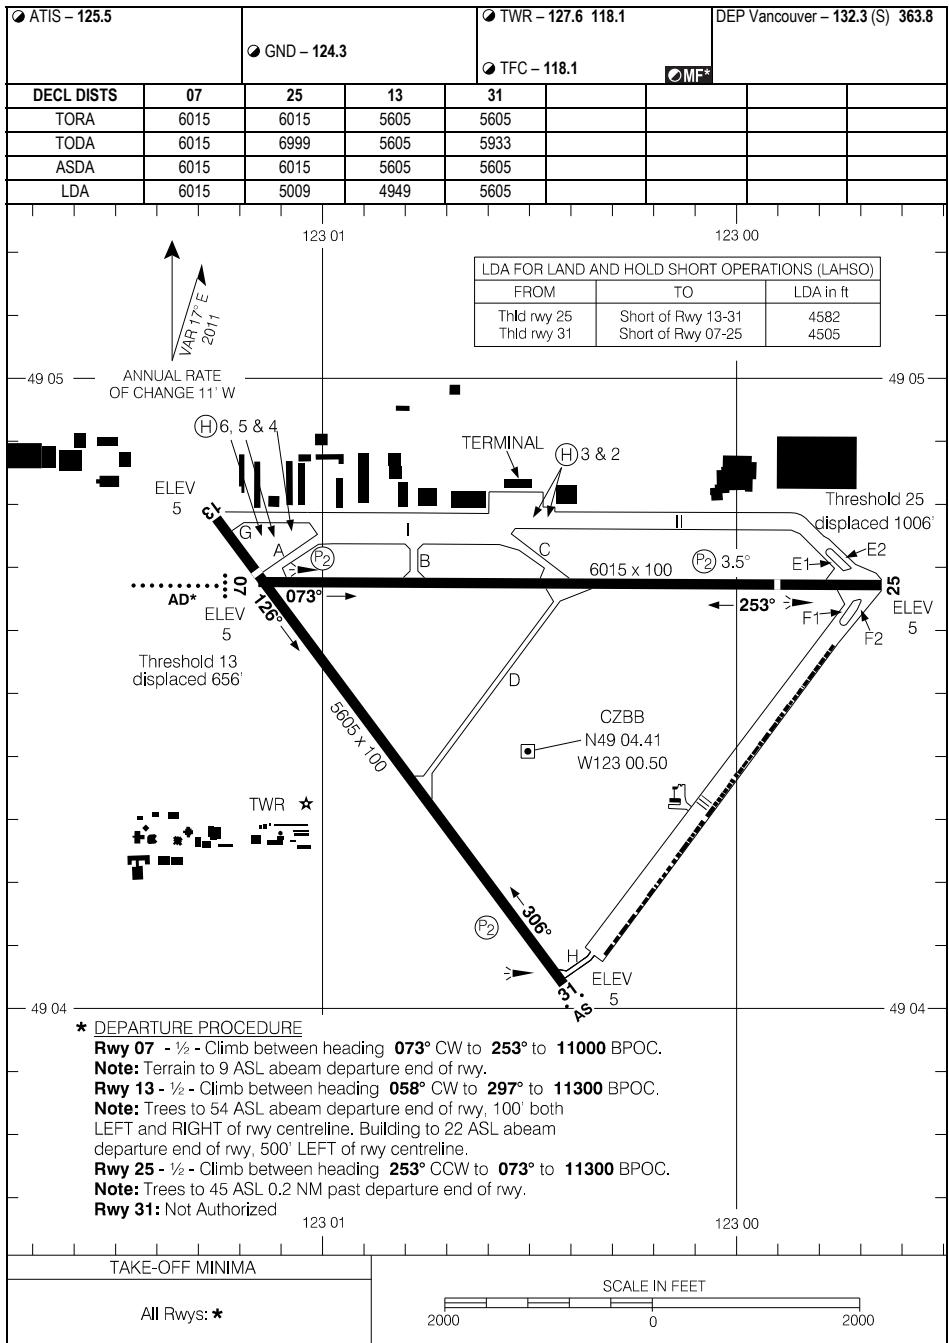

AERODROME CHART

EFF 20 FEB 25

CZBB


CZBB-AD

CBC7-HP

VANCOUVER/HARBOUR (PUBLIC), BC

CBC7

HELIPORT CHART

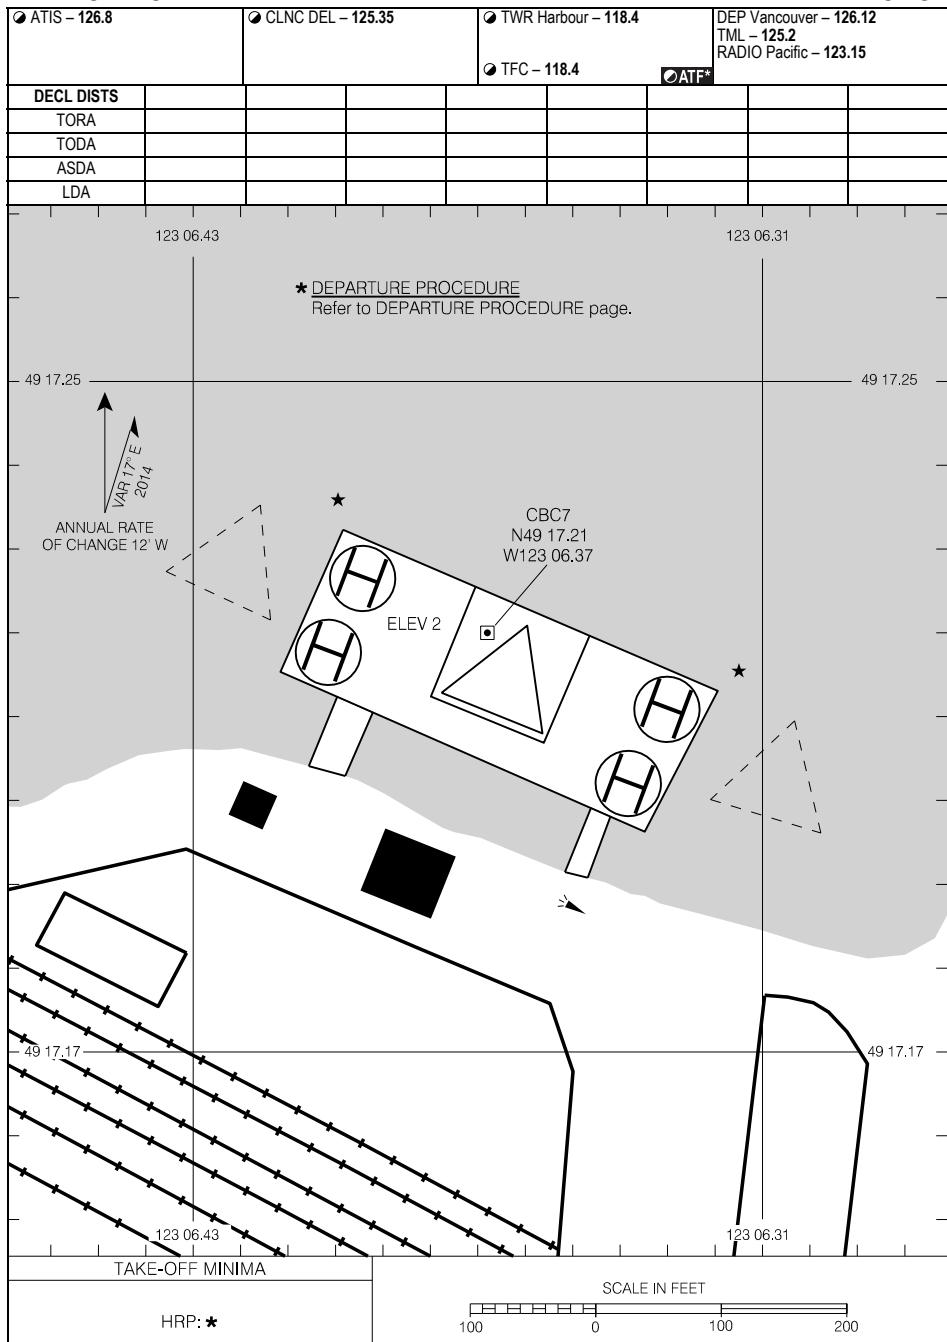

HELIPORT CHART

EFF 17 APR 25

CBC7-HP


CBC7

CAU4-AD

VANDERHOOF, BC
CAU4

AERODROME CHART

AWOS – 122.55				TFC – 122.8		CTR Vancouver – 133.8
DECL DISTS	03	21	07	25	16	ATF
TORA	4496	4496	5019	5019	3331	3331
TODA	4496	4496	5019	5019	3331	3331
ASDA	4496	4496	5019	5019	3331	3331
LDA	4496	4496	5019	4796	3331	3331

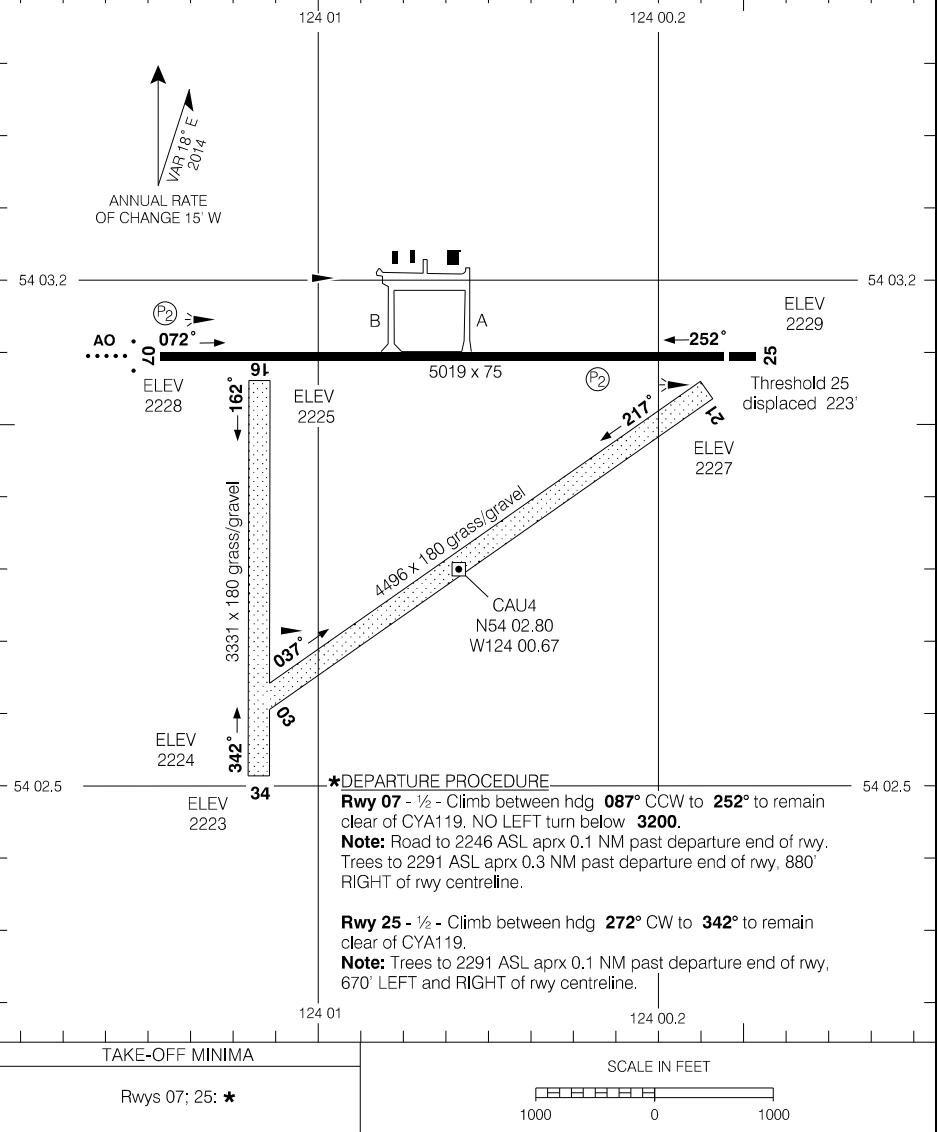

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 23 FEB 23


CAU4

CAU4-AD

CYVK-AD

VERNON, BC
CYVK

AERODROME CHART

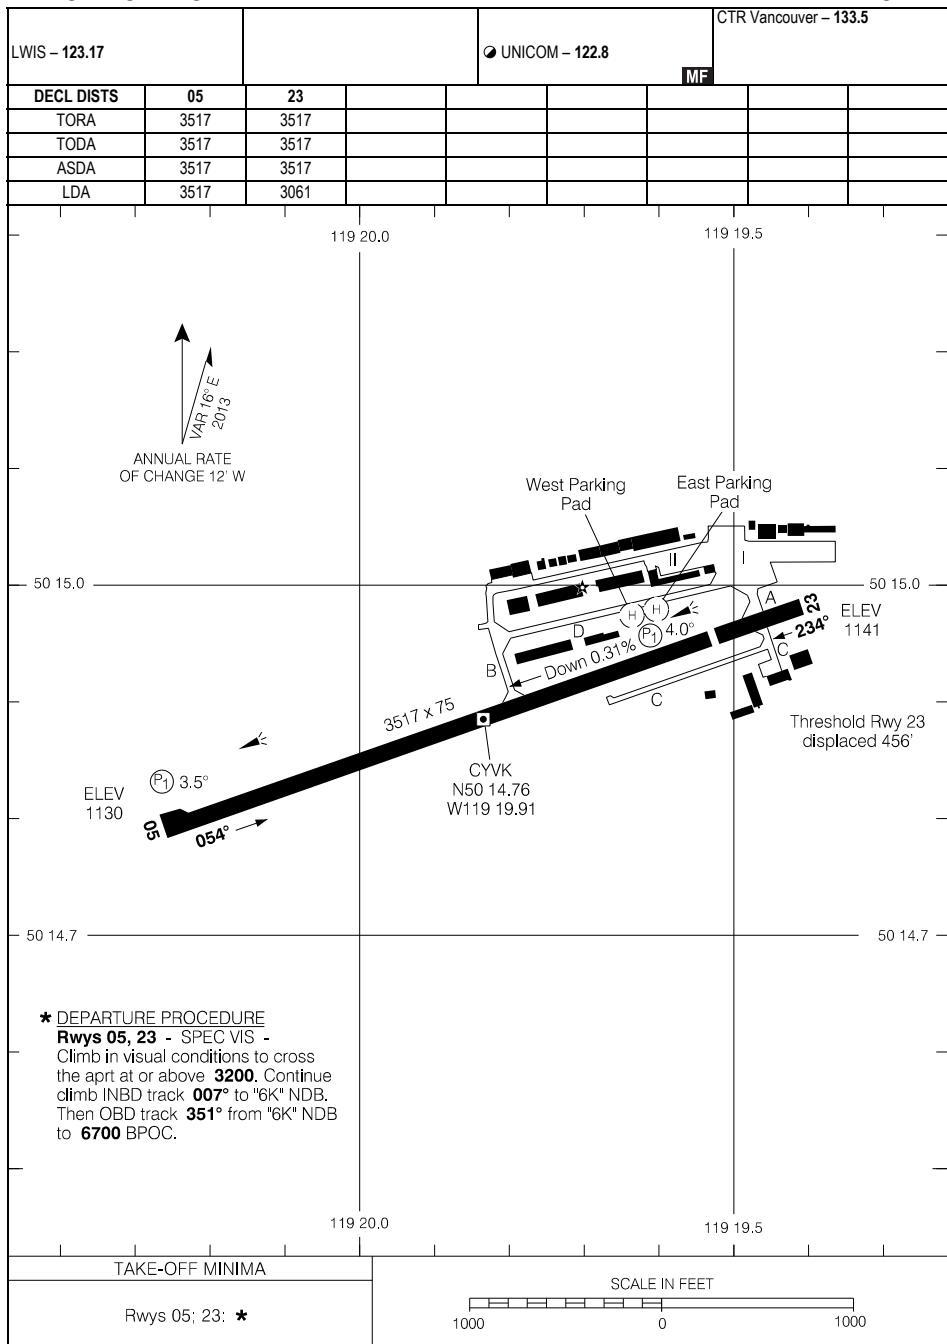

AERODROME CHART

EFF 5 SEP 24


CYVK

CYVK-AD

CBF7-HP

VICTORIA HARBOUR (CAMEL POINT), BC
CBF7

HELIPORT CHART

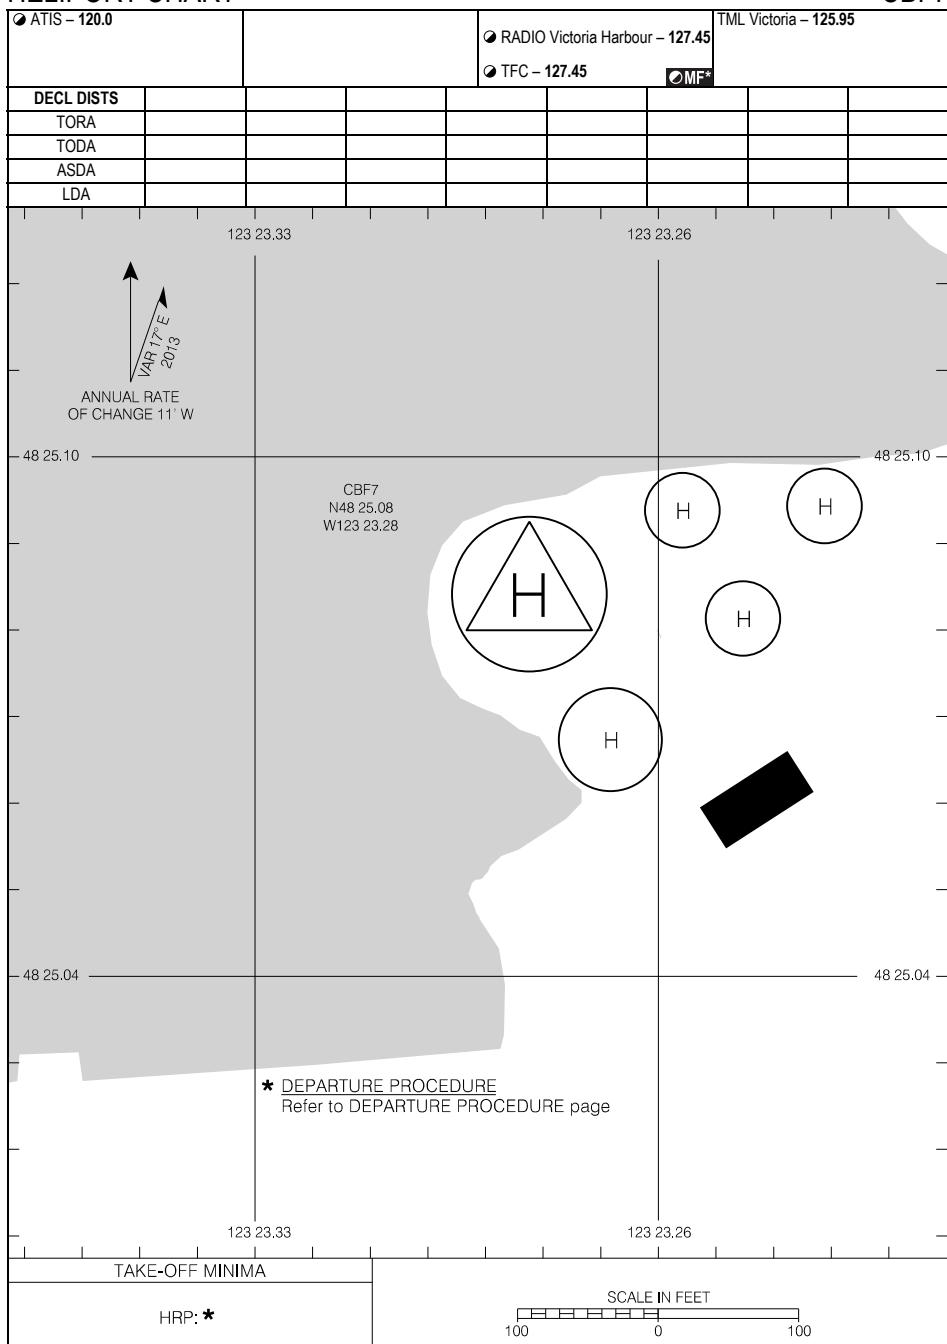

HELIPORT CHART

EFF 5 SEP 24

CBF7

CBF7-HP


CYYJ-AD

VICTORIA INTL, BC
CYYJ

AERODROME CHART

● ATIS - 118.8		● CLNC DEL - 126.4		● TWR - 119.7 239.6 ● GND - 121.9 361.4		● RADIO Kamloops - 119.7		DEP - 125.95
● LWIS - 118.8								MF*
DECL DISTS	03	21	09	27	14	32		
TORA	4141	3622	6998	6998	5001	4574		
TODA	4141	3622	7982	7982	5001	4574		
ASDA	5027	5027	6998	6998	5001	5001		
LDA	3622	4141	6998	6998	4574	5001		

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

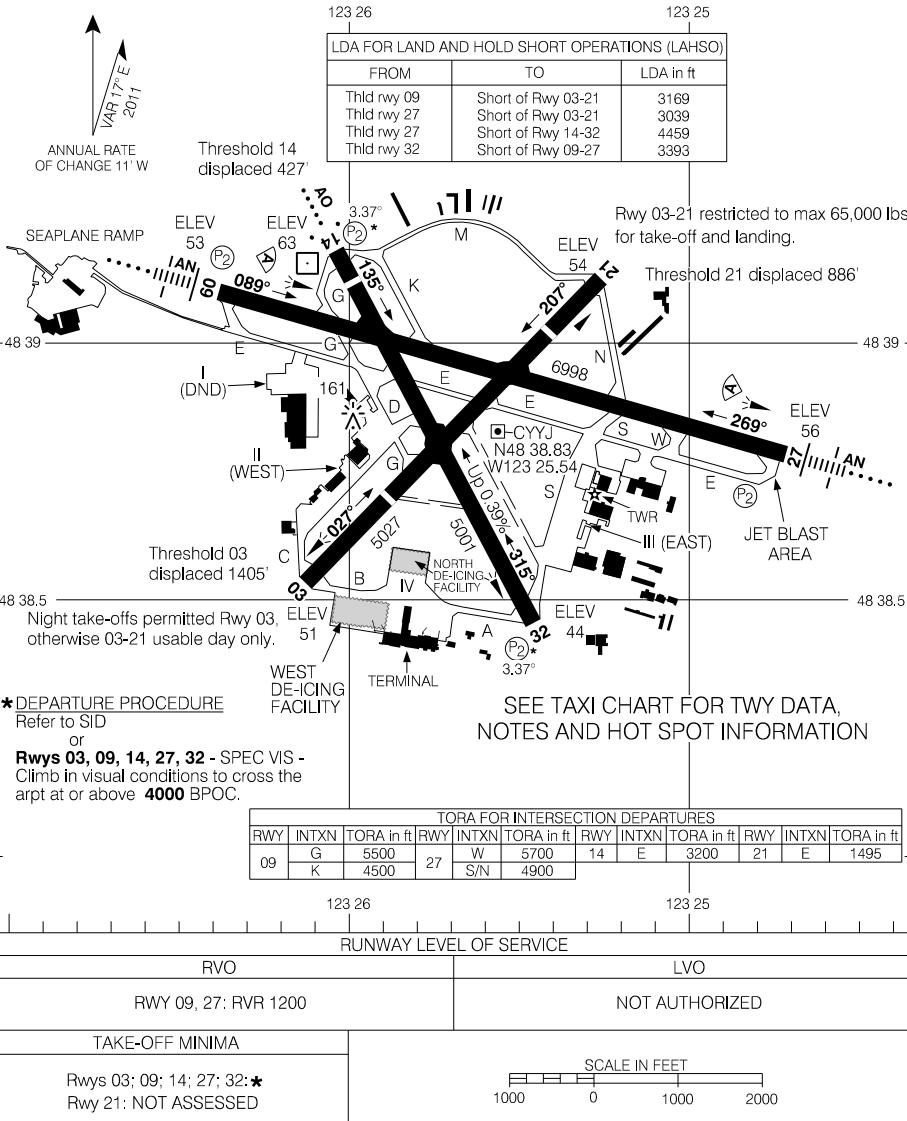

AERODROME CHART

EFF 7 AUG 25

CYYJ

CYYJ-AD

TAXI CHART**Notes****Widebody Aircraft**

Rwy 09 Departures: Twy B, Rwy 03/21, Twy G, Twy E.

Rwy 09 Arrivals: Twy E westbound, Twy S, Twy A.

Rwy 27 Departures: Twy A, Twy S, Twy E eastbound.

Rwy 27 Arrivals: Twy E, Twy G, Rwy 03/21, Twy B.

Taxiways

Taxiway C restricted to 50,000 lbs.

Taxiway M restricted to 12,500 lbs.

Aprons

Apron II restricted to 50,000 lbs.

Apron IV restricted to scheduled commercial traffic only. Acft engine runs abv idle power prohibited, PPR fr OPR for idle power engine runs. Exceptions require prior approval of airport operator.

Rwy 03-21 Operations

Aircraft restricted to max 65,000 lbs for take-off and landing.

No weight restriction for taxiing aircraft rwy 03/21 south of rwy 14/32.

Rwy 27 Arrivals

Aircraft exiting on rwy 14, HOLD SHORT rwy 03, see Hot Spot 3.

Rwy 09 Arrivals


Aircraft exiting on rwy 21, HOLD SHORT rwy 14, see Hot Spot 3.

TAXI CHART

EFF 11 JUL 24

CYYJ

TAXI CHART

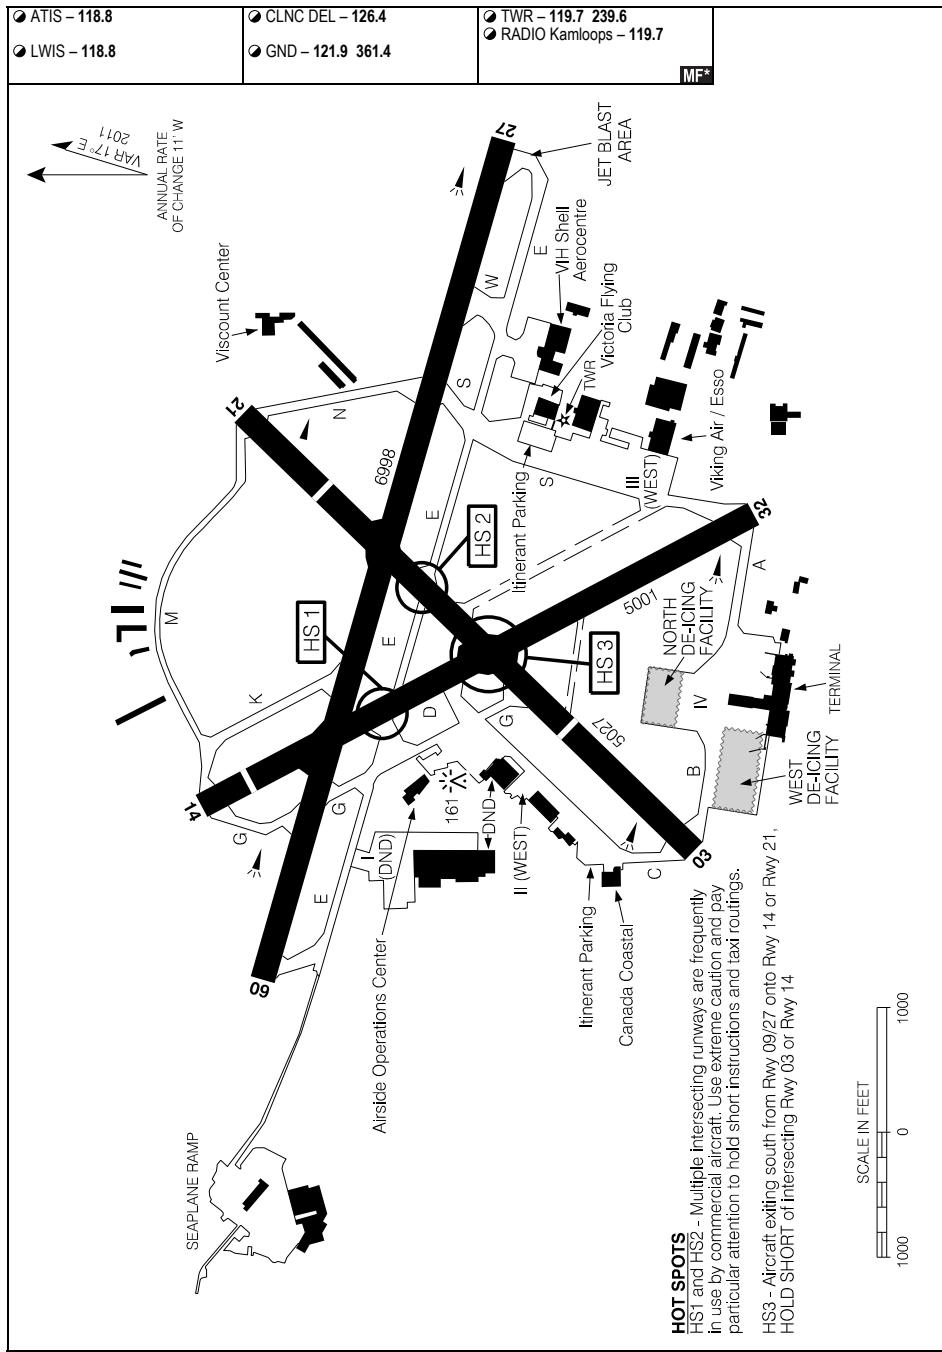

TAXI CHART

EFF 7 AUG 25

DE-ICING OPERATIONS

VICTORIA INTL, BC
CYYJ

DE-ICING PROCEDURES

GENERAL

1. De-icing at gates is not permitted without authorization from airport operator.
2. North de-icing pad access is controlled by DE-ICE CONTROL. ALL Aircraft must have an approved assignment time prior to pushback or taxi.
3. Assignment times will be provided to de-icing providers only and are provided at 20-minute intervals. De-icing provider contact information and times are detailed in the Services section.
4. ATC does not have oversight of de-icing assignments; all inquiries must be directed to de-icing providers or Snow Desk when open (250-953-7595). If the Snow Desk is not open, all inquiries should be directed to de-icing providers or Airport Operations, Manager, Integrated Operations Centre.

SCHEDULED COMMERCIAL AIRCRAFT

1. De-icing assignments will be communicated to commercial aircraft via de-icing providers and individual company processes.
2. **NO de-icing will occur until an assignment has been issued.**

NON-SCHEDULED AIRCRAFT

1. Aircraft requiring an assignment shall contact a de-icing provider, who will request the assignment.
2. De-ice control will issue the assignment between scheduled commercial movements and notify the de-icing provider. The de-icing provider will provide the assignment to the aircraft.
3. If the non-scheduled aircraft misses their assignment, a new assignment must be obtained.
4. **NO de-icing will occur until an assignment has been issued.**

DE-ICING OPERATIONS


EFF 12 AUG 21

CYYJ

CYYJ-APD

VICTORIA INT'L, BC
CYYJ


PARKING AREAS

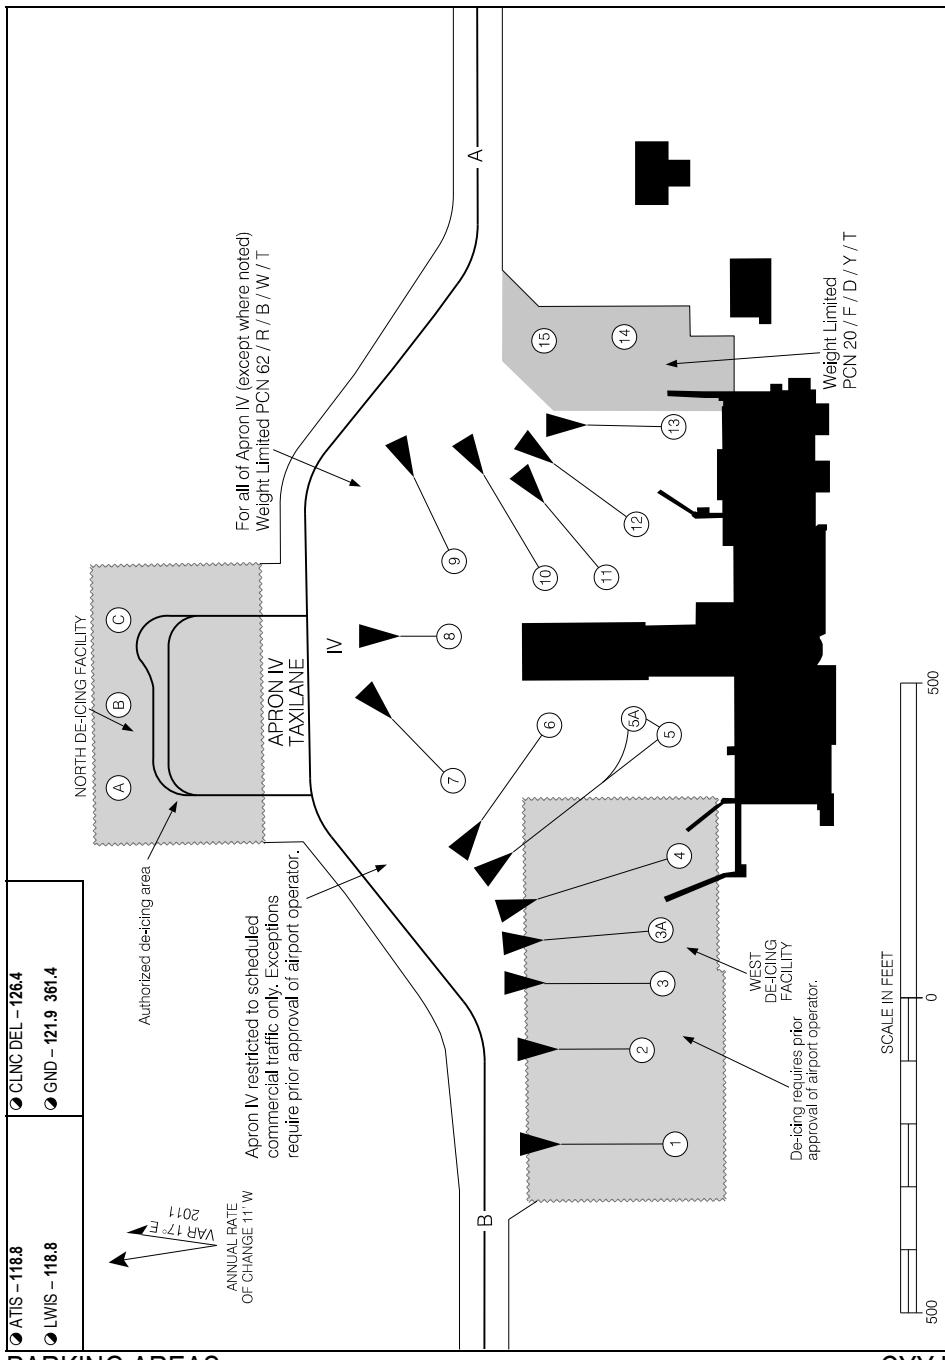

CYWL-AD

WILLIAMS LAKE, BC
CYWL

AERODROME CHART

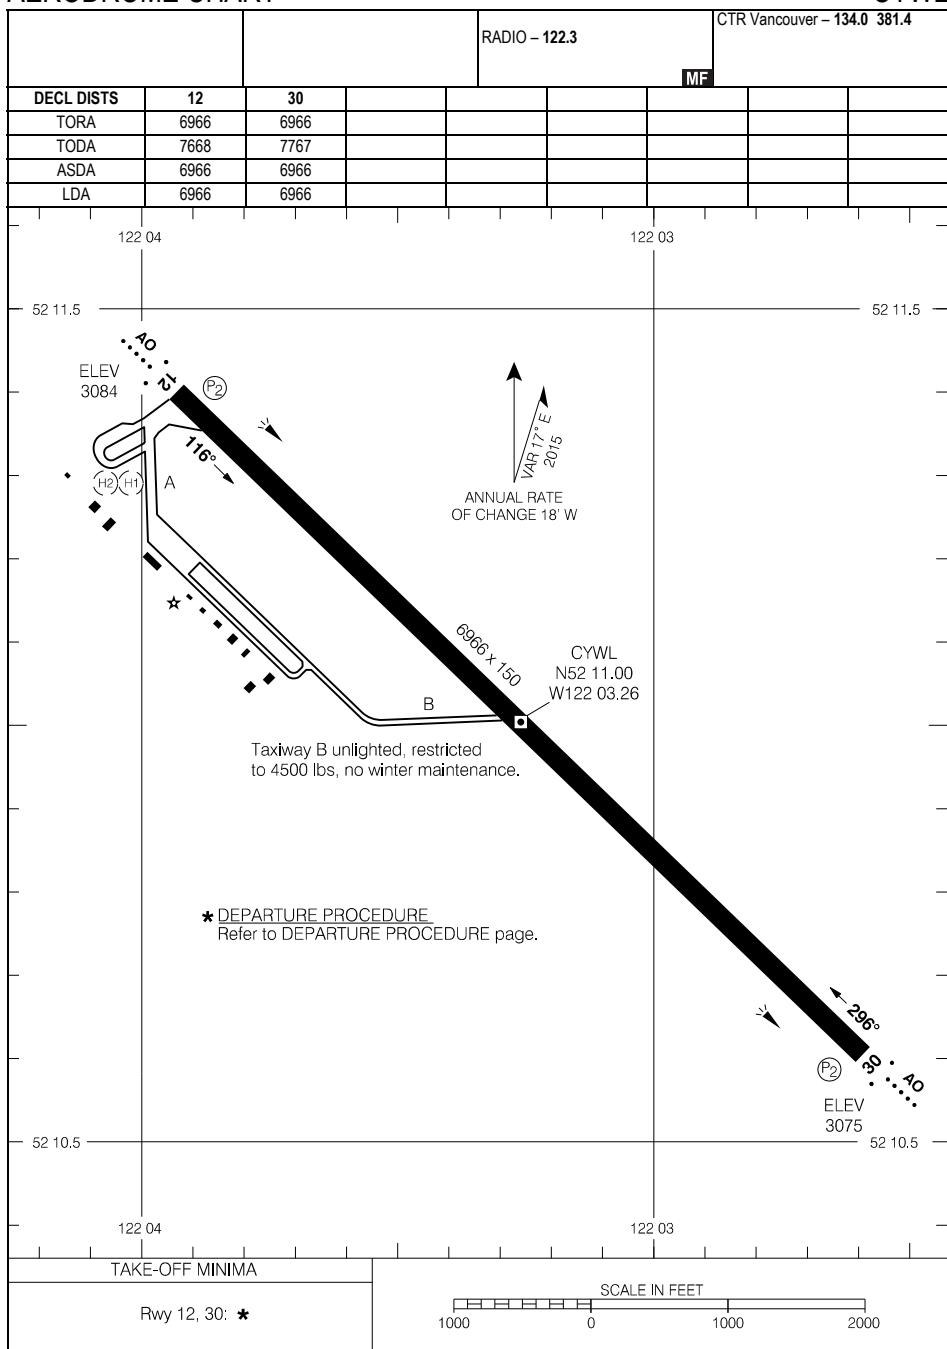

AERODROME CHART

EFF 12 JUN 25


CYWL

CYWL-AD

CYWM-AD

ATHABASCA, AB
CYWM

AERODROME CHART

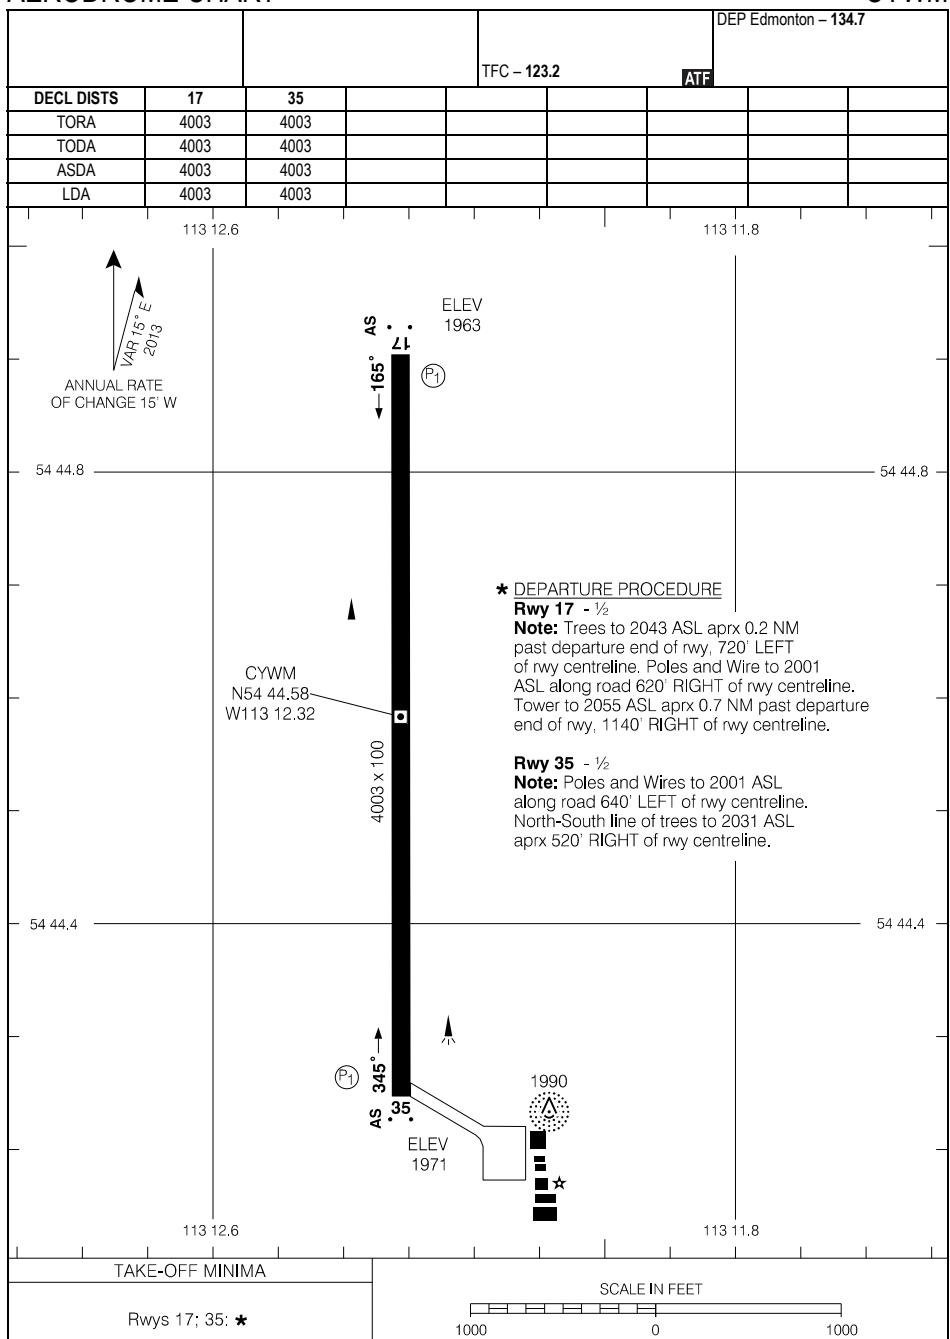

AERODROME CHART

EFF 7 OCT 21


CYWM-AD

CYWM

CYBV-AD

BERENS RIVER, MB
CYBV

AERODROME CHART

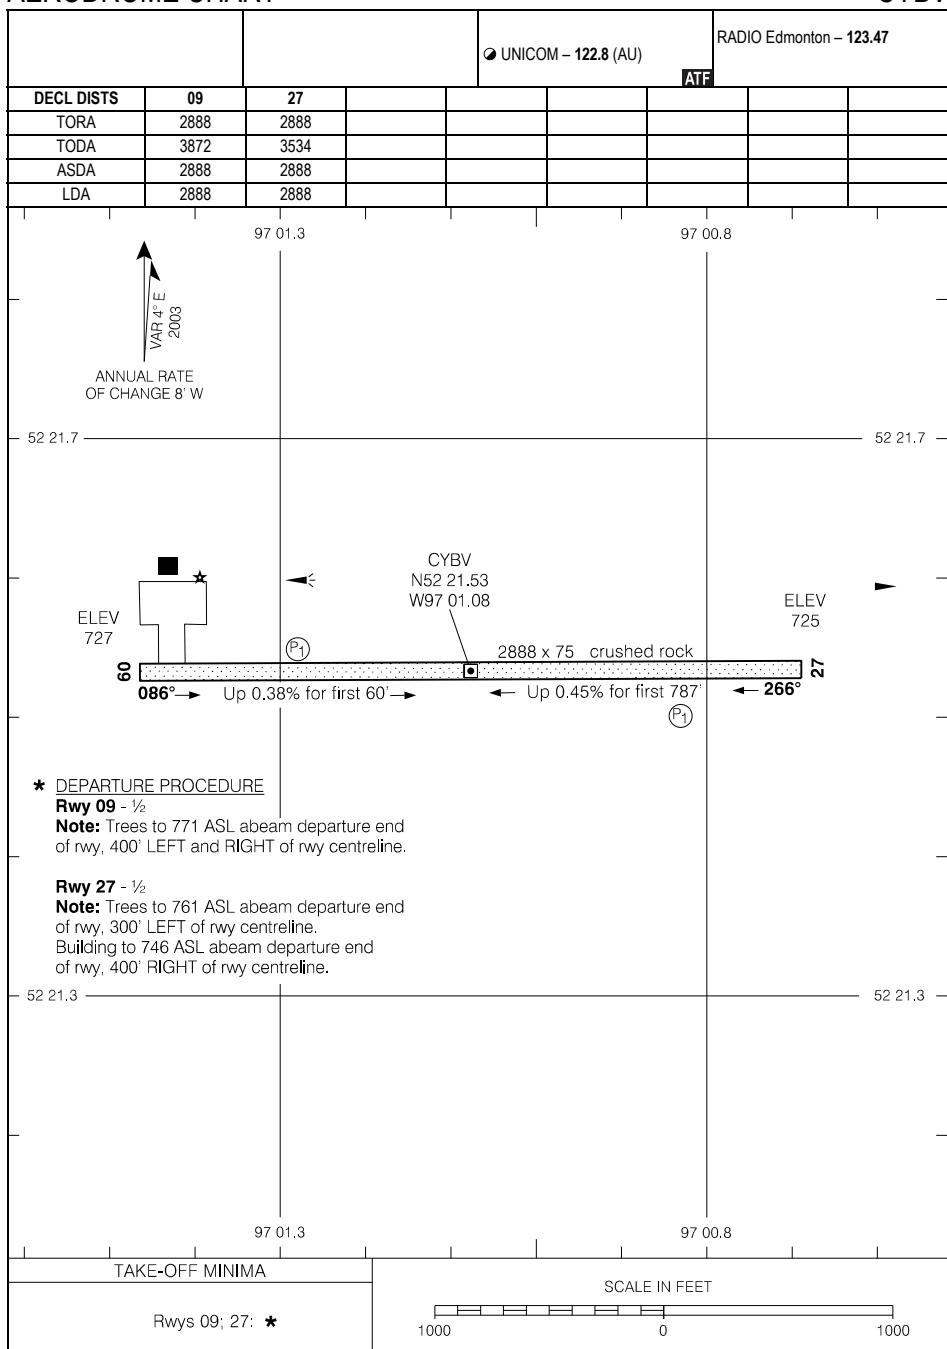

AERODROME CHART

EFF 23 FEB 23

CYBV

CYBV-AD

CZTA-AD

BLOODVEIN RIVER, MB
CZTA

AERODROME CHART

				<input checked="" type="radio"/> UNICOM – 122.8 (AU)	
					ATF
DECL DISTS	18	36			
TORA	2995	2995			
TODA	3979	3979			
ASDA	2995	2995			
LDA	2995	2995			

96418

96 41 3

18 ELEV
727

Up 0.3% if st 197° →
 2995 × 75
 Crushed Roc

ANNUAL RATE
OF CHANGE 8' E

VAR 3° E
2013

*** DEPARTURE PROCEDURE**

Rwy 18 - 1/2

Note: Trees to 811 ASL aprx 0.2 NM past departure end of rwy.

Rwy 36 - 1/2

Note: Trees to 805 ASL aprx 0.2 NM past departure end of rwy.

ELEV
728

—51 46.8—————**128 36**—————51 46.8—

96 41.8

96 41.3

TAKE-OFF MINIMA

SCALE IN FEET

Rwys 18; 36: *

A horizontal number line starting at -1000 and ending at 1000. The line is marked with tick marks every 200 units, labeled as -1000, 0, and 1000.

AERODROME CHART

CZTA

EEE 11.III.24


CZTA-AD

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CYBF-AD

BONNYVILLE, AB
CYBF

AERODROME CHART

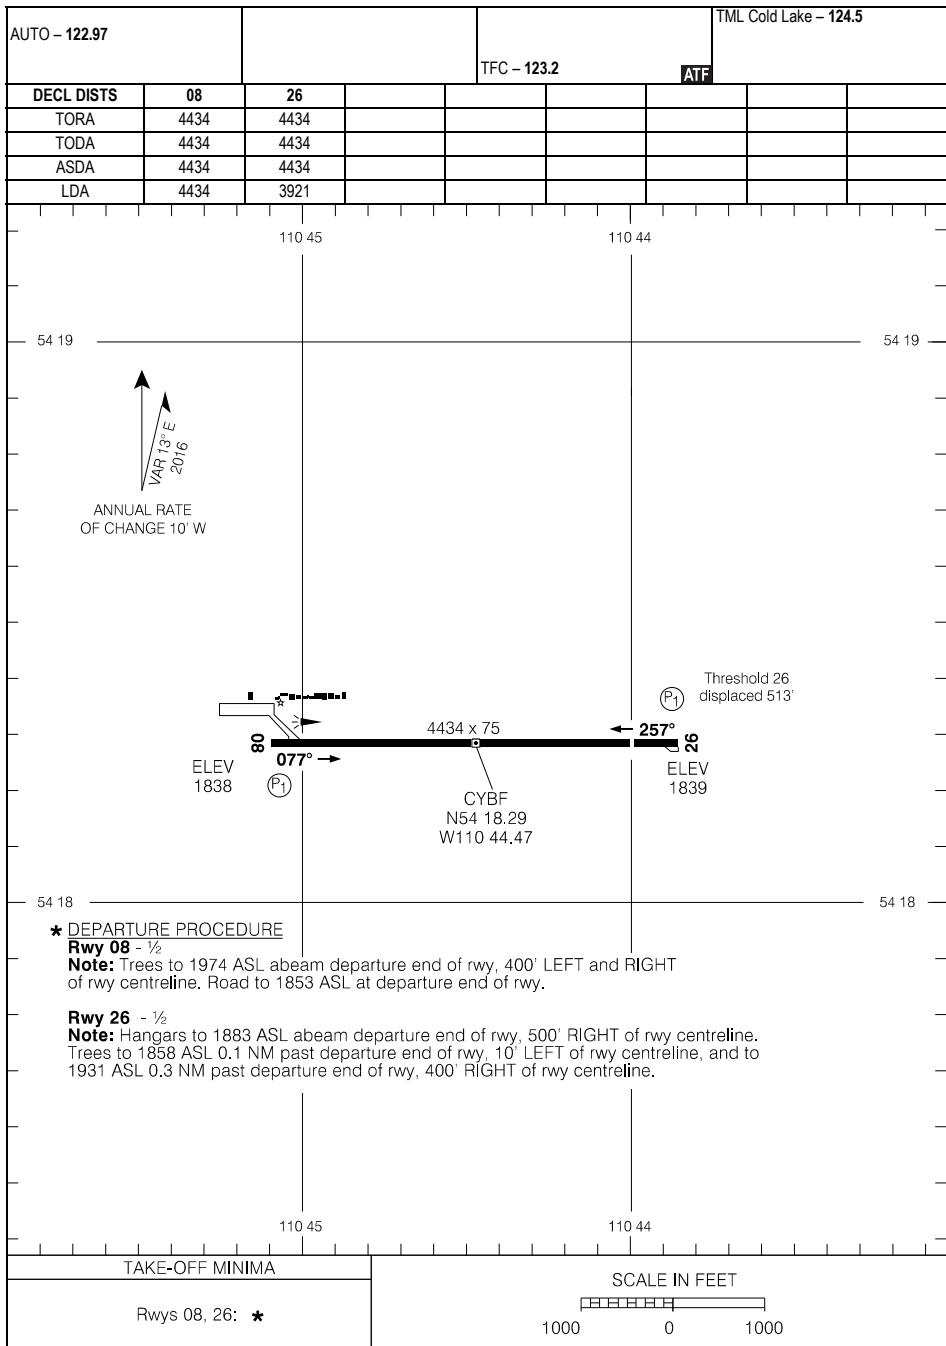

AERODROME CHART

EFF 21 MAR 24


CYBF

CYBF-AD

CYBR-AD

BRANDON MUNI, MB
CYBR

AERODROME CHART

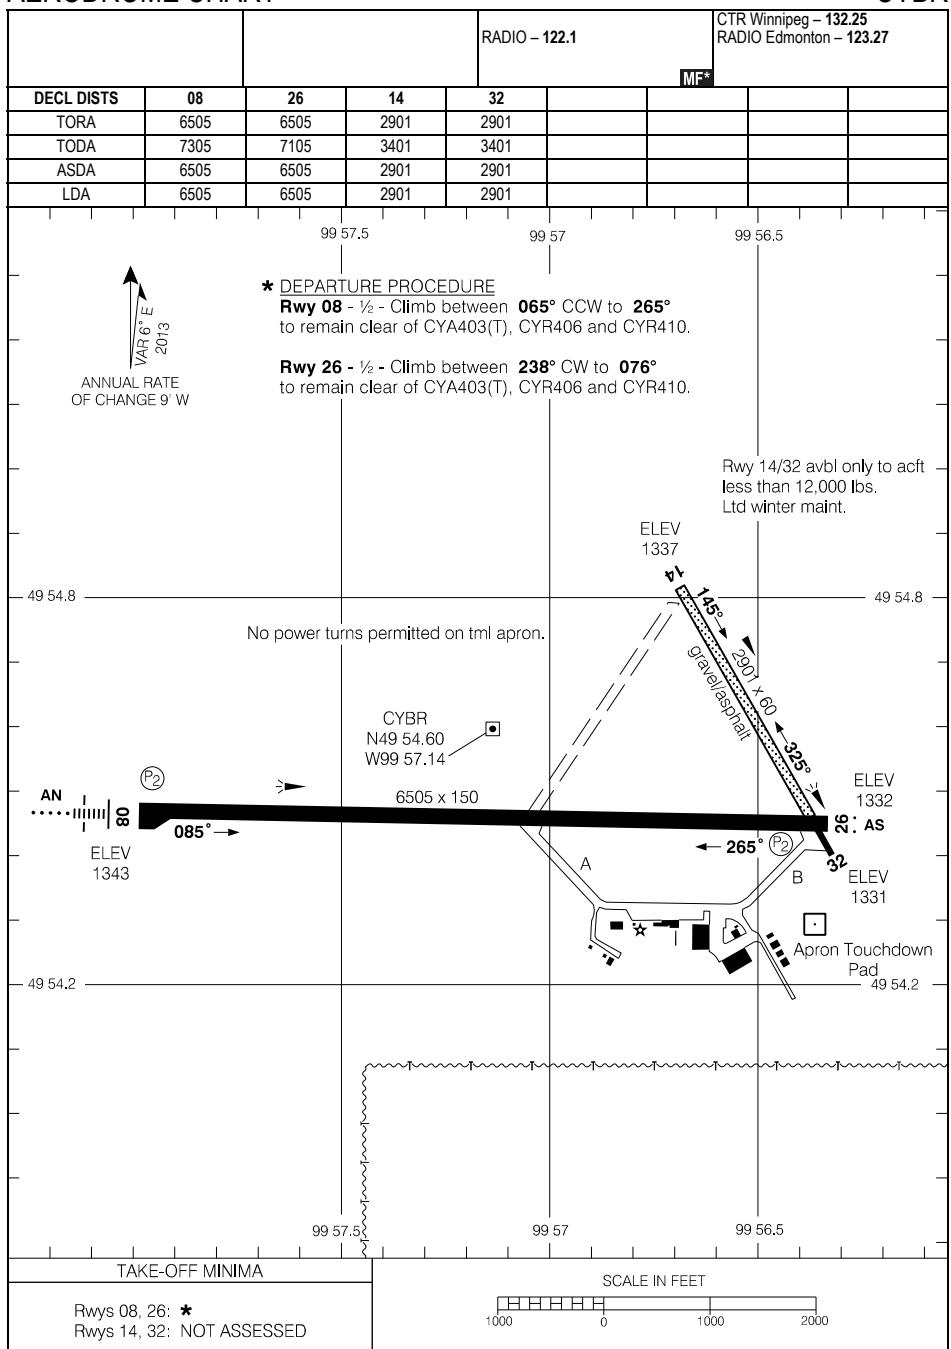

AERODROME CHART

EFF 17 APR 25


CYBR-AD

CYBR

CYBT-AD

BROCHET, MB
CYBT

AERODROME CHART

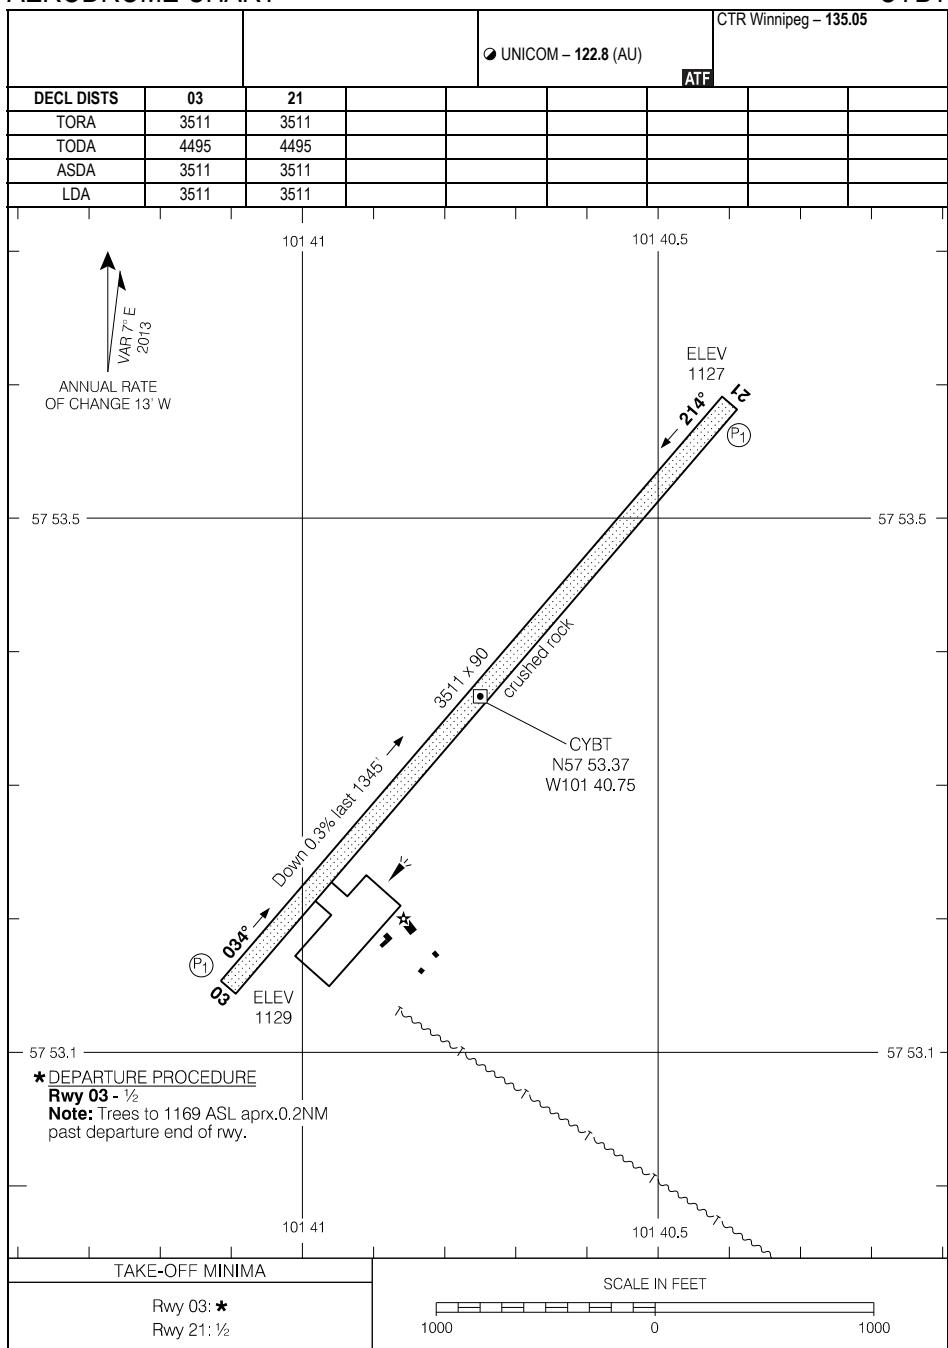


AERODROME CHART

EFF 20 FEB 25

CYBT

CYBT-AD

AERODROME CHART

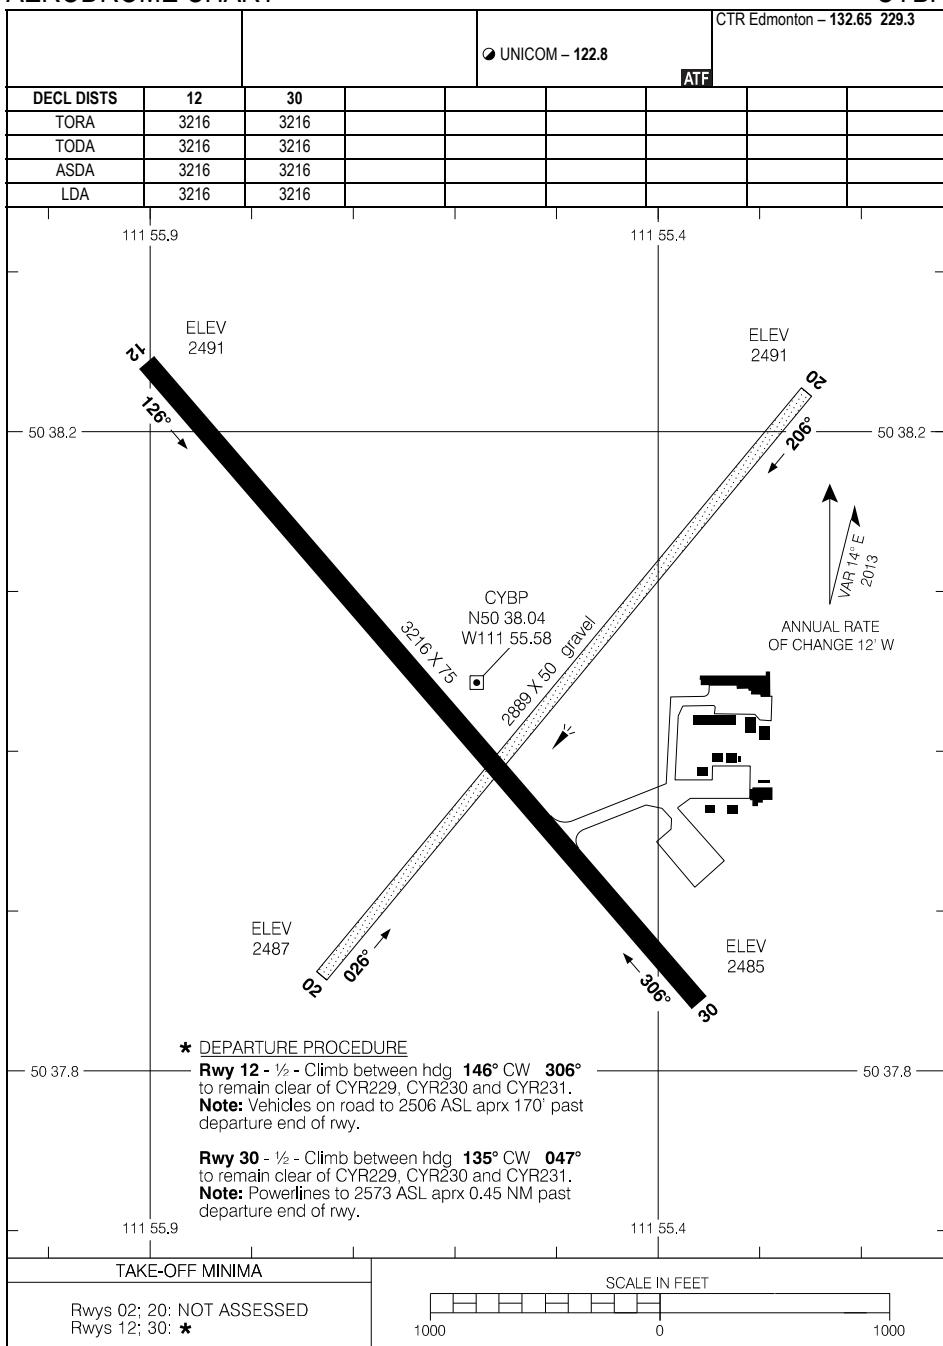

AERODROME CHART


EFF 20 FEB 25

CYBP

CYVT-AD

BUFFALO NARROWS, SK
CYVT

AERODROME CHART

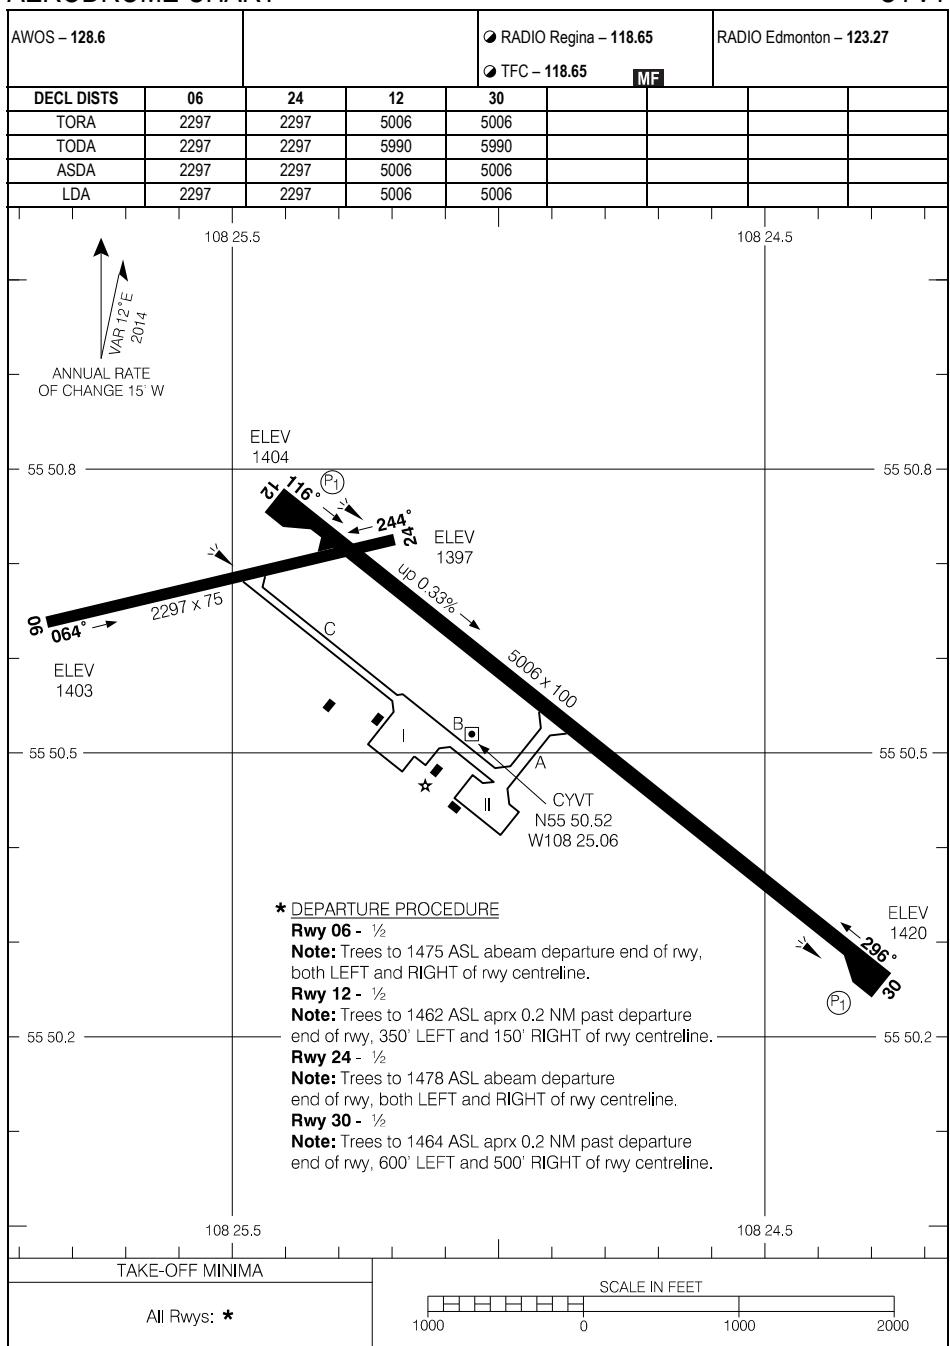

AERODROME CHART

EFF 17 APR 25


CYVT-AD

CYVT

CYBW-AD

CALGARY/SPRINGBANK, AB
CYBW

AERODROME CHART

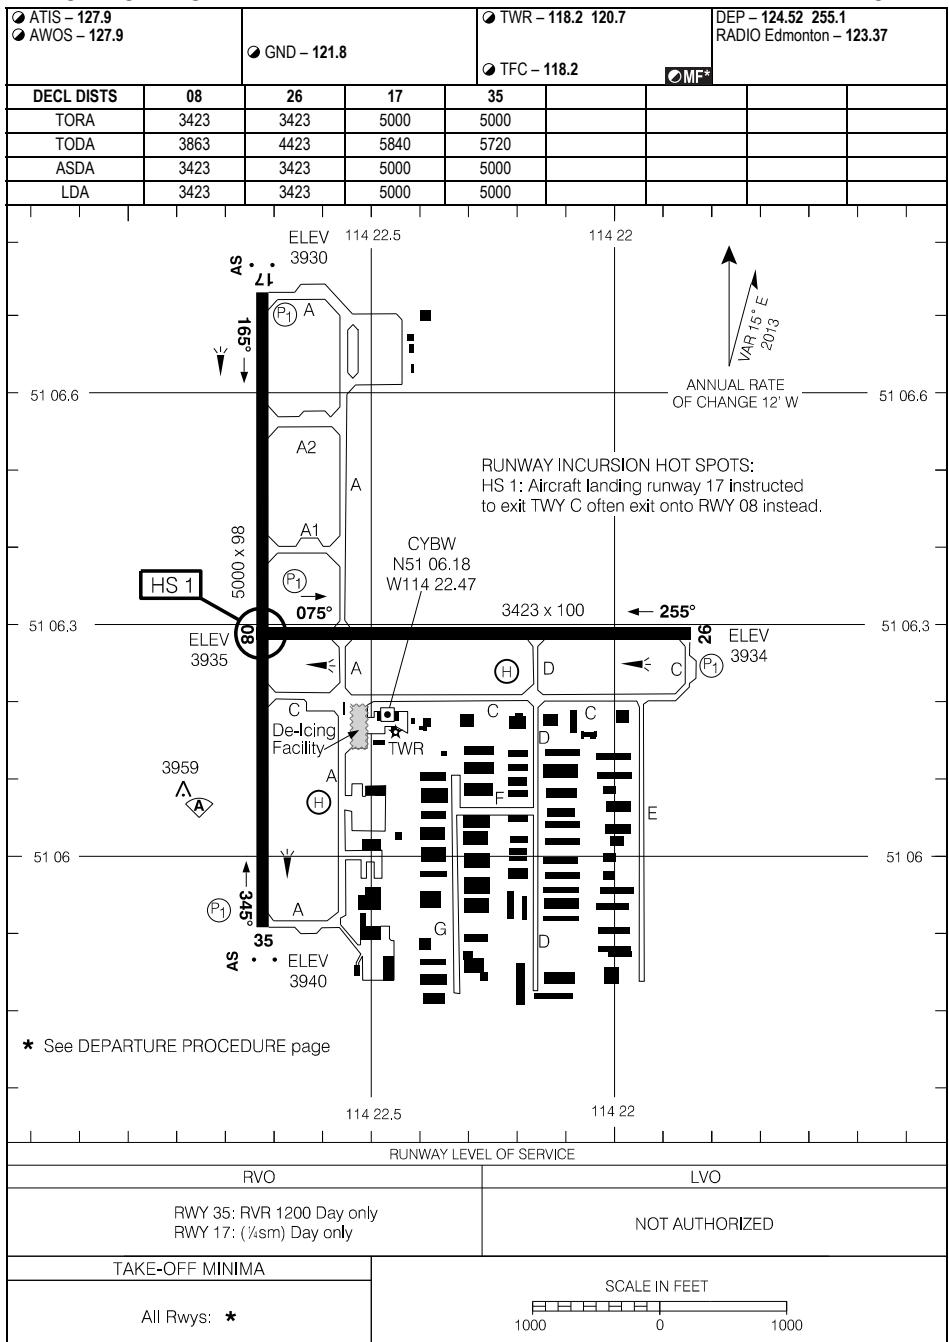

AERODROME CHART

EFF 7 AUG 25

CYBW

CYBW-AD

REDUCED VISIBILITY PROCEDURES**Visibility Procedures (RVR less than 2600 to 1200 ft)****Reduced Visibility Taxi Routes**

Taxi routes will be coordinated by ATC. All taxiways and runways are available except for Rwy 08/26, taxiway D north of taxiway C, and taxiway C east of taxiway E. Uncontrolled taxiways may be used at the discretion of the pilot. Vehicles responding to an emergency are not required to follow the routes.

Departures

Rwy 17/35 will be used for departures.

Sequencing of Ground Movements for Take-off

Pilots must follow instructions on Sequencing of Ground Movements for Take-off as described in CAP GEN Operating Minima.

Surface Movement Guidance Control System

All taxiway intersections on Rwy 17/35 are equipped with rwy guard lights.

Arrivals

Taxi routes will be coordinated by ATC.

Airport Services and Equipment Available under Reduced Visibility Operations

All taxiway intersections on Rwy 17/35 are equipped with rwy guard lights.

Runway Level of Service

Runway	Certification
17	1/4 sm Day only
35	RVR 1200 Day only


REDUCED VISIBILITY PROCEDURES

EFF 7 AUG 25

CYBW

REDUCED VISIBILITY TAXI CHART
(RVR LESS THAN 2600 TO 1200 FT)


CALGARY/SPRINGBANK, AB
CYBW

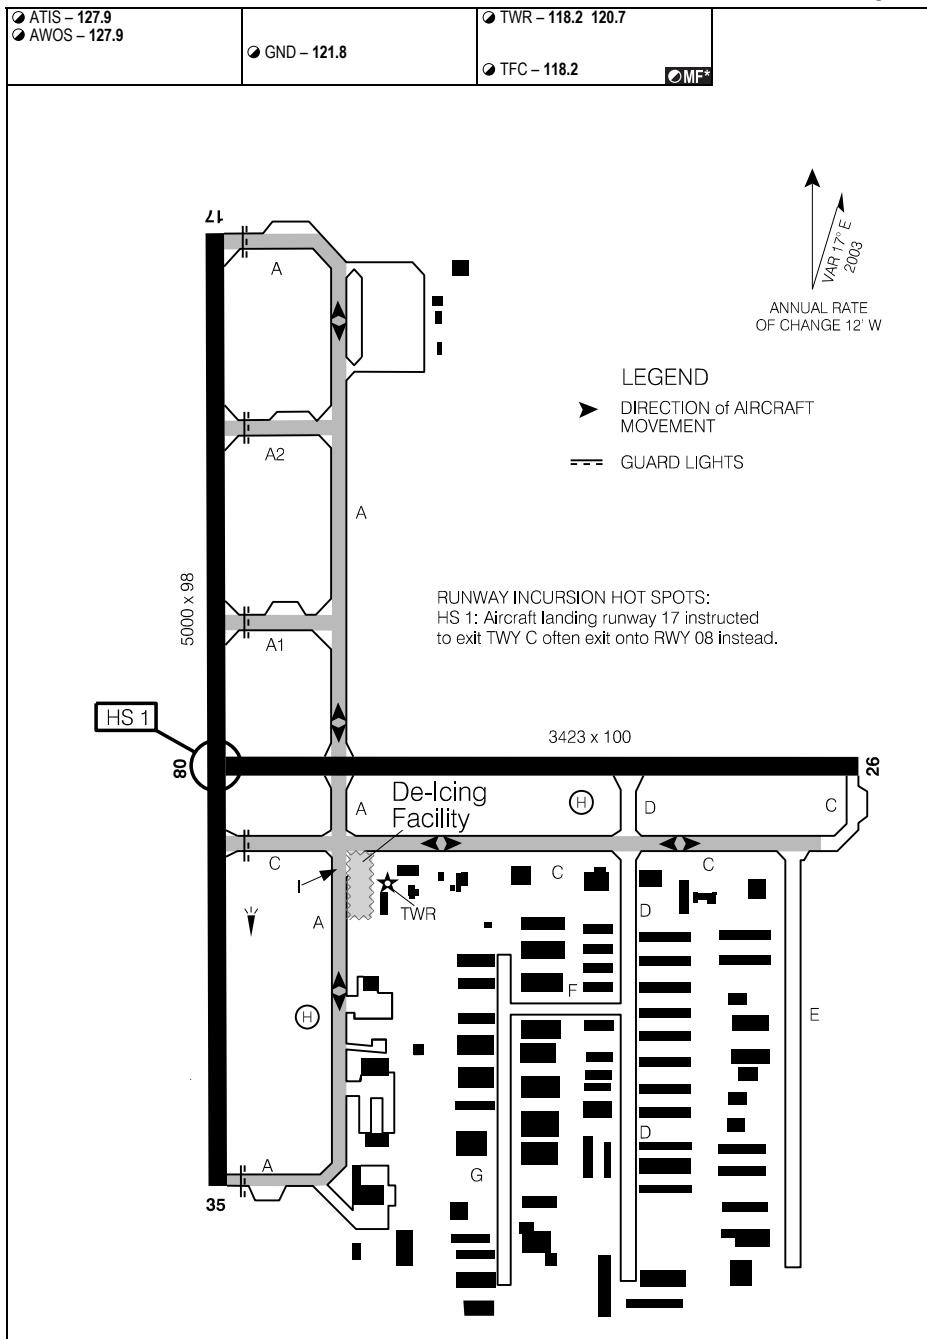

(RVR LESS THAN 2600 TO 1200 FT)
REDUCED VISIBILITY TAXI CHART

CYBW
EFF 7 AUG 25

AERODROME CHART

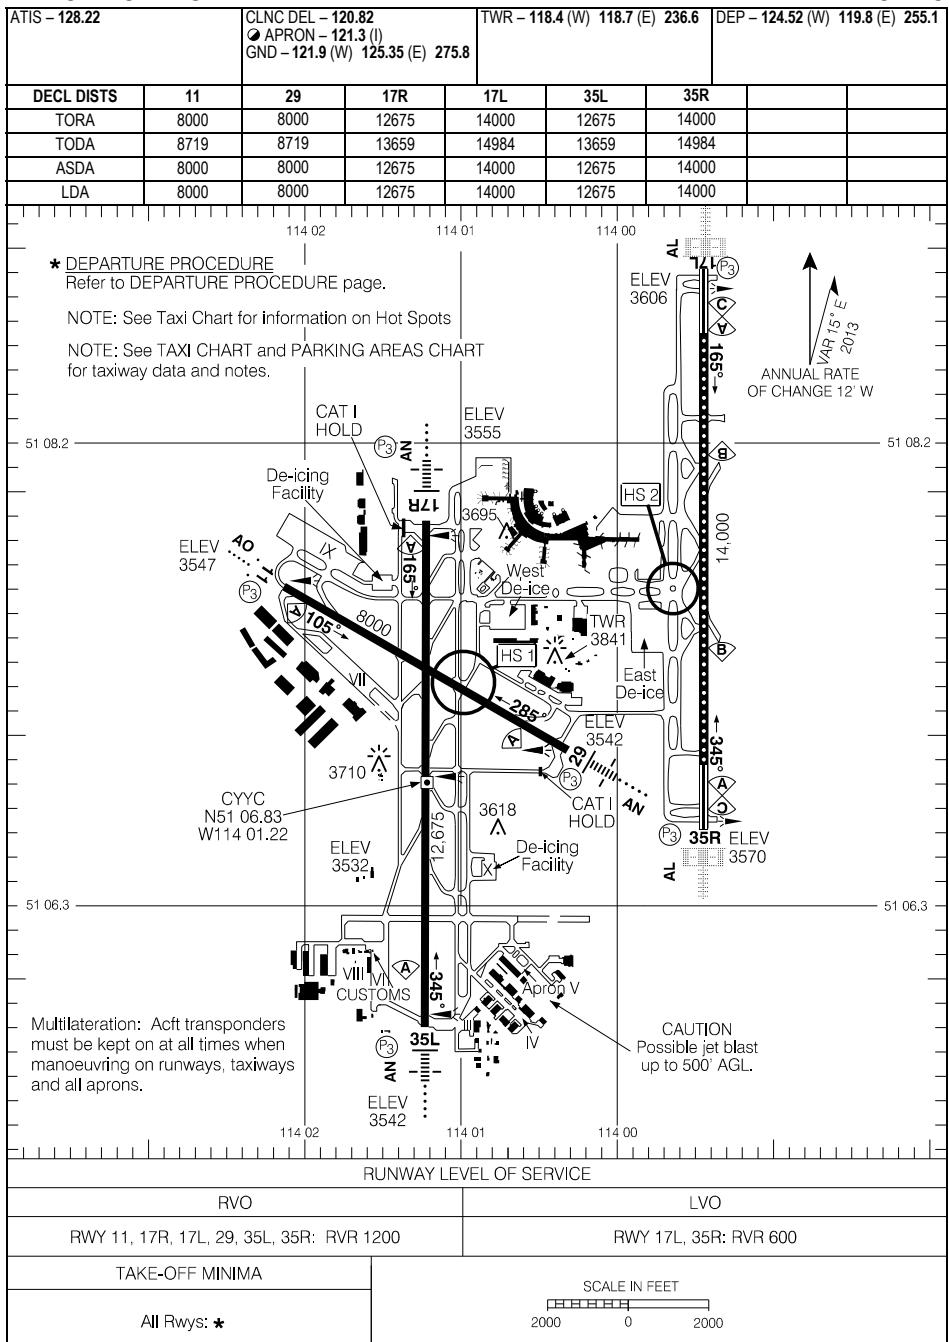

AERODROME CHART

EFF 7 AUG 25

AERODROME CHART

(HIGH INTENSITY RUNWAY OPERATIONS – HIRO)

LDA for High Intensity Runway Operations				
From threshold rwy:	To exit point	LDA in ft	Preferred exit for med/heavy jet transport	Preferred exit for prop/ turboprop transport
11	A C G F1 F/U	3373 5000 5165 6000 8000	F/U	F1
17L	D1 D3 D5 S Q B	4154 6549 8261 11,979 13,475 13,795	D3 D5	D3
17R	A1 C2 C1 A3 C3 C/A	3976 5840 6415 7489 8516 12,675	C1 A3 C3	C1 A3
29	C A J2 W/J	3200 4853 6606 8000	J2 J	J2
35L	C3 A3 C1 C2 A1 C4 C6 A/C	4154 5181 6255 6830 8684 9369 10,984 12,675	C2 C4	C2
35R	D2 D4 D6 Z V D	4156 6462 8265 10,205 13,475 13,795	D4 D6	D2 D4

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA. All rights reserved

Pilots may plan their arrivals using the above table of threshold-to-exit-point distances. The distances are measured from the landing threshold to the point of the intersection of the runway centreline and the extended exit taxiway centreline.

During HIRO operations, the Control Tower may nominate the rwy exit. Compliance with ATC nomination of rwy exit is at the pilot's discretion and should be acknowledged.

REMARK: For detailed information on High Intensity Runway Operations, pilots may refer to AIP RAC 4.4.10

AERODROME CHART

(HIGH INTENSITY RUNWAY OPERATIONS – HIRO)

AERODROME CHART (REDUCED TAKE OFF RUNS)**Reduced Take-Off Runs**

When authorized by ATC, intersection departures are available as follows:

RUNWAY	INTERSECTION	RUNWAY REMAINING
17L	V Z	13680 10450
35R	Q S	13680 12200

AERODROME CHART (REDUCED TAKE OFF RUNS)

EFF 28 FEB 19

TAXI CHART**Notes****Widebody Aircraft**

***A380/*B747-8/*AN124 Available Taxiways:** B, BC, D, E, EA, J (east of JV), JS, JQ, JR, S, V, Q, Z, Apron IX and Apron IX De-Ice Pad.

*Twy H and C (north of J) restricted from simultaneous use by aircraft larger than B767/A300.

A340-600/777-300: Discretionary oversteer required at all intersections.

Taxiways

P, GB, GD: Uncontrolled.

W, N & M: Restricted to aircraft with wingspan of 170' or less.

AB, P, GB, JT, L west of A, WB, YD & YE: Restricted to aircraft with wingspan of 118' or less.

C: Right turn on YB restricted to aircraft with wingspan of 118' or less.

F: Left turn on G restricted to aircraft with wingspan of 118' or less.

F1: Left turn on F1 restricted to aircraft with wingspan of 79' or less.

F1: Right turn on F restricted to aircraft with wingspan of 79' or less.

G: Right turn on F restricted to aircraft with wingspan of 118' or less.

GB & GD: Restricted to one-way westbound.

J eastbound: Right turn on J2 restricted to aircraft with wingspan of 79' or less.

J2: Left turn on J restricted to aircraft with wingspan of 79' or less.

Y: Right turn on YB restricted to aircraft with wingspan of 118' or less.

YB: Left turn on C restricted to aircraft with wingspan of 118' or less. Left turn on Y restricted to aircraft with wingspan of 118' or less.

Hot Spots

HS 1 – Crossing Rwy 29, aircraft mistake Twy G and Twy C.

HS 2 - Aircraft taxiing for departure Rwy 17L via Twy J, B, D or Twy E, B, D often miss the turn onto Twy B and instead turn onto Twy D, conflicting with aircraft on Twy D3.

TAXI CHART

CYYC-GM-1B


CALGARY/YYC CALGARY INTL, AB
CYYC

TAXI CHART

ATIS - 128.22

CLNC DEL - 120.82
APRON - 121.3 (I)
GND - 121.9 (W) 125.35 (E) 275.8

TWR - 118.4 (W) 118.7 (E) 236.6

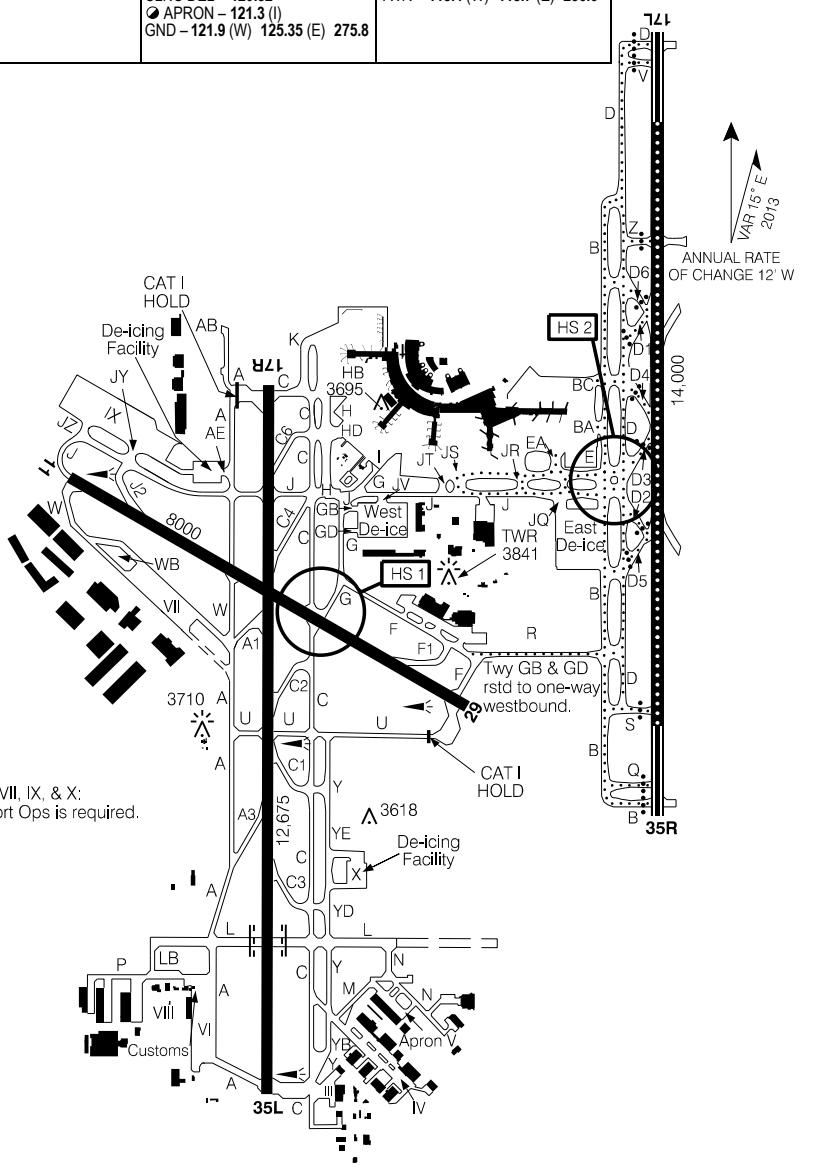

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

TAXI CHART

EFF 7 AUG 25

CYYC-GM-1B

LOW/REDUCED VISIBILITY PROCEDURES

Low Visibility Procedures (RVR less than 1200 to 600 ft) and Reduced Visibility Procedures (RVR less than 2600 to 1200 ft)

Low/Reduced Visibility Taxi Routes

Anticipated taxi routes will be identified, and should portions thereof be unavailable, alternate routes will be identified.

In the event that an aircraft must taxi across the airfield for departure, the RVR values along the taxi route must be used to determine visibility limitations.

Once an aircraft has commenced taxi for takeoff, or taxi after landing, and the visibility falls below the published level of service on the given taxiway, the aircraft may continue to taxi.

Aircraft requiring imminent departure are permitted to tow during RVO but must obtain taxi routing clearances and follow all applicable airside traffic directives guidelines. Tow operations below 1200 RVR are not authorized on manoeuvring areas.

Engine run ups will not be allowed.

Departures

Departures during LVO will be on rwy 17L/35R. During RVO, rwy 17R/35L will be the preferential runway. The departure runway will be identified.

Runways 17L/35R and 17R/35L are equipped with high intensity edge lights and threshold/end lights. Rwy 17L/35R is equipped with centreline lights.

Departure taxi routes will be the most direct route to the threshold. Intersection departures are not permitted. If the primary route is unavailable, Calgary Tower may recommend a secondary route.

Exceptions for departures:

- Taxi to Rwy 11 may be approved from Apron VII and IX when RVR 11 is 1200 or greater
- Taxi to Rwy 11 may be approved from Apron I, East Deice and West Deice when RVR 11 AND 17R are 1200 or greater
- Taxi to Rwy 17R may be approved from Apron I, IX, East Deice and West Deice when RVR 17R is 1200 or greater
- Taxi to Rwy 17R may be approved from Apron VII when RVR 11 AND 17R are 1200 or greater.
- Taxi to Rwy 35L may be approved from Aprons III, IV, V, VI and VIII when RVR 35L is 1200 or greater
- Taxi to Rwy 29 may be approved from Aprons I, IX and West Deice when RVR 17R and RVR 29 are 1200 or greater.

LOW/REDUCED VISIBILITY PROCEDURES

LOW/REDUCED VISIBILITY PROCEDURES**Sequencing of Ground Movements for Take-off**

Pilots must follow instructions on Sequencing of Ground Movements for Take-off as described in CAP GEN Operating Minima.

Surface Movement Ground Control System

All taxi hold positions on taxiways leading to Runway 17L/35R are equipped with stop bars.

Prior to manoeuvring on aprons, aircraft are recommended to contact Apron Advisory Service.

AT NO TIME SHALL A PILOT CROSS AN ILLUMINATED RED STOP BAR**Arrivals**

Arrivals during LVO will be on rwy 17L/35R. During RVO, rwy 17L/35R will be the preferential runway. ATC will designate the arrival runway.

Calgary Tower will direct arrival taxi routes in order to ensure the aircraft exits the runway at the first available exit, and will provide instruction from the runway to the Apron.

Airport Services And Equipment Available Under Low Or Reduced Visibility Operations

Airport Surface Movement & Ground Control System (A-SMGCS)

Upon request "follow-me" service can be provided to aircraft. Requests should be made with as much notice as possible.

Runway Level of Service	
Rwy	Certification
11	RVR 1200
29	RVR 1200
17L	RVR 600
35R	RVR 600
17R	RVR 1200
35L	RVR 1200

LOW/REDUCED VISIBILITY PROCEDURES

EFF 7 AUG 25

CYYC

LOW VISIBILITY TAXI CHART

LAND RWY 17L, DEPART RWY 17L (RVR LESS THAN 1200 TO 600 FT)

CALGARY/YYC CALGARY INT'L, AB

CYYC


ATIS - 128.22

CLNC DEL - 120.82
 APRON - 121.3 (I)
 GND - 121.9 (W) 125.35 (E) 275.8

TWR - 118.4 (W) 118.7 (E) 236.6


LEGEND

- CENTRELINE LIGHTING
- ... STOP BARS
- - - INTERMEDIATE HOLDING POSITION
- DIRECTION OF AIRCRAFT MOVEMENTS

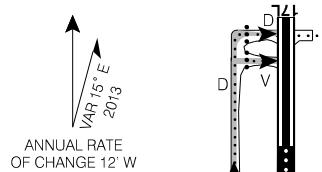

Multilateration: Acft transponders must be kept on at all times when manoeuvring on runways, taxiways and all aprons.

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

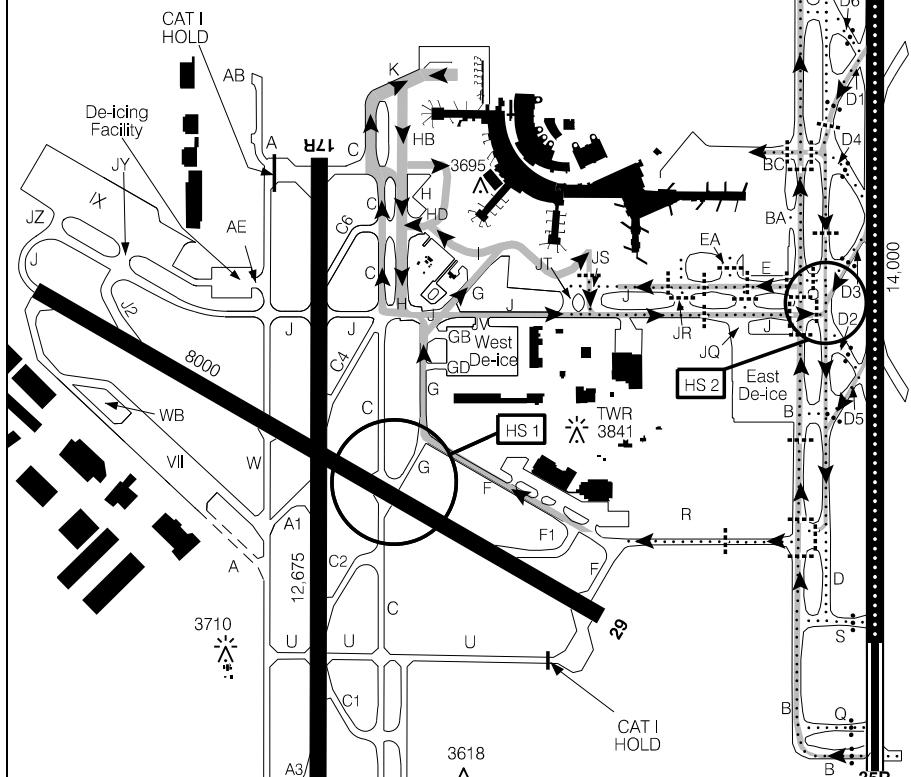

LAND RWY 17L, DEPART RWY 17L (RVR LESS THAN 1200 TO 600 FT)
 LOW VISIBILITY TAXI CHART

CYYC

EFF 7 AUG 25

LOW VISIBILITY TAXI CHART

LAND RWY 35R, DEPART RWY 35R (RVR LESS THAN 1200 TO 600 FT)

CALGARY/YYC CALGARY INTL, AB

CYYC


ATIS - 128.22

CLNC DEL - 120.82
 APRON - 121.3 (I)
 GND - 121.9 (W) 125.35 (E) 275.8


TWR - 118.4 (W) 118.7 (E) 236.6

LEGEND

- CENTRELINE LIGHTING
- ... STOP BARS
- - - INTERMEDIATE HOLDING POSITION
- DIRECTION OF AIRCRAFT MOVEMENTS

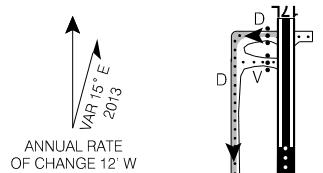

Multilateration: Acft transponders must be kept on at all times when manoeuvring on runways, taxiways and all aprons.

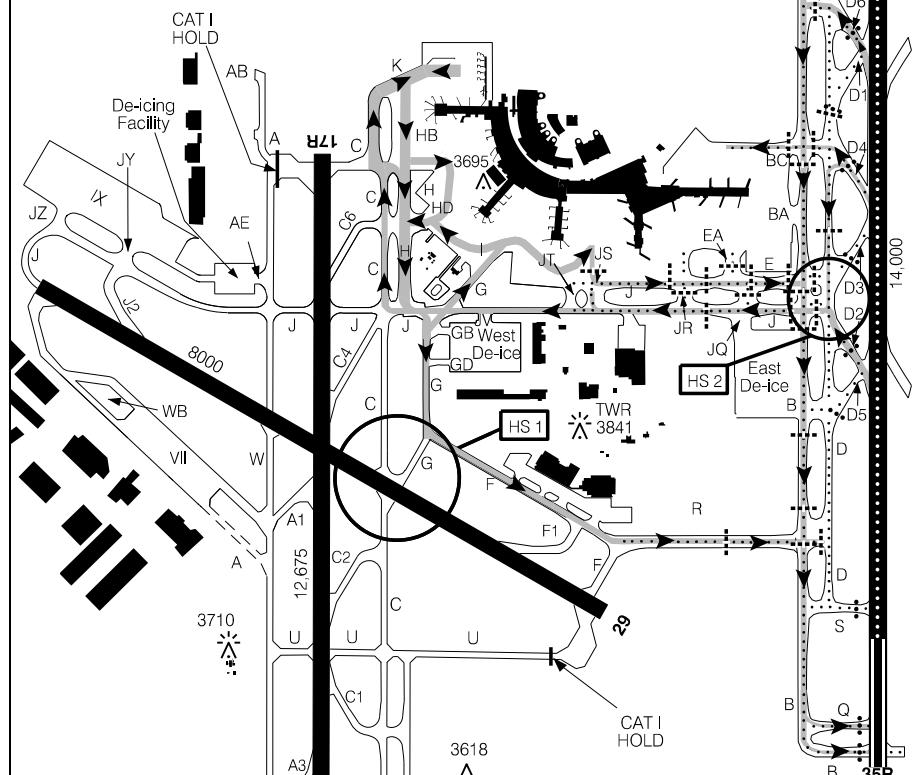

LAND RWY 35R, DEPART RWY 35R (RVR LESS THAN 1200 TO 600 FT)
 LOW VISIBILITY TAXI CHART

CYYC
 EFF 7 AUG 25

DE-ICING OPERATIONS

De-icing Procedures

1. Contact CALGARY DE-ICE on 129.5 thirty (30) min prior to push-back with aircraft type and estimated push-back time.
2. Contact CALGARY DE-ICE on 129.5 five (5) min prior to push-back to confirm treatment type and DE-ICE pad assignment.
3. Follow normal pushback procedures and advise Apron Advisory EAST or WEST DE-ICE pad has been assigned.
4. East Pad - Enter from Twy J at Twy JQ. When instructed by GROUND CONTROL, contact PAD CONTROL on 129.12 prior to entering pad.
5. West Pad - Enter from Twy J at Twy JV. When instructed by GROUND CONTROL, contact PAD CONTROL on 122.35 prior to entering pad.
6. Follow PAD CONTROL instructions, signboards and guidance lines to the assigned staging position or de-icing bay and confirm "BRAKES SET" when in position with nosewheel on stop bar.

AUTOMATIC MODE (Active signboard guidance)

As the aircraft enters the de-icing bay, proximity capturing devices will recognize the aircraft. The signboards will actively guide the aircraft to the stop bar position and the signboard will advise SET PARK BRAKE.

MANUAL MODE (Automatic mode not operational)

Follow the instructions from PAD CONTROL and stop on the designated stop bar. Nosewheel should be placed as close to the stop bar marking as possible.

CAUTION: The wingtip to tail clearance for aircraft taxiing in the EAST pad from JQ behind staged aircraft is only assured when the staged aircraft nosewheel is on the stop bar.

7. If assigned a staging bay, monitor PAD CONTROL until further instructed.
8. When directed by PAD CONTROL, contact ICEMAN (East 123.35, West 122.72) and confirm "BRAKES SET, AIRCRAFT CONFIGURED FOR DE-ICE."
9. When de-ice is complete, do not move aircraft. When directed by ICEMAN, contact PAD CONTROL on assigned frequency.
10. Advise PAD CONTROL when ready to taxi. PAD CONTROL will assign appropriate GROUND CONTROL frequency to obtain taxi clearance.
11. Queuing is not permitted on Twy J, staging positions are provided on both EAST and WEST pads, reference DE-ICE Facility diagram.

CAUTION:

During the de-icing process, thrust setting must not exceed ground idle and/or propellers must remain feathered at all times.

Engine run-ups will only be approved by PAD CONTROL or ICEMAN when operations permit and when it is safe to do so. Engine fan blade ice shedding run-ups are prohibited on the de-ice pads.


DE-ICING OPERATIONS

DE-ICING OPERATIONS

ATIS - 128.22

DE-ICE - 129.5
GND - 121.9 (W) 125.35 (E) 275.8
PAD CTL - 122.35 (W) 129.12 (E)
ICEMAN - 122.72 (W) 123.35 (E)

WEST DE-ICE

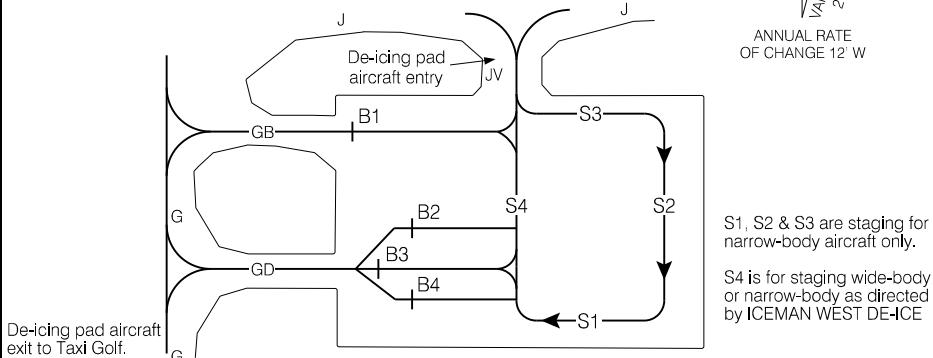

CALGARY DEICE (Initial contact)
PAD CONTROL WEST DE-ICE
ICEMAN WEST DE-ICE

129.5
122.35
122.725


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA. All rights reserved.

EAST DE-ICE

Apron taxilane up to Bay 5 will accommodate aircraft with wingspans of 213' (65m) and smaller.

Apron taxilane Bay 6 to Bay 9 will accommodate aircraft with wingspans of 118' (36m) and smaller.

Aircraft in staging positions must place nosewheel on stopbar to ensure clearance to taxilane.

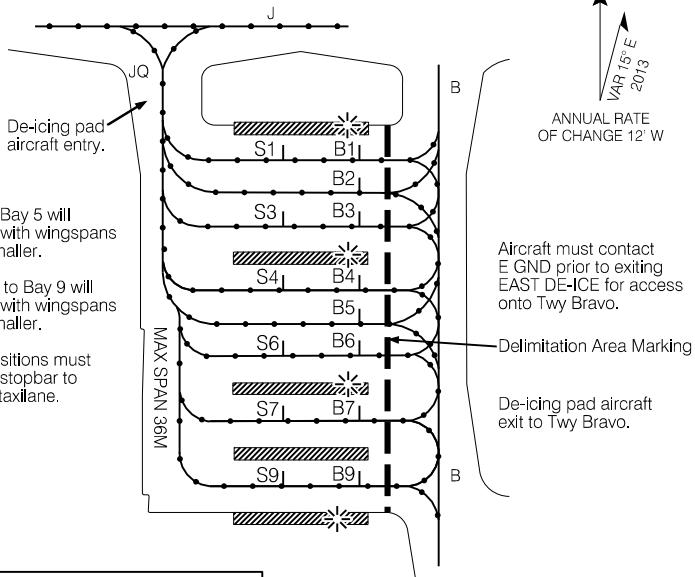

CALGARY DEICE (Initial contact)
PAD CONTROL EAST DE-ICE
ICEMAN EAST DE-ICE

129.5
129.125
123.35


DE-ICING OPERATIONS

EFF 19 MAY 22

PARKING AREAS

ATIS - 128.22

CLNC DEL - 120.82
 ○ APRON - 121.3 (I)
 GND - 121.9 (W) 125.35 (E) 275.8

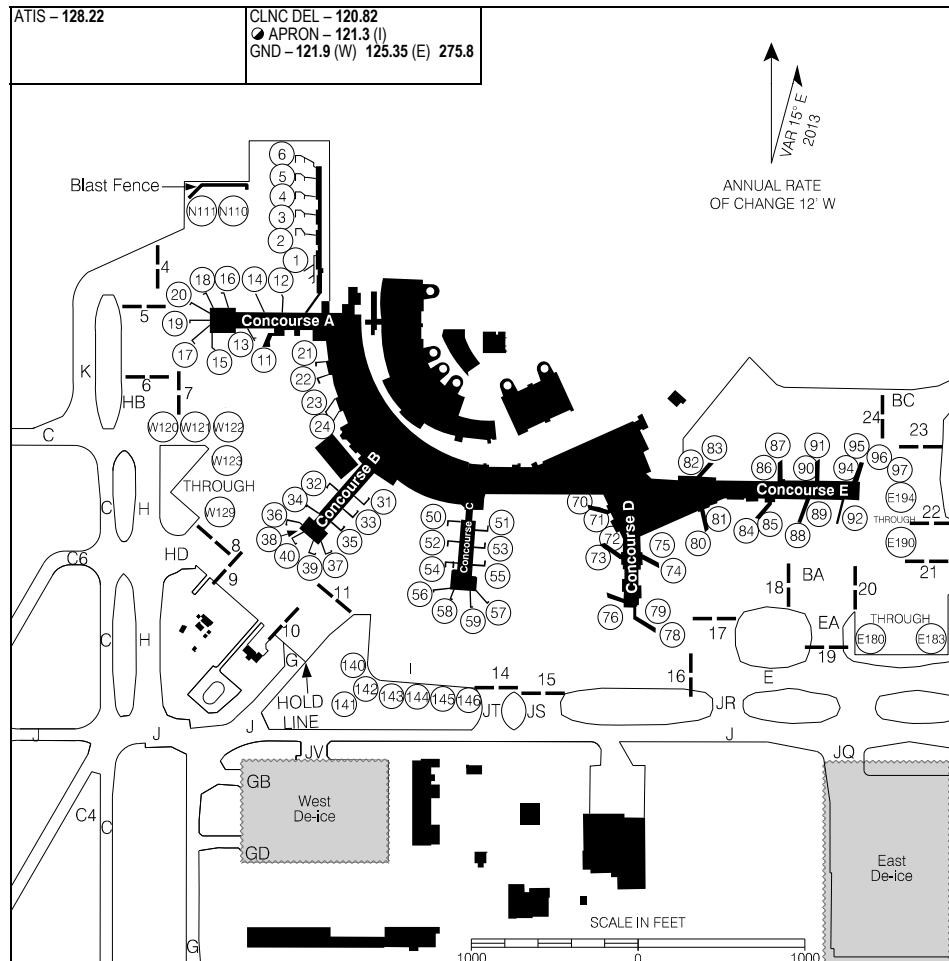

Apron 1 Exit Routing Procedure and Restrictions (see chart below)

Routing

Apron I Advisory (121.3 - limited hours) will normally direct departing acft to a taxi position fix dependent upon active runways.

Twy JT restricted to aircraft with wingspan of 118' or less.

Twy GB is restricted to one-way westbound and to aircraft with wingspan of 118' or less.


Twy GD restricted to one-way westbound

Multilateration: Acft transponders must be kept on at all times when manoeuvring on runways, taxiways and all aprons.

PARKING AREAS

EFF 7 AUG 25

AERODROME CHART

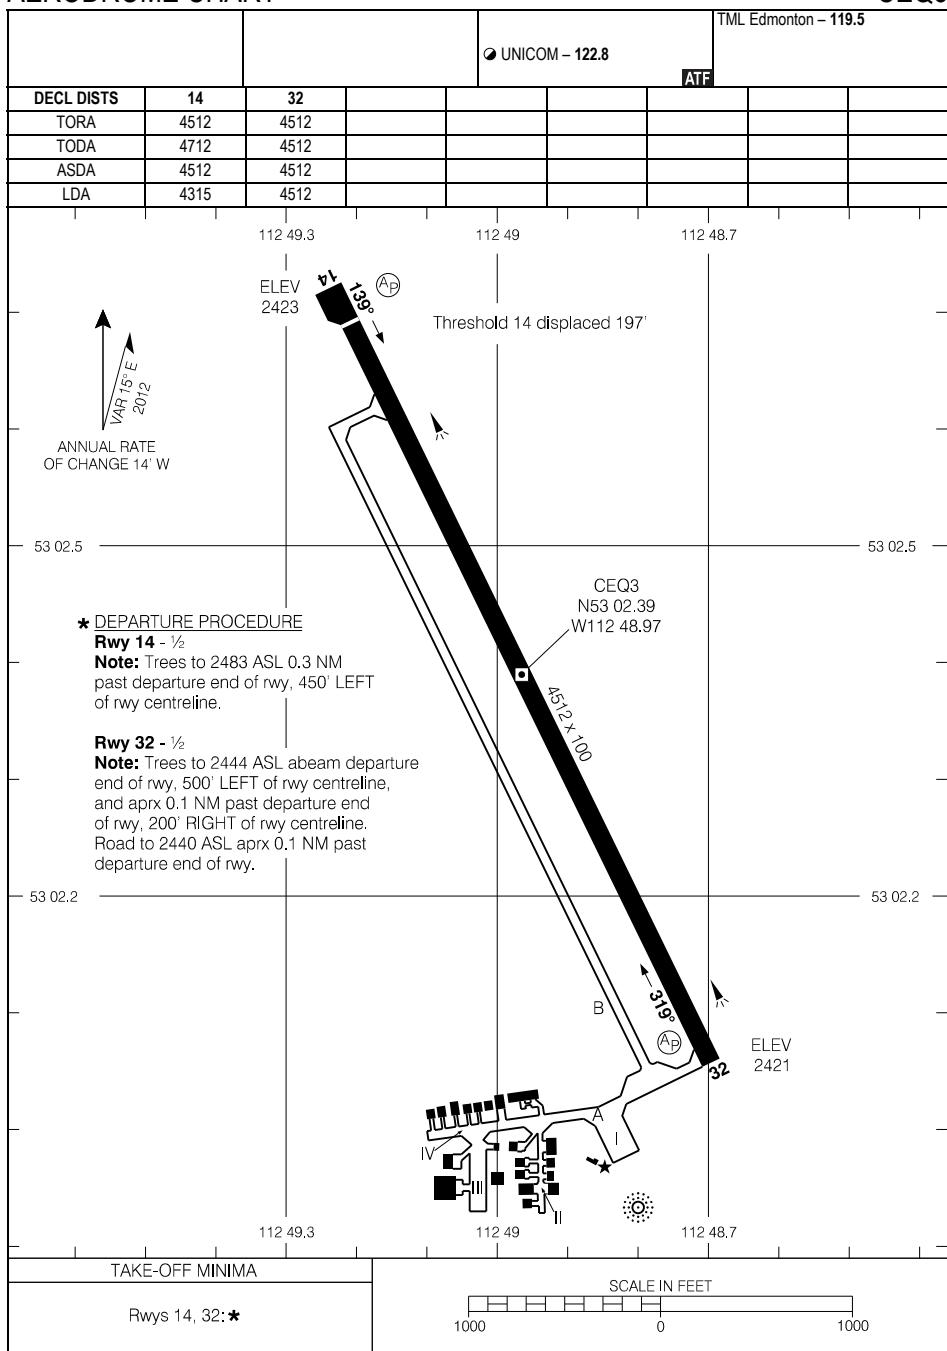

AERODROME CHART


EFF 23 FEB 23

CEQ3

CYYQ-AD

CHURCHILL, MB
CYYQ

AERODROME CHART

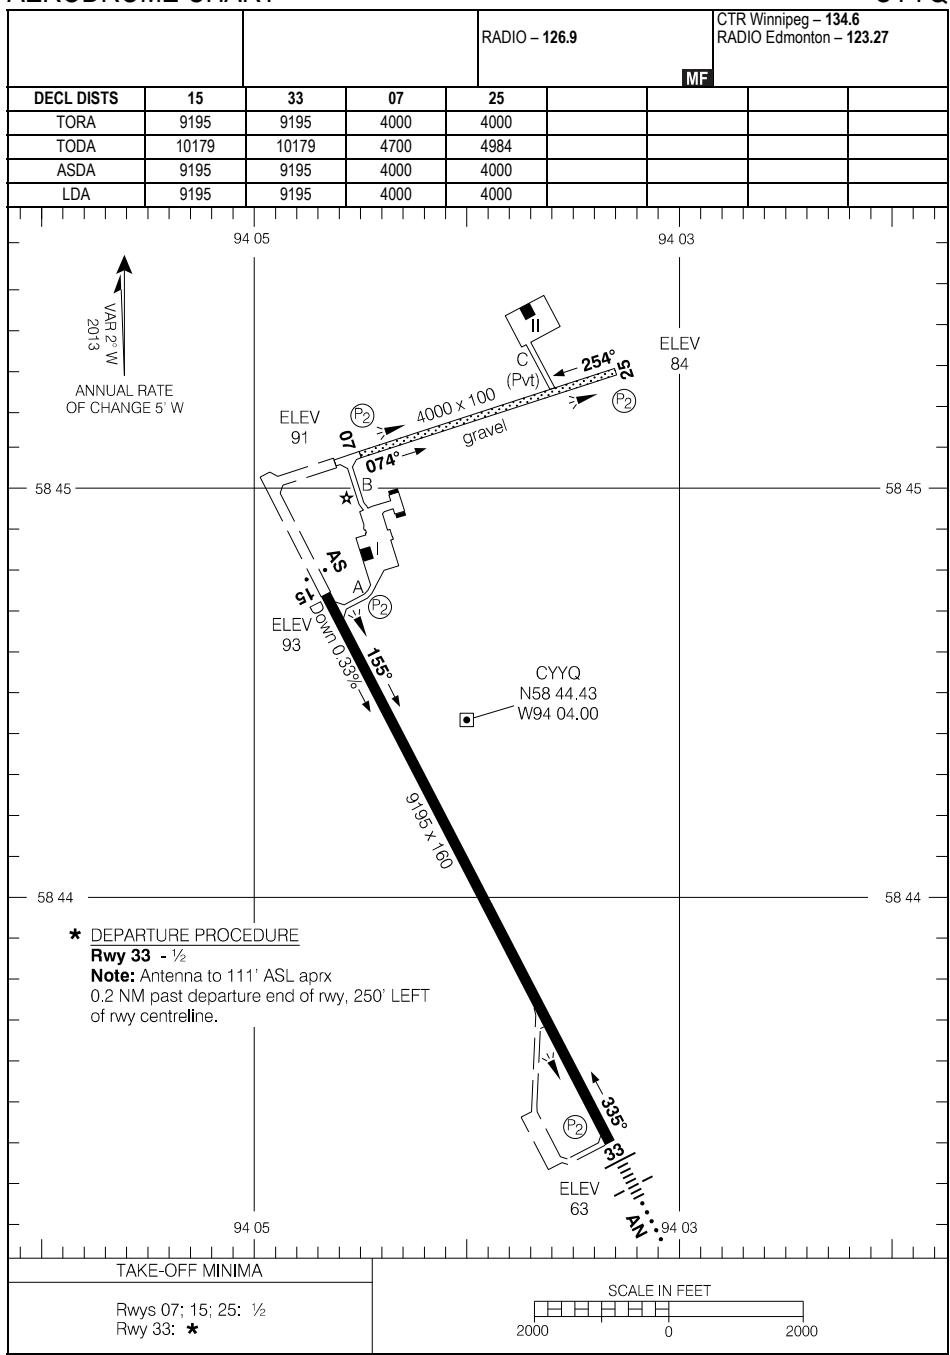

AERODROME CHART

EFF 7 AUG 25


CYYQ-AD

CYYQ

CJW7-AD

CIGAR LAKE, SK
CJW7

AERODROME CHART

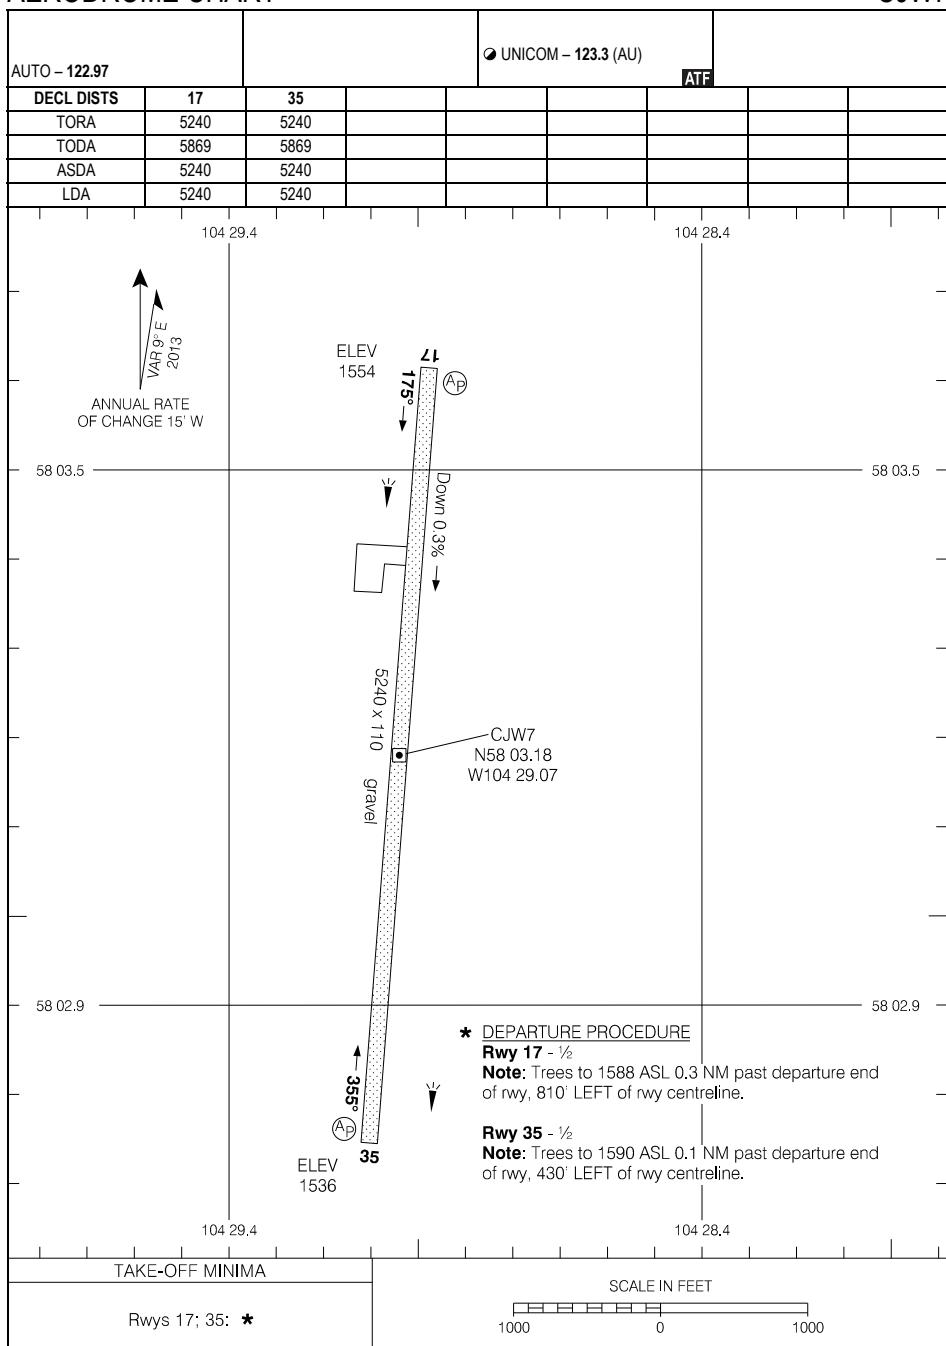

AERODROME CHART

EFF 15 JUN 23

CJW7

CJW7-AD

CYOD-AD


COLD LAKE/GROUP CAPTAIN R.W. MCNAIR, AB

CYOD

AERODROME CHART (DND)

ATIS - 118.25 260.0	CLNC DEL -120.6 230.6 GND -121.9 275.8	TWR - 126.2 226.5 236.6 255.7 (E) ● ADVSY Cold Lake - 126.2 (E)	TML - 124.5 322.8
---------------------	---	---	-------------------

DECL DISTS	04	22	13L	31R	13R	31L		
TORA	8273	8273	12599	12599	9999	9999		
TODA	8273	8273	12599	12599	9999	9999		
ASDA	8273	8273	12599	12599	9999	9999		
LDA	8273	8273	12599	12599	9999	9999		

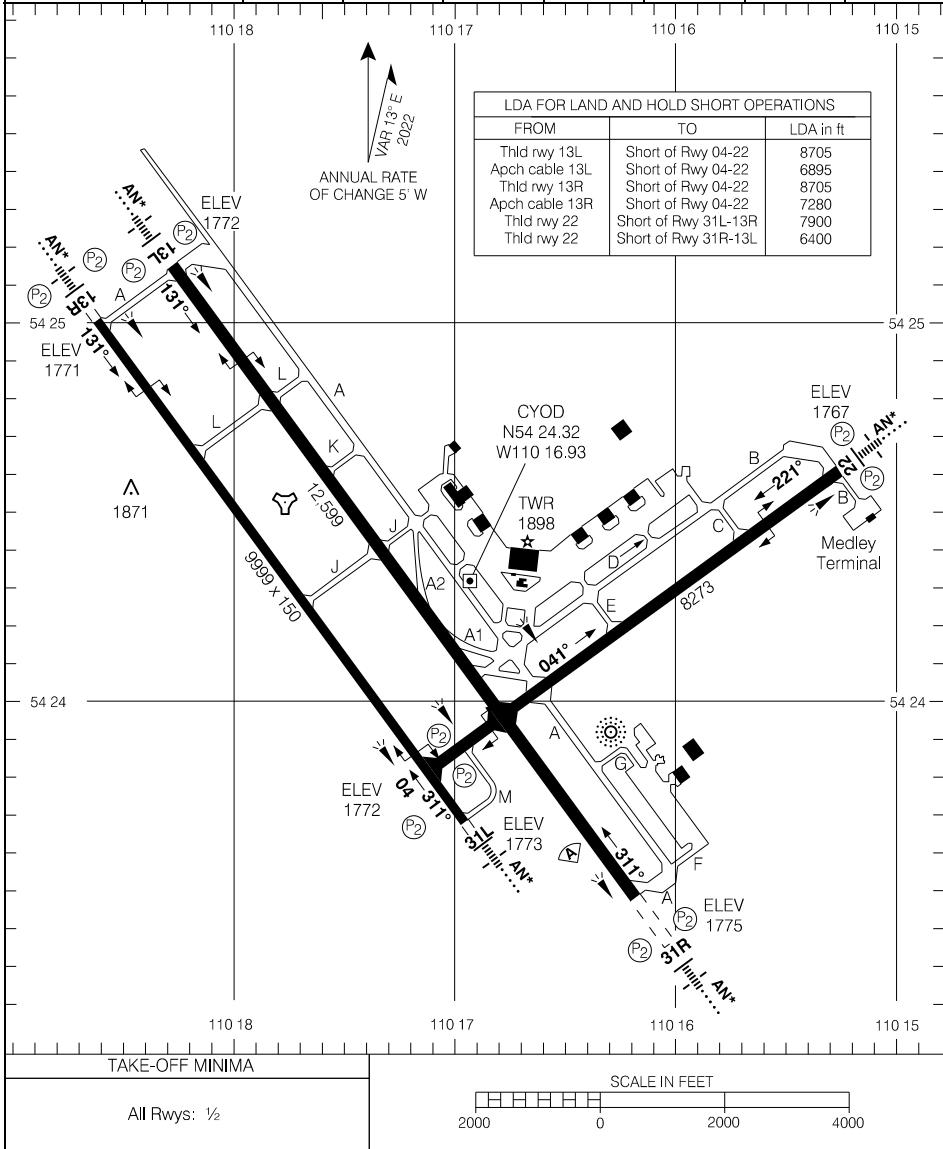

AERODROME CHART (DND)

EFF 26 DEC 24


CYOD

CYOD-AD

CYKC-AD

COLLINS BAY, SK
CYKC

AERODROME CHART

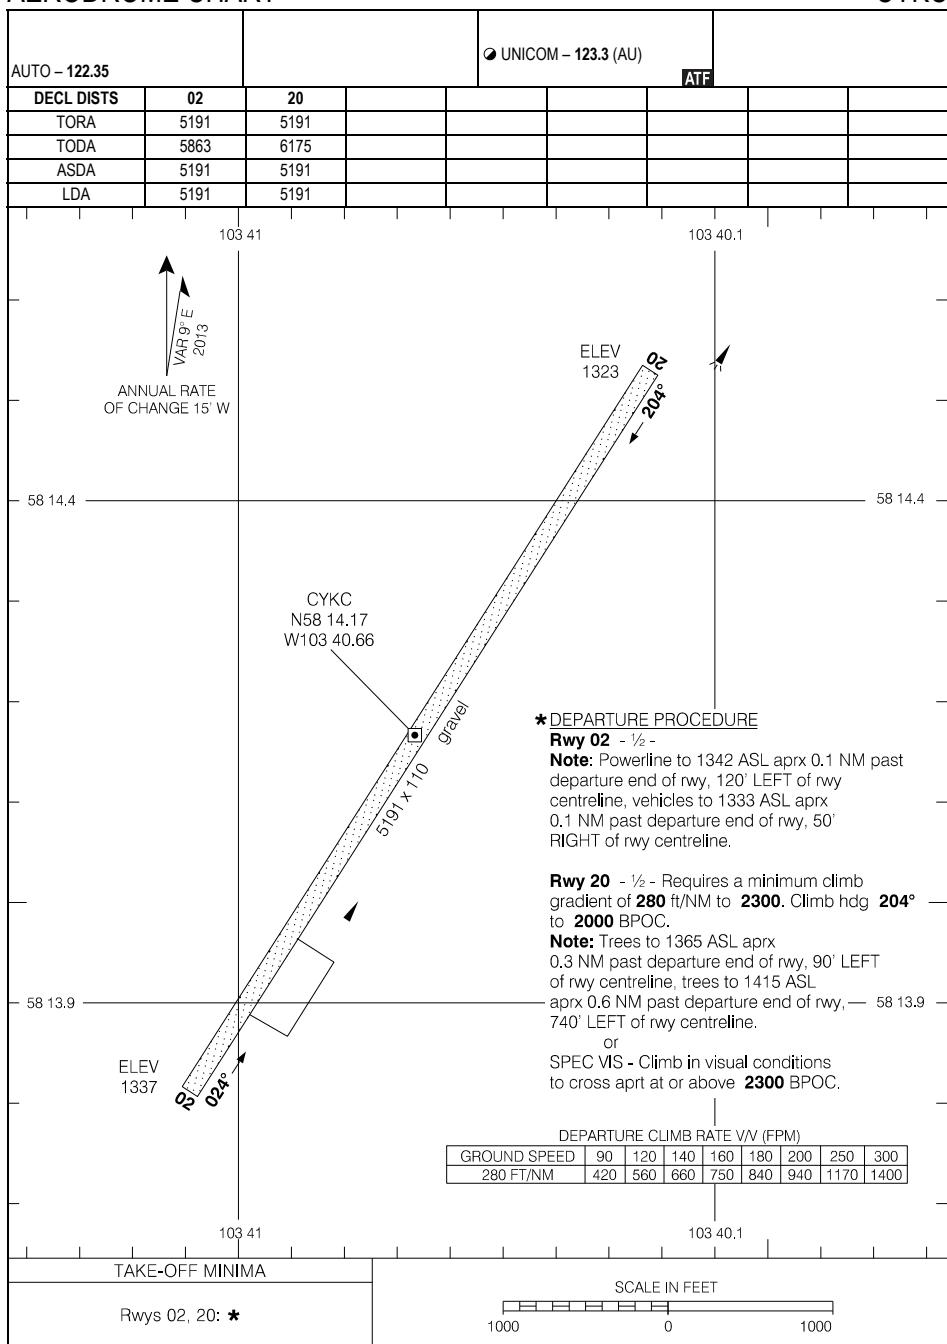


AERODROME CHART

EFF 5 OCT 23

CYKC-AD

CYKC


AERODROME CHART

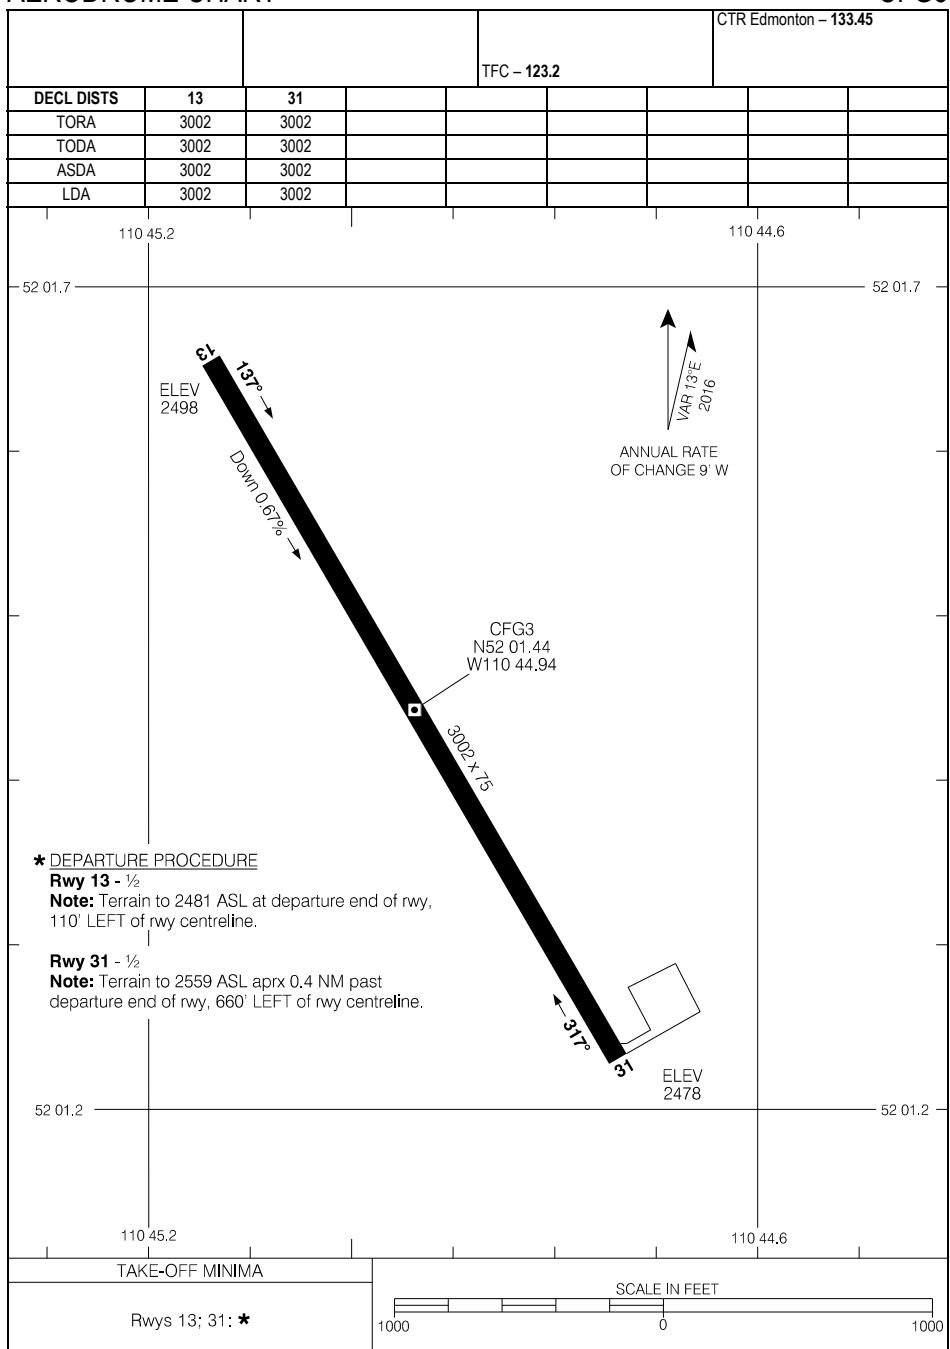

AERODROME CHART

EFF 11 JUL 24

AERODROME CHART

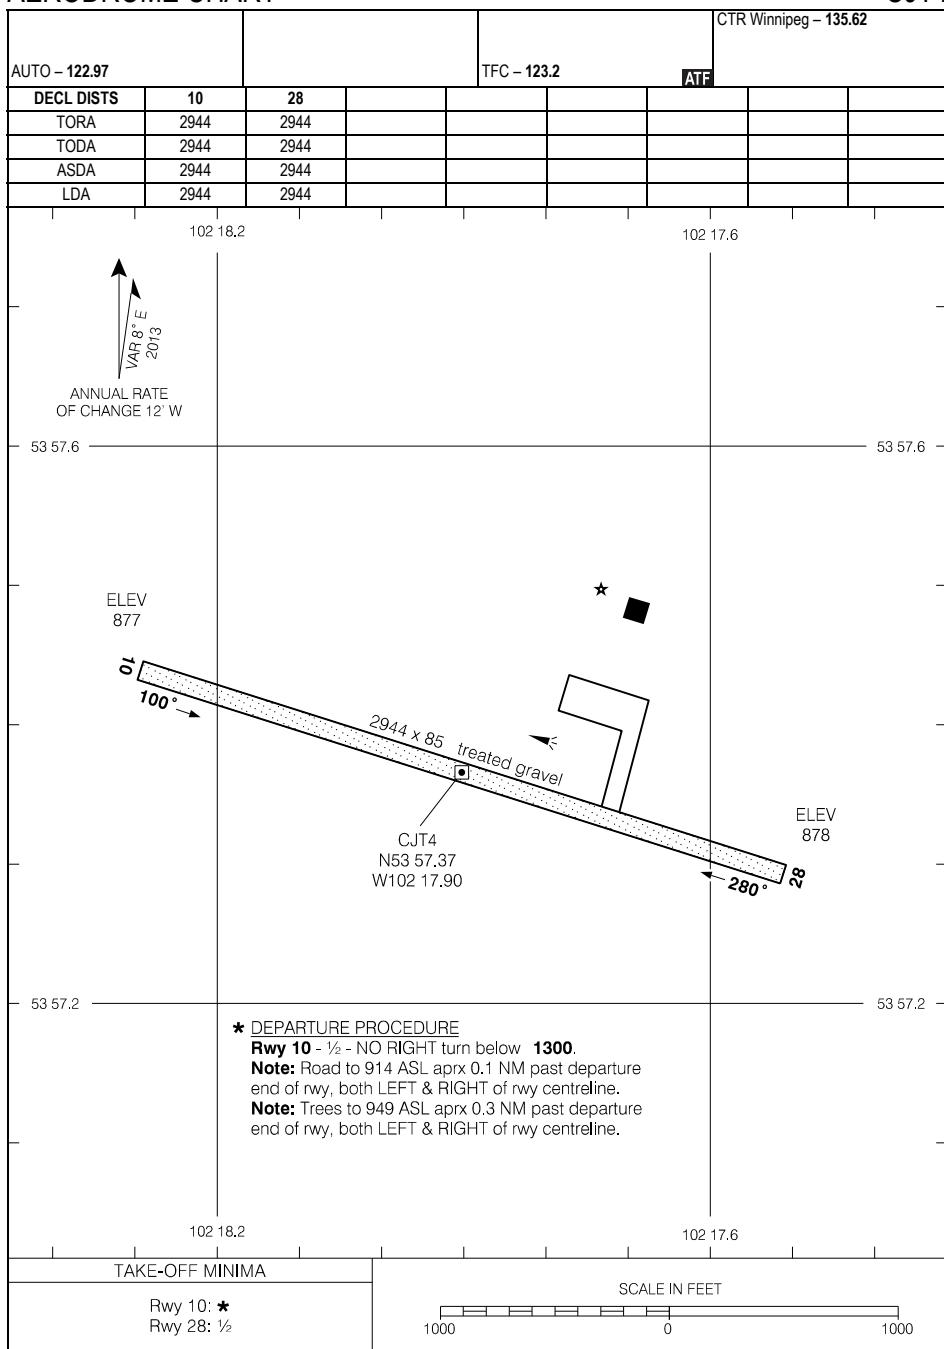

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART


EFF 11 JUL 24

CJT4

CYDN-AD

DAUPHIN (LT. COL W.G.(BILLY) BARKER, VC), MB
CYDN

AERODROME CHART

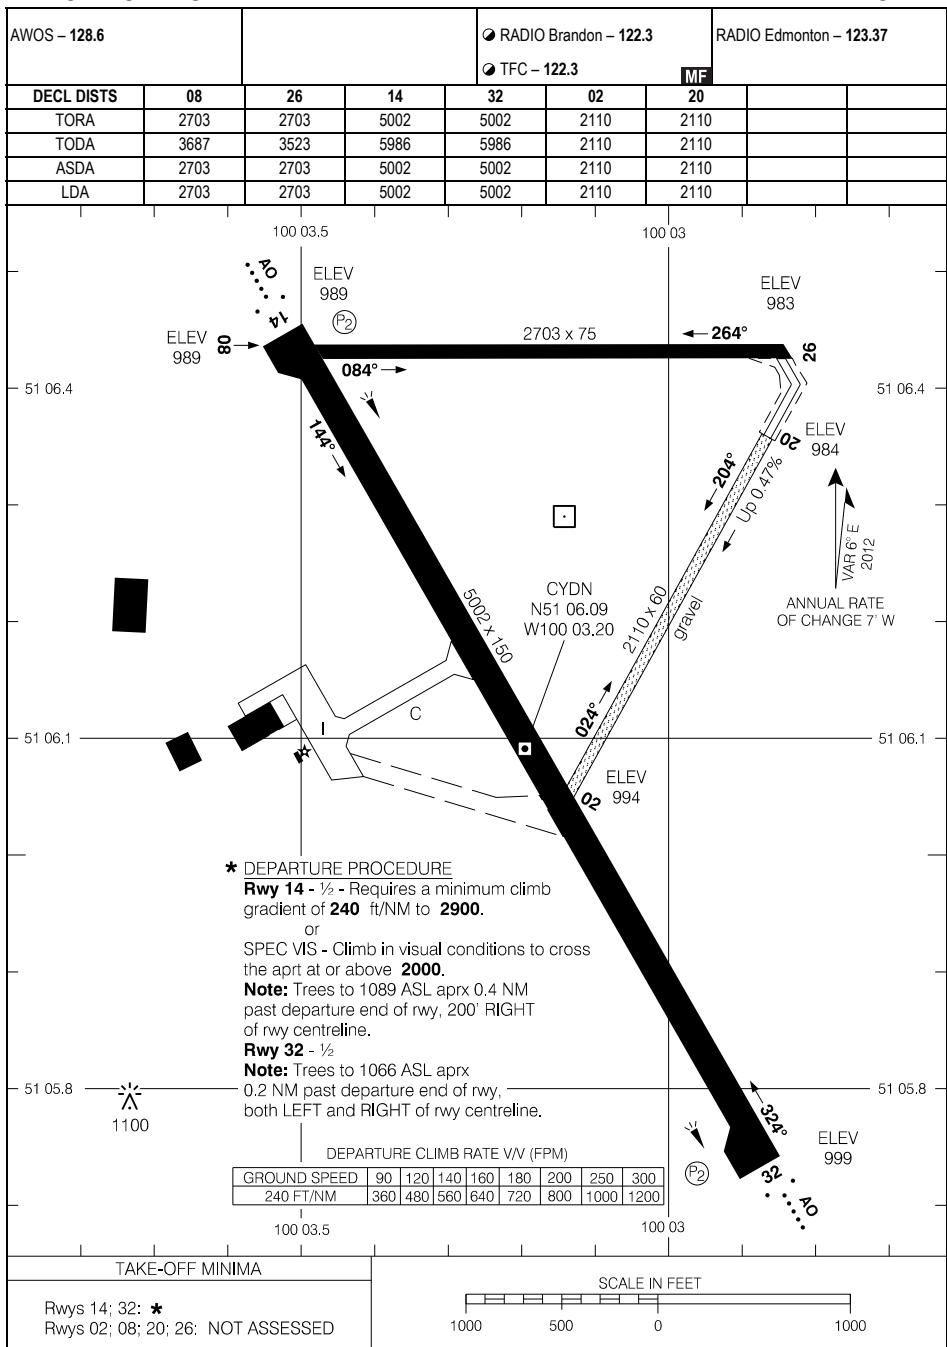


AERODROME CHART

EFF 30 NOV 23

CYDN-AD

CYDN

AERODROME CHART

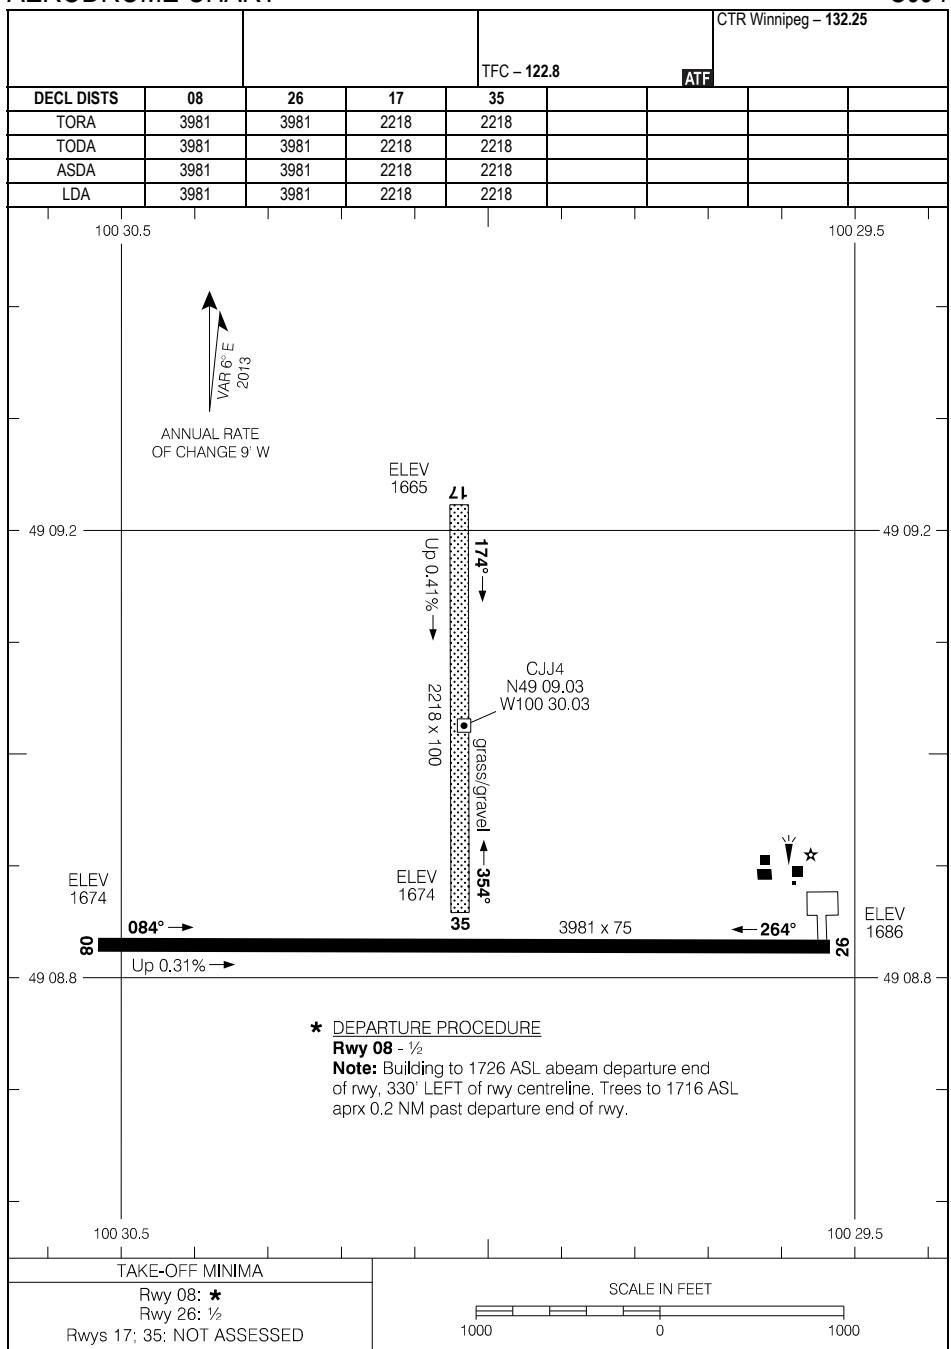

AERODROME CHART

EFF 11 JUL 24

CJJ4


CFM4-AD

DONNELLY, AB
CFM4

AERODROME CHART

CTR Edmonton – 135.27

				TFC – 123.2	ATF	
DECL DISTS	07	25				
TORA	3182	3182				
TODA	3182	3182				
ASDA	3182	3182				
LDA	3182	2980				

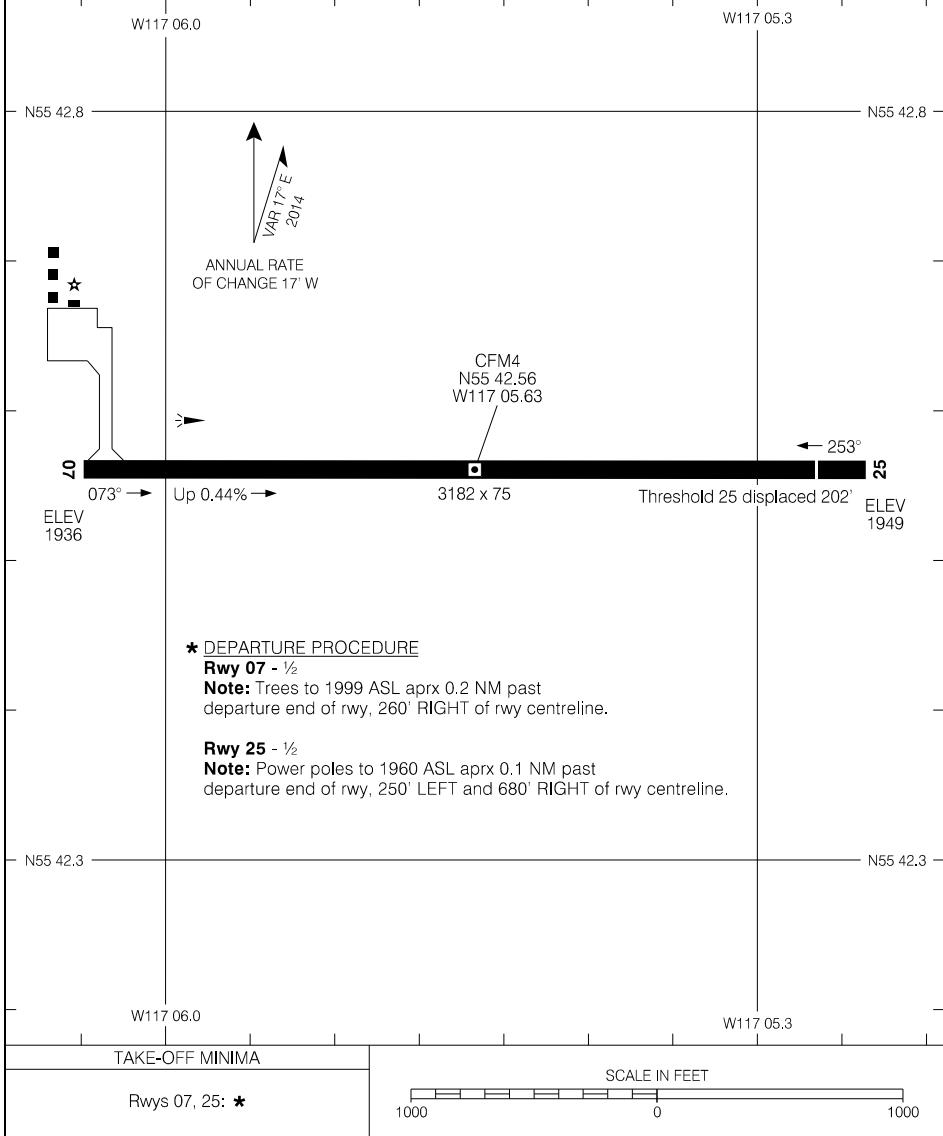

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 30 NOV 23

CFM4


CFM4-AD

CFV9-HP

DRAYTON VALLEY (HOSP & CARE CENTRE), AB

CFV9

HELIPORT CHART

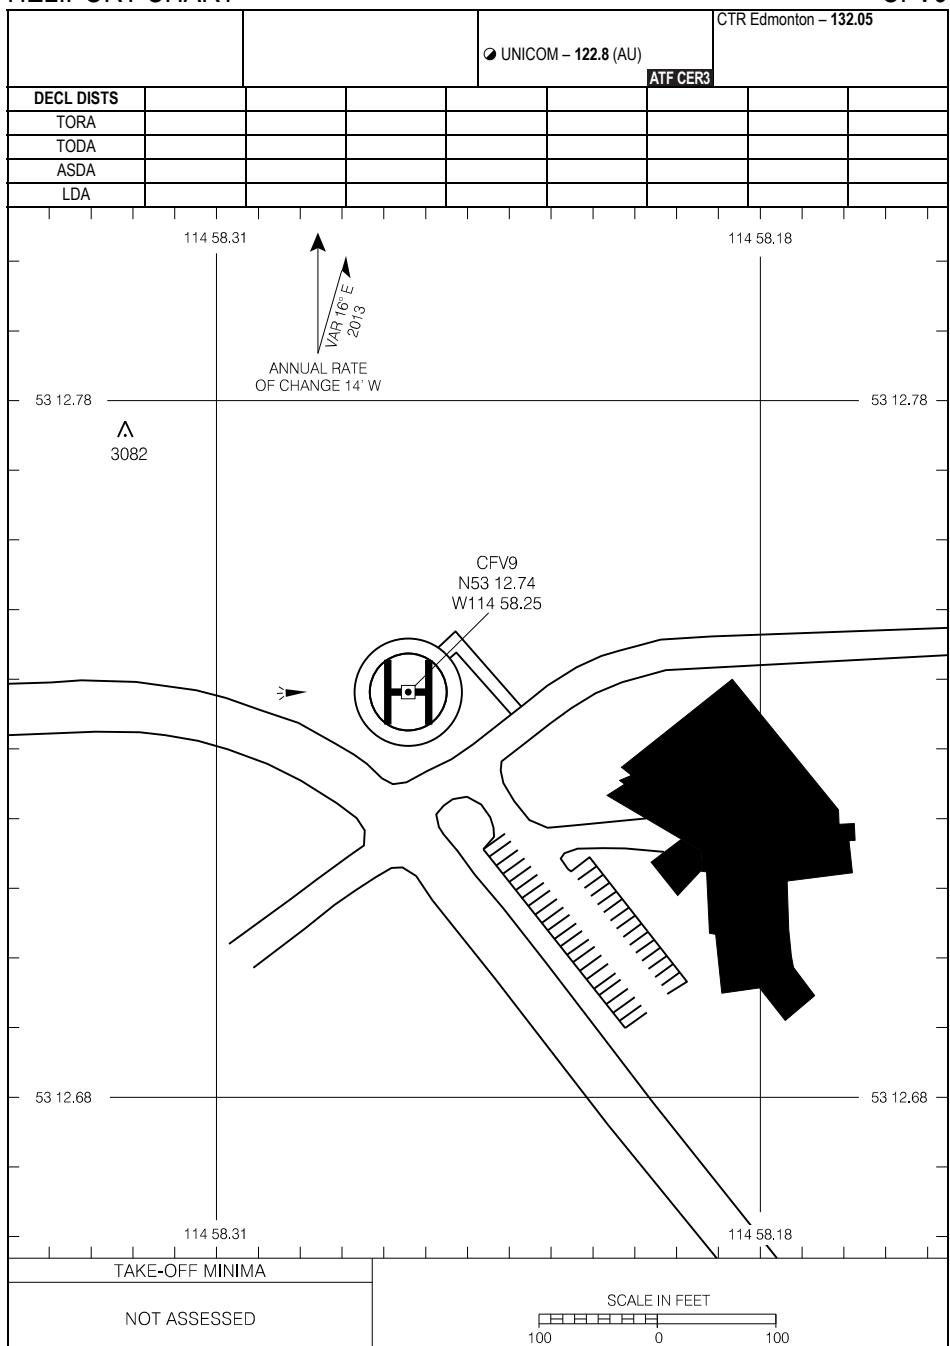


HELIPORT CHART

EFF 11 JUL 24

CFV9

CFV9-HP

AERODROME CHART

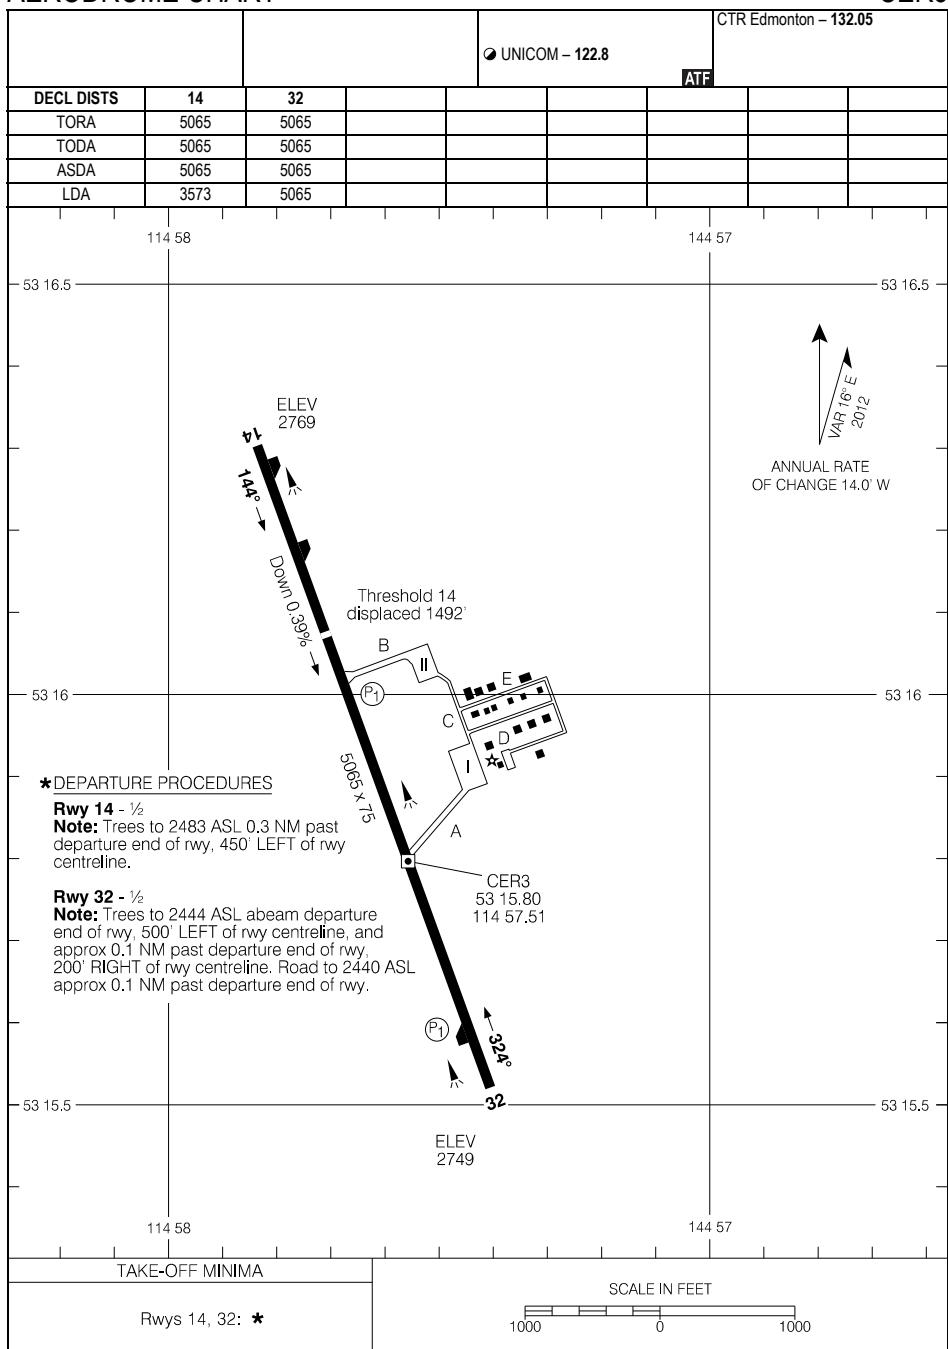

AERODROME CHART


EFF 21 MAR 24

CER3

CEG4-AD

DRUMHELLER MUNI. AB
CEG4

AERODROME CHART

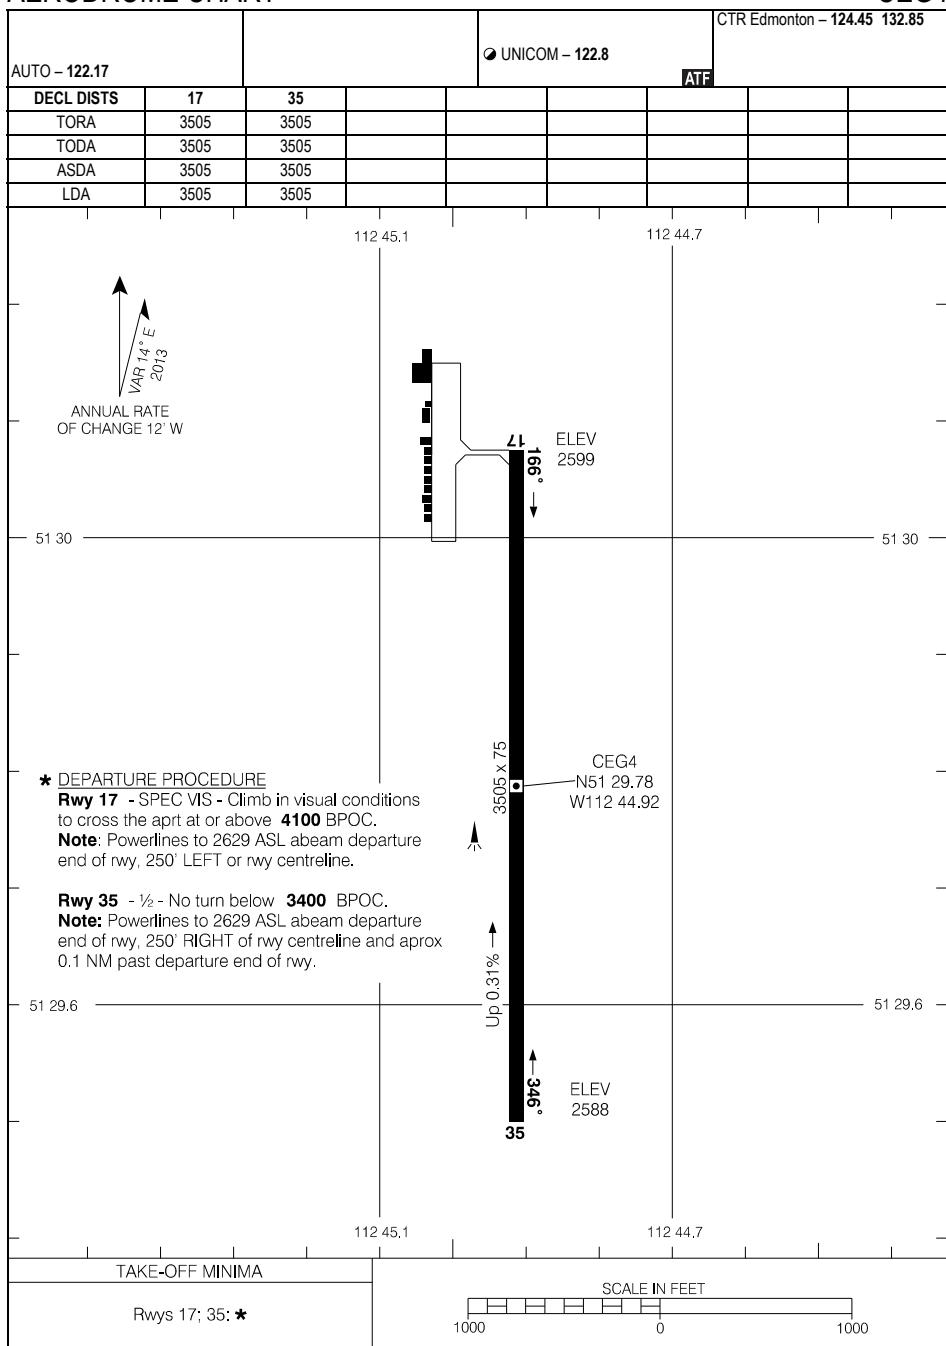

AERODROME CHART

EFF 25 JAN 24


CEG4

CEG4-AD

CEZ3-AD

EDMONTON/COOKING LAKE, AB
CEZ3

AERODROME CHART

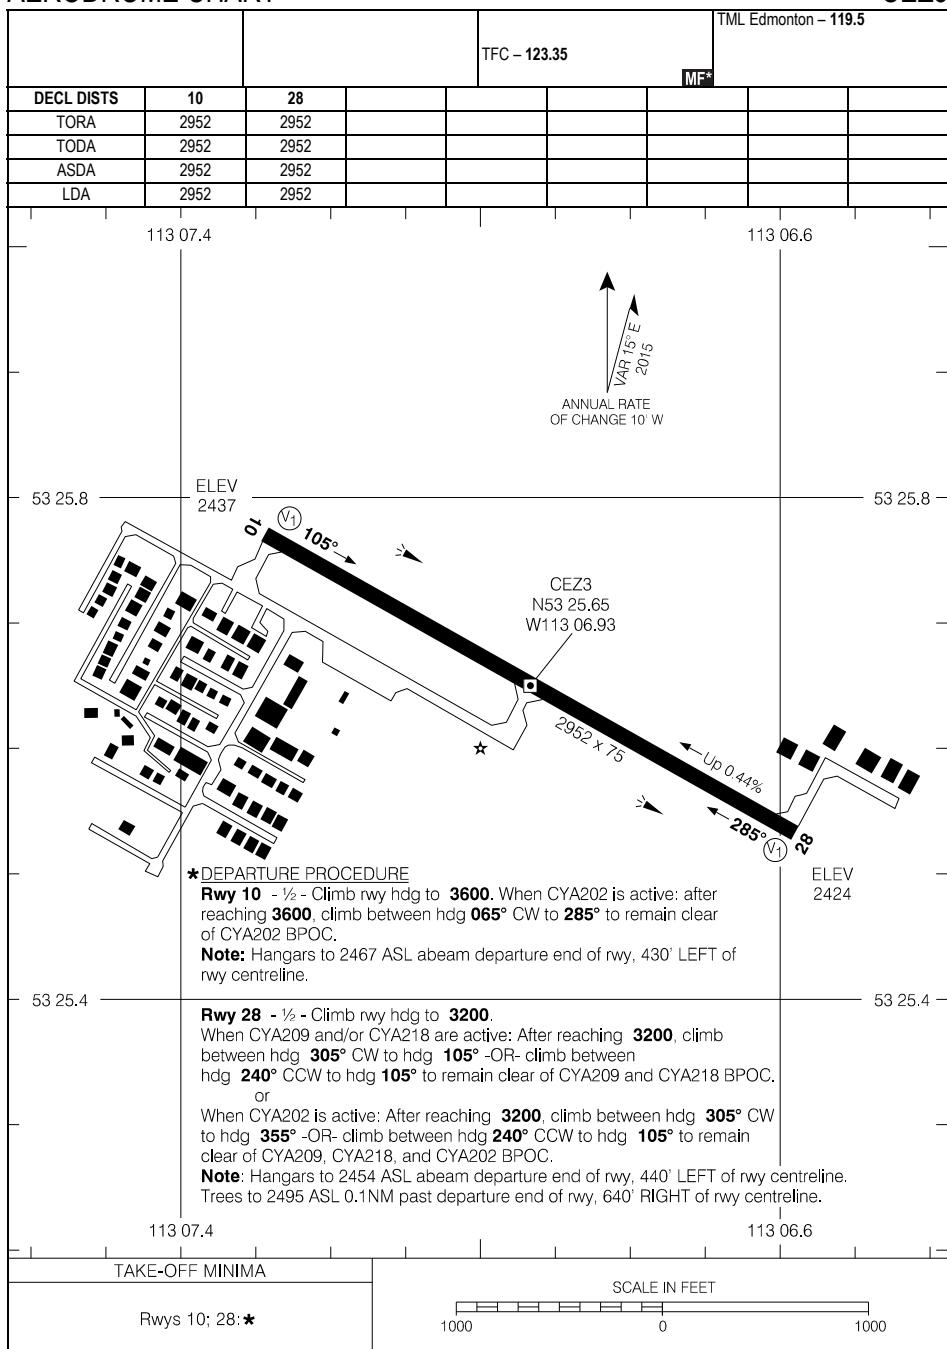

AERODROME CHART

EFF 5 SEP 24


CEZ3-AD

CEZ3

CYEG-AD

EDMONTON INTL, AB
CYEG

AERODROME CHART

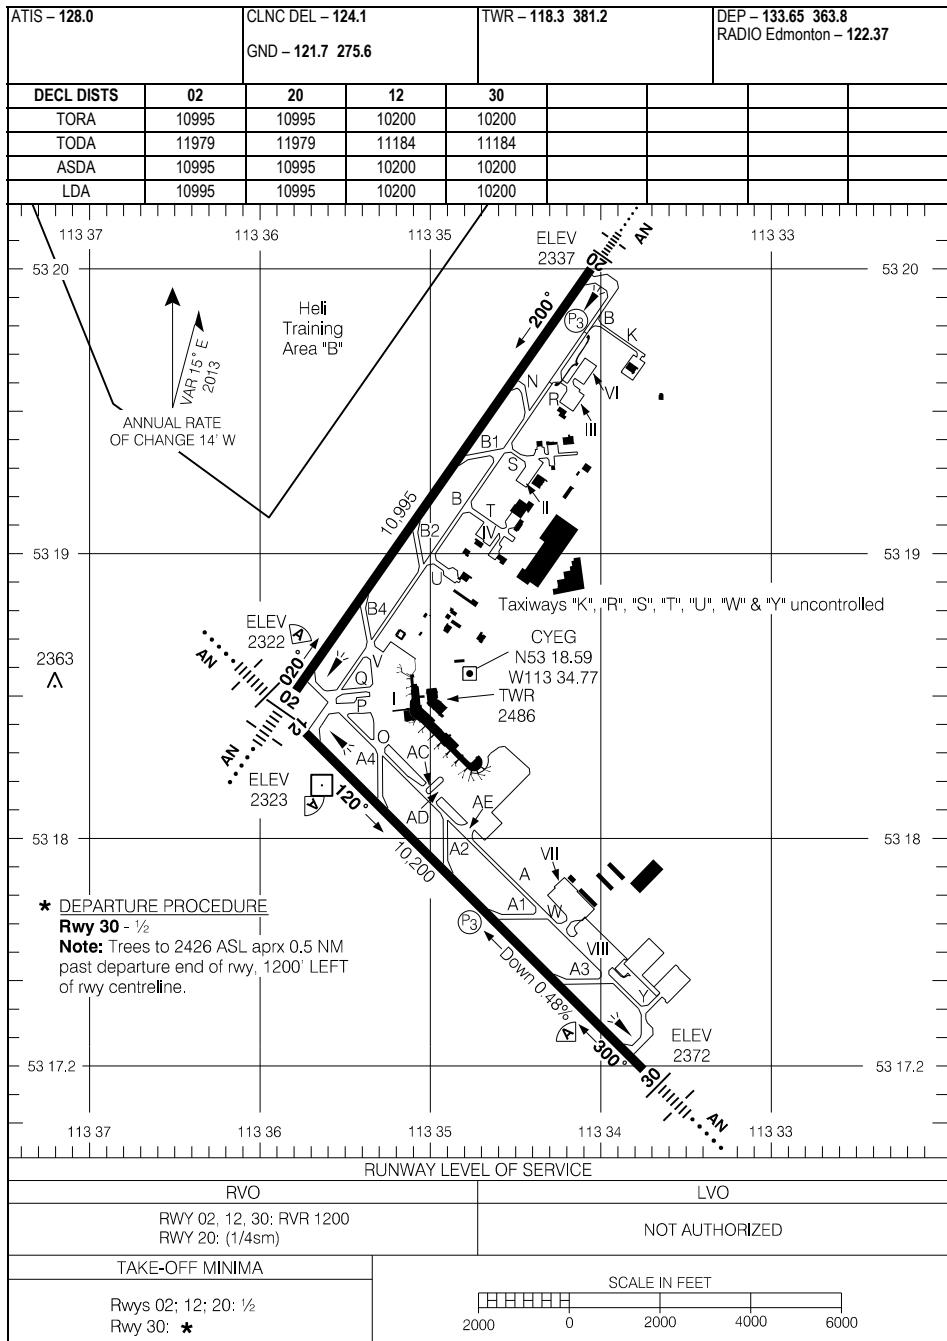

AERODROME CHART

EFF 16 MAY 24

CYEG

CYEG-AD

REDUCED VISIBILITY PROCEDURES**Reduced Visibility Procedures (RVR less than 2600 to 1200 ft)**

If any portion of the airport drops below $\frac{1}{2}$ SM or 2600 RVR but is at or above $\frac{1}{4}$ SM or 1200 RVR, the airport is considered to be operating in RVOP with no restrictions to aircraft or vehicles.

If any portion of the airport drops below $\frac{1}{4}$ SM or 1200 RVR, provided the runway of intended use is at or above $\frac{1}{4}$ SM or 1200 RVR, the following procedures shall be implemented:

- Any runway that is below $\frac{1}{4}$ SM or 1200 RVR will not be used for arrivals or departures.
- Restrictions apply to vehicles and aircraft on the manoeuvring area. Only one aircraft, helicopter or vehicle will be given permission to operate on the manoeuvring area at any given time (except as permitted below under Vehicle Exceptions).
- Towing of aircraft on the manoeuvring area is not permitted.

Departures

An aircraft may be taxied for departure if the runway of intended use is at or above $\frac{1}{4}$ SM or 1200 RVR provided no other aircraft or vehicle is on the manoeuvring area.

If the visibility drops below $\frac{1}{4}$ SM or 1200 RVR after taxi clearance was issued, the aircraft may continue to taxi.

An aircraft may depart during RVOP operations provided the RVR serving the departure runway is at or above $\frac{1}{4}$ SM or 1200 RVR.

Arrivals

An aircraft may land and taxi if the runway of intended use is at or above $\frac{1}{4}$ SM or 1200 RVR provided no other aircraft or vehicle is on the manoeuvring area.

Arrivals will be in accordance with applicable approach minima or approach ban considerations. After landing, the aircraft may taxi provided no other aircraft or vehicle is on the manoeuvring area.

If the visibility for the runway of intended use drops below $\frac{1}{4}$ SM or 1200 RVR after an arriving aircraft crosses the final approach fix (FAF), the aircraft may land and taxi in.

Vehicle Exceptions

A group of vehicles may be considered one movement provided they are traveling together and use a single call sign.

Vehicles are permitted to operate on an inactive runway. Once vehicles are established and restricted to remain on the inactive runway, RVOP may resume on the remaining manoeuvring area.

Emergency vehicles responding to emergency situations are exempt.

REDUCED VISIBILITY PROCEDURES

EFF 8 NOV 18

CYEG

DE-ICING OPERATIONS

De-icing Procedures

1. When de-icing is required, ctc EDMONTON DE-ICE on 122.850 30 min prior or as soon as possible with de-icing requirements. AEROMAG will assign the expected de-icing pad or holding area according to de-icing flow.
2. Prior to pushback and for taxi clearance ctc GROUND CONTROL on 121.700 with de-icing pad assignment.
3. On the Main Apron, hold short of the assigned de-icing pad and ctc AEROMAG PAD CONTROL on 122.775.
4. Follow AEROMAG PAD CONTROL instructions and guidance lines to the assigned de-icing bay or staging bay and confirm "BRAKES SET" when in position. Monitor GROUND CONTROL on 121.700 at all times.
5. When directed by AEROMAG PAD CONTROL, ctc ICEMAN on 130.125 (136.535 backup frequency) and confirm "BRAKES SET, AIRCRAFT CONFIGURED and ENGINES IDLE FOR DE-ICE."
6. When de-ice is complete, do not move aircraft. When directed by ICEMAN, ctc AEROMAG PAD CONTROL on 122.775 to obtain taxi instructions.
7. Follow AEROMAG PAD CONTROL instructions to exit de-icing. Hold short of Twy ALPHA and ctc GROUND on 121.700 to obtain clearance. Holding short of Twy ALPHA is only relevant to DF1 and DF2. DF3 aircraft exit onto Apron I.

DE-ICING OPERATIONS


EFF 5 OCT 23

CYEG

CYEG-APD

EDMONTON INTL, AB
CYEG


PARKING AREAS (APRON 1)

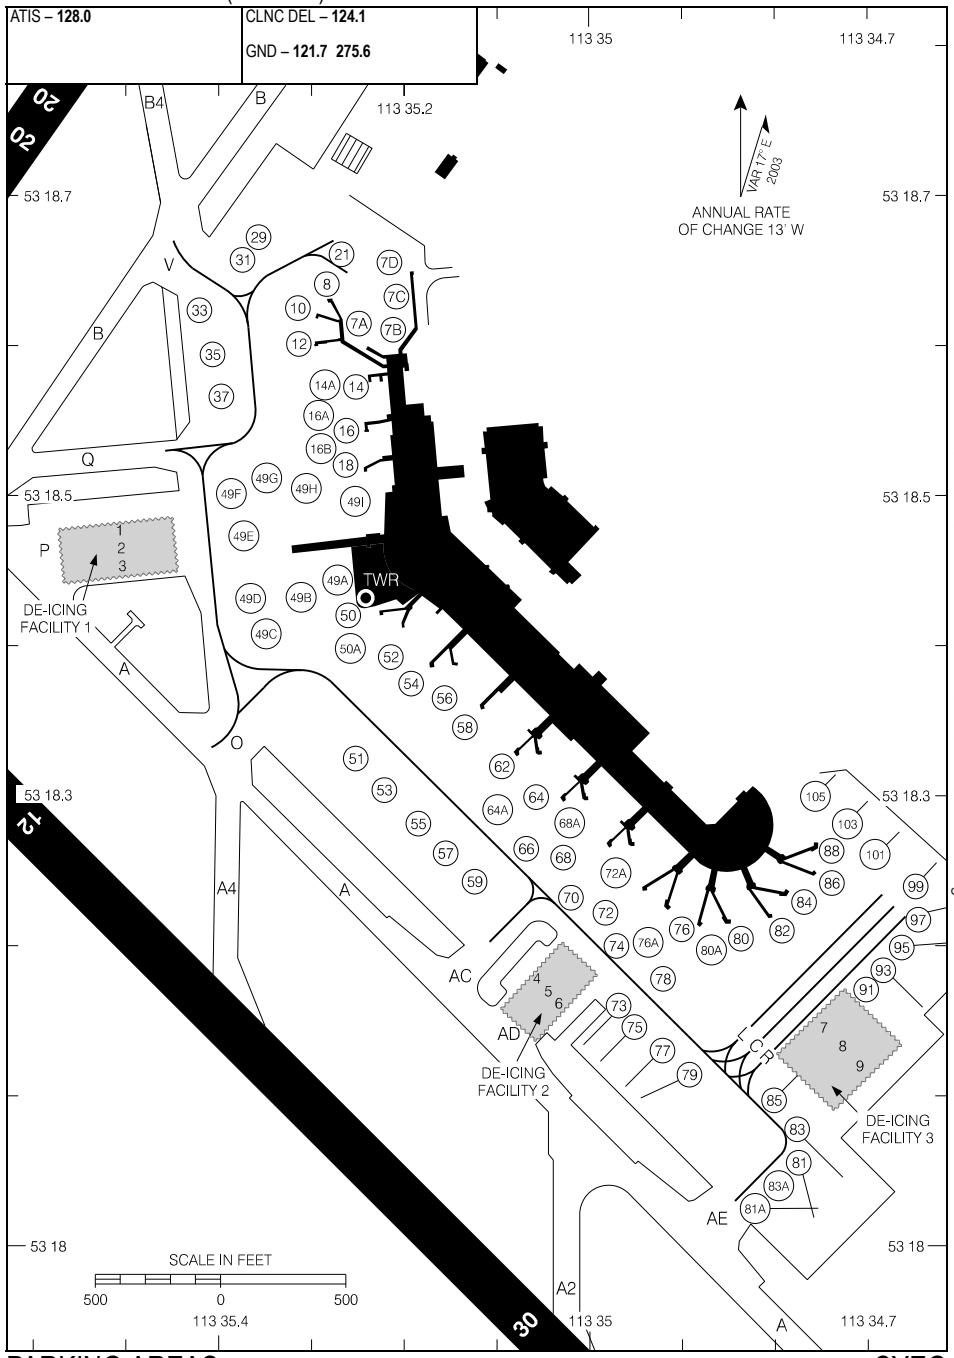

CYEG-APD

AERODROME CHART

CYEP-AD
EDMONTON/EDMONTON PARKLAND EXECUTIVE AIRPORT, AB
CYEP

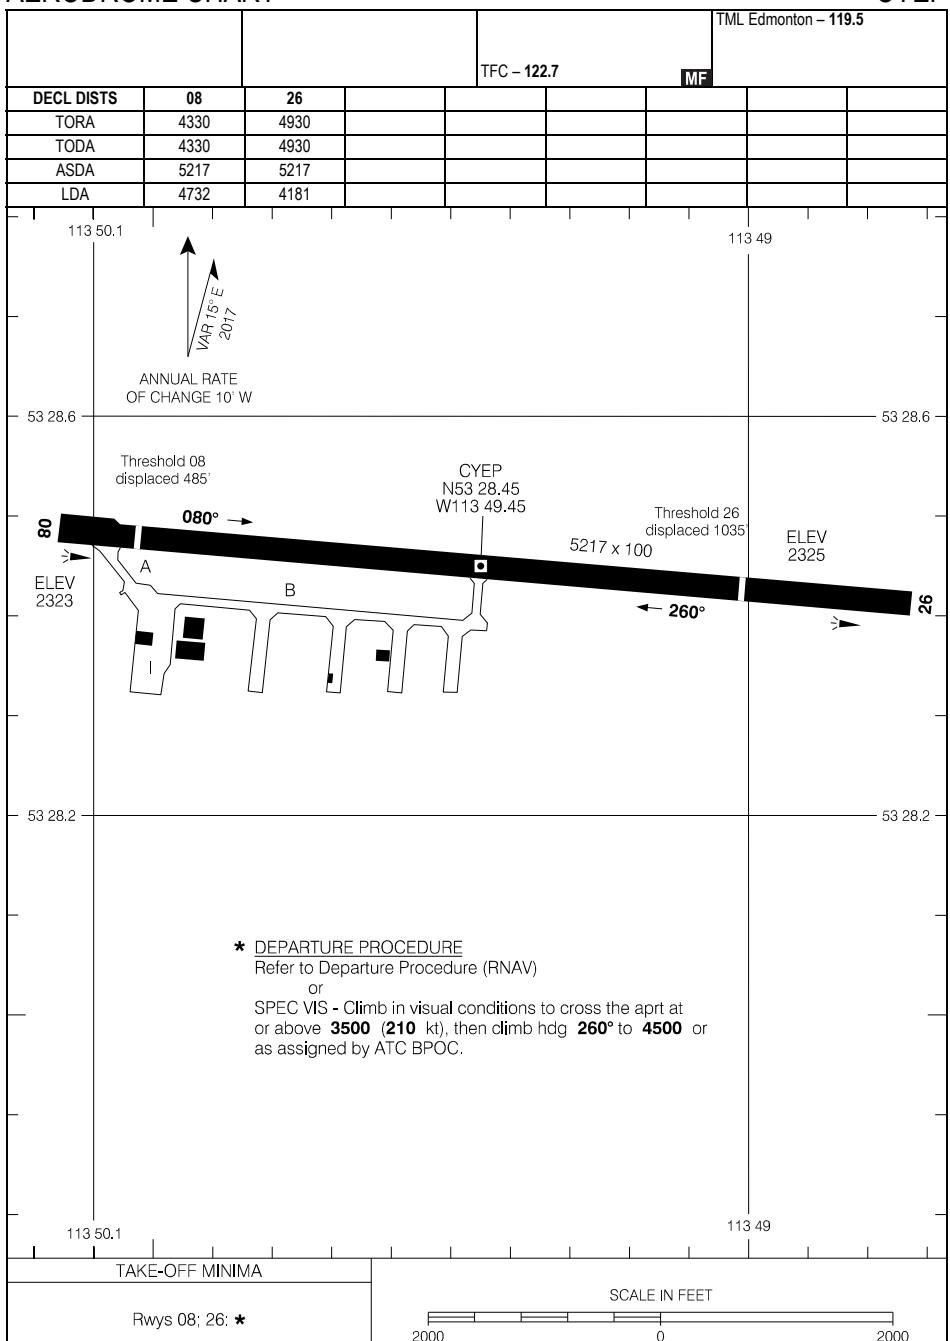

AERODROME CHART

EFF 12 JUN 25

CYEP-AD


CFB6-AD

EDMONTON/JOSEPHBURG, AB
CFB6

AERODROME CHART

AWOS - 122.35				TFC - 123.5		ATF		TML - 119.5
DECL DISTS	08	26						
TORA	4560	4560						
TODA	4796	4826						
ASDA	4560	4560						
LDA	4166	4313						

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

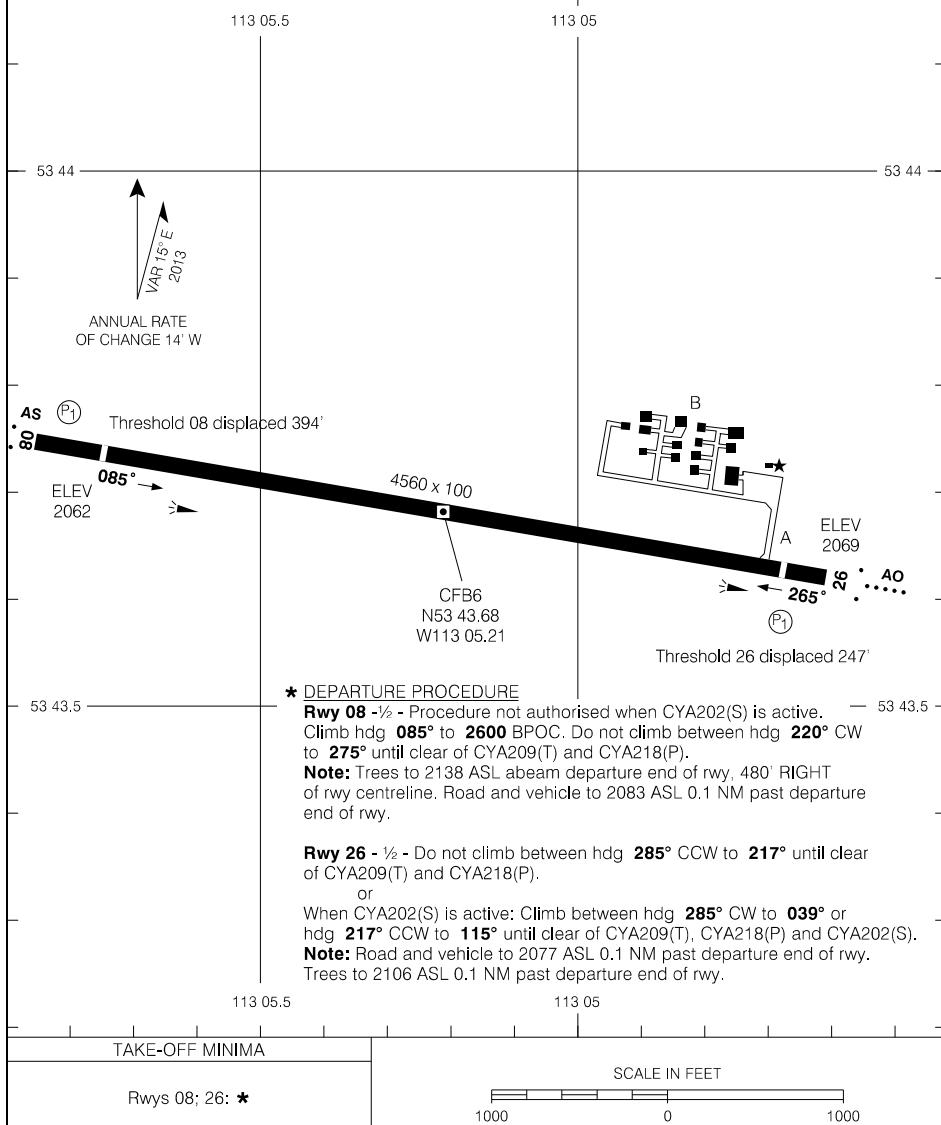

AERODROME CHART

EFF 16 MAY 24

CFB6-AD

HELIPORT CHART

CEW7-HP

EDMONTON/UNIV OF ALBERTA (STOLLERY CHILDREN'S HOSP MAHI), AB

CEW7

TML Edmonton - 119.5

TFC - 123.2

ATF*

DECL DISTS

TORA

TODA

ASDA

LDA

113 31.41

113 31.31

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

ANNUAL RATE
OF CHANGE 14.1' W

53 31.24

53 31.24

CEW7
N53 31.22
W113 31.31

53 31.19

53 31.19

113 31.41

113 31.31

TAKE-OFF MINIMA

NOT ASSESSED

SCALE IN FEET

100 0 100

HELIPORT CHART

EFF 24 MAR 22

CEW7

CEW7-HP


CZVI -AD

EDMONTON/VILLENEUVE, AB
CZVL

AERODROME CHART

● ATIS - 128.35 ● AWOS - 128.35		● GND - 120.8		● TWR - 118.8 ● TFC - 118.8		TML - 119.5 ● ATF*
DECL DISTS	08	26	16	34		
TORA	5001	5001	3496	3496		
TODA	5001	5001	3696	3696		
ASDA	5001	5001	3496	3496		
LDA	5001	5001	3496	3496		

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

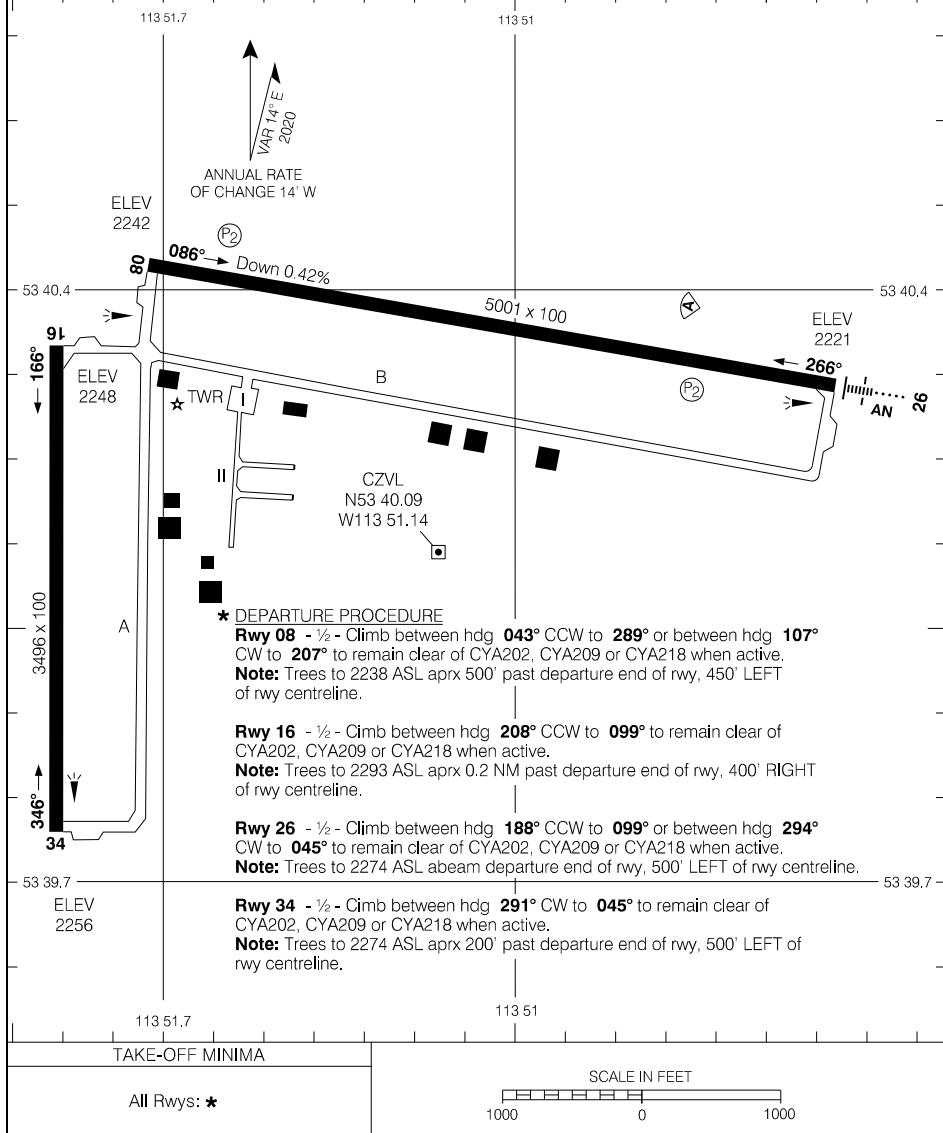

AERODROME CHART

EFF 3 NOV 22

CZVL-AD

CZVL

CYET-AD

EDSON, AB
CYET

AERODROME CHART

AWOS – 128.75						RADIO Edmonton – 126.7	
				TFC – 123.2		ATF	
DECL DISTS	07	25					
TORA	5997	5997					
TODA	6197	6197					
ASDA	5997	5997					
LDA	5403	5513					

DEPARTURE PROCEDURE
Rwy 07 - ½ - Requires a minimum climb gradient of **390** ft/NM to **3900**

Note: Buildings to 3052 ASL aprx 200' past departure end of rwy.
Trees to 3082 ASL aprx 0.2NM past departure end of rwy, 600' LEFT
of centerline.

SPEC VIS - Climb in visual conditions to cross the apt at or above **4000**, then on a heading between **202°** CW to **171°** to **12000** PROG.

Rwy 25 - $\frac{1}{2}$ - Requires a minimum climb gradient of **480 ft/NM** to **6400**. Climb between hda **240°** CW to **074°** to **13600** RPOC.

Note: Terrain to 3079 ASL, aprx 200' past departure end of rwy

Note: Return to 3073 ASL aprx 200' past departure end of rwy.
- Trees to 3131 ASL aprx 200' past departure end of rwy, 400' LEFT
and RIGHT of rwy centreline.

- or -
SPEC VIS - Climb in visual conditions to cross the apt at or above **4000**, then on a heading between **293°** CW to **171°** to **13900** BPOC.

Threshold 07 displaced 594

EV
443 (P1) ➔
5997 x 100
07 0748
D B A ELEV
3021

074 → Down 0.37% → CYET N53 34.74 W116 27.90 ← 254° 2 P1 Threshold 25 displaced 484

— N53 34.5 ————— N53 34.5

DEPARTURE CLIMB RATE V/V (FPM)							
GROUND SPEED	90	120	140	160	180	200	250
390 FT/NM	590	780	910	1040	1170	1300	1630
480 FT/NM	720	960	1120	1280	1440	1600	2000

W116 28.5 W116 27.5

TAKE-OFF MINIMA

SCALE IN FEET


AFRODROME CHART

FFF 5 SEP 24

CYET

CYET-AD

AERODROME CHART

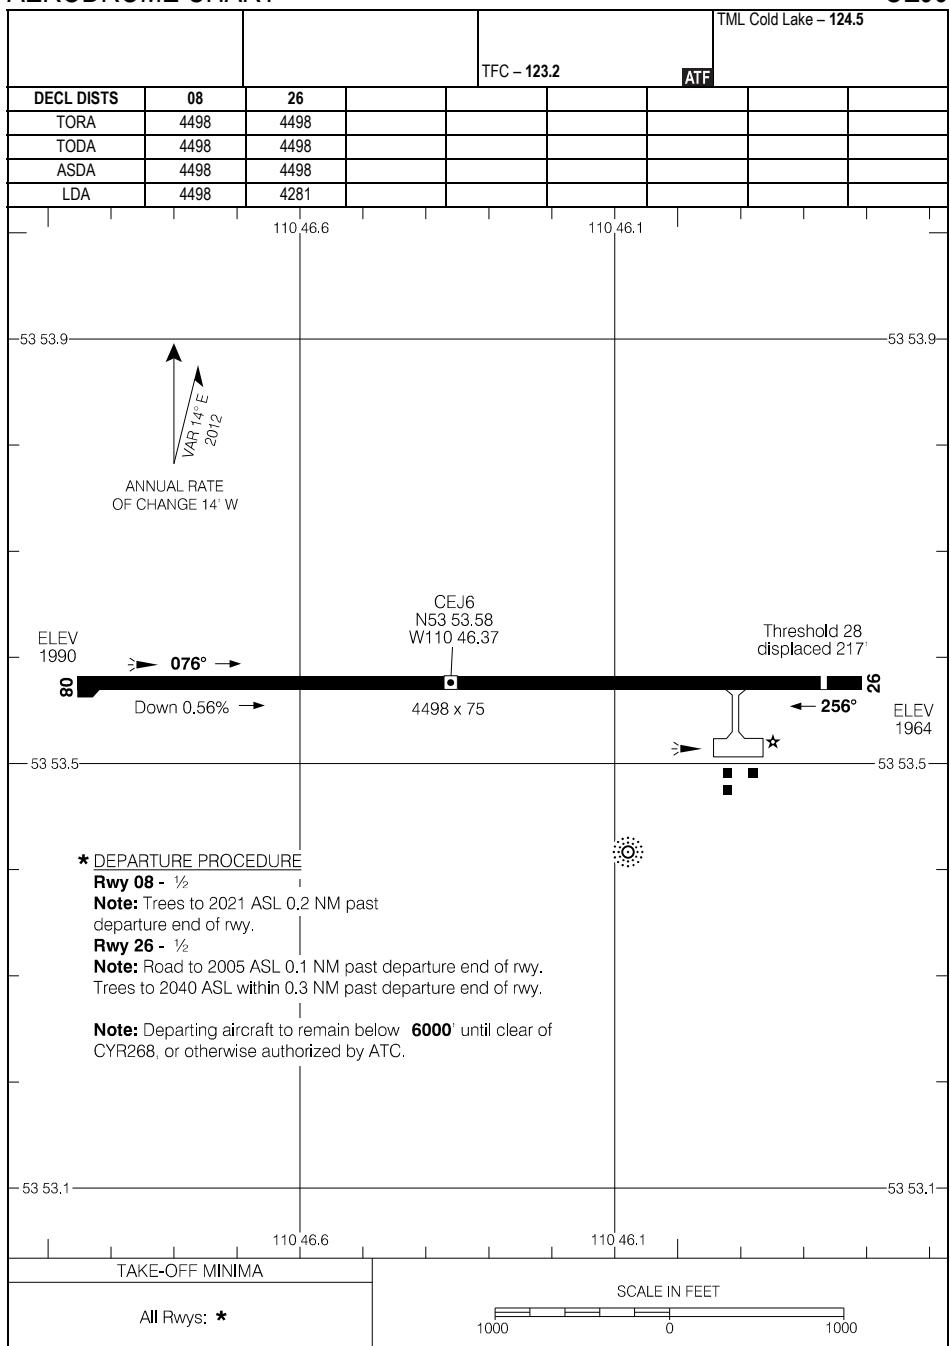

AERODROME CHART


EFF 15 JUN 23

CEJ6

CYEN-AD

ESTEVAN REGIONAL, SK
CYEN

AERODROME CHART

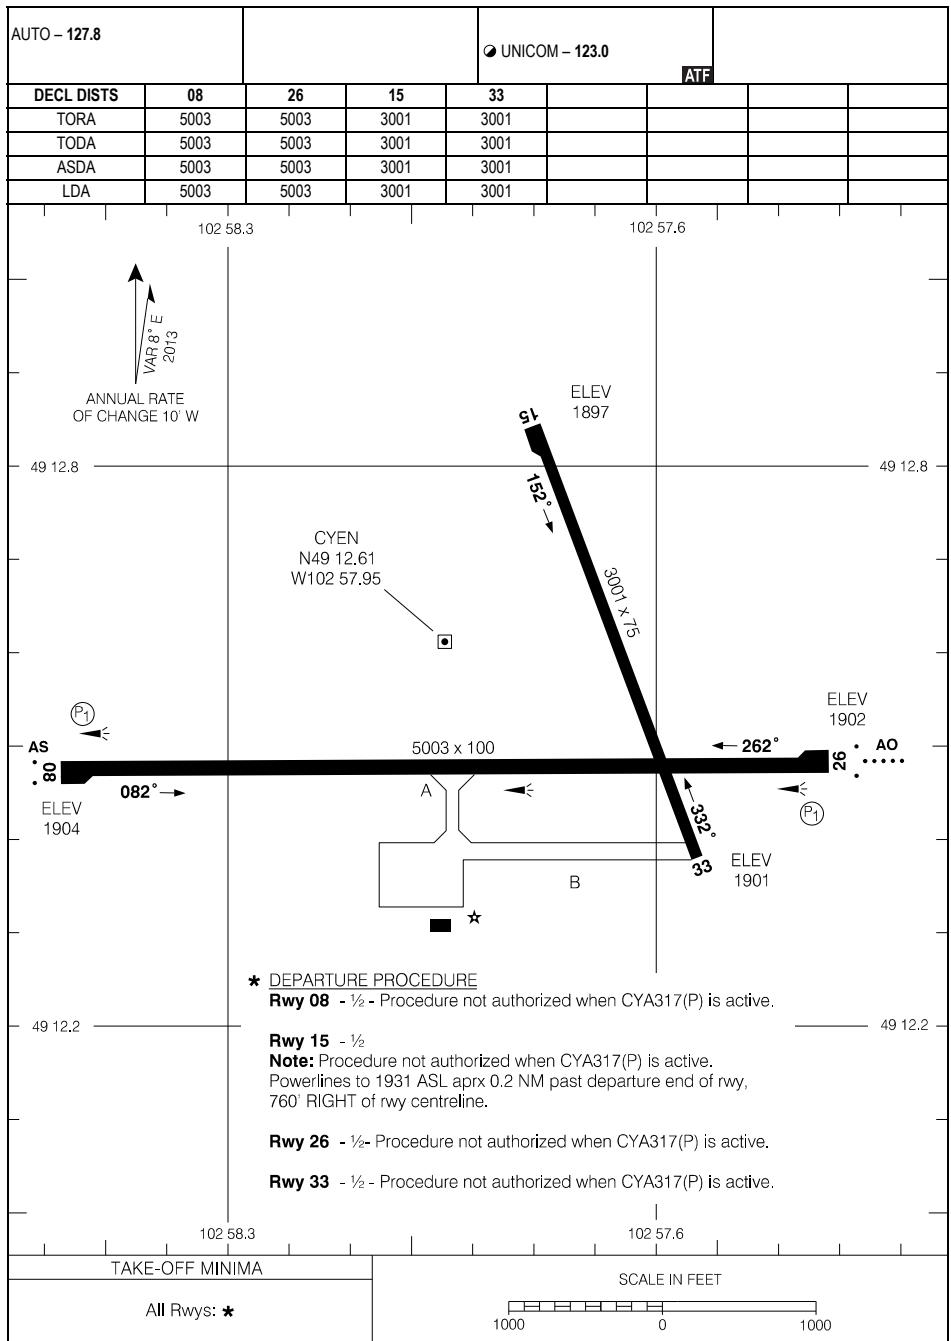

AERODROME CHART

EFF 2 DEC 21


CYEN-AD

CYEN

FAIRVIEW, AB
CEB5

AERODROME CHART

AUTO - 122.97			● UNICOM - 122.8	CTR Edmonton - 135.27
DECL DISTS	04	22		ATF
TORA	3506	3506		
TODA	3506	3506		
ASDA	3506	3506		
LDA	3506	3506		

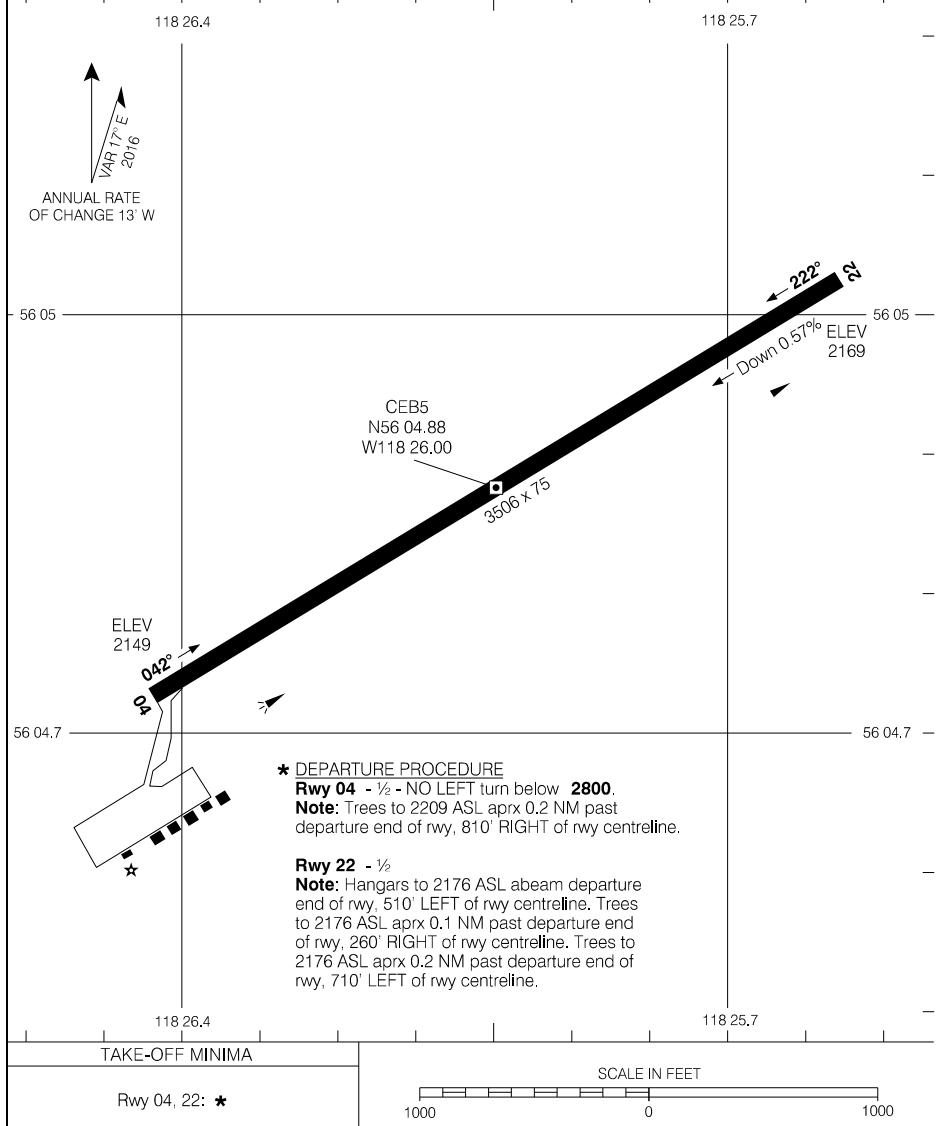

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART


EFF 5 OCT 23

CEB5

CYFO-AD

FLIN FLON, MB
CYFO

AERODROME CHART

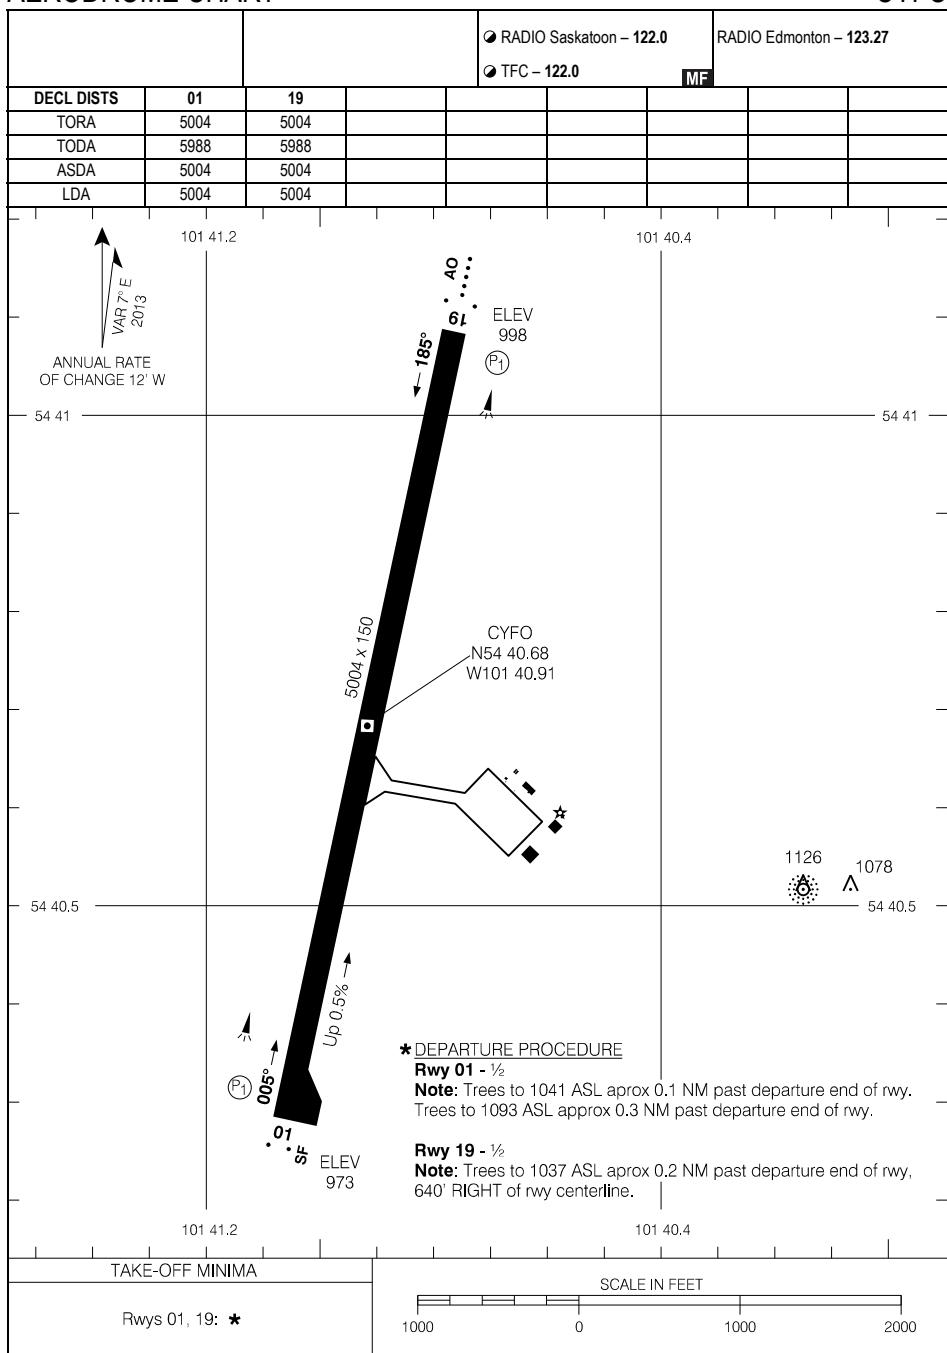

AERODROME CHART

EFF 24 MAR 22


CYFO

CYFO-AD

CZFD-AD

FOND-DU-LAC, SK
CZFD

AERODROME CHART

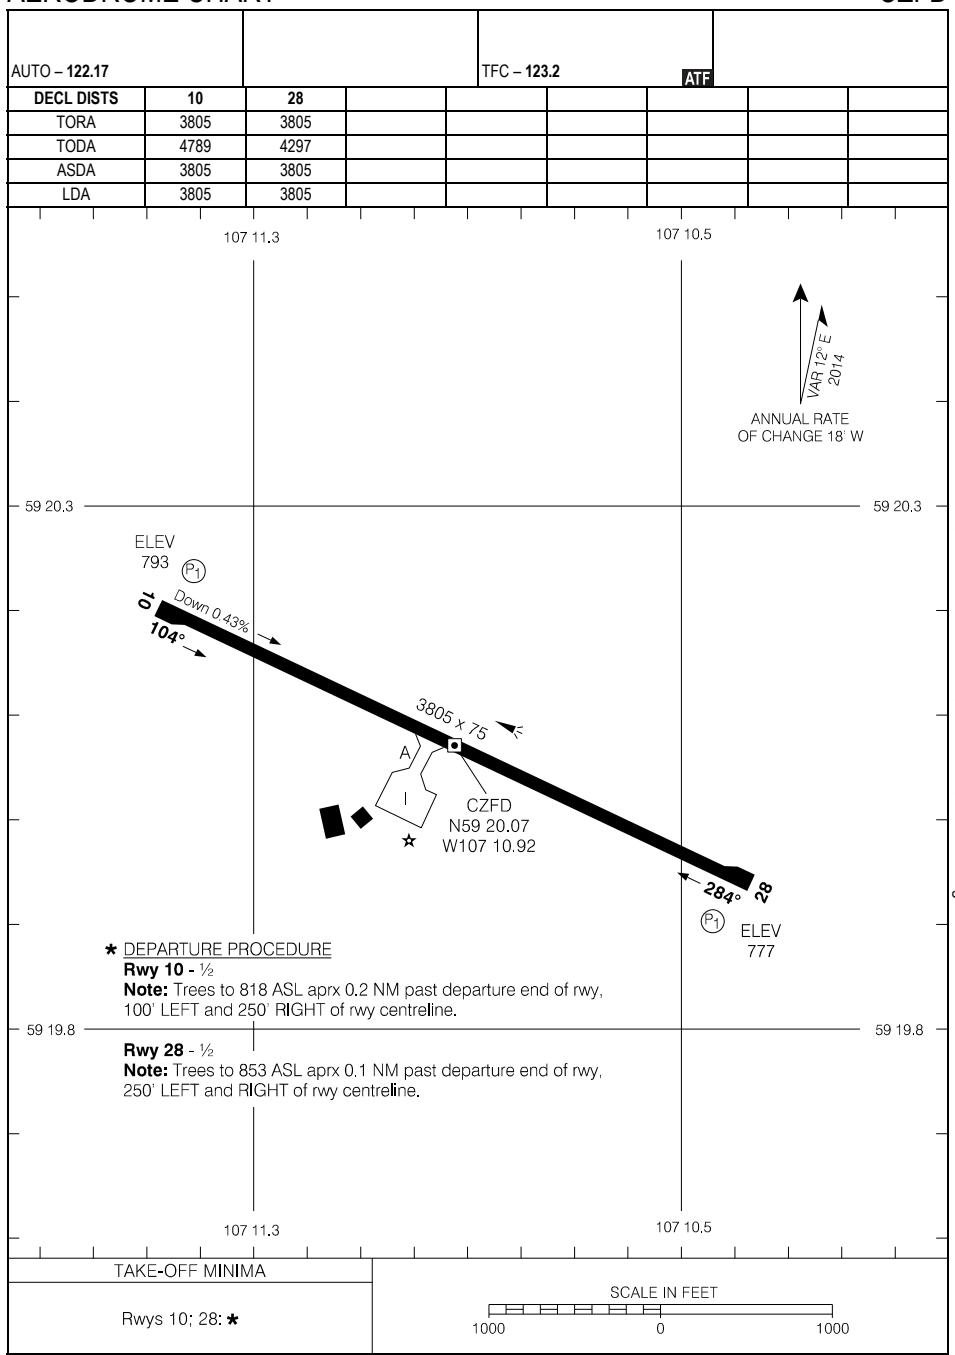

AERODROME CHART

EFF 17 APR 25

CZFD

CZFD-AD


CYPY-AD

FORT CHIPEWYAN, AB
CYPY

AERODROME CHART

AWOS – 128.0				TFC – 123.2		RADIO Edmonton – 123.47
DECL DISTS	04	22			ATF	
TORA	5000	5000				
TODA	5984	5984				
ASDA	5000	5000				
LDA	5000	5000				

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

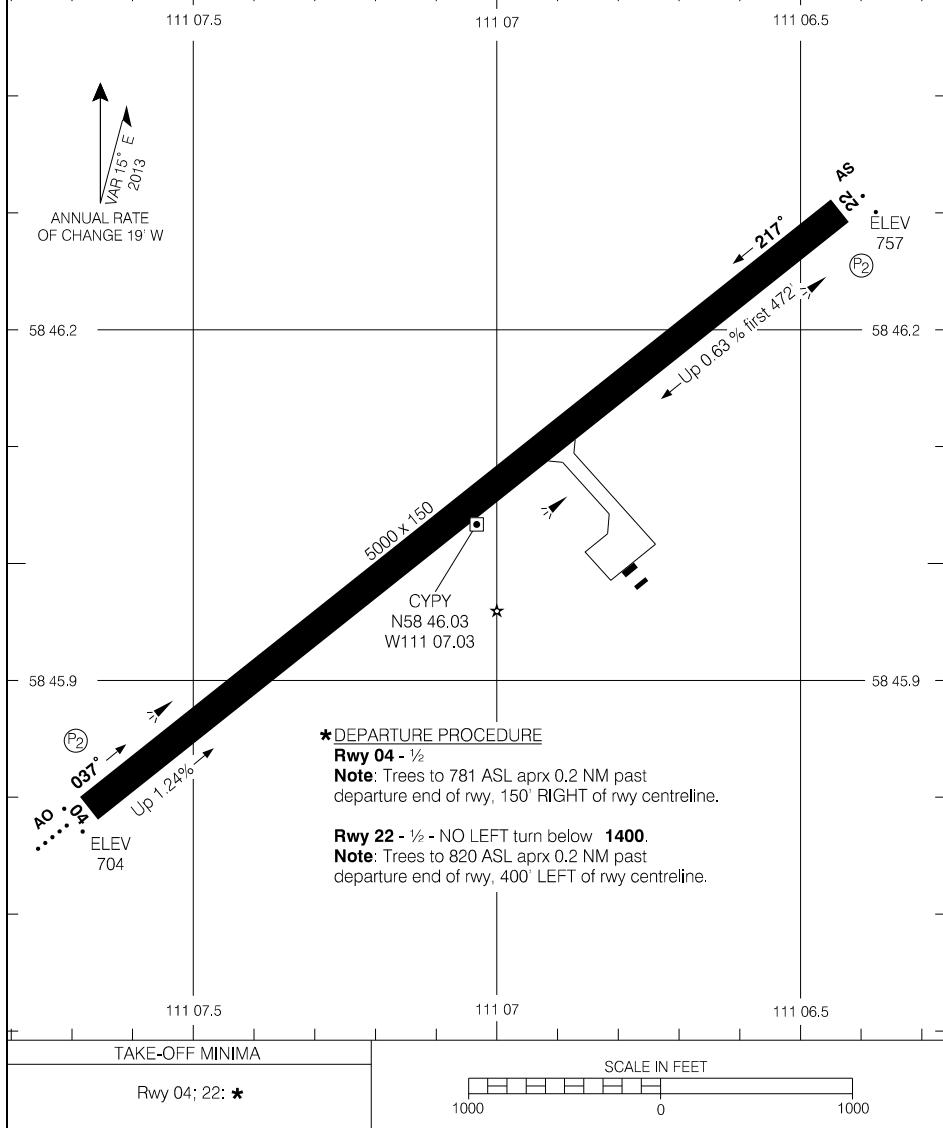

AERODROME CHART

EFF 5 SEP 24

COPY


CYPY-AD

CAL4-AD

FORT MACKAY/ALBIAN, AB

CAL4

AERODROME CHART

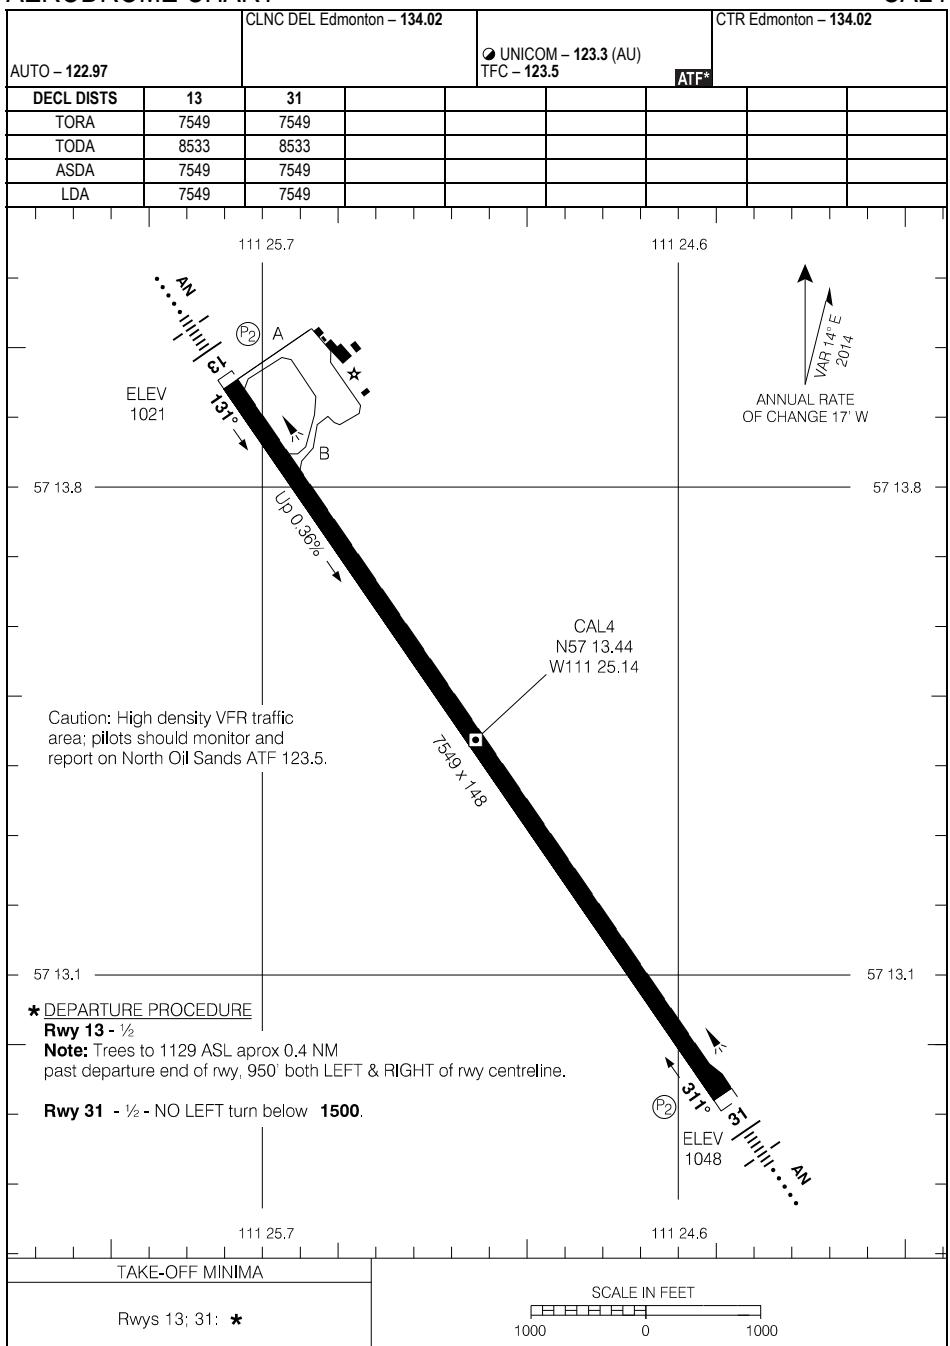

AERODROME CHART

EFF 29 DEC 22


CAL4

CAL4-AD

CYFI-AD

FORT MACKAY/FIREBAG, AB
CYFI

AERODROME CHART

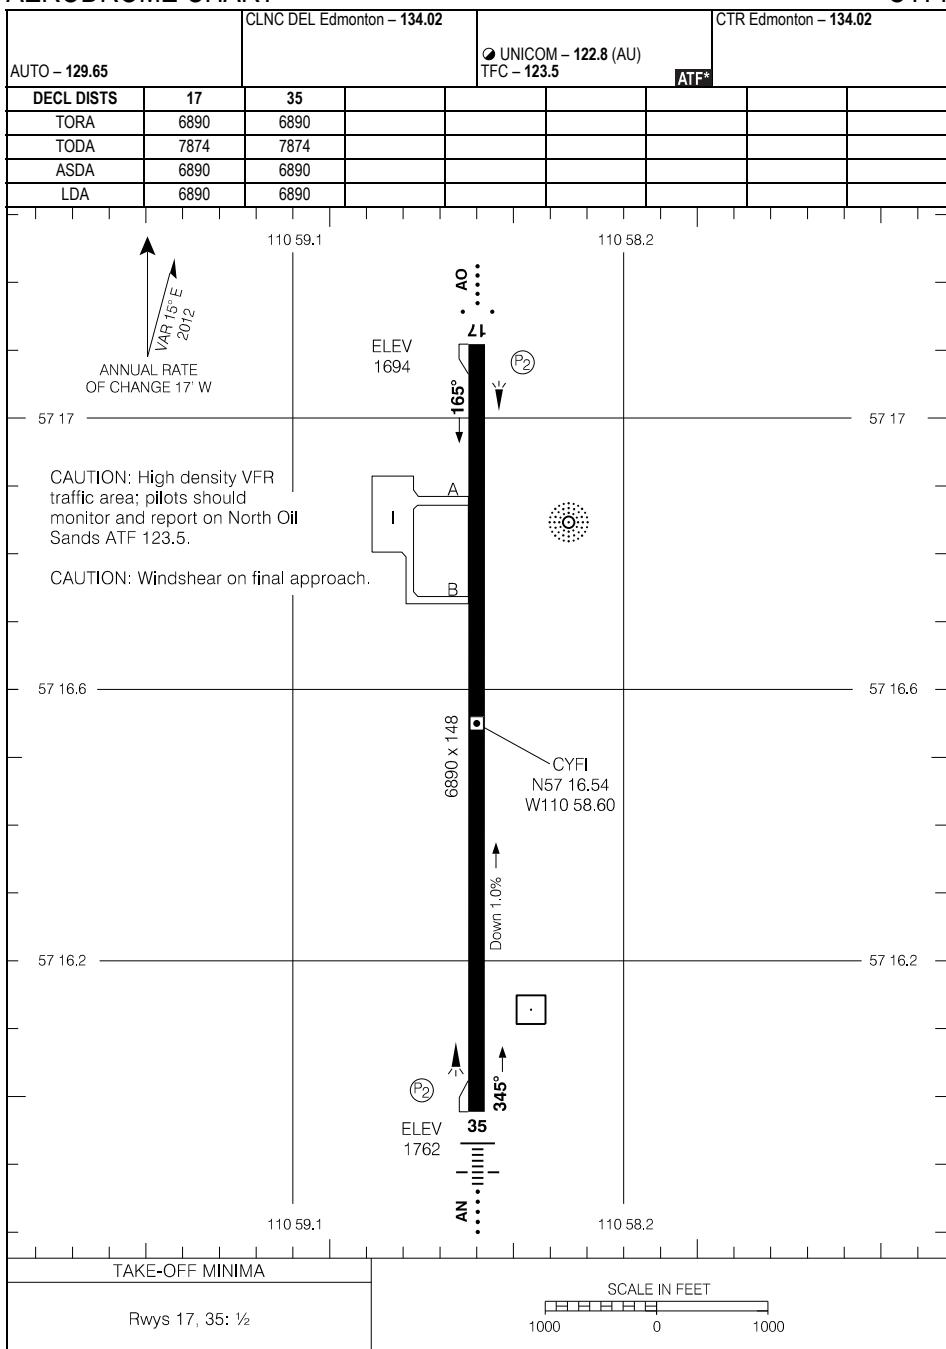

AERODROME CHART

EFF 17 JUN 21


CYFI

CYFI-AD

CYNR-AD

FORT MACKAY/HORIZON, AB
CYNR

AERODROME CHART

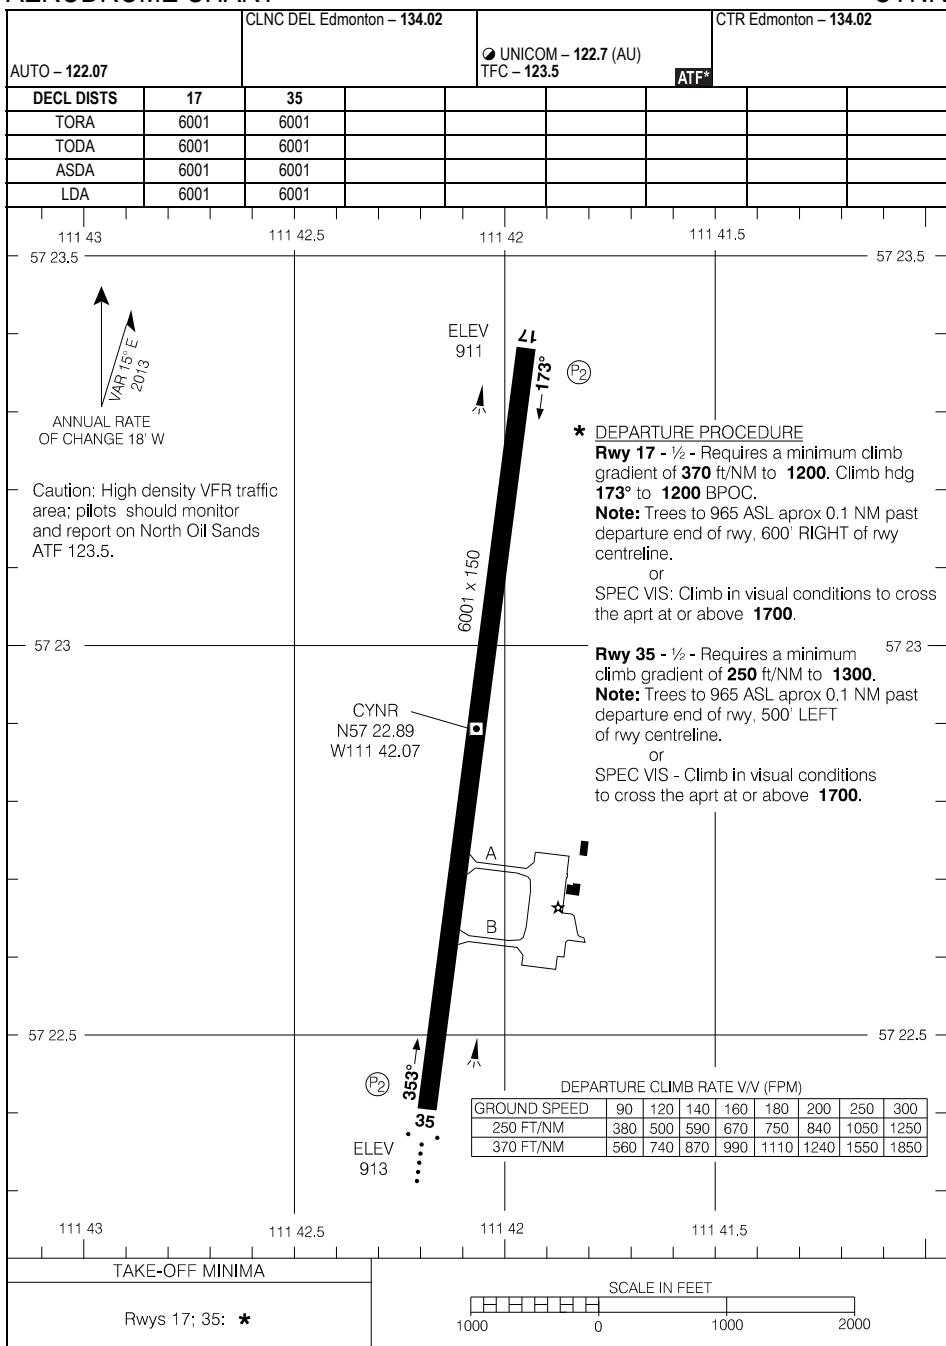

AERODROME CHART

EFF 11 JUL 24


CYNR-AD

CYNR

CYMM-AD

FORT McMURRAY, AB
CYMM

AERODROME CHART

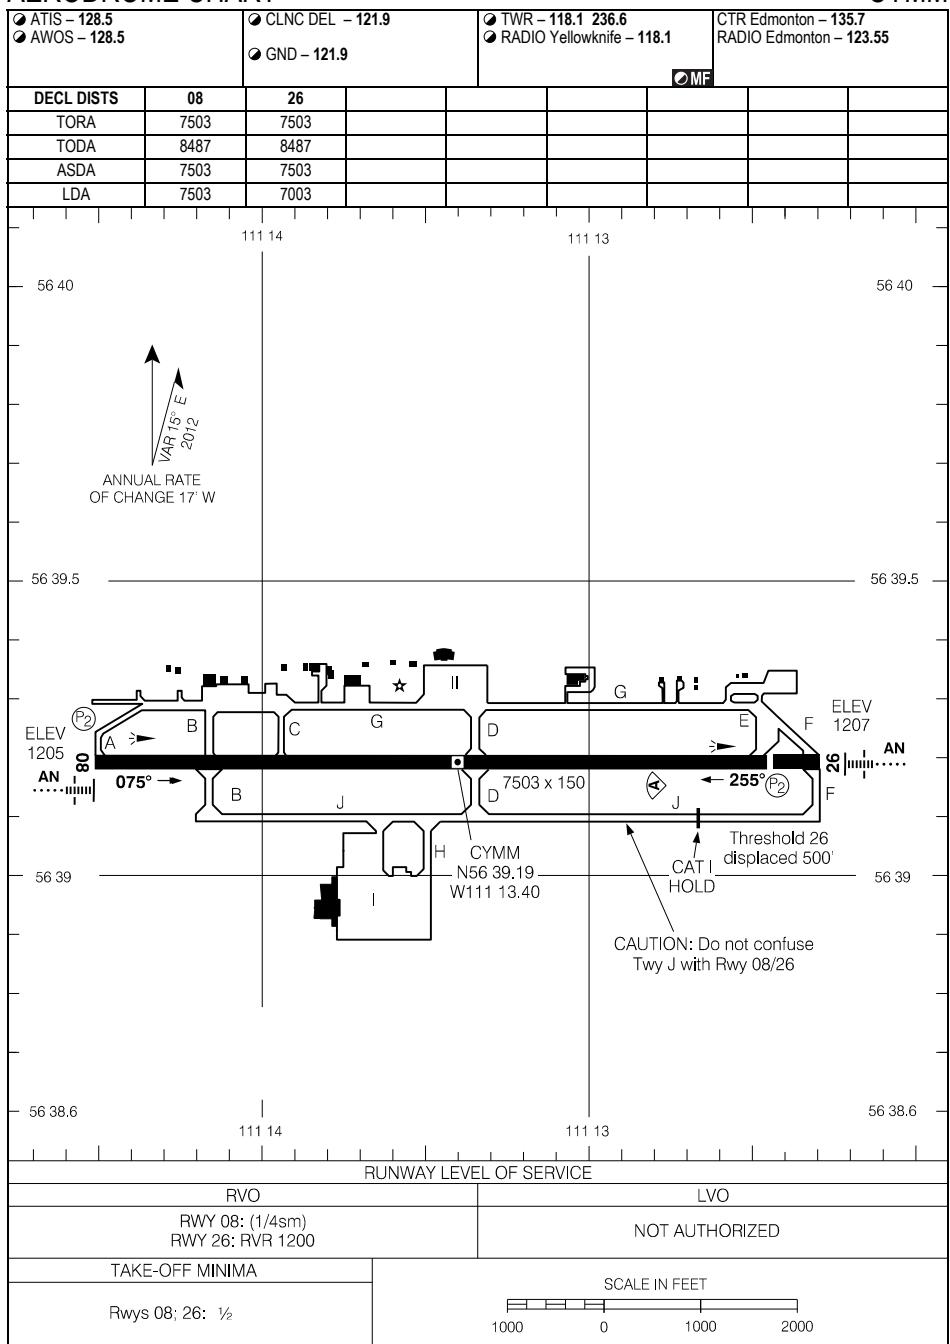

AERODROME CHART

EFF 7 AUG 25

CYMM

CYMM-AD

DE-ICING OPERATIONS

De-Ice Bay Procedure

Fort McMurray International operates a central de-icing facility which is located on the main/south ramp (Apron I) on the south side of the airport. All bays are capable of both engine on and engine off de-icing operations concurrently. All de-icing is to be accomplished at this facility.

1. De-icing is accomplished by each of the ground handling companies that operate at the Fort McMurray International Airport.
2. Coordinate any special treatment with your Ground Handler prior to taxi to the CDF.
3. Entry point to the CDF, if transitioning from the North, is via taxi-way J to Apron I – use west entrance.
4. If required to hold – the designated holding area is to your immediate right upon entering Apron I.
5. CDF flow is from west to east.
6. Contact YMM Ground on 121.9 (or Yellowknife Radio on 118.1 during the hours of 2245-0615 local) for runway and taxi instructions.
7. Exit is via taxi-way H.

DE-ICING OPERATIONS

EFF 12 JUN 25

CYMM

DE-ICING OPERATIONS

- ATIS - 128.5
- AWOS - 128.5

- CLNC DEL – 121.9
- GND – 121.9

GND – 121.9

De-icing holding area

Apron I

ANNUAL RATE
OF CHANGE 17% W

ENTRY

EXIT

LEGEND

BAY AND STAND RESTRICTIONS


Bay 1 max wingspan 24m (79')
Bay 2 & 4 max wingspan 36m (118')
Bay 3 max wingspan 52m (170')
Stand 7 max wingspan 36m (118')

CYMM-GM-4B

CEZ4-AD

FORT VERMILION (WOP MAY MEMORIAL), AB
CEZ4

AERODROME CHART

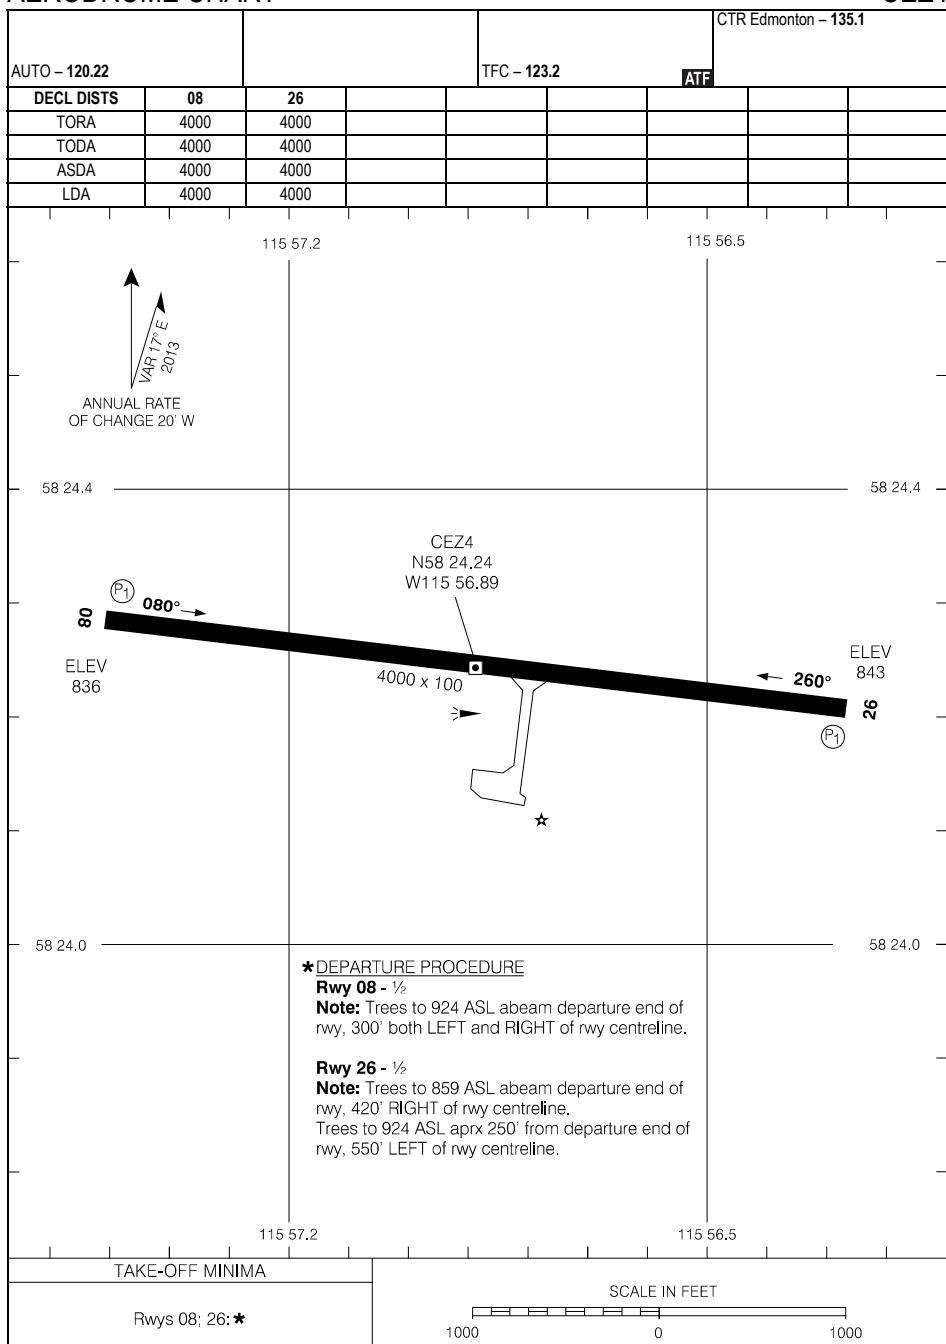

AERODROME CHART

EFF 7 AUG 25


CEZ4-AD

CEZ4

CYGX-AD

GILLAM, MB
CYGX

AERODROME CHART

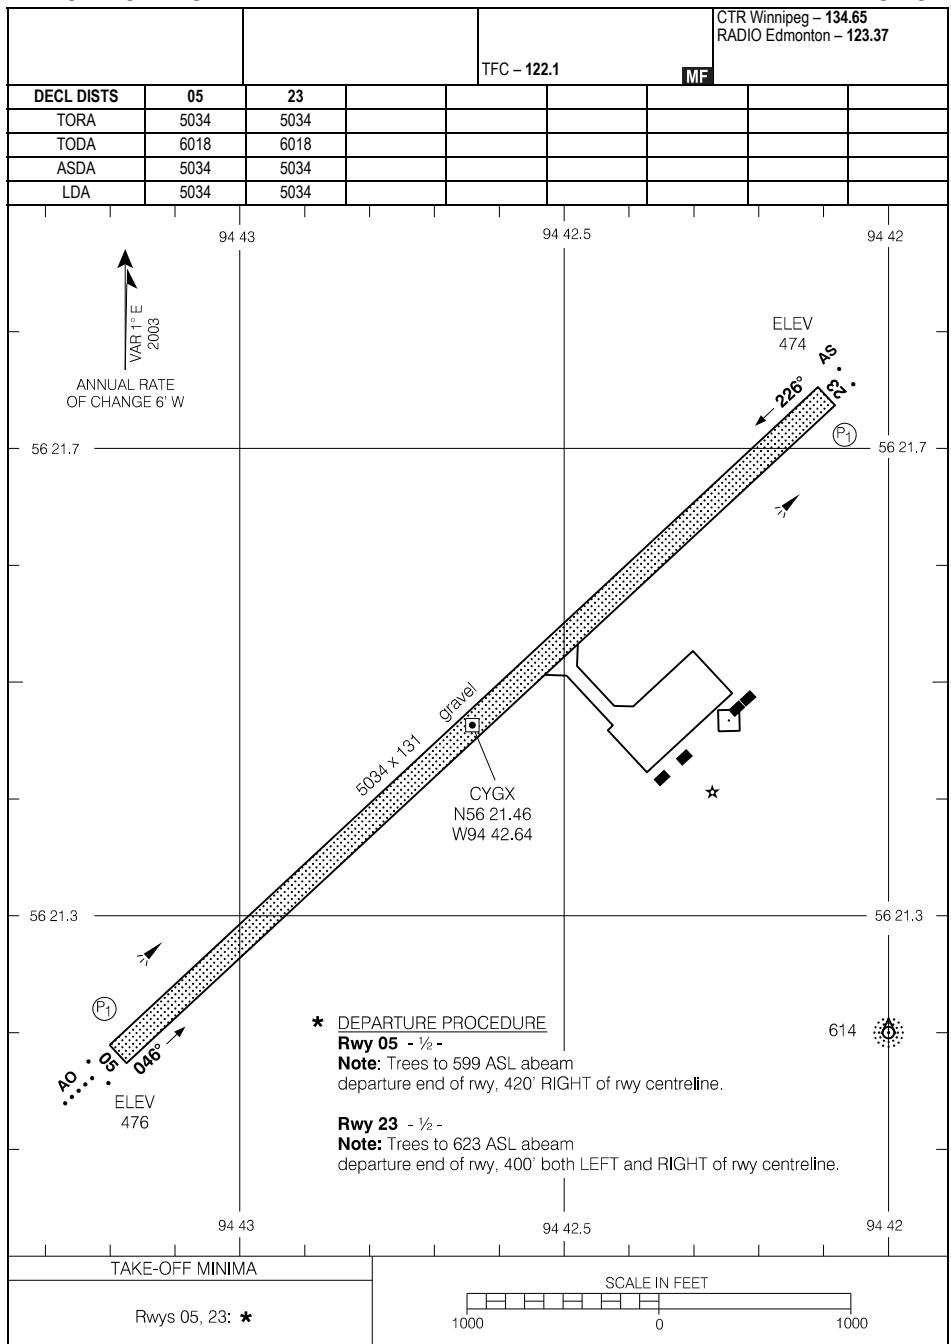

AERODROME CHART

EFF 24 MAR 22


CYGX

CYGX-AD

CYGM-AD

GIMLI/GIMLI INDUSTRIAL PARK AIRPORT, MB
CYGM

AERODROME CHART

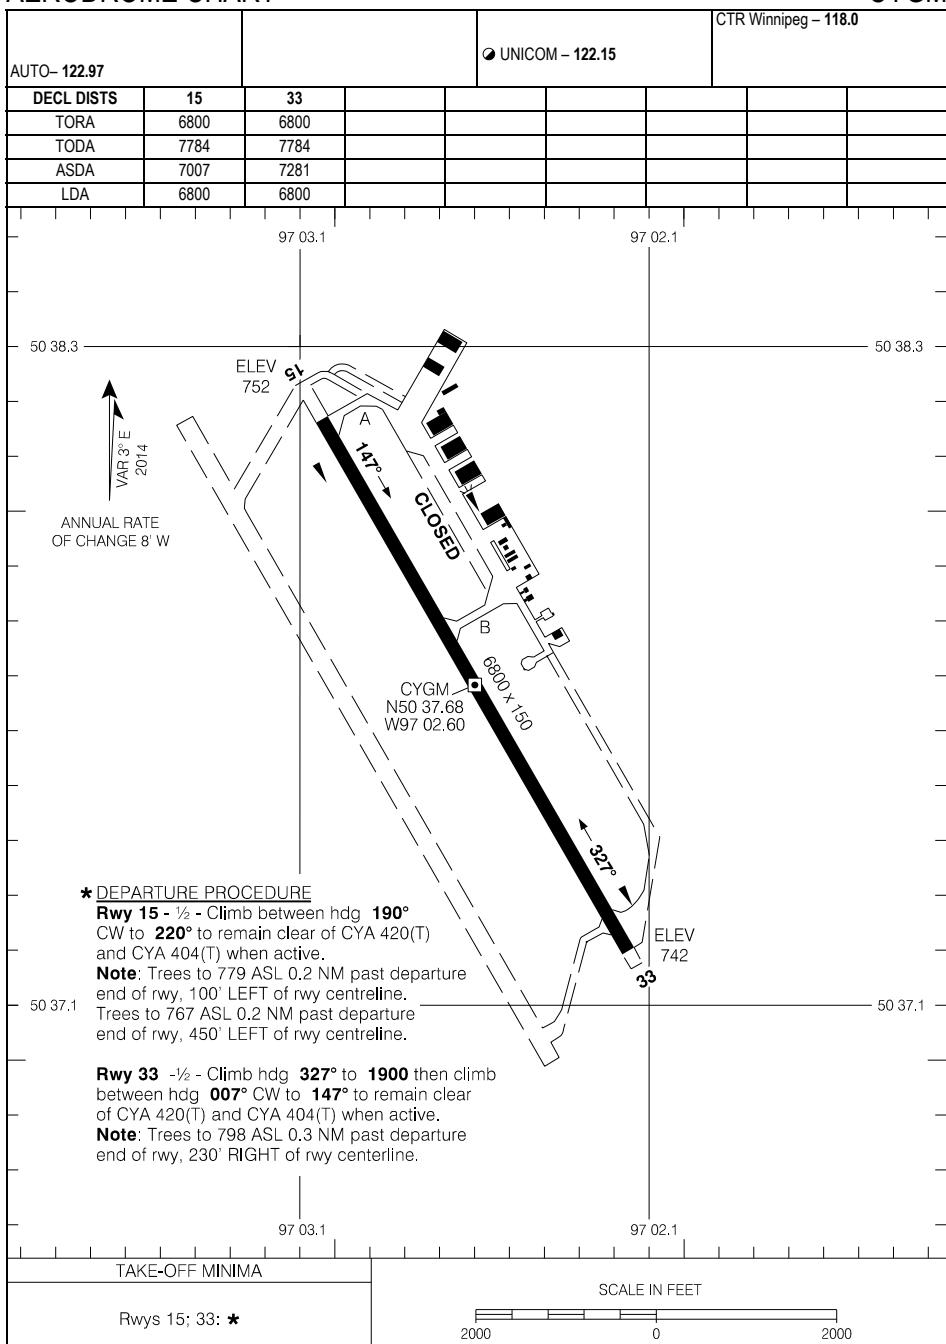

AERODROME CHART

EFF 12 JUN 25


CYGM-AD

CYGM

CYGO-AD

GODS LAKE NARROWS, MB
CYGO

AERODROME CHART

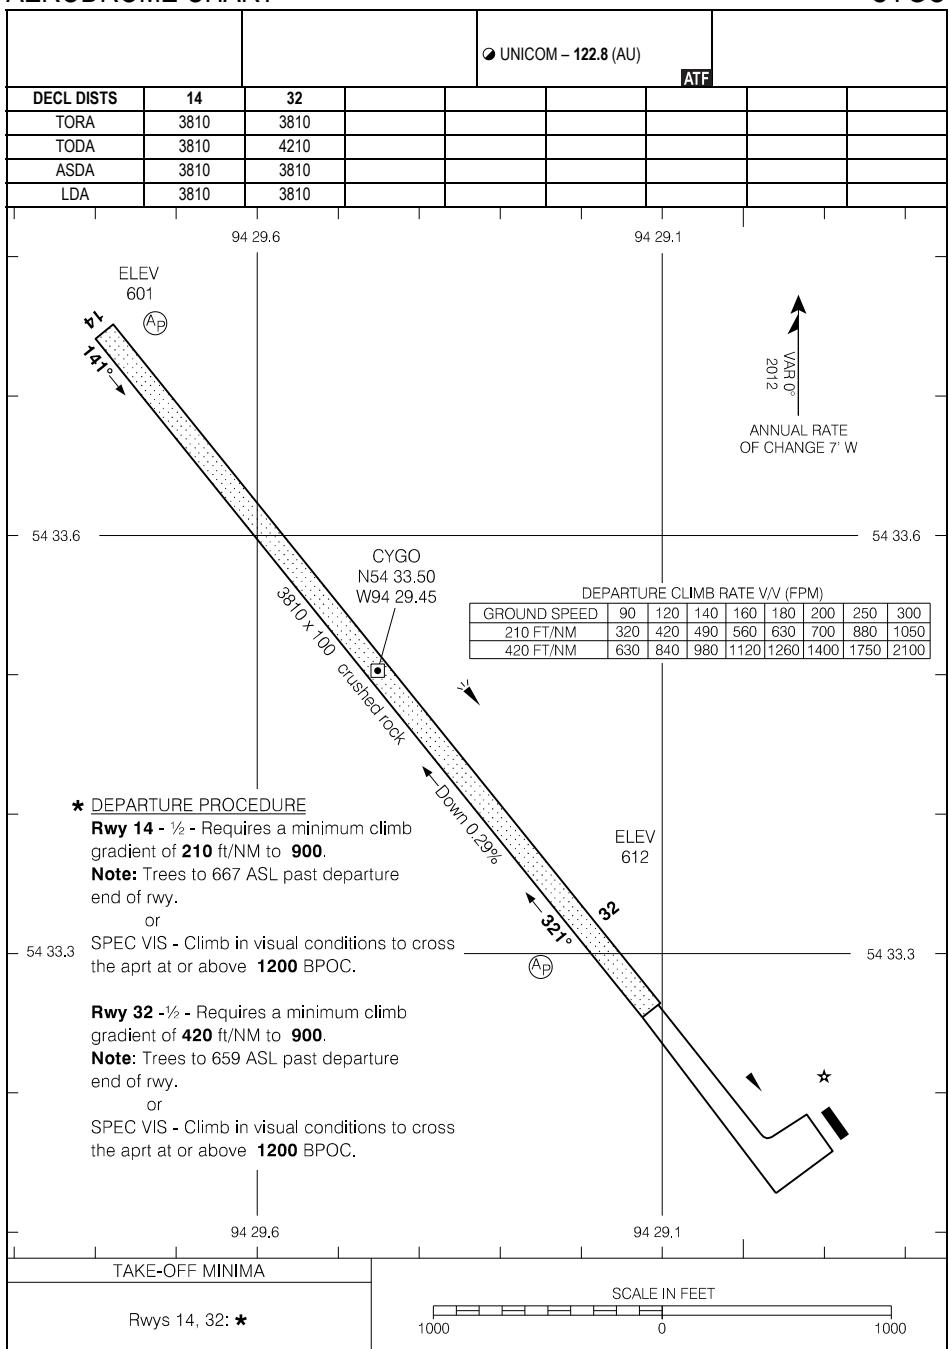

AERODROME CHART

EFF 21 MAY 20

CYGO-AD

CYGO

CZGI-AD

GODS RIVER, MB
CZGI

AERODROME CHART

			<input checked="" type="radio"/> UNICOM - 122.8 (AU)	
DECL DISTS	09	27		ATF
TORA	3538	3538		
TODA	3538	4522		
ASDA	3538	3538		
LDA	3538	3538		

94 05.2 94 04.7 94 04.2

94.04.7

六

DEPARTURE PROCEDURE

Rwy 09 - $\frac{1}{2}$ - Climb between hdg 076° CW to 271° to 1700 BPOC.

Note: Trees to 684 ASL abeam departure end of rwy, 150' LEFT and RIGHT of rwy centreline. Tower to 728 ASL aprx 0.5NM past departure end of rwy, 1100' RIGHT of rwy centreline.

VAR 1° W
2013

ANNUAL RATE
OF CHANGE 6% W

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

ELEV
606 ° 091 → P1

CZGI
N54 50.38
W94 04.72

3538 x 80

←27

ELEV
627

— 54 50.1 ————— | ————— 54 50.1

94 05.2

A scale bar diagram consisting of a horizontal line with tick marks. The word "SCALE IN FEET" is written above the line. Below the line, the value "1000" is placed at the far left, "0" is in the center, and "1000" is at the far right.

AFRODROME CHART

FFF 20 FEB 25


CZG

CZGI-AD

CYQU-AD

GRANDE PRAIRIE, AB
CYQU

AERODROME CHART

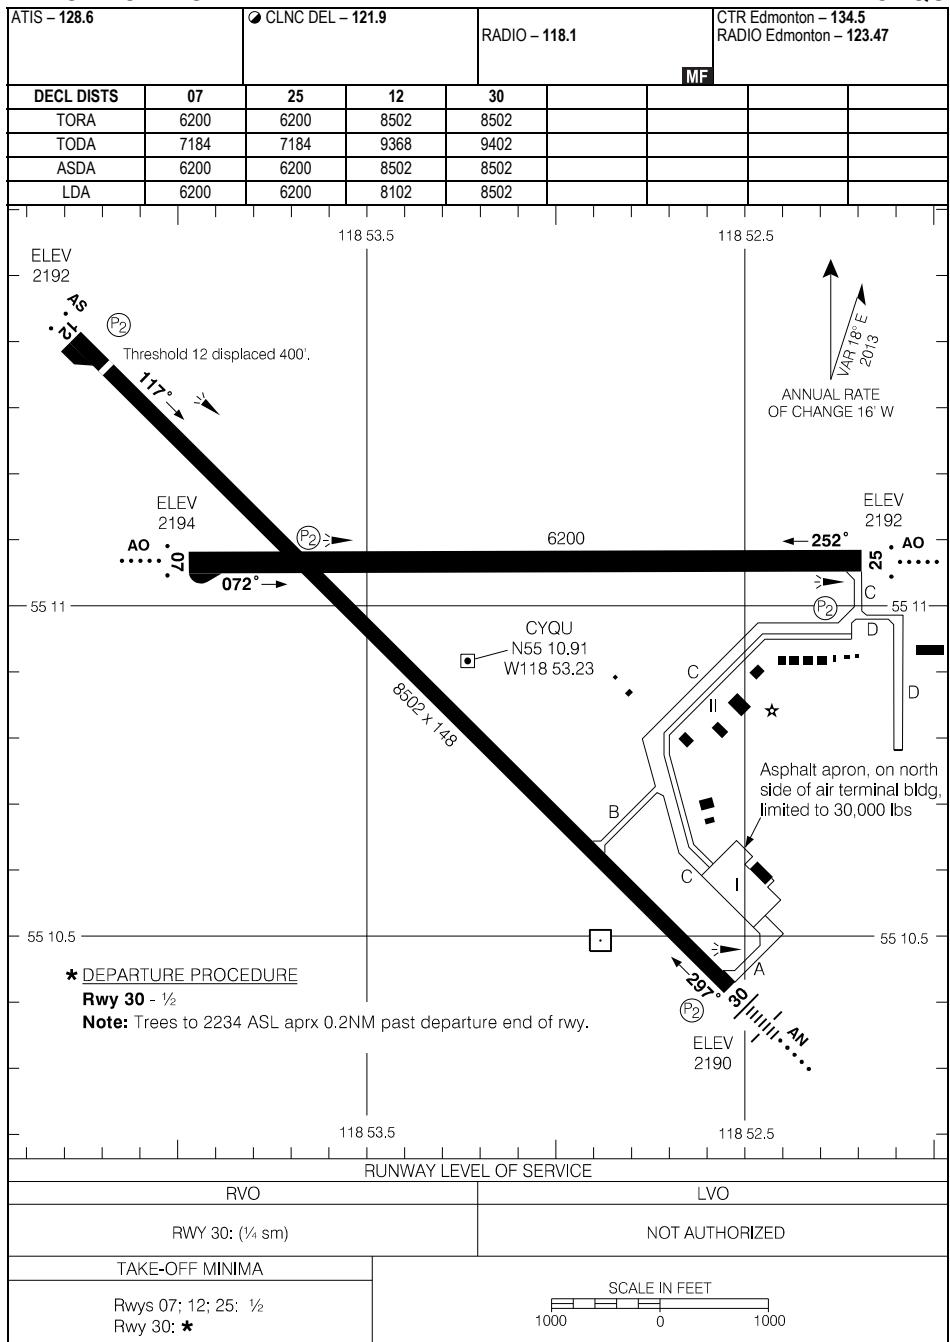

AERODROME CHART

EFF 29 DEC 22

CYQU-AD

CYQU


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

GRAND RAPIDS, MB
CJV8

AERODROME CHART

AUTO - 129.17				UNICOM - 122.8		ATF	
DECL DISTS	13	31					
TORA	3119	3119					
TODA	3119	3119					
ASDA	3119	3119					
LDA	3119	3119					

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

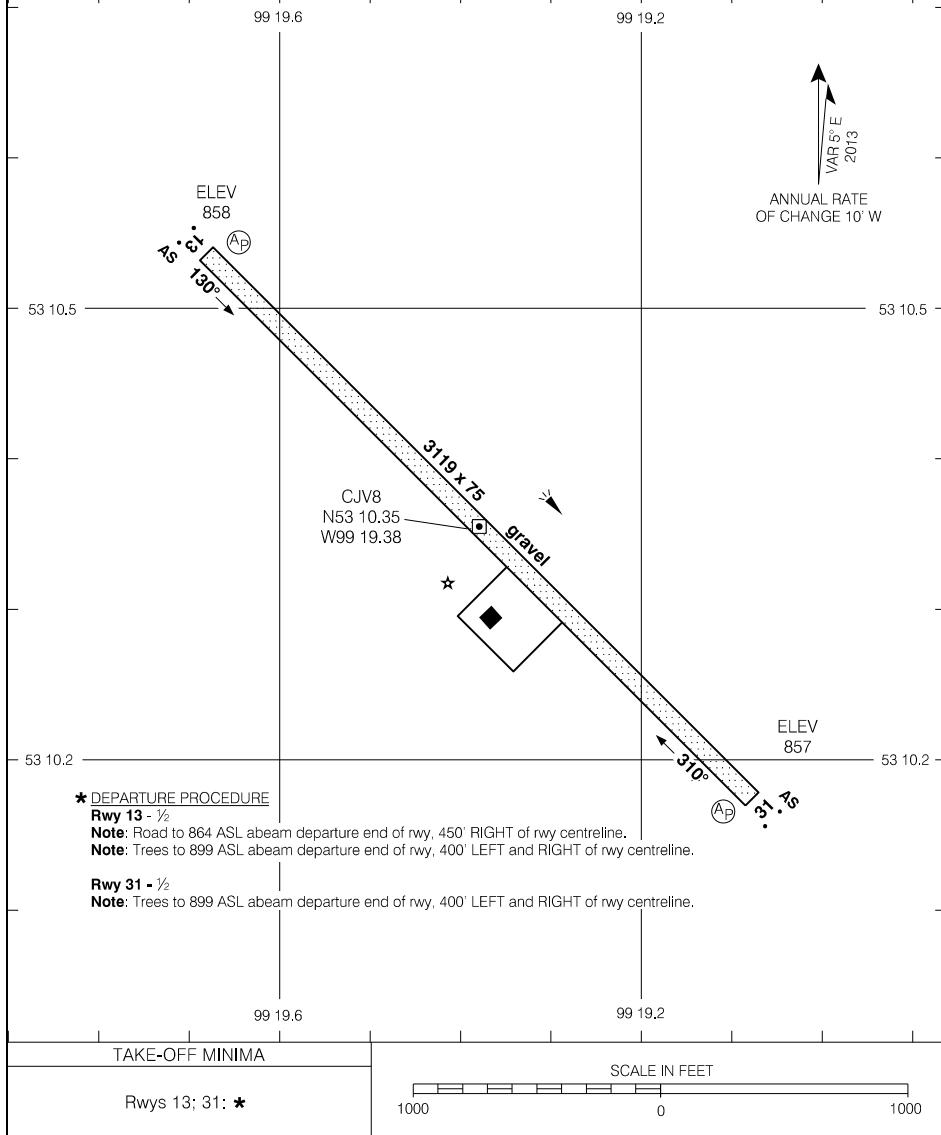

AERODROME CHART


EFF 16 MAY 24

CJV8

CEL4-AD

HANNA, AB
CEL4

AERODROME CHART

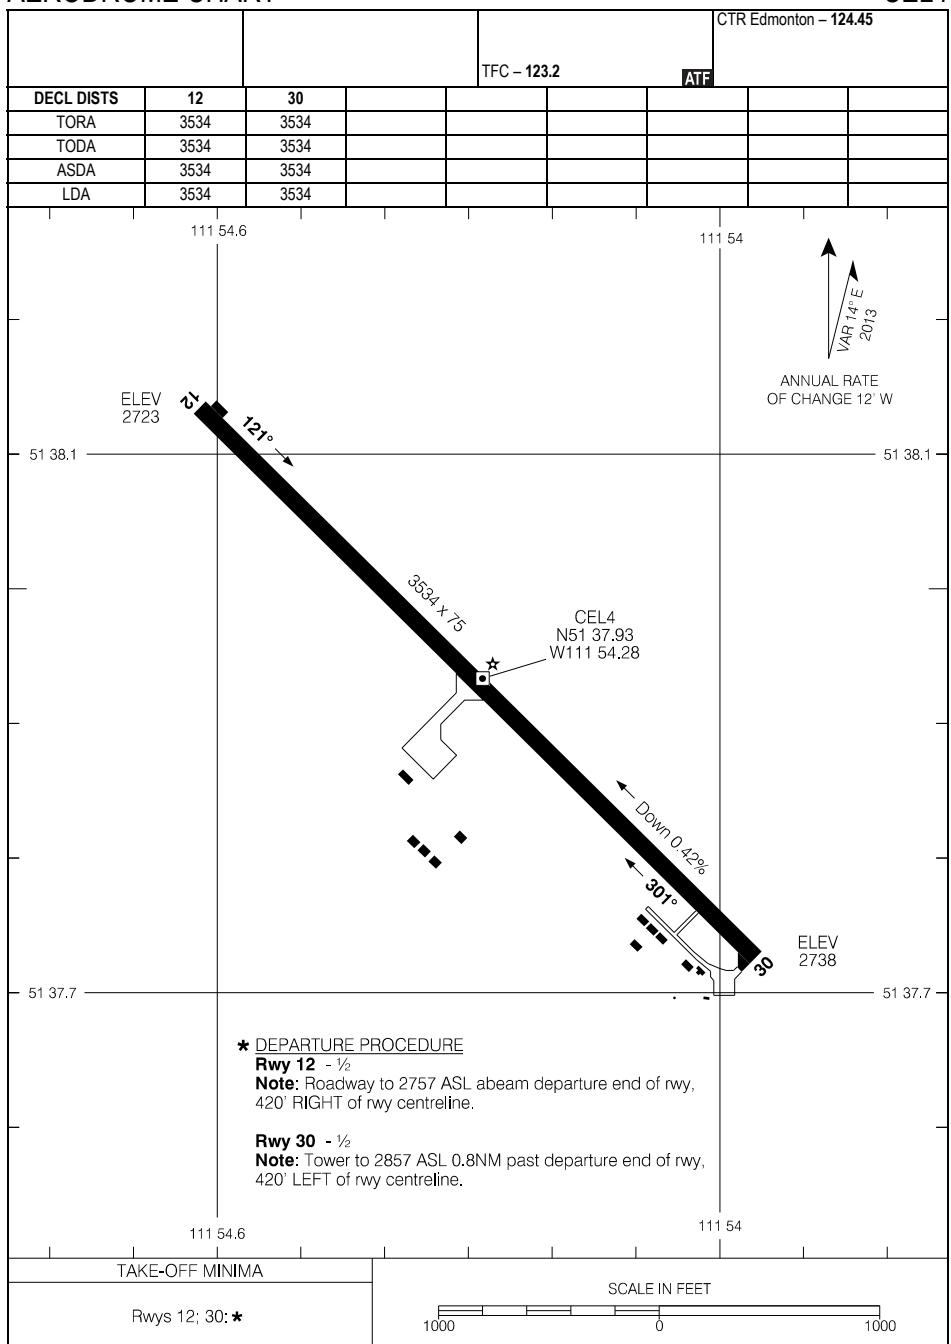

AERODROME CHART

EFF 20 FEB 25


CEL4

CEL4-AD

CEA5-AD

HARDISTY, AB
CEA5

AERODROME CHART

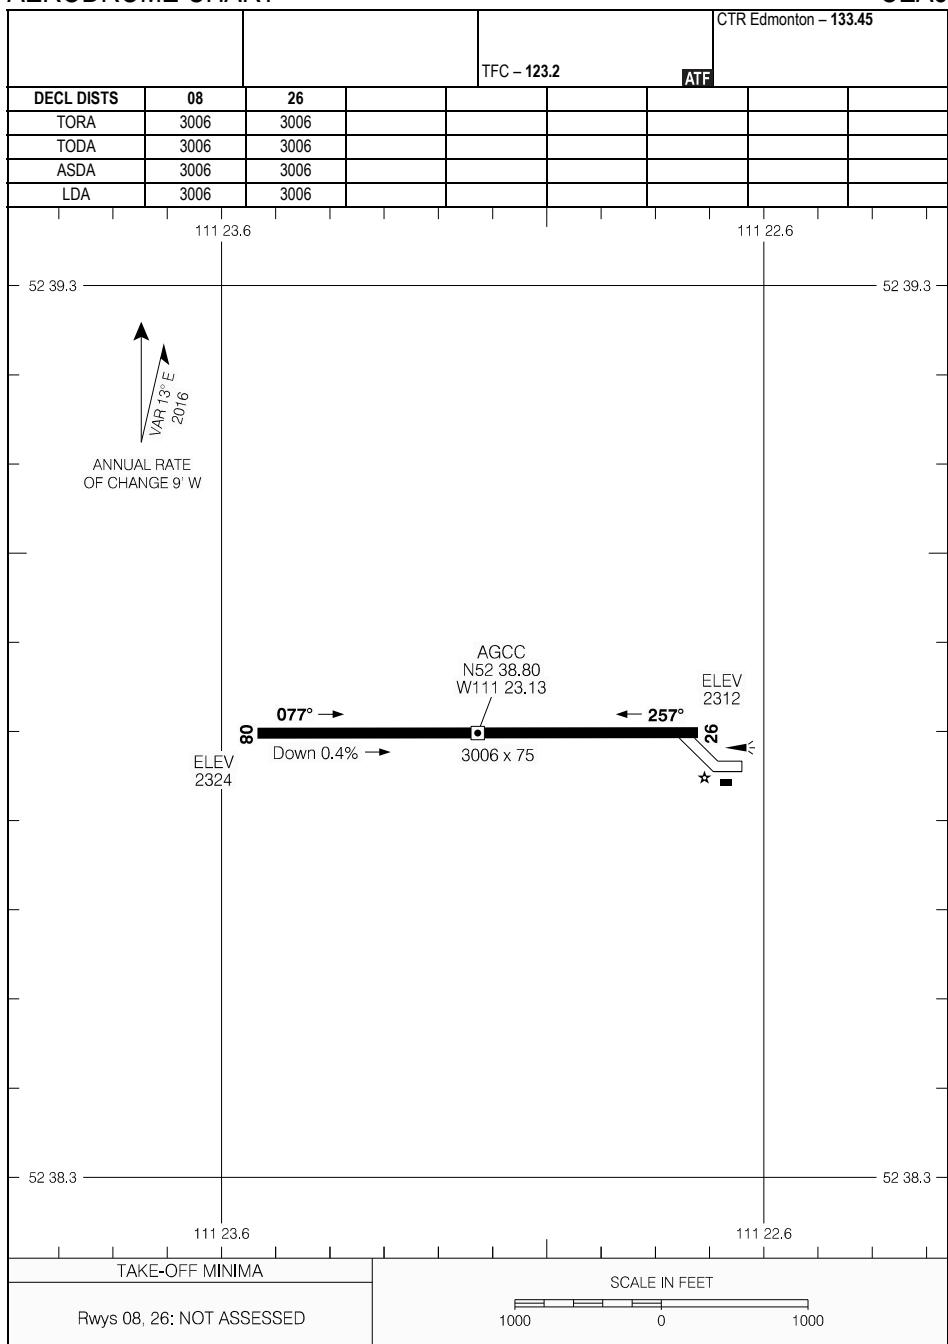

AERODROME CHART

EFF 28 FEB 19

CEA5


CEA5-AD

HATCHET LAKE, SK
CJL2

AERODROME CHART

			<input checked="" type="radio"/> UNICOM - 123.3 (AU)	
				ATF
DECL DISTS	07	25		
TORA	5823	5823		
TODA	5823	5823		
ASDA	5823	5823		
LDA	5823	5823		

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

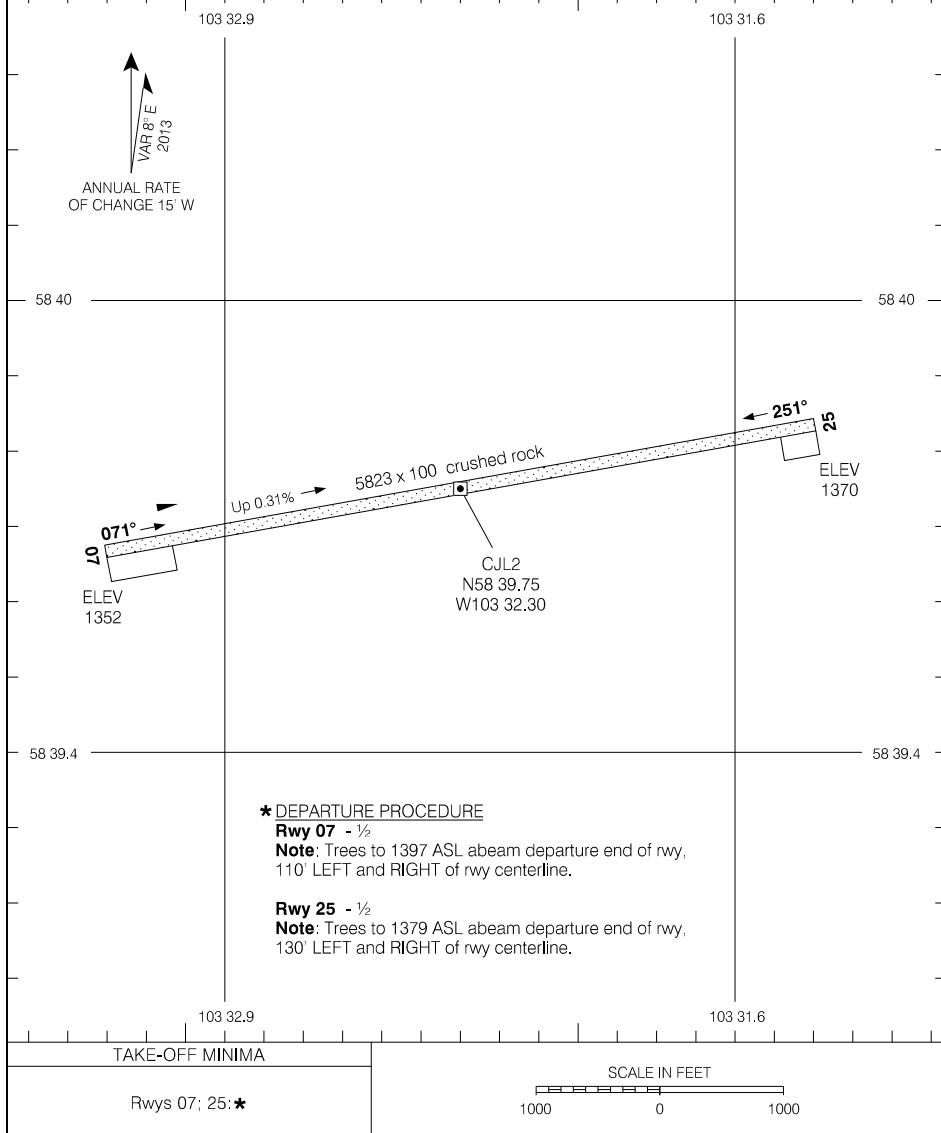

AERODROME CHART

EFF 24 MAR 22

CJL2


CY0J-AD

HIGH LEVEL, AB
CYOJ

AERODROME CHART

● AWOS – 128.22	● CLNC DEL – 135.1	● RADIO – 123.25 ● TFC – 123.25	CTR Edmonton – 123.7 135.1 RADIO Edmonton – 123.37
DECL DISTS	13	31	MF
TORA	5002	5002	
TODA	5888	5986	
ASDA	5002	5002	
LDA	5002	5002	

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

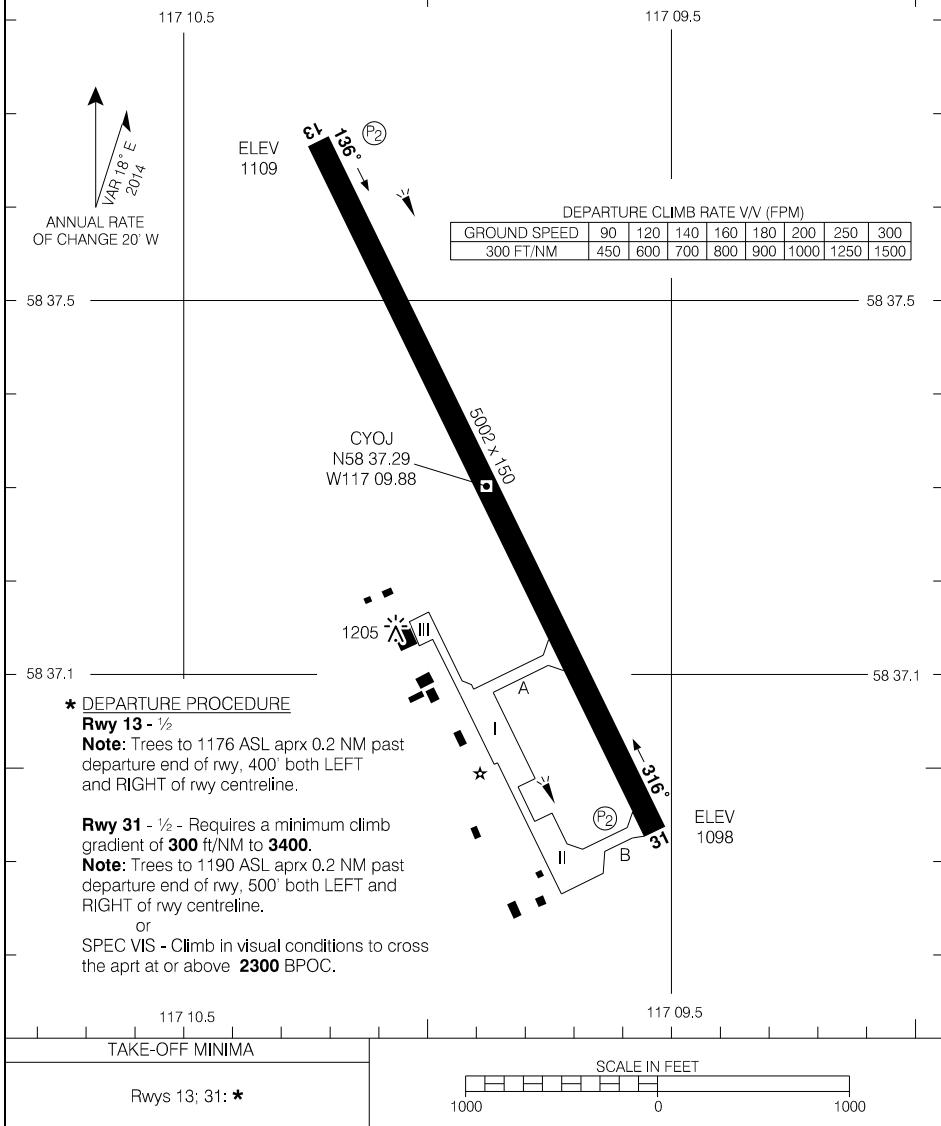

AERODROME CHART


EFF 17 APR 25

CY0J-AD

CZHP-AD

HIGH PRAIRIE, AB
CZHP

AERODROME CHART

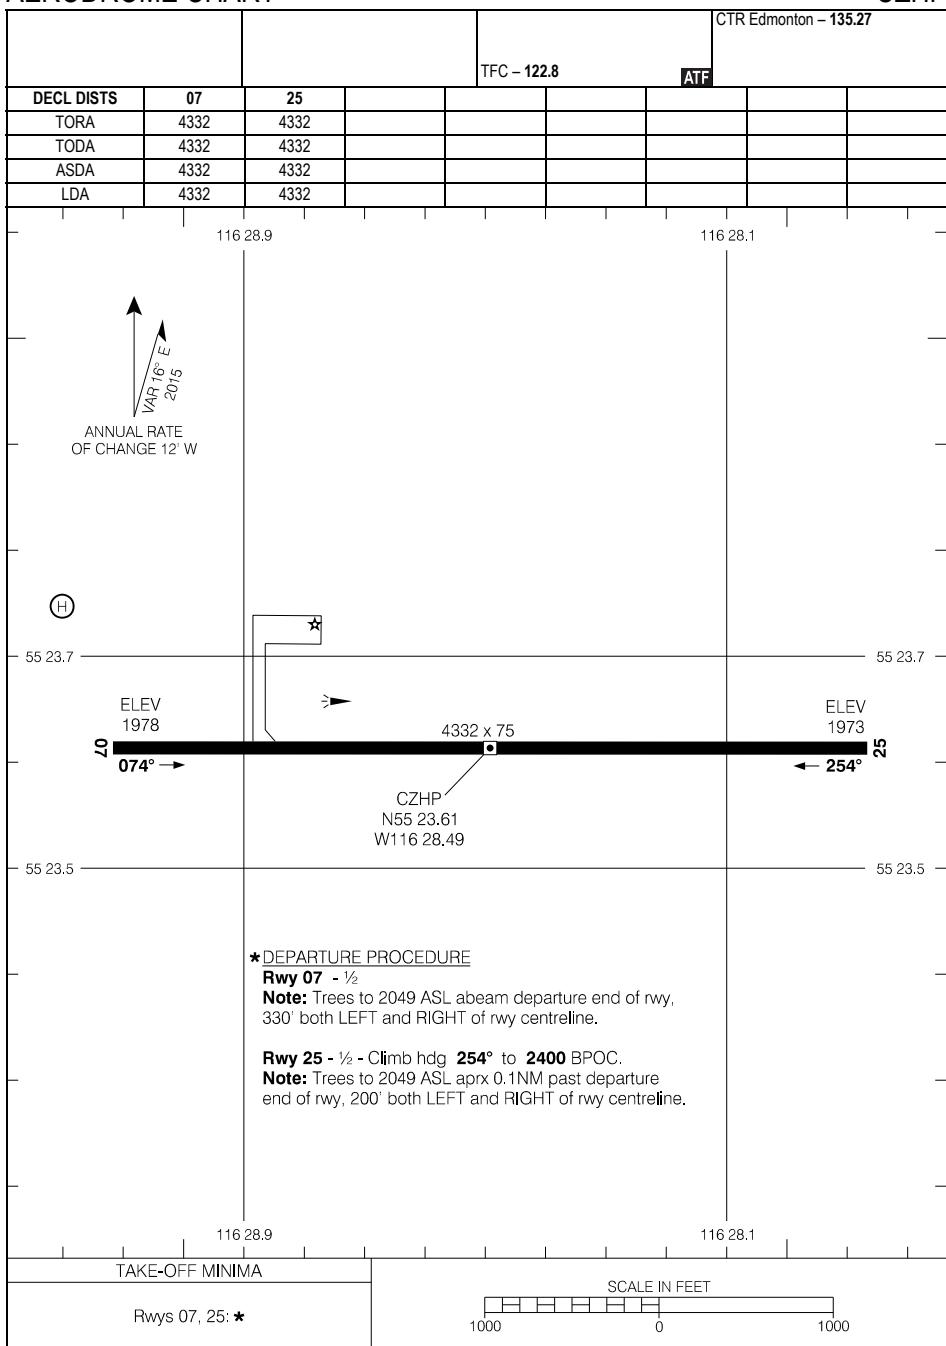

AERODROME CHART

EFF 7 AUG 25

CZHP


CZHP-AD

CEN4-AD

HIGH RIVER/FOOTHILLS REGIONAL AIRPORT, AB

CEN4

AERODROME CHART

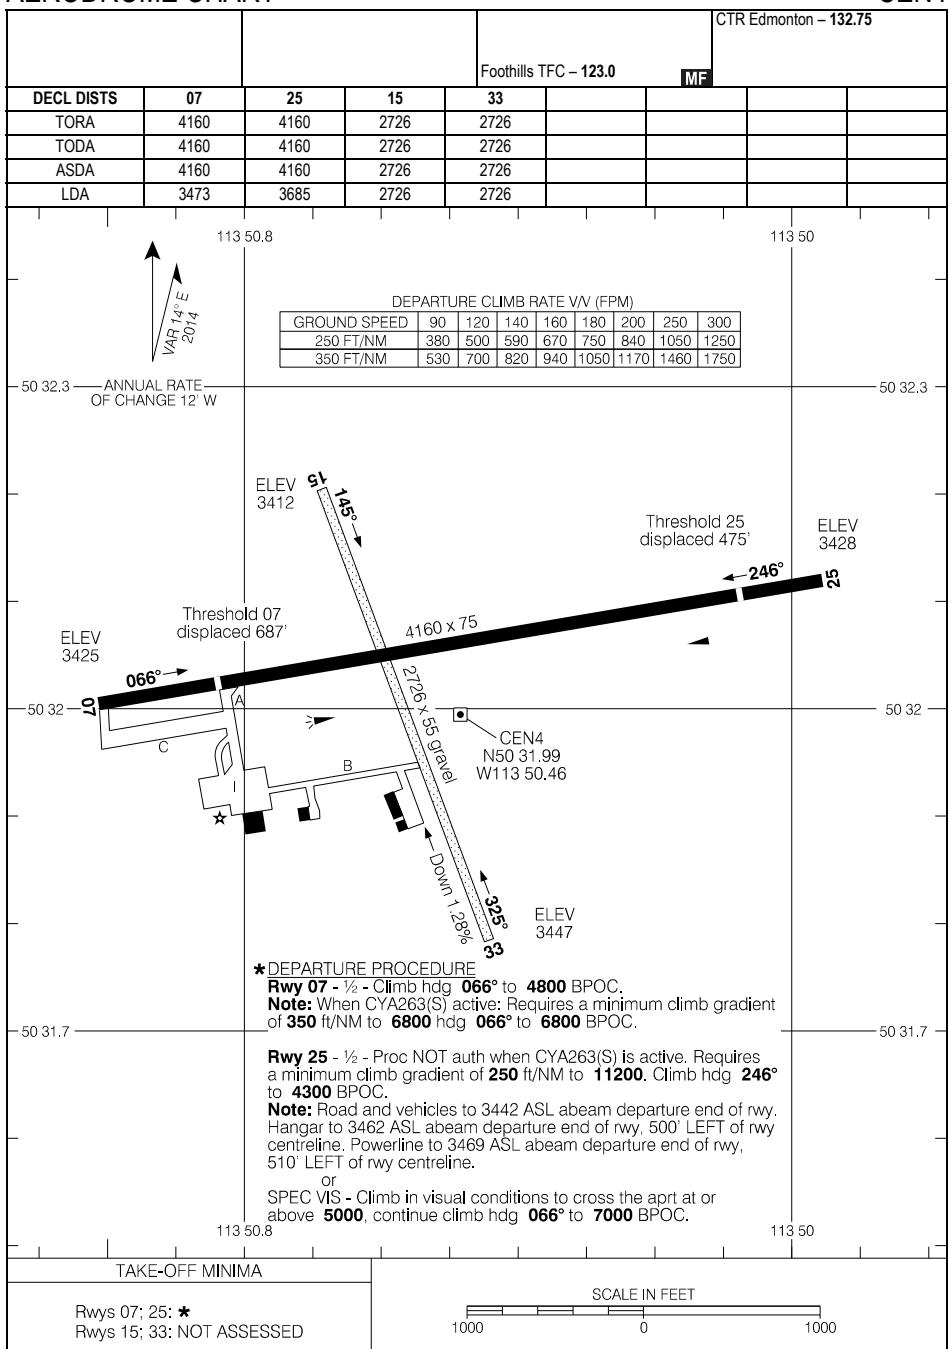


AERODROME CHART

EFF 16 MAY 24

CEN4

CEN4-AD

AERODROME CHART

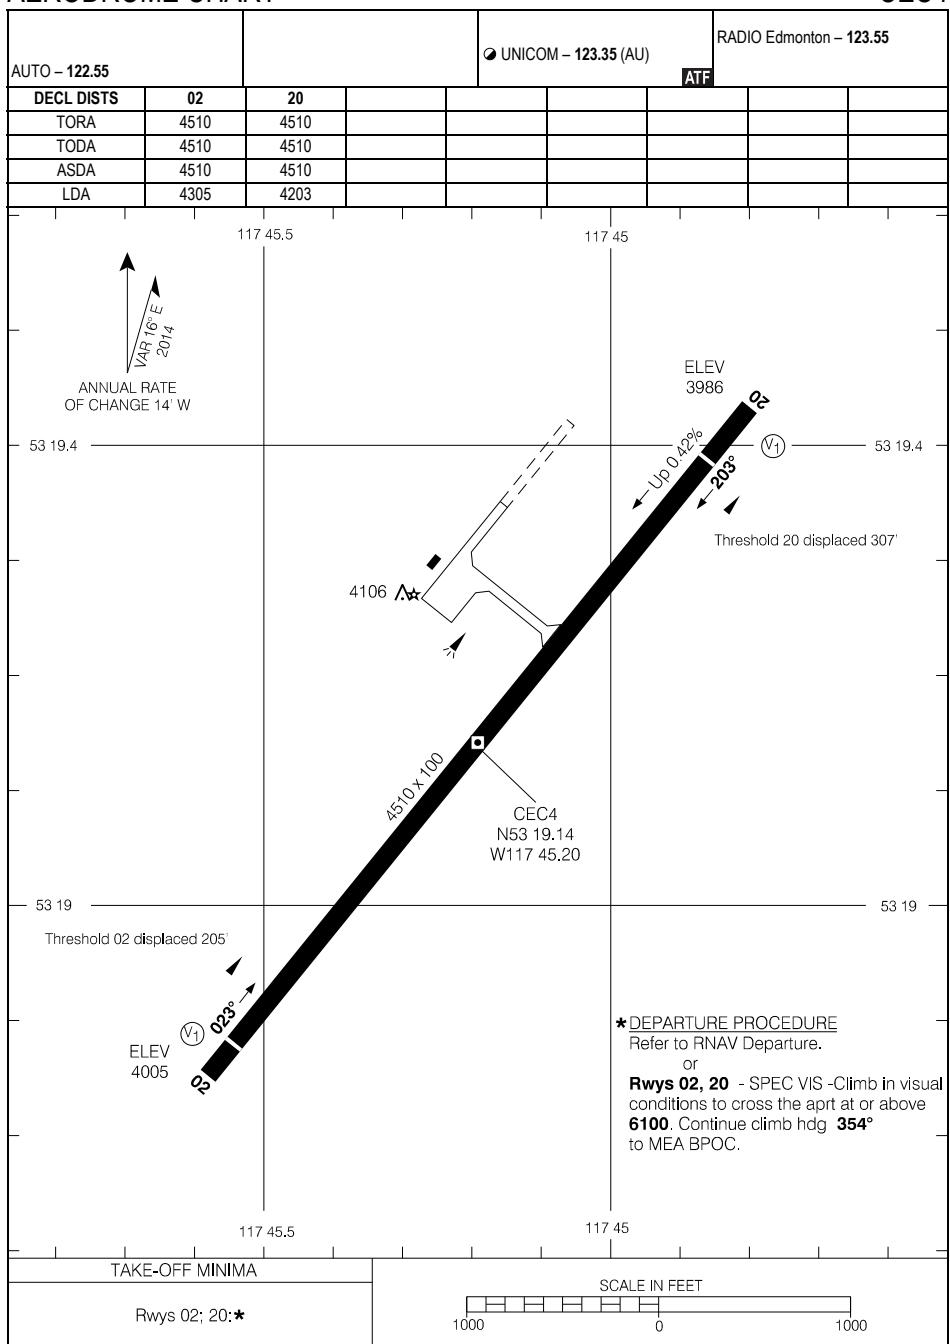

AERODROME CHART


EFF 10 AUG 23

CEC4

CYHB-AD

HUDSON BAY, SK
CYHB

AERODROME CHART

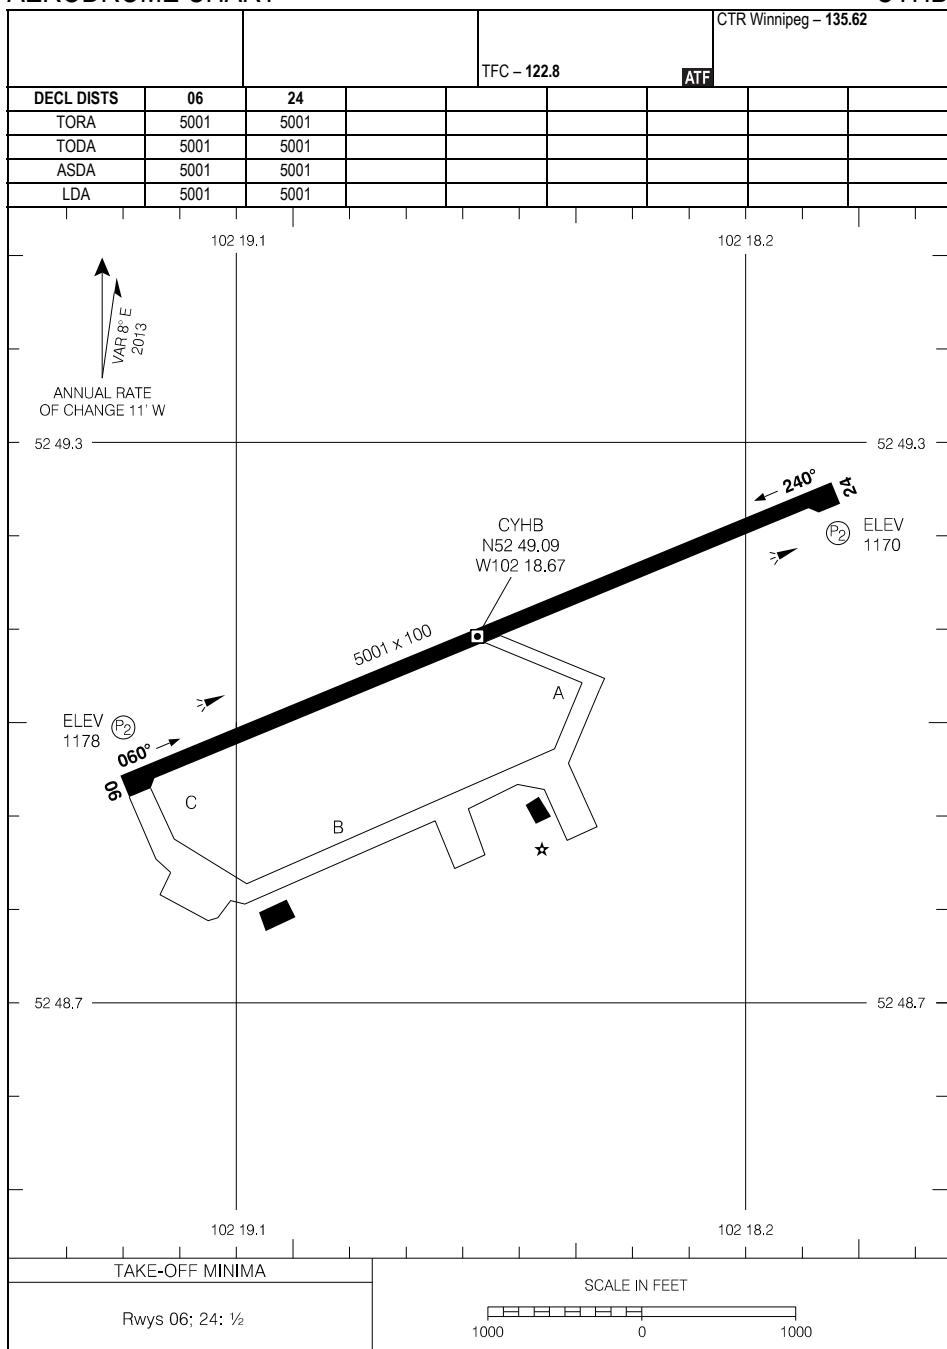


AERODROME CHART

EFF 7 AUG 25

CYHB-AD

CYHB

AERODROME CHART

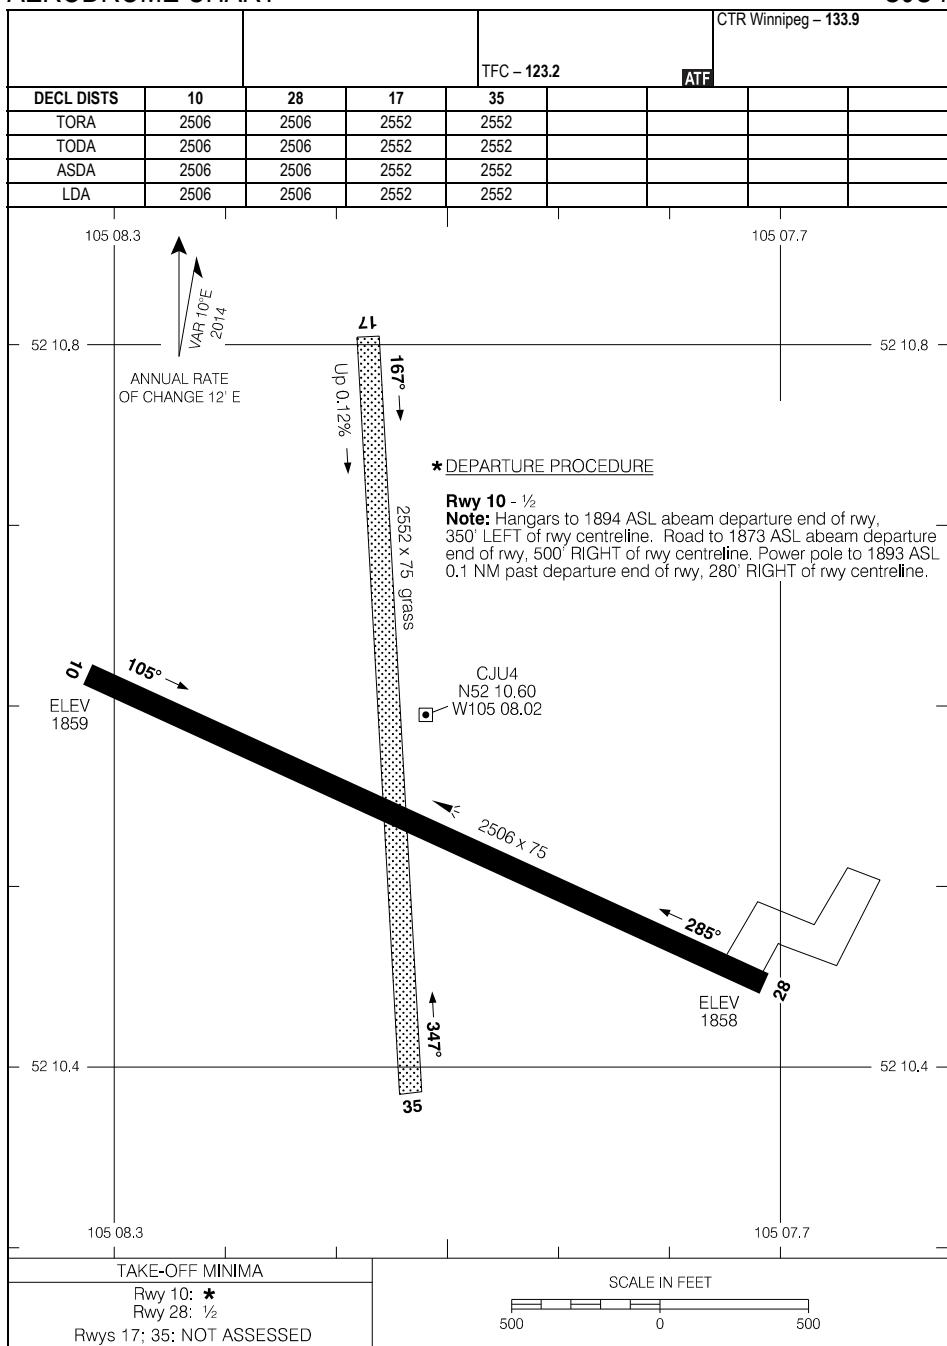


AERODROME CHART

EFF 16 MAY 24

CJU4

AERODROME CHART

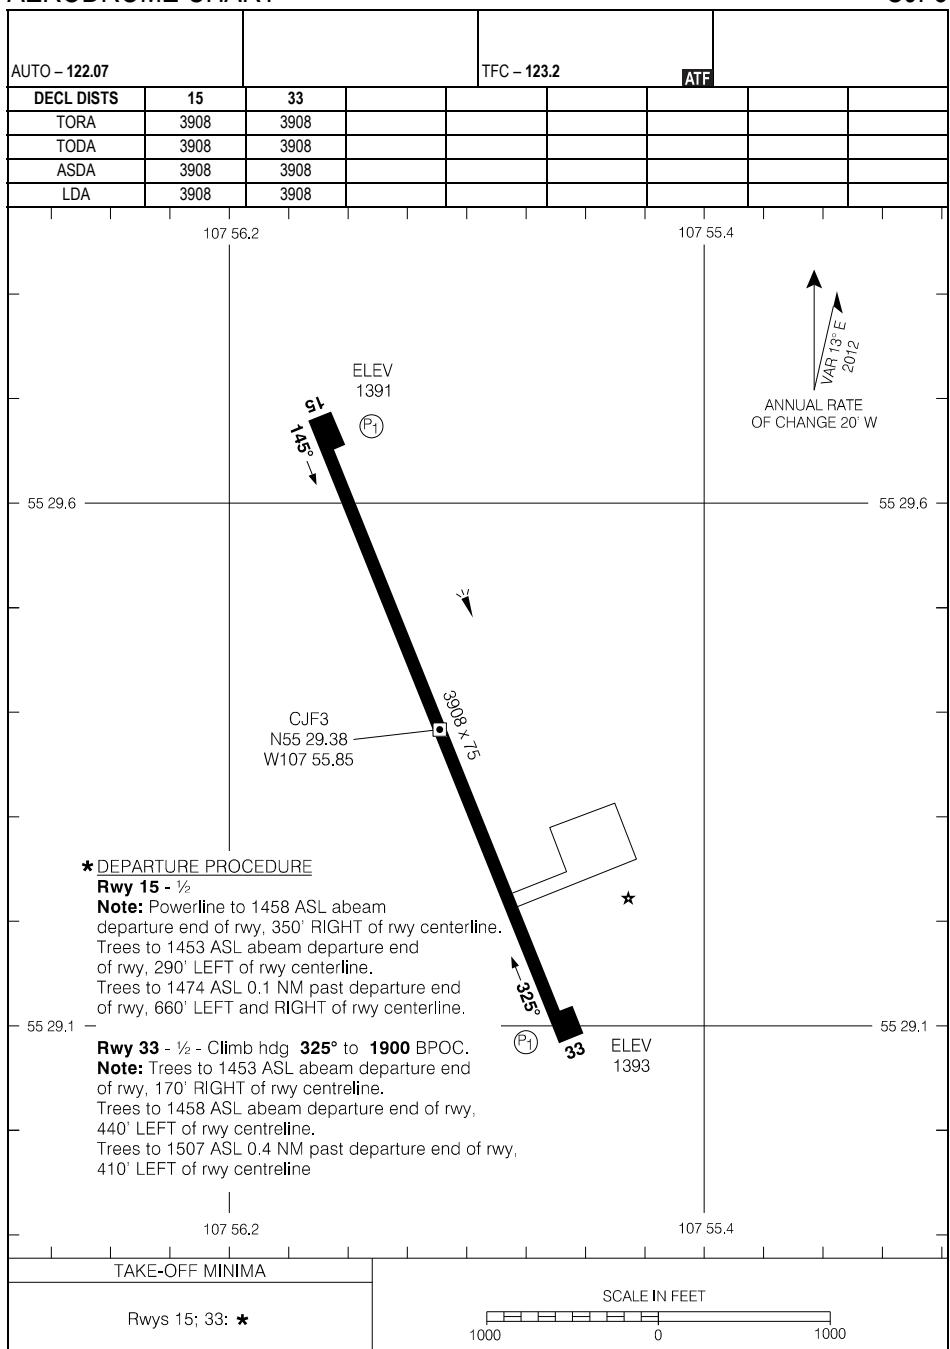

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 11 JUL 24

CZBD-AD

ILFORD, MB
CZBD

AERODROME CHART

CTR Winnipeg – 133.15

AT

95.37.5

95.36

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

ANNUAL RATE
OF CHANGE 8% W

60

ELEV
635

crushed rock

2989 x 75

ELEV
642

ELEV
642

- DEPARTURE PROCEDURE

* **Rwy 09** - $\frac{1}{2}$ - Climb between hdg **062°** CW to **018°** to remain clear of blasting area aprx 22NM NE to **5500**

Note: Trees to 699 ASL within 0.2NM of departure end of rwy

Note: Fees to 099 ASE within 0.2NM of departure end of Iwy.

Rwy 27 - $\frac{1}{2}$ - Climb between hdg **018°** CCW to **062°** to remain clear of blasting area aprx 22NM NE to **5500**.

Note: Trees to 676 ASL within 0.3NM of departure end of rwy.

95 37.5

95 36.

TAKE-OFF MINIMA

Rwys 09, 27: *

SCALE IN FEET

A horizontal number line starting at -500 and ending at 500. It has tick marks at intervals of 100. The origin is marked with 0. The tick marks are labeled -500, 0, and 500.

AERODROME CHART

EEE 16.III.20


GZBD

CZBD-AD

CYIV-AD

ISLAND LAKE, MB
CYIV

AERODROME CHART

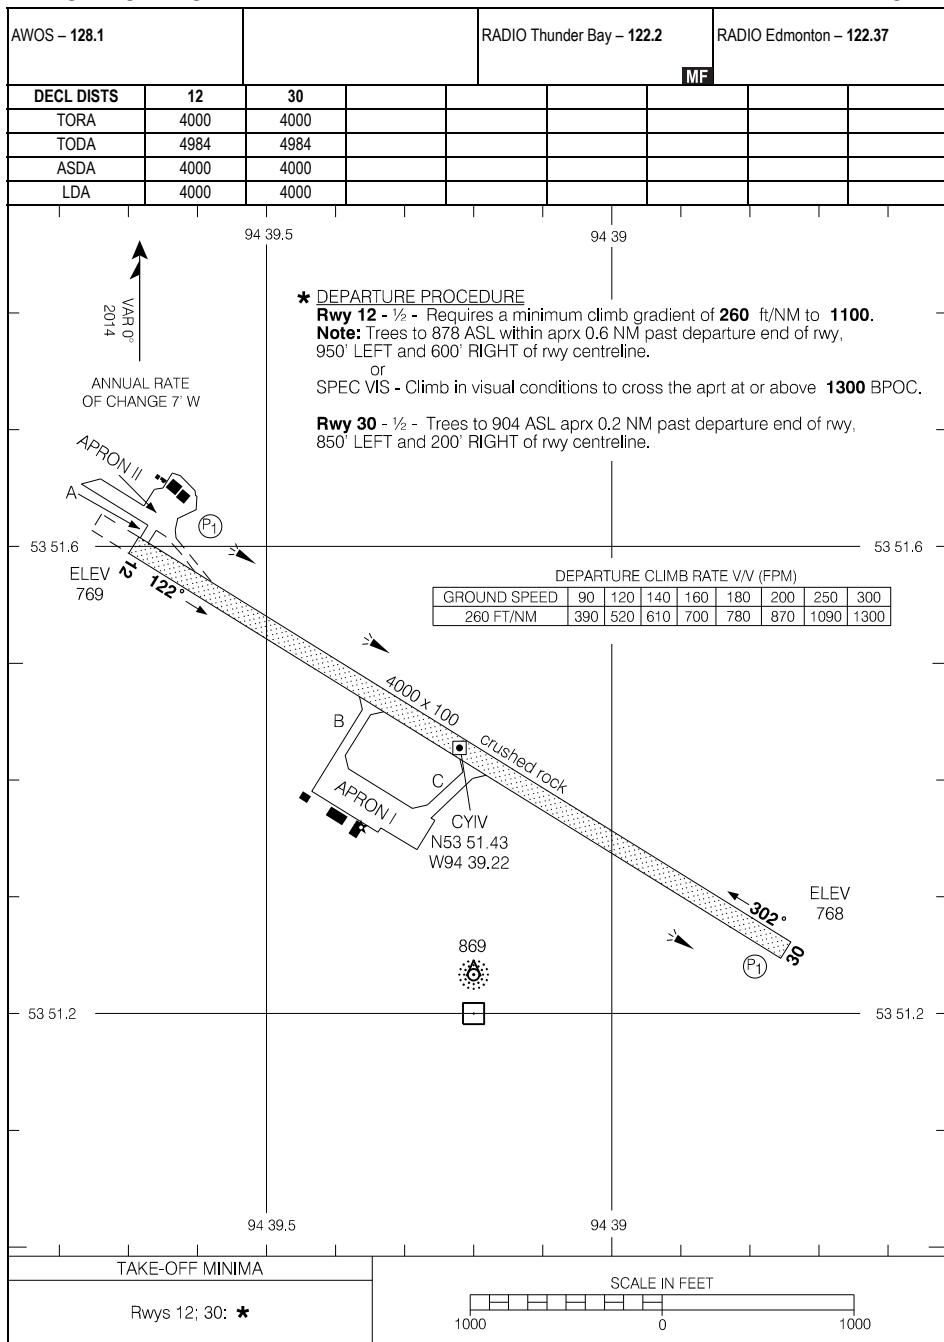


AERODROME CHART

EFF 24 MAR 22

CYIV

CYIV-AD

AERODROME CHART

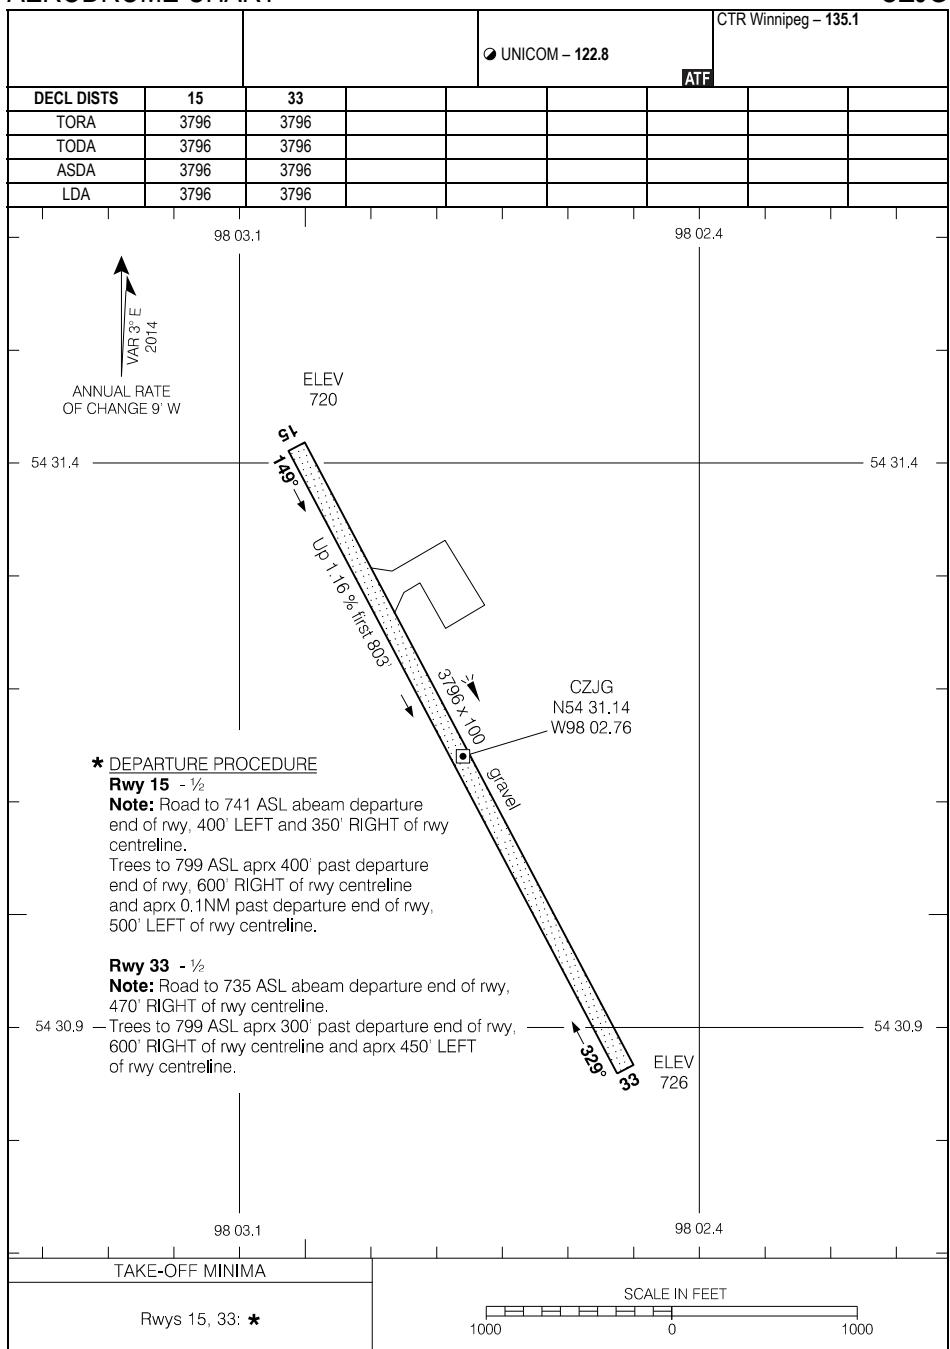

AERODROME CHART


EFF 5 SEP 24

CZJG

CZEE-AD

KELSEY, MB
CZEE

AERODROME CHART

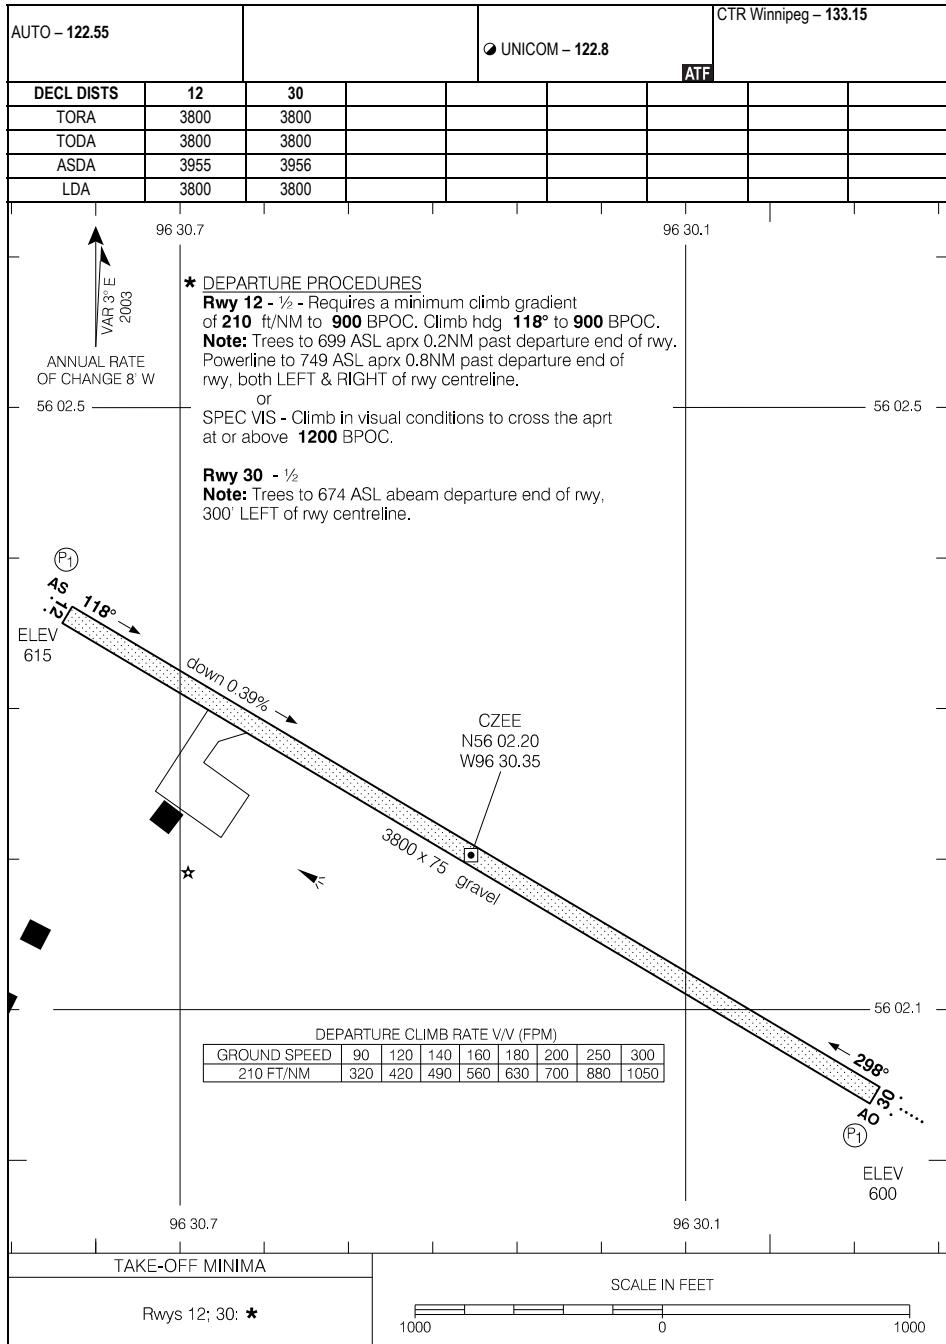

AERODROME CHART

EFF 14 JUL 22

CZEE-AD

CZEE

CYKJ-AD

KEY LAKE, SK
CYKJ

AERODROME CHART

AUTO - 127.7

UNICOM – 122.7

RADIO Edmonton – 123.37 DRCO

105 37.4

105 36,6

2013 10°E

ANNUAL RATE
OF CHANGE 15' W

- 57 15.6

57 15.6

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

*DEPARTURE PROCEDURE

Rwy 03 - ½ - Requires a minimum climb gradient of 340 ft/NM to 2000.

Note: trees to 1706 ASL 0.1
370' LEFT of rwy centreline.

or
SPEC VIS - Climb in visual conditions to cross airport
at or above **2300** BPOC.

Rwy 21 - ½ - Climb hdg 213° to 2200 BPOC.

Note: Trees and terrain to 1825 ASL 0.9 NM past departure end of rwy, 1220' LEFT and 1310' RIGHT of rwy centreline.

DEPARTURE CLIMB RATE V/V (FPM)								
GROUND SPEED	90	120	140	160	180	200	250	300
340 FT/NM	510	680	800	910	1020	1140	1420	1700

105 37.4

105 36,6

TAKE-OFF MINIMA

SCALE IN FEET

A horizontal number line representing integers from -1000 to 1000. The line has major tick marks at intervals of 100, labeled -1000, 0, and 1000. Between each major tick mark, there are ten smaller tick marks, representing increments of 10. The origin is explicitly marked with a vertical line at 0.

AERODROME CHART

EFF 23 FEB 23


CYKJ

CYKJ-AD

CEK6-AD

KILLAM-SEDGEWICK/FLAGSTAFF REGIONAL, AB
CEK6

AERODROME CHART

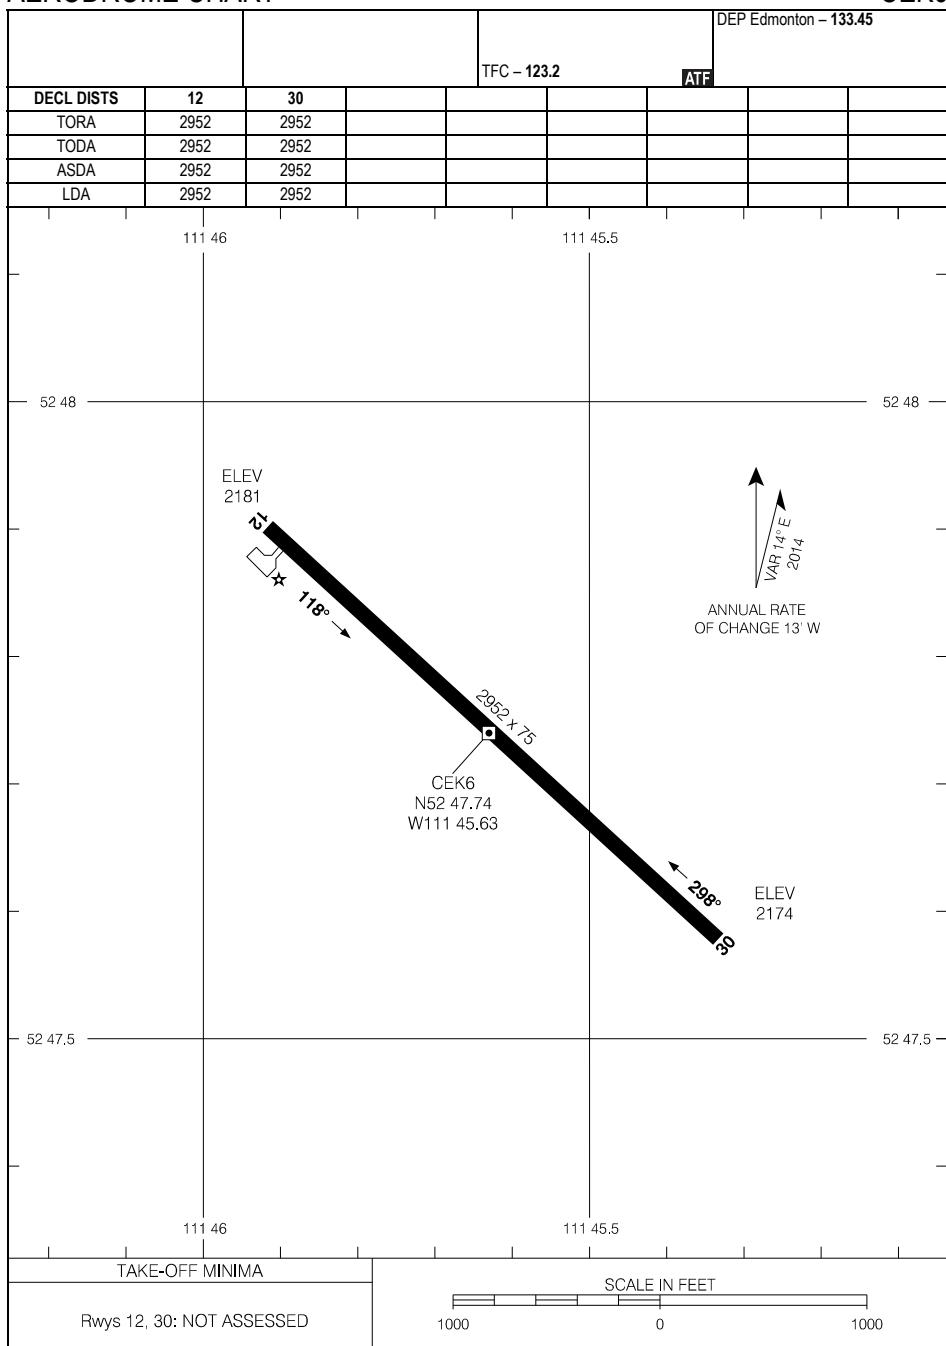

AERODROME CHART

EFF 16 JUL 20


CEK6-AD

CEK6

CYKY-AD

KINDERSLEY REGIONAL, SK
CYKY

AERODROME CHART

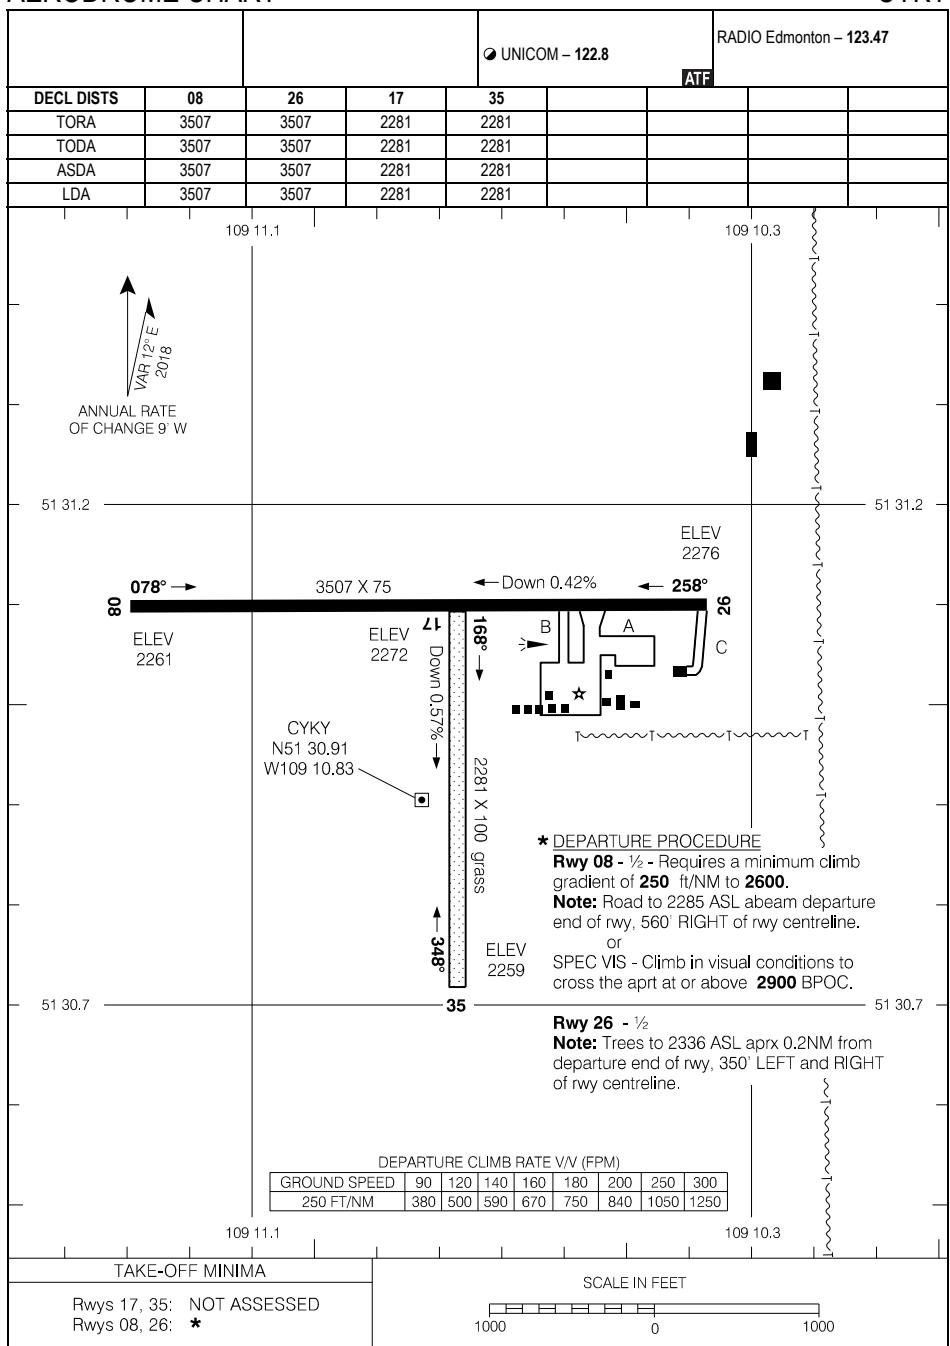


AERODROME CHART

EFF 26 DEC 24

CYKY-AD

CYKY

AERODROME CHART

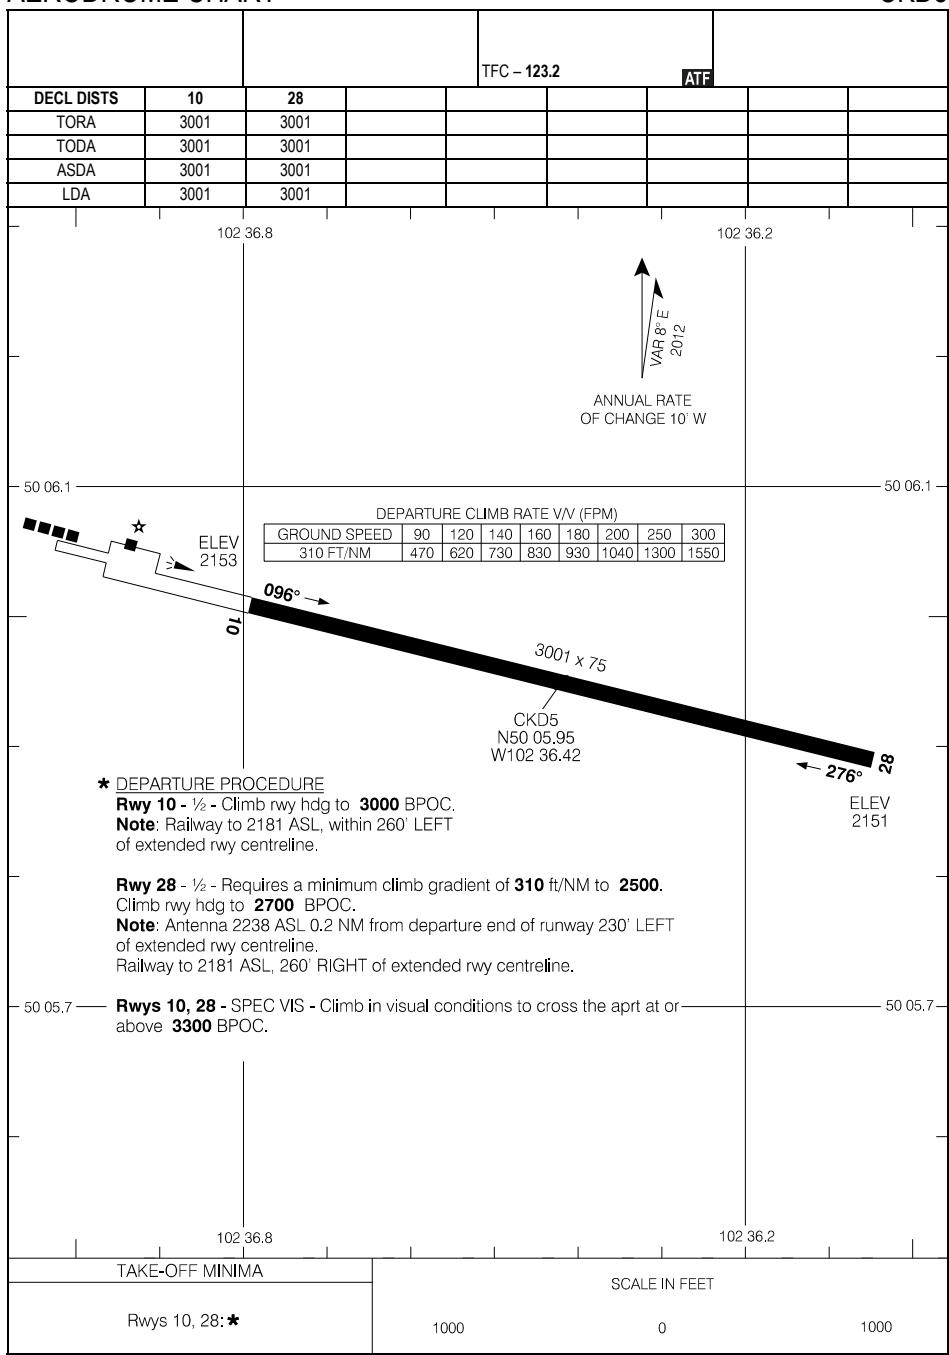

AERODROME CHART


EFF 7 AUG 25

CKD5

CFN5-AD

LA CRETE (JAKE FEHR MEMORIAL) AB
CFN5

AERODROME CHART

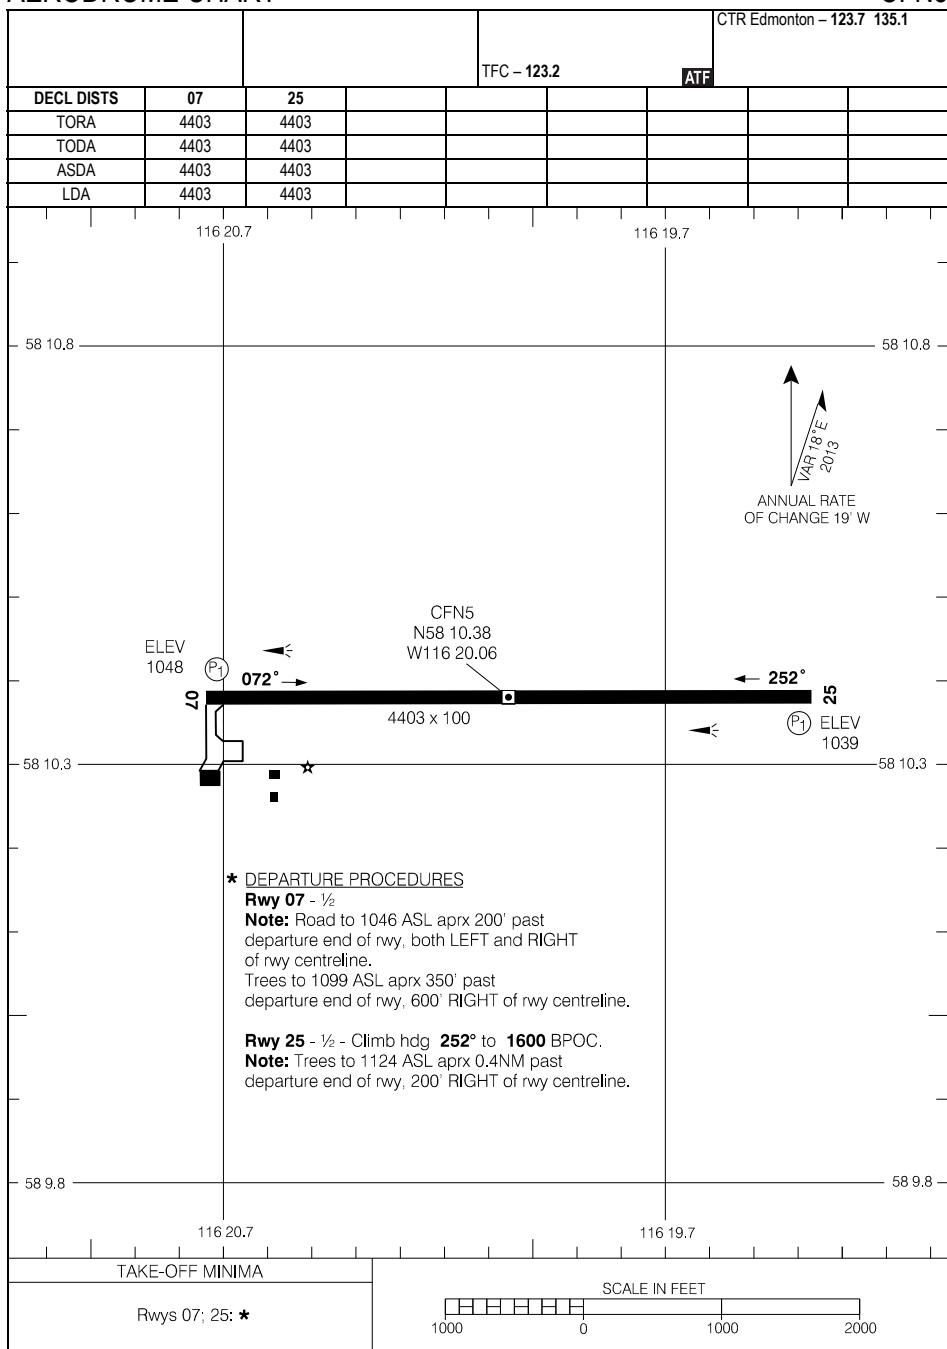

AERODROME CHART

EFF 7 AUG 25


CFN5

CFN5-AD

CYVC-AD

LA RONGE (BARBER FIELD), SK
CYVC

AERODROME CHART

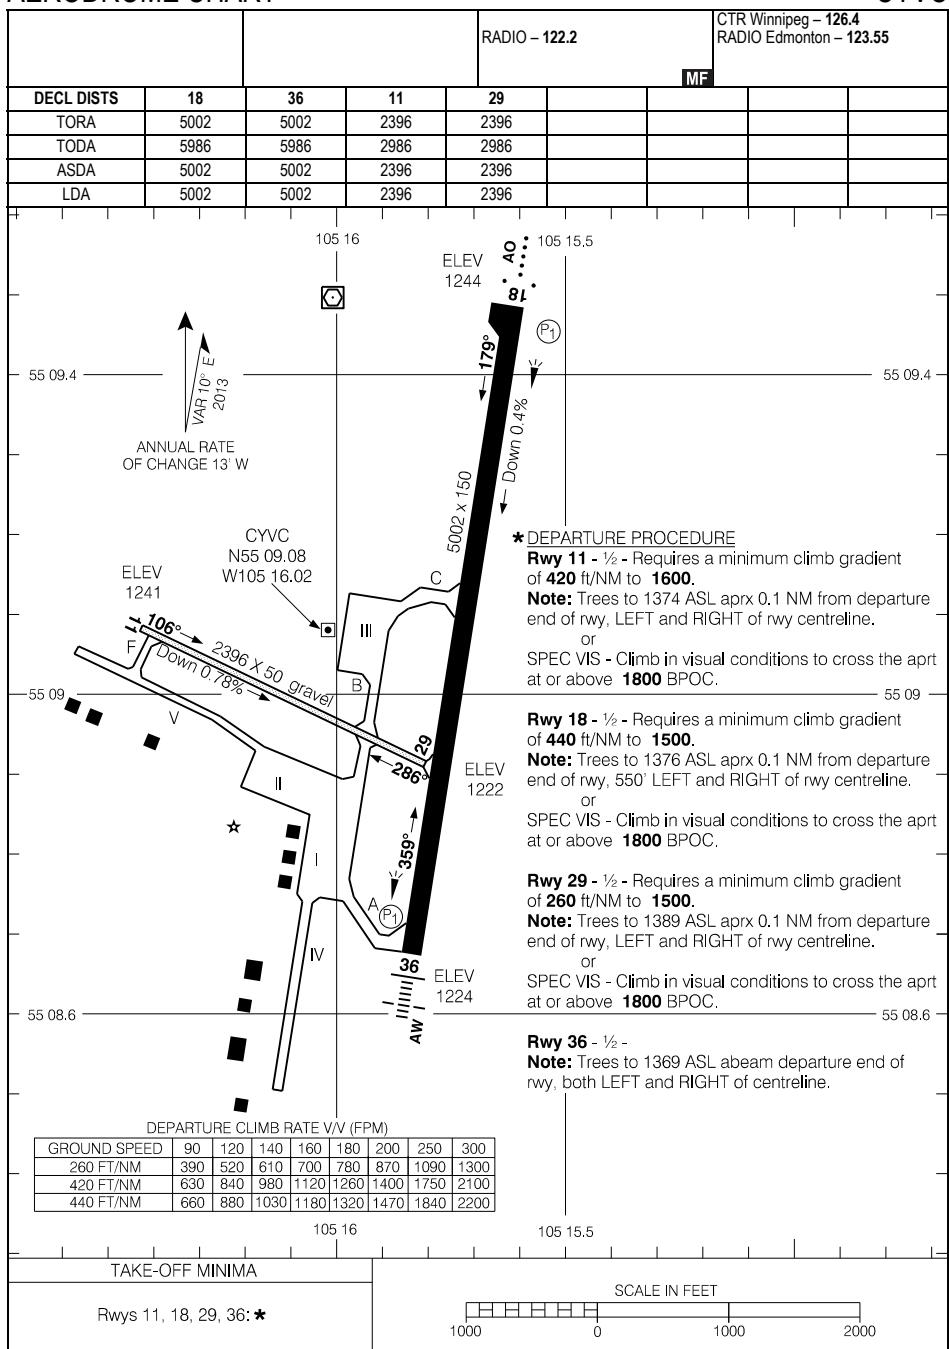

AERODROME CHART

EFF 20 FEB 25


CYVC-AD

CYVC

CZWH-AD

LAC BROCHET, MB
CZWH

AERODROME CHART

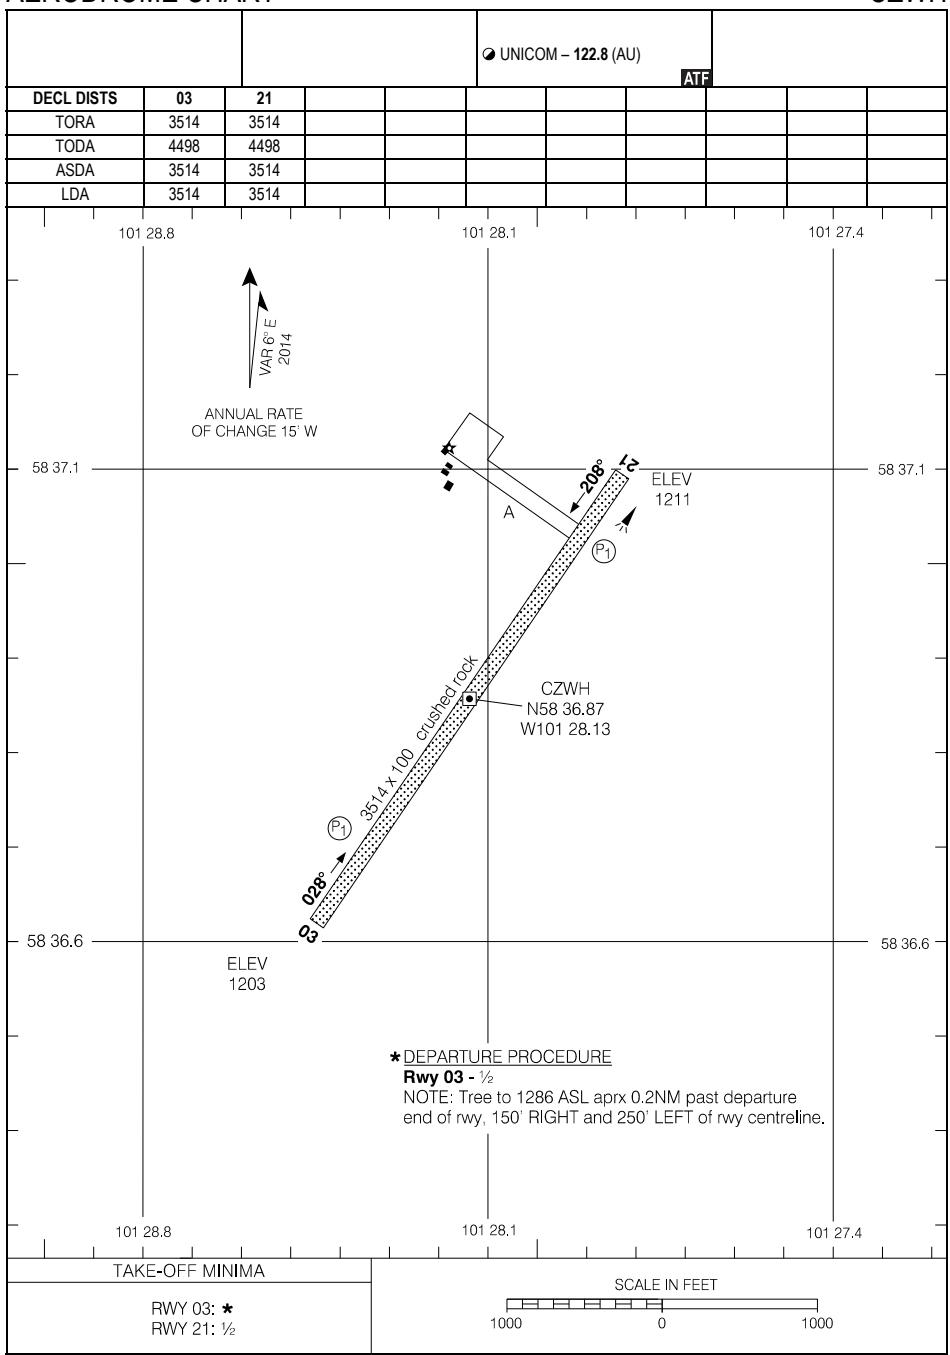

AERODROME CHART


EFF 20 FEB 25

CZWH-AD

CYAX-AD

LAC DU BONNET, MB
CYAX

AERODROME CHART

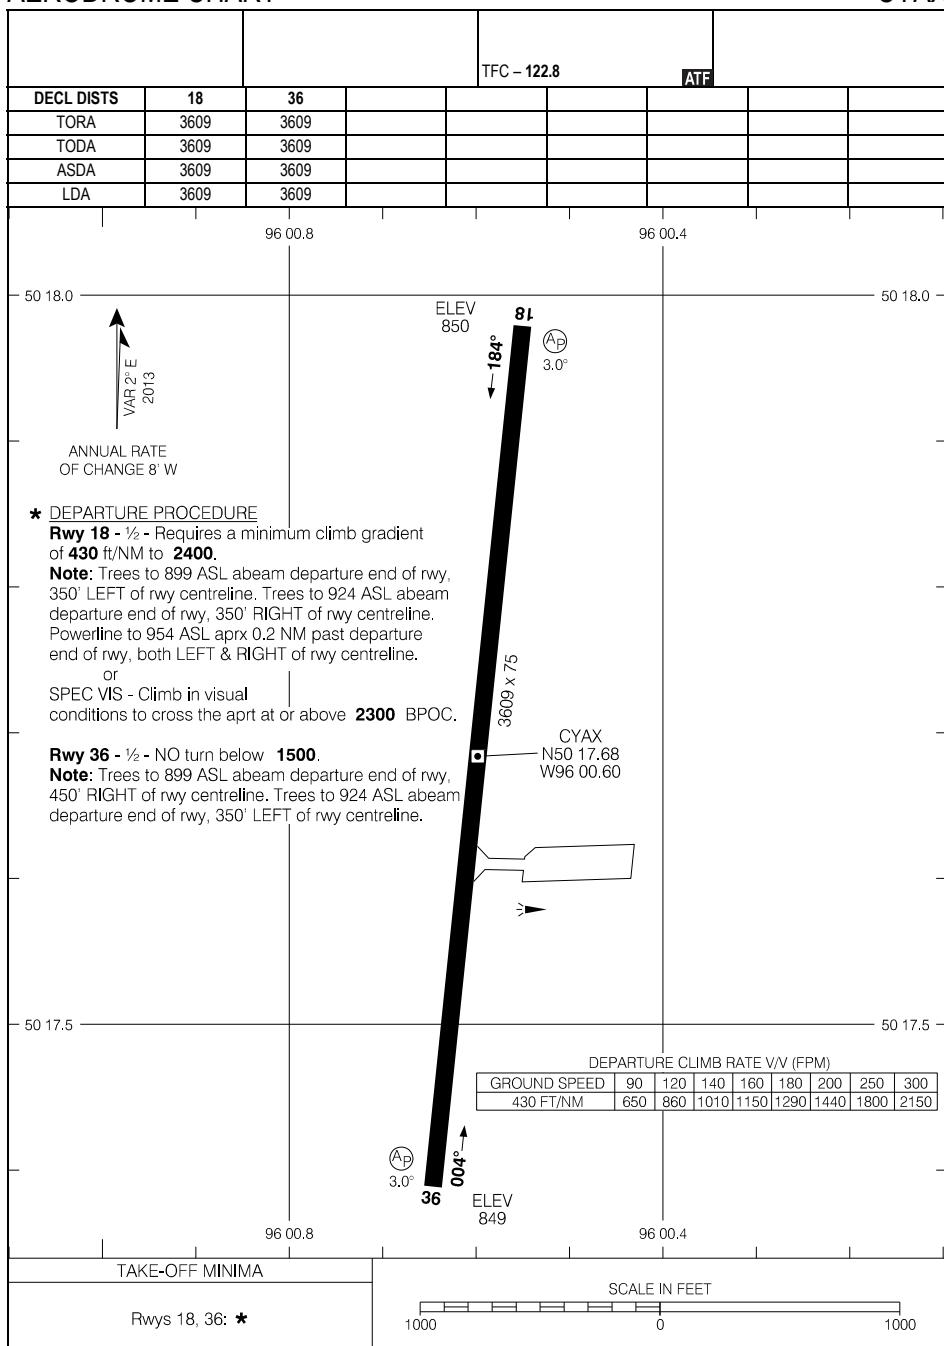

AERODROME CHART

EFF 16 MAY 24

CYAX

CYAX-AD

CYLB-AD

LAC LA BICHE, AB
CYLB

AERODROME CHART


AUTO - 122.12

TFC - 123.2

1

RADIO Edmonton – 123.47

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

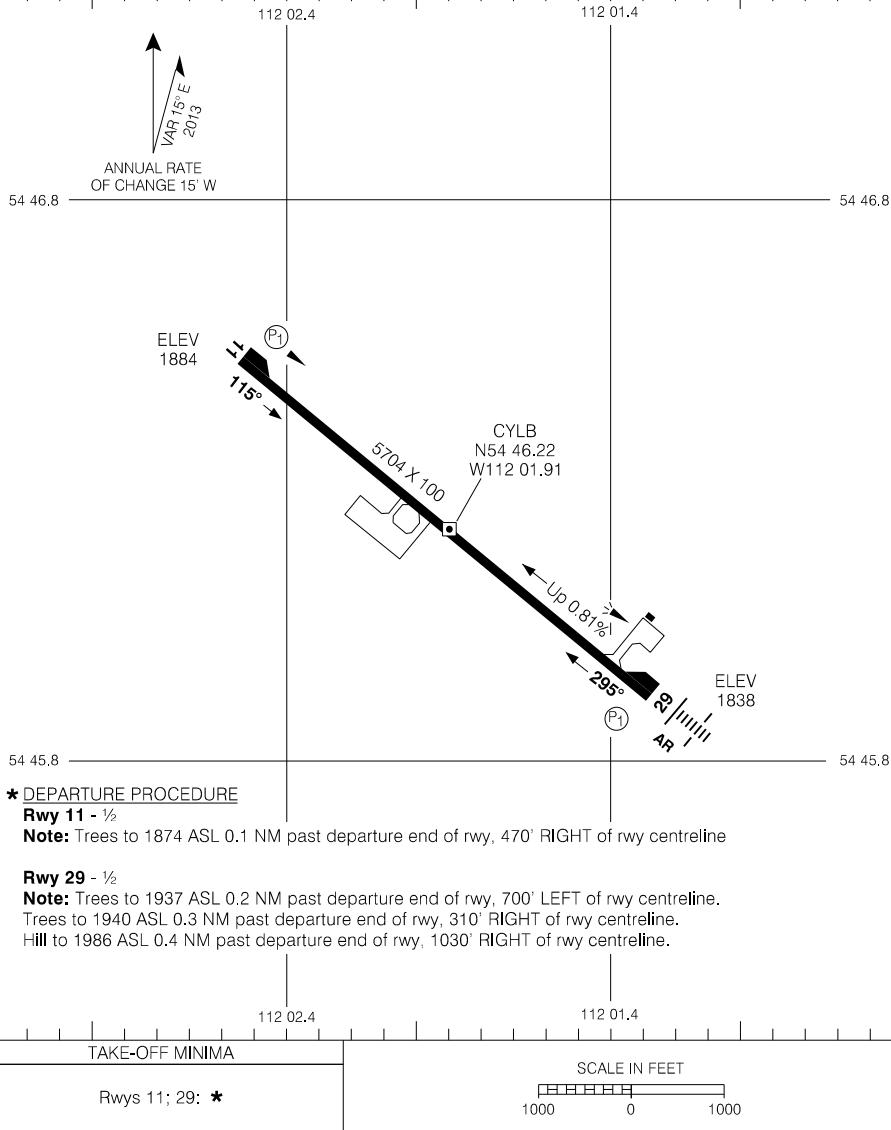

AERODROME CHART

EFF 17 APR 25

CYL B-AD

CYLB

CEG3-AD

LACOMBE, AB
CEG3

AERODROME CHART

ATIS Red Deer - 124.0		● UNICOM - 123.3		CTR Edmonton - 132.85	
DECL DISTS	17	35			ATF
TORA	3004	3004			
TODA	3004	3004			
ASDA	3004	3004			
LDA	3004	3004			

52 29.6 113 43 ELEV 2784 113 42.5 52 29.6



ELEV 2784

17
165° →
Down 0.4% →
3004 x 74

CEG3
N52 29.31
W113 42.71


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

* DEPARTURE PROCEDURE

Rwy 17 - $\frac{1}{2}$ NO LEFT turn below **3600**.
Note: Hangar line to 2805 ASL abeam
 departure end of rwy, 250' RIGHT of rwy
 centreline. Trees to 2837 ASL 0.2 NM past
 departure end of rwy, 500' RIGHT of rwy centreline.
 Road lights to 2822 ASL 0.1 NM past
 departure end of rwy, 400' LEFT of rwy centreline.

Rwy 35 - $\frac{1}{2}$

Note: Trees to 2794 ASL 0.1 NM past
 departure end of rwy.

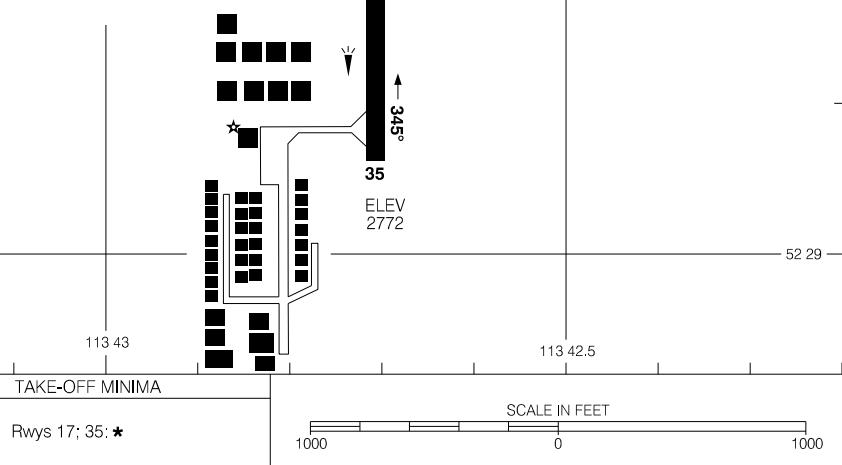

AERODROME CHART

EFF 3 NOV 22

CEG3

CEG3-AD

AERODROME CHART

● ATIS - 124.4				● RADIO - 121.0		CTR Edmonton - 132.75 265.2 RADIO Edmonton - 123.47	
● AWOS - 124.4				● TFC - 121.0		MF	
DECL DISTS	06	24	13	31			
TORA	6500	6500	5500	5500			
TODA	7484	7484	6484	6484			
ASDA	6500	6500	5500	5500			
LDA	6500	6500	5500	5500			

* DEPARTURE PROCEDURE

Rwy 06 - $\frac{1}{2}$ - Climb between hdg **070°** CCW to **222°** to remain clear of CYA210, CYR236, CYR251 and CYR252.

Rwy 13 - $\frac{1}{2}$ - Departure not auth when CYR234, CYR236, CYR251 or CYR252 active. Climb between hdg **155°** CCW to **222°** to remain clear of CYA210.

or

When CYR234, CYR236, CYR251 or CYR252 active:
Climb hdg **126°** to **3500**. Then climbing LEFT turn direct to "YQL" VOR.
As required shuttle climb INRD **R-158** to MFA BPOC.


Rwy 24 - ½ - Climb between hdg 222° CW to 070° to remain clear of CYA210, CYR236, CYR251 and CYR252.

Rwy 31 - $\frac{1}{2}$ - Climb between hdg **222° CW to **070°** to remain clear of CYA210, CYR236, CYR251 and CYR252.**

No RIGHT turn below **3600.**

NOTE:
When FSS clsd, obtain
IFR CLNC from Edmonton
Centre 132.75 or 265.2

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

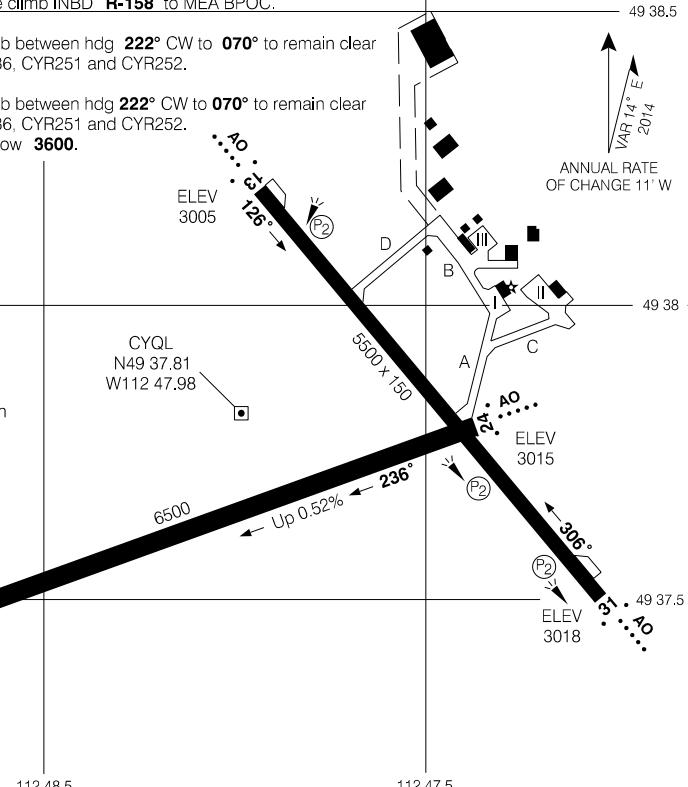

TAKE-OFF MINIMA

SCALE IN FEET

1


AFRODROME CHART

EFF 15 JUN 23

CYLL-AD

LLOYDMINSTER, AB
CYLL

AERODROME CHART

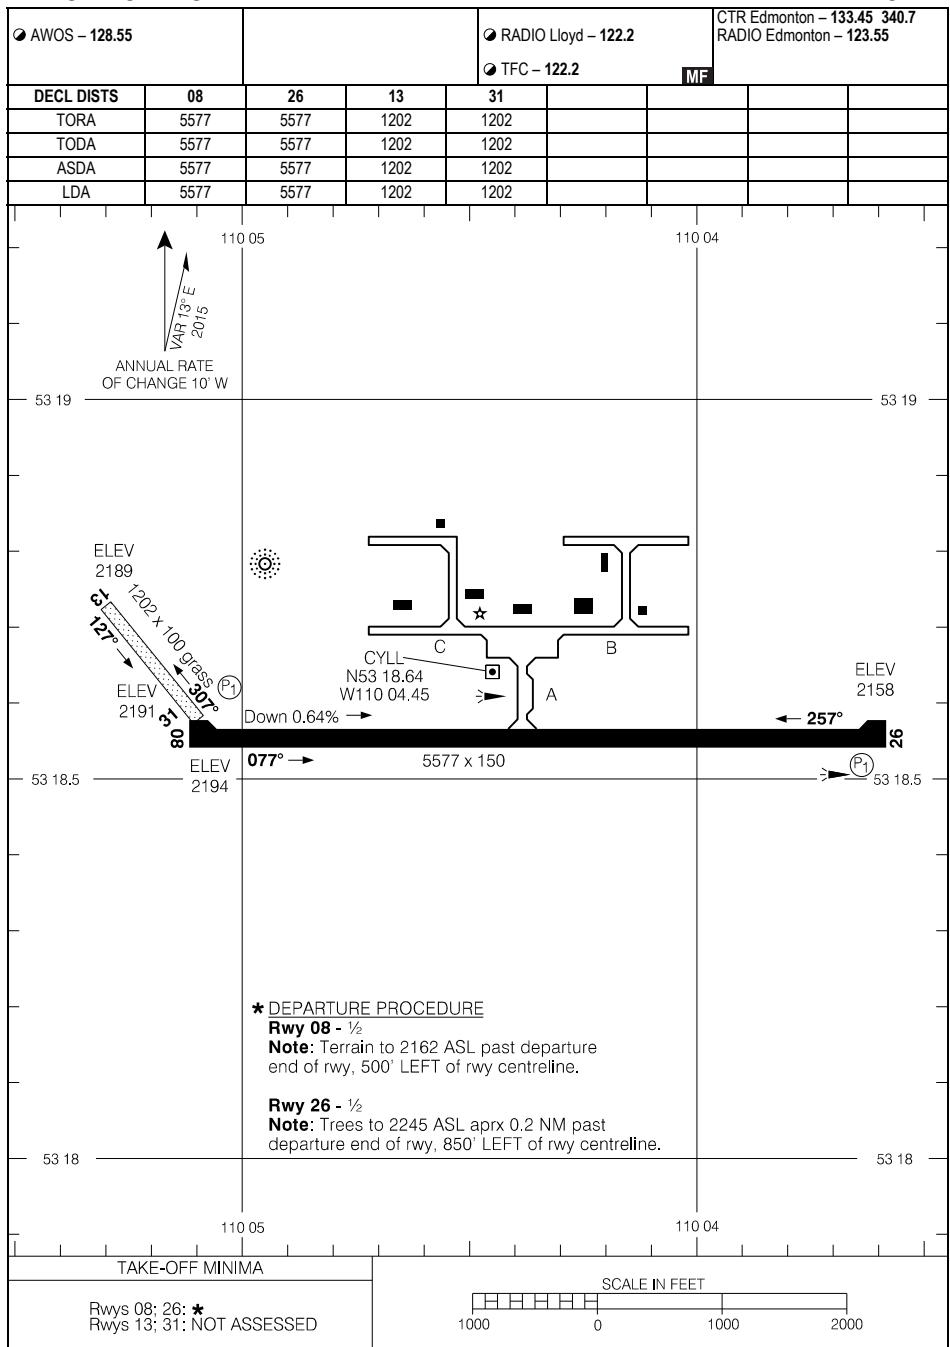

AERODROME CHART

EFF 10 AUG 23


CYLL-AD

CYLL

CJR2-AD

LUSELAND, SK
CJR2

AERODROME CHART

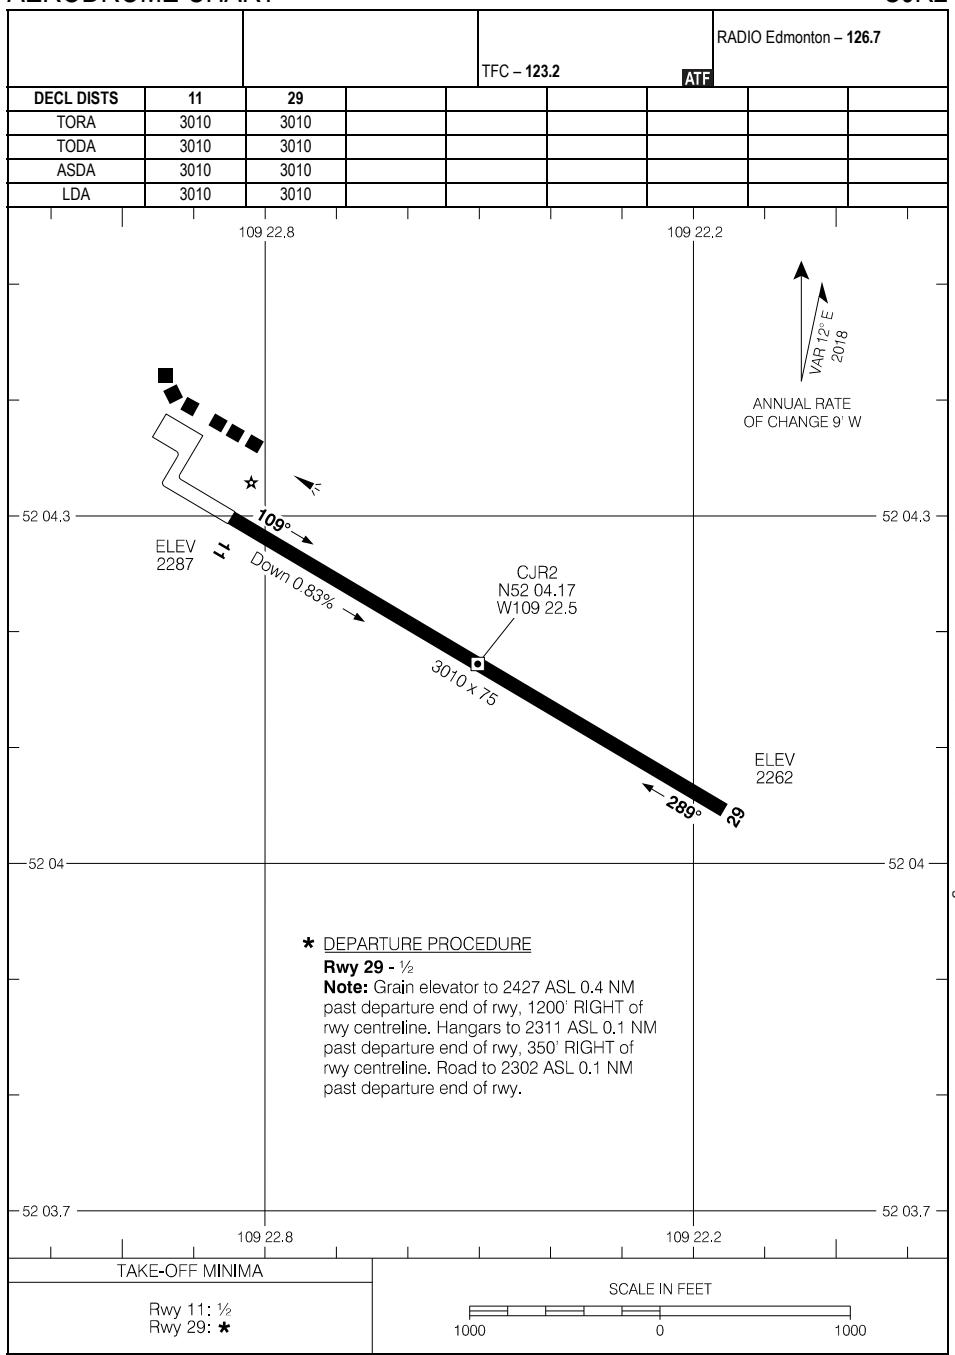

AERODROME CHART

EFF 24 MAR 22


CJR2

CJR2-AD

CYYL-AD

LYNN LAKE, MB
CYYL

AERODROME CHART

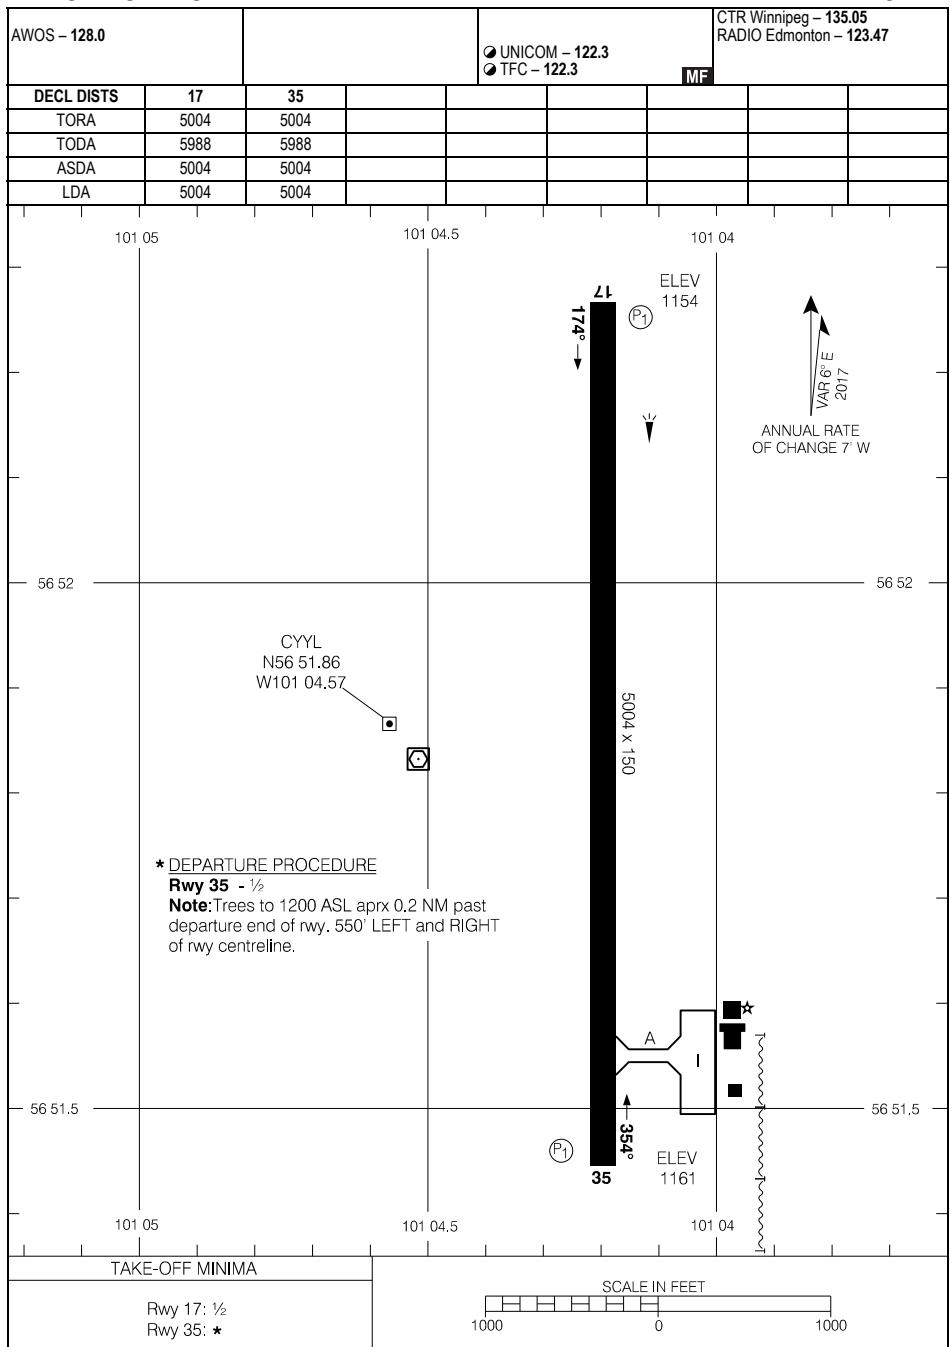


AERODROME CHART

EFF 12 JUN 25

CYYL-AD

CYYL

AERODROME CHART

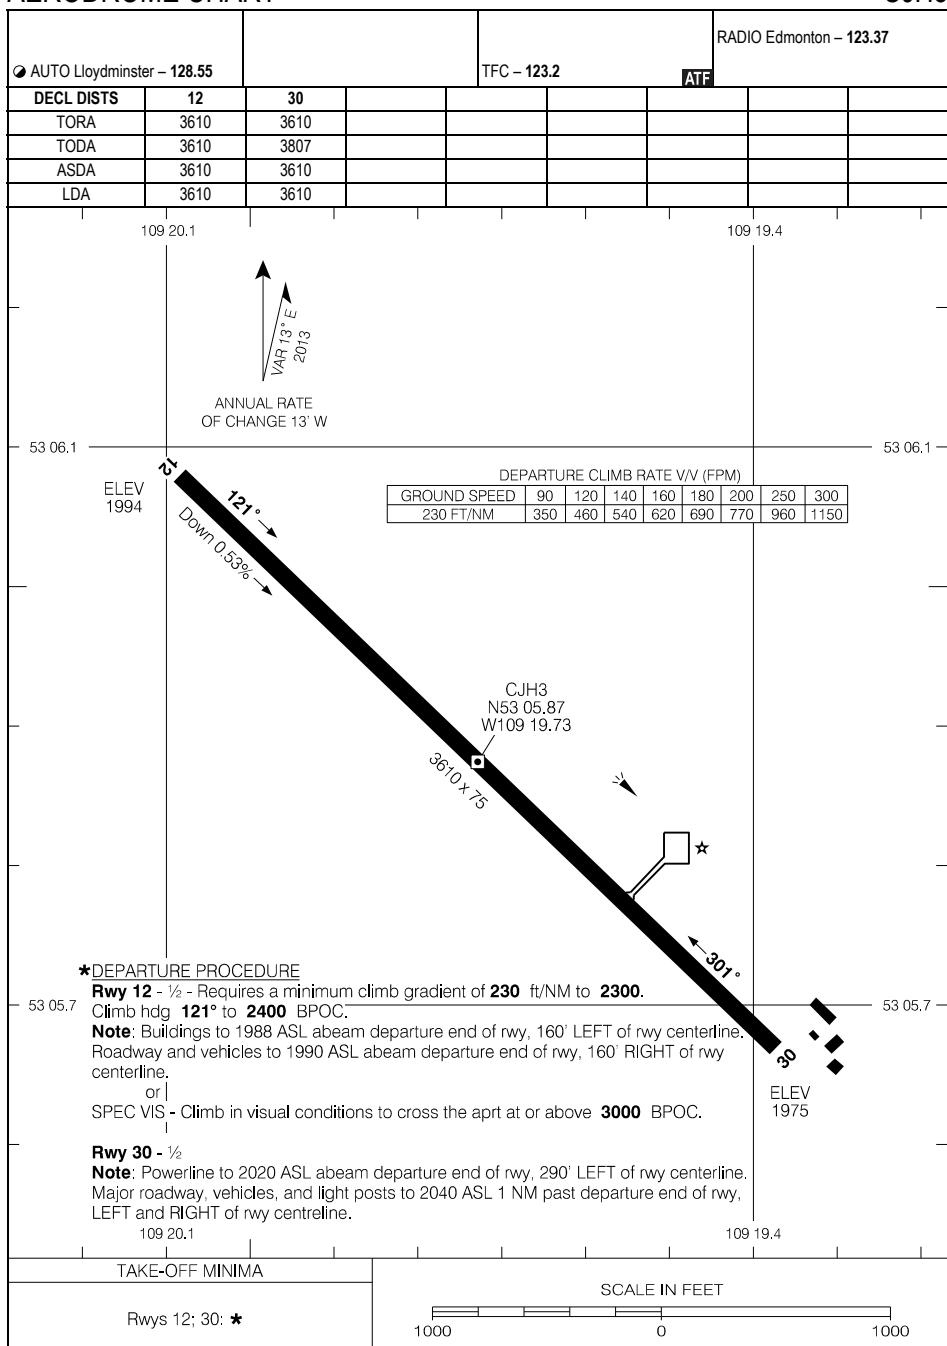

AERODROME CHART

EFF 3 NOV 22

CJH3


CFX4-AD

MANNING, AB
CFX4

AERODROME CHART

AUTO - 122.55				TFC - 123.2		CTR Edmonton - 135.27
DECL DISTS	07	25			ATF	
TORA	5580	5580				
TODA	6422	6364				
ASDA	5580	5580				
LDA	5580	5580				

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

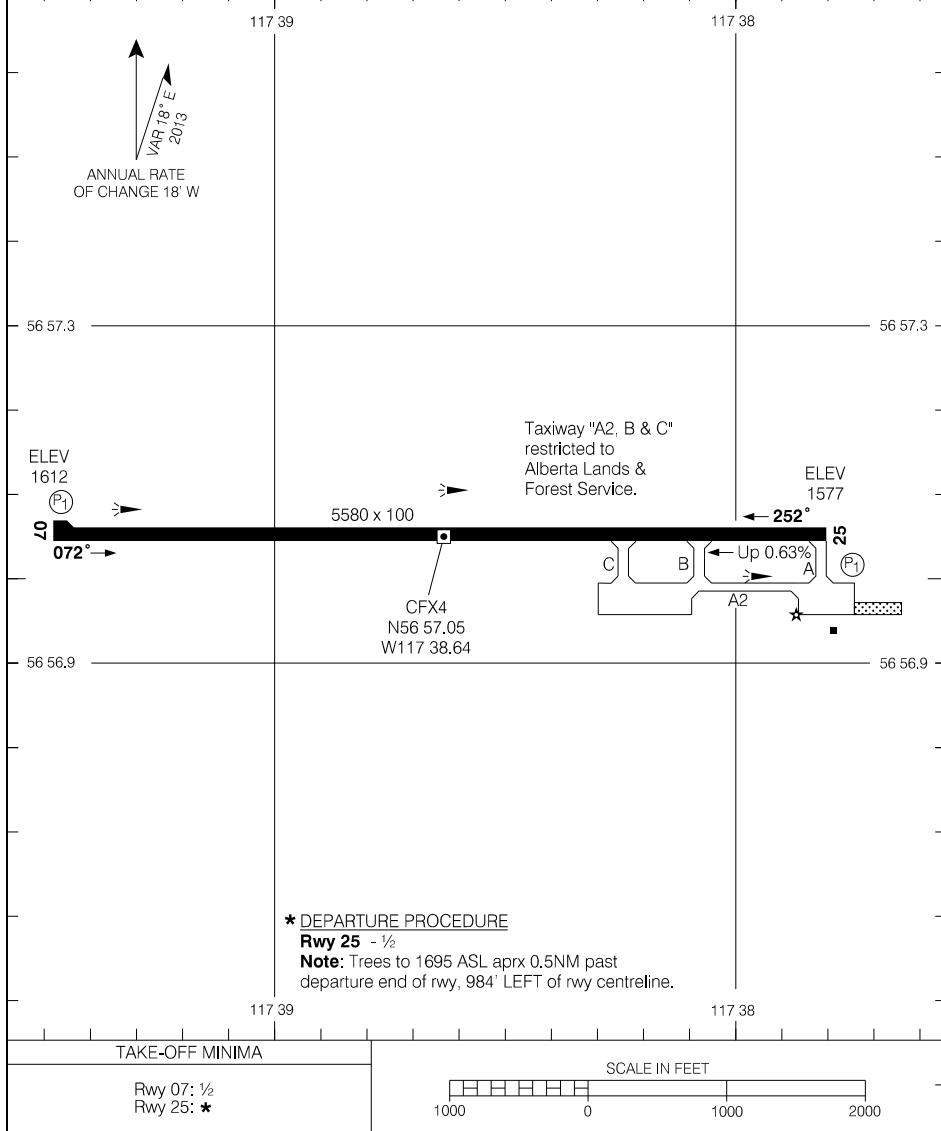


AERODROME CHART

EFF 5 OCT 23

CFX4

CFX4-AD

AERODROME CHART

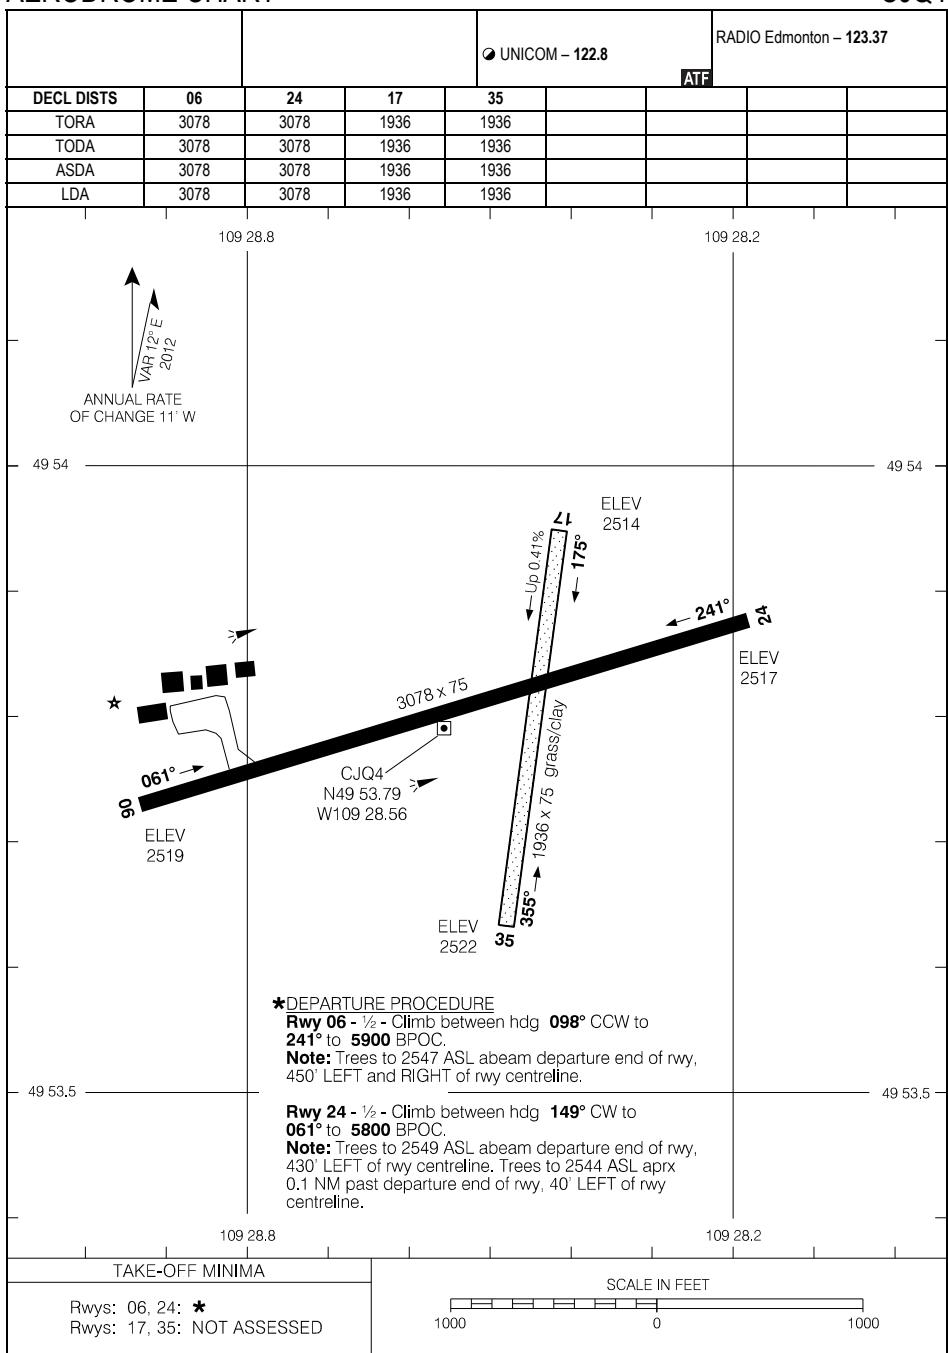


AERODROME CHART

EFF 20 FEB 25

CKQ8-AD

MCARTHUR RIVER, SK
CKQ8

AERODROME CHART

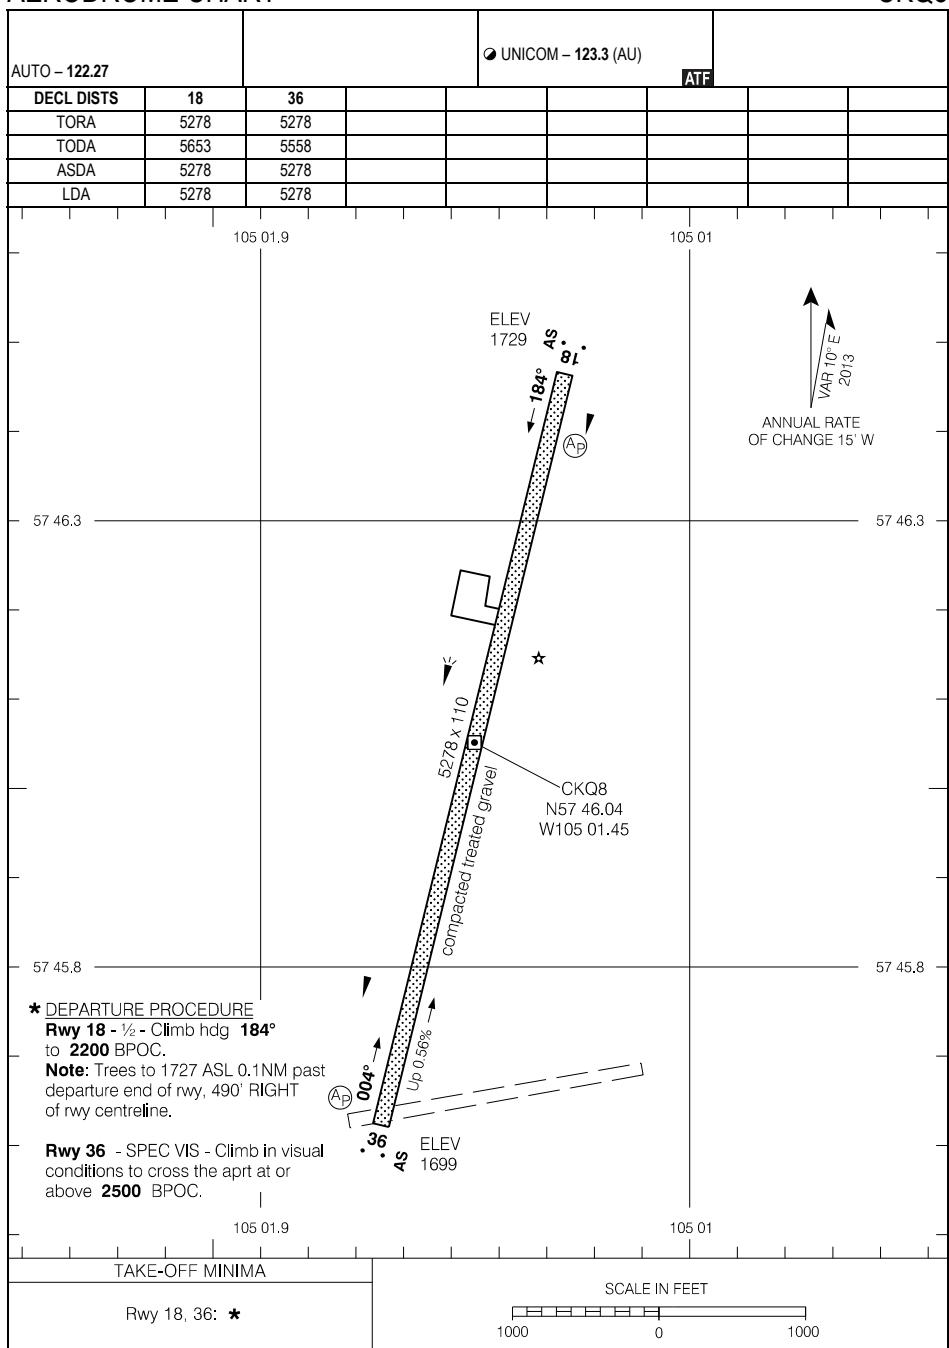

AERODROME CHART

EFF 23 FEB 23


CKQ8-AD

CKQ8

CYLJ-AD

MEADOW LAKE, SK
CYLJ

AERODROME CHART

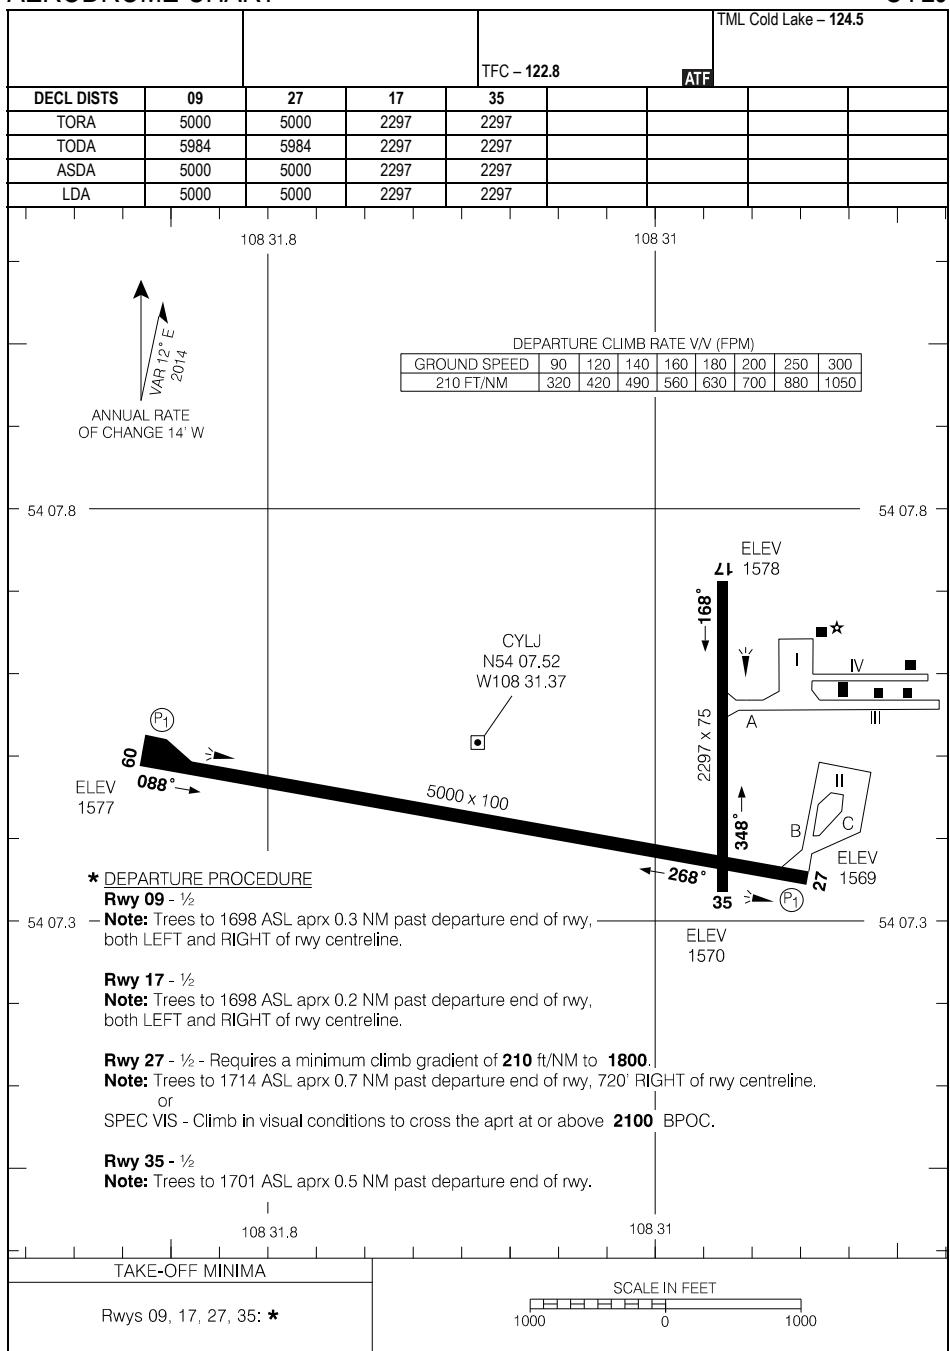

AERODROME CHART

EFF 17 JUN 21


CYLJ-AD

CYLJ

CYXH-AD

MEDICINE HAT, AB
CYXH

AERODROME CHART

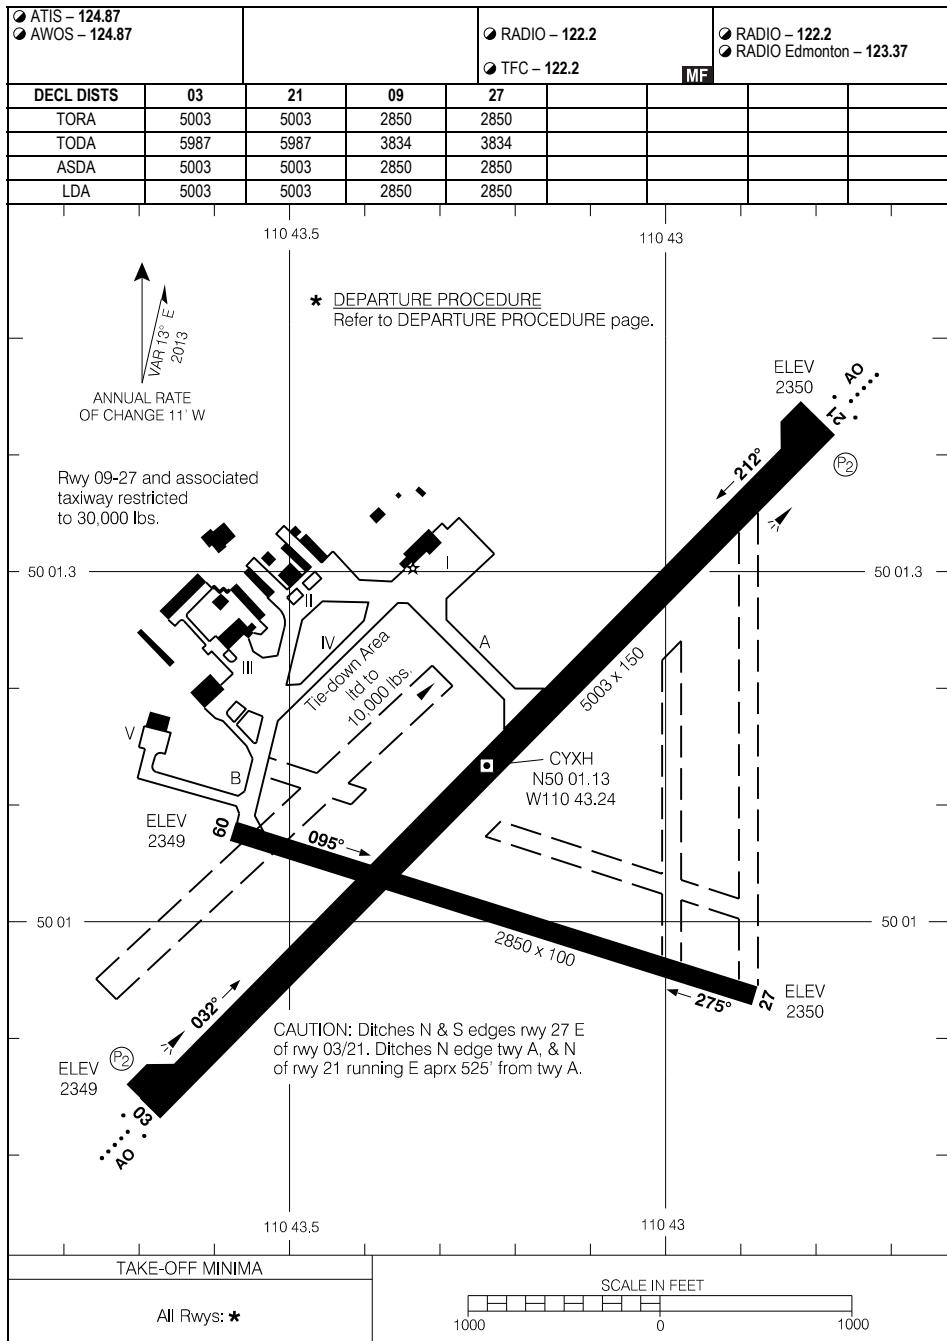

AERODROME CHART

EFF 8 SEP 22


CYXH-AD

CYXH

CJZ3-AD

MELFORT (MILLER FIELD), SK
CJZ3

AERODROME CHART

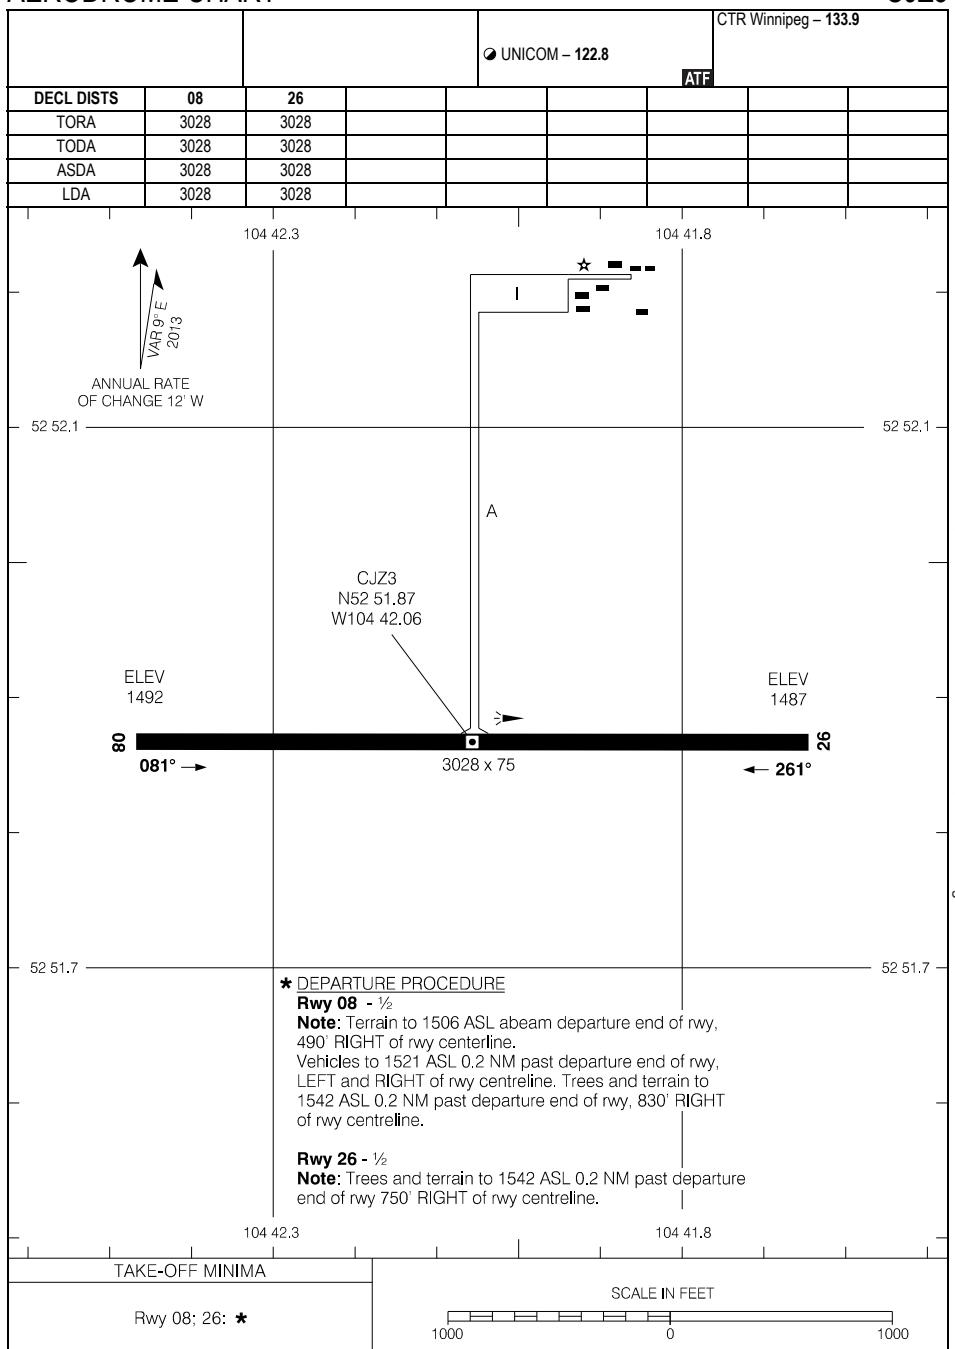

AERODROME CHART

EFF 16 MAY 24

CJZ3

CJZ3-AD

CYMJ-AD


MOOSE JAW/AIR VICE MARSHAL C.M. MCEWEN, SK

CYMJ

AERODROME CHART (DND)

● ATIS - 131.3 257.8	● CLNC DEL - 135.3 234.4	● TWR - 126.2 295.6	● DEP - 119.0 227.6
	● GND - 121.8 275.8		

DECL DISTS	11L	29R	11R	29L	03	21			
TORA	8320	8320	7280	7280	3460	3460			
TODA	8320	8320	7280	7280	3460	3460			
ASDA	8520	8520	7480	7480	3720	3680			
LDA	8320	8320	7280	7280	3460	3460			

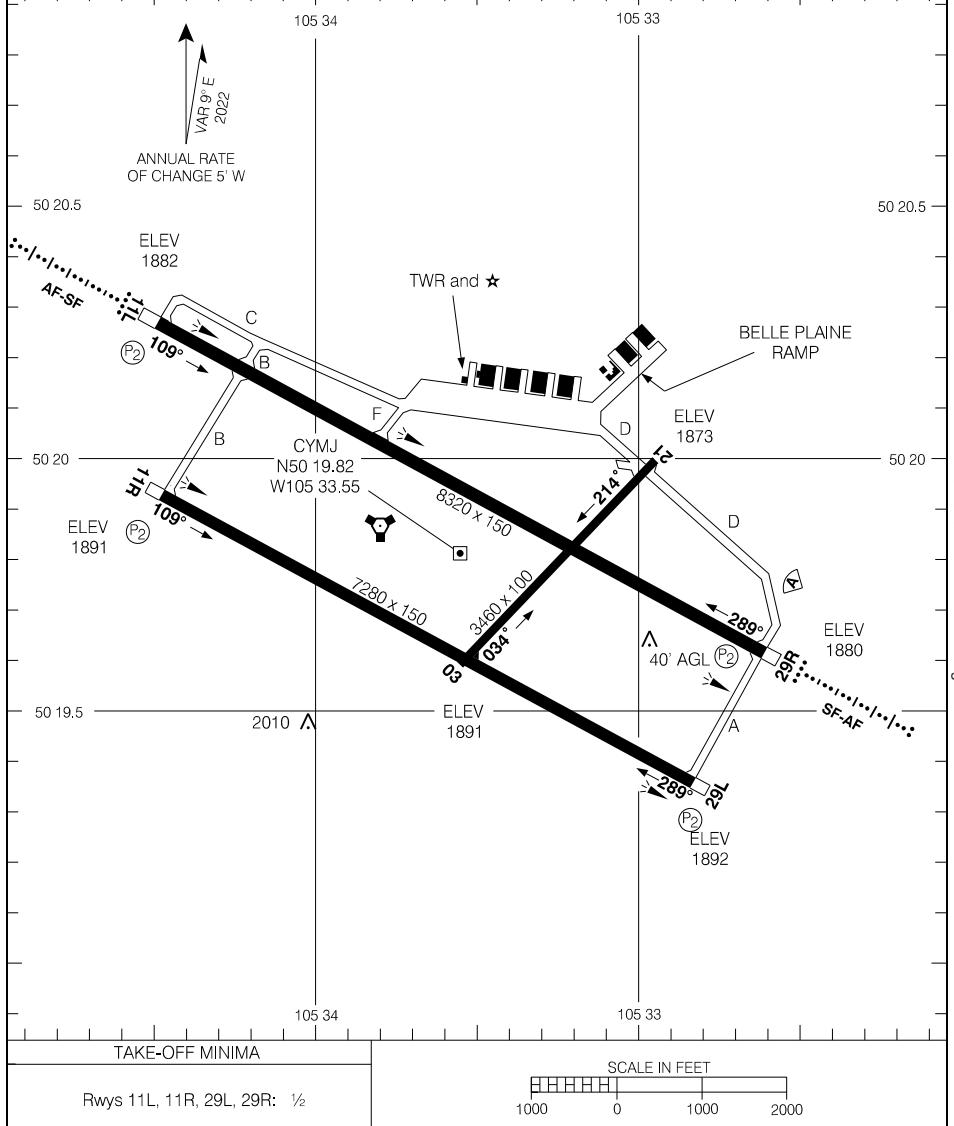


AERODROME CHART (DND)

EFF 8 SEP 22

CYMJ-AD

CYMJ

AERODROME CHART

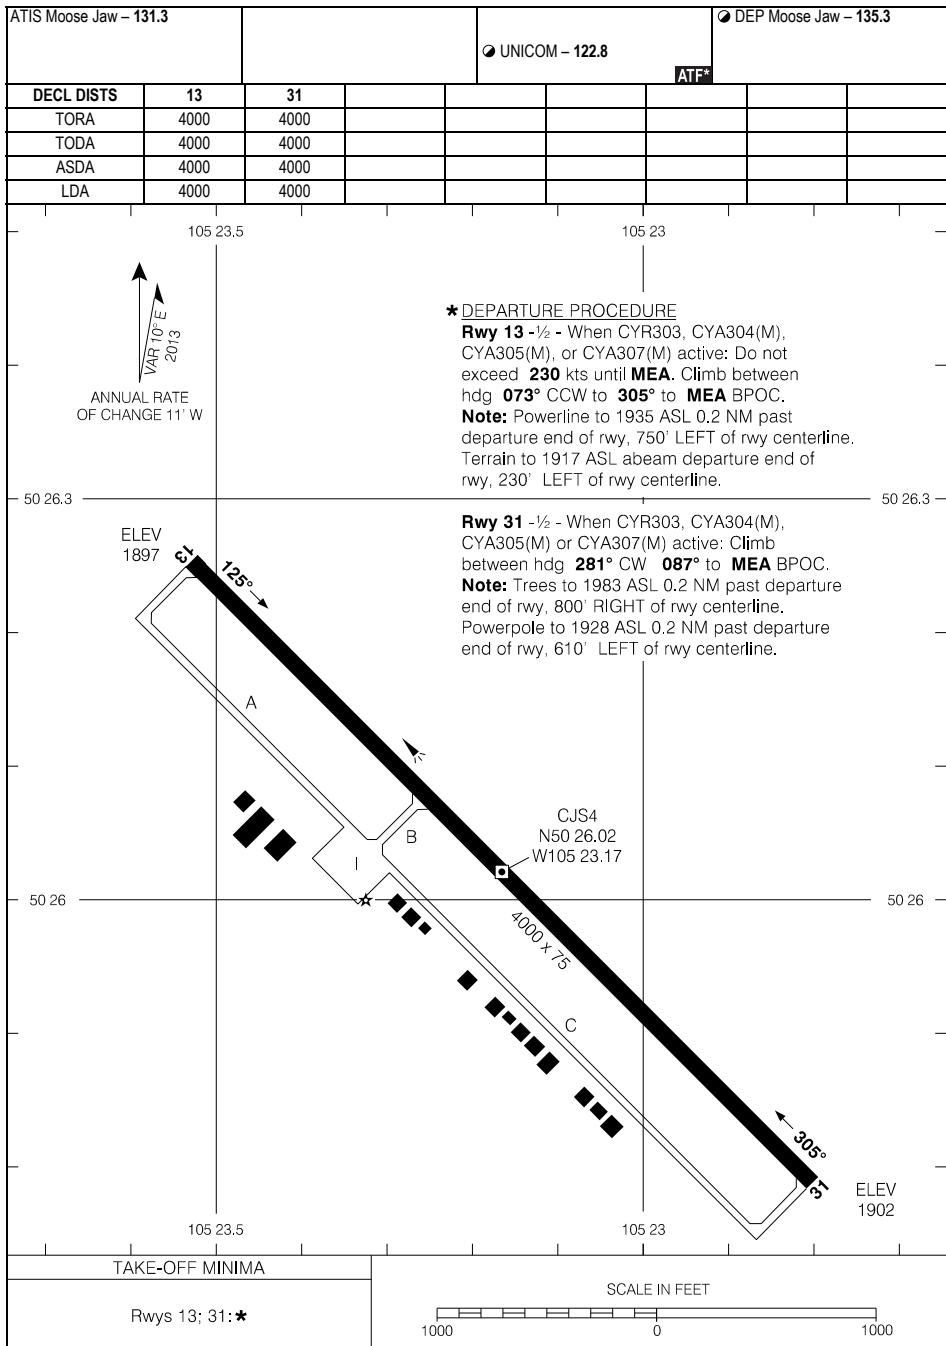

AERODROME CHART


EFF 31 OCT 24

CJS4

CJB5-AD

MOOSOMIN/MARSHALL MCLEOD FIELD, SK
CJB5

AERODROME CHART

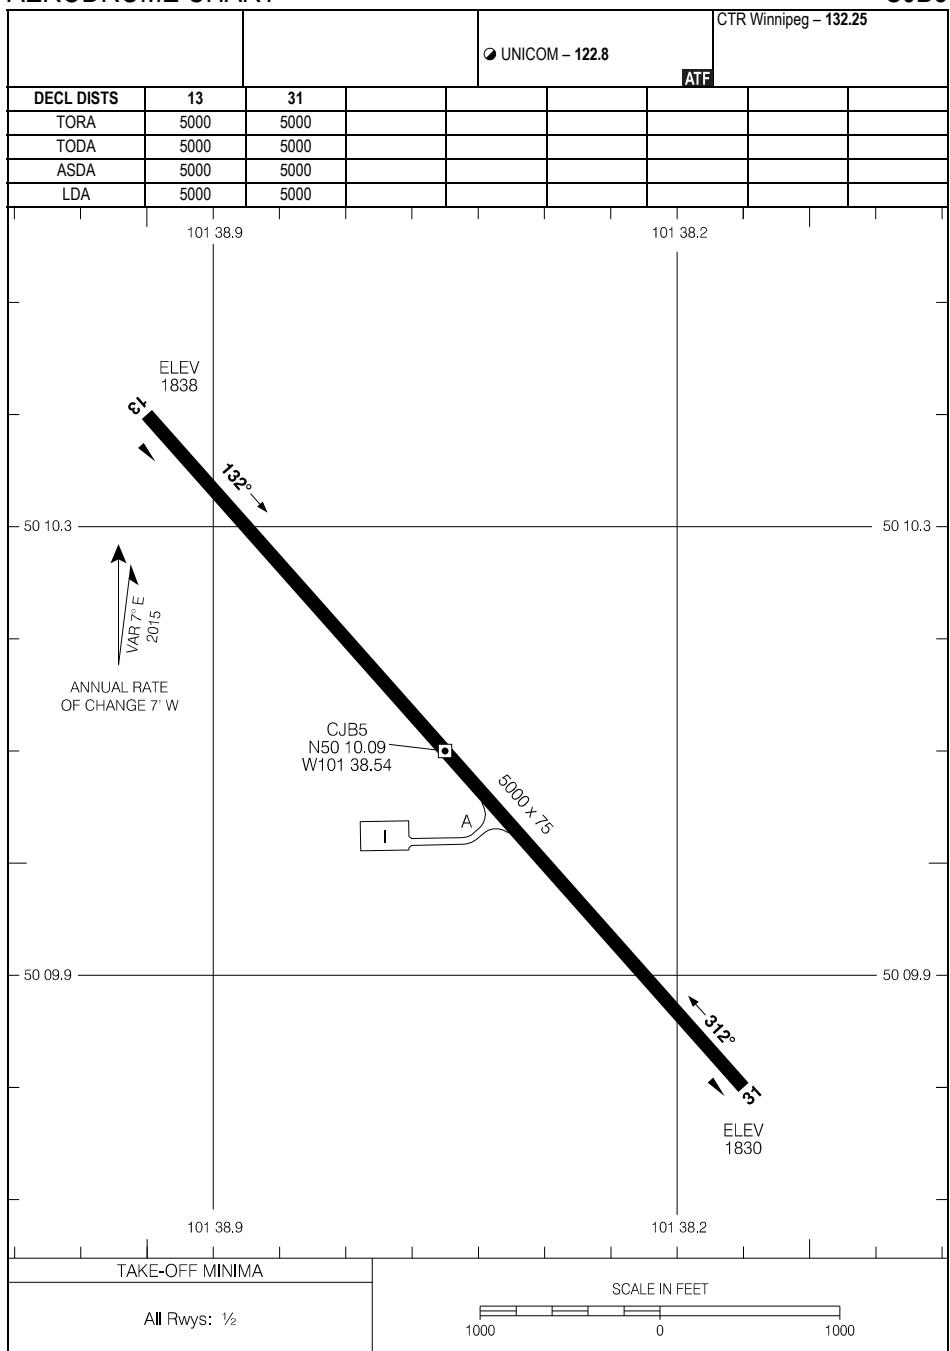

AERODROME CHART

EFF 31 OCT 24


CJB5

CJB5-AD

CJV5-AD

NEEPAWA, MB
CJV5

AERODROME CHART

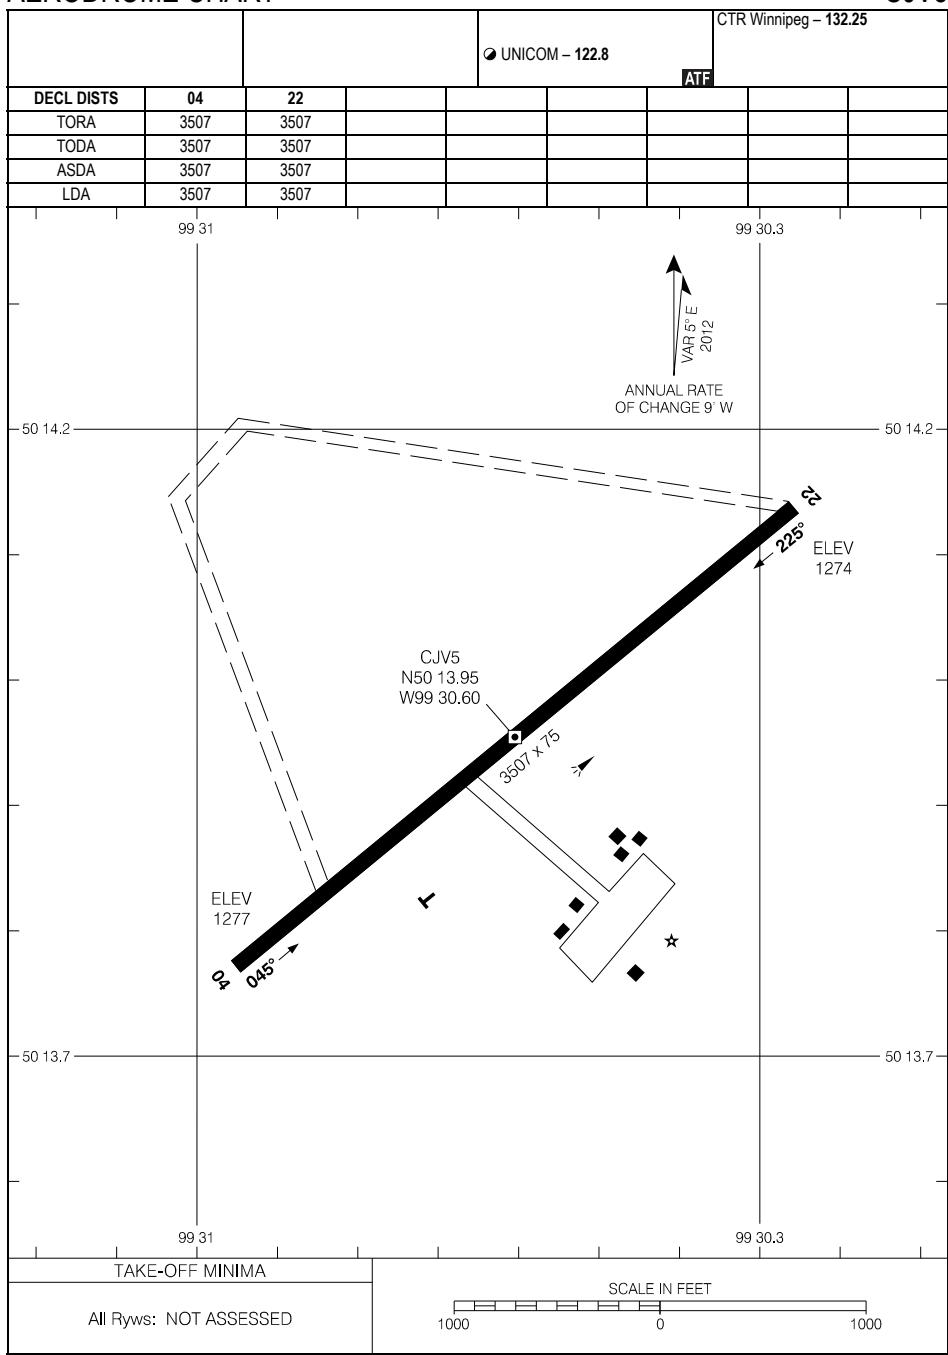

AERODROME CHART

EFF 30 JAN 20


CJV5

CJV5-AD

CYBU-AD

NIPAWIN, SK
CYBU

AERODROME CHART

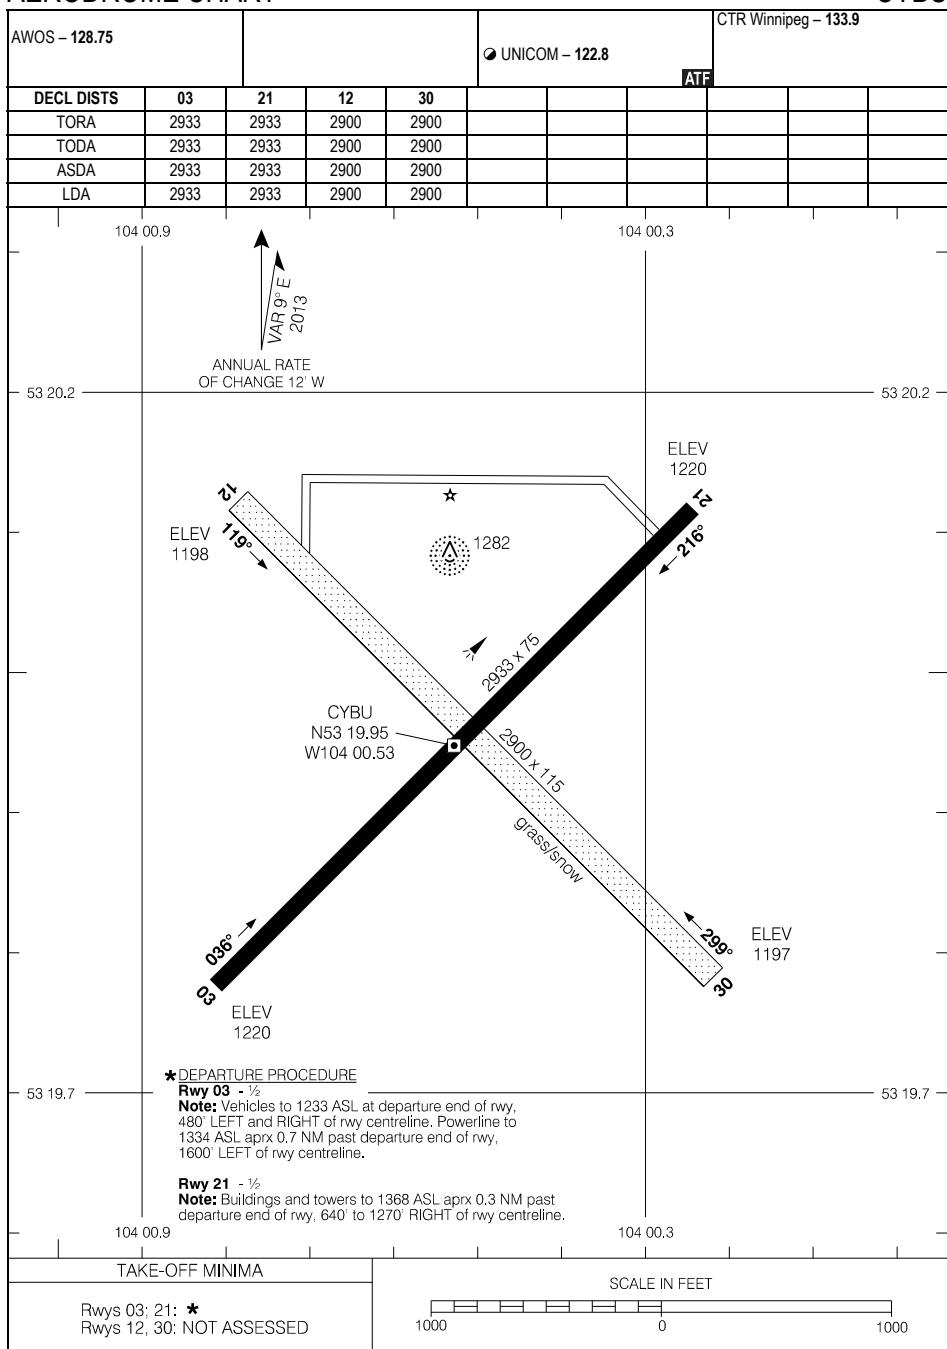

AERODROME CHART

EFF 23 FEB 23


CYBU-AD

CYBU

CYQW-AD

NORTH BATTLEFORD, SK
CYQW

AERODROME CHART

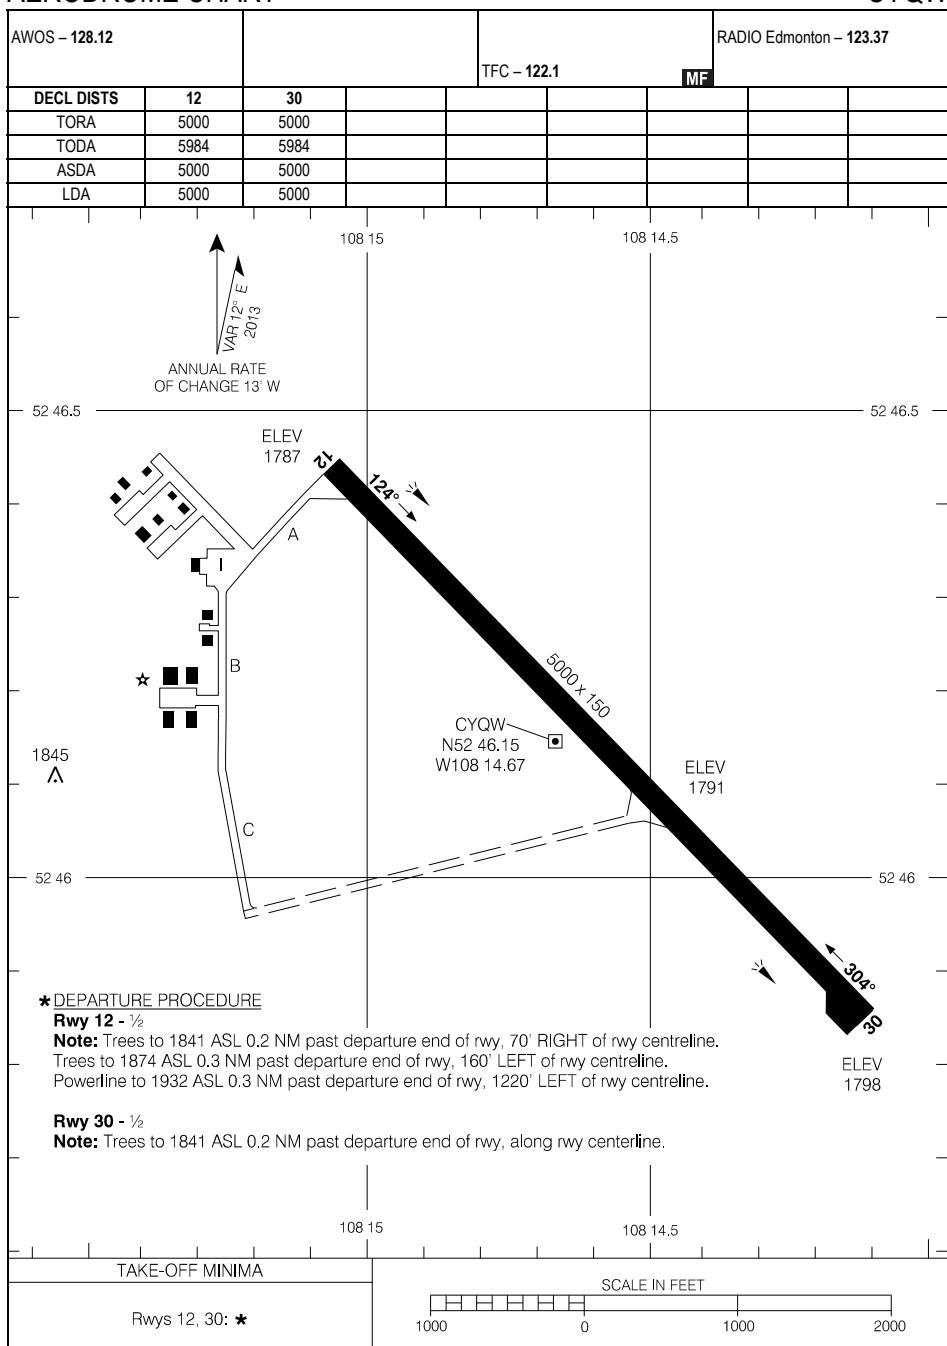

AERODROME CHART

EFF 25 JAN 24


CYQW

CYQW-AD

CYNE-AD

NORWAY HOUSE, MB
CYNE

AERODROME CHART

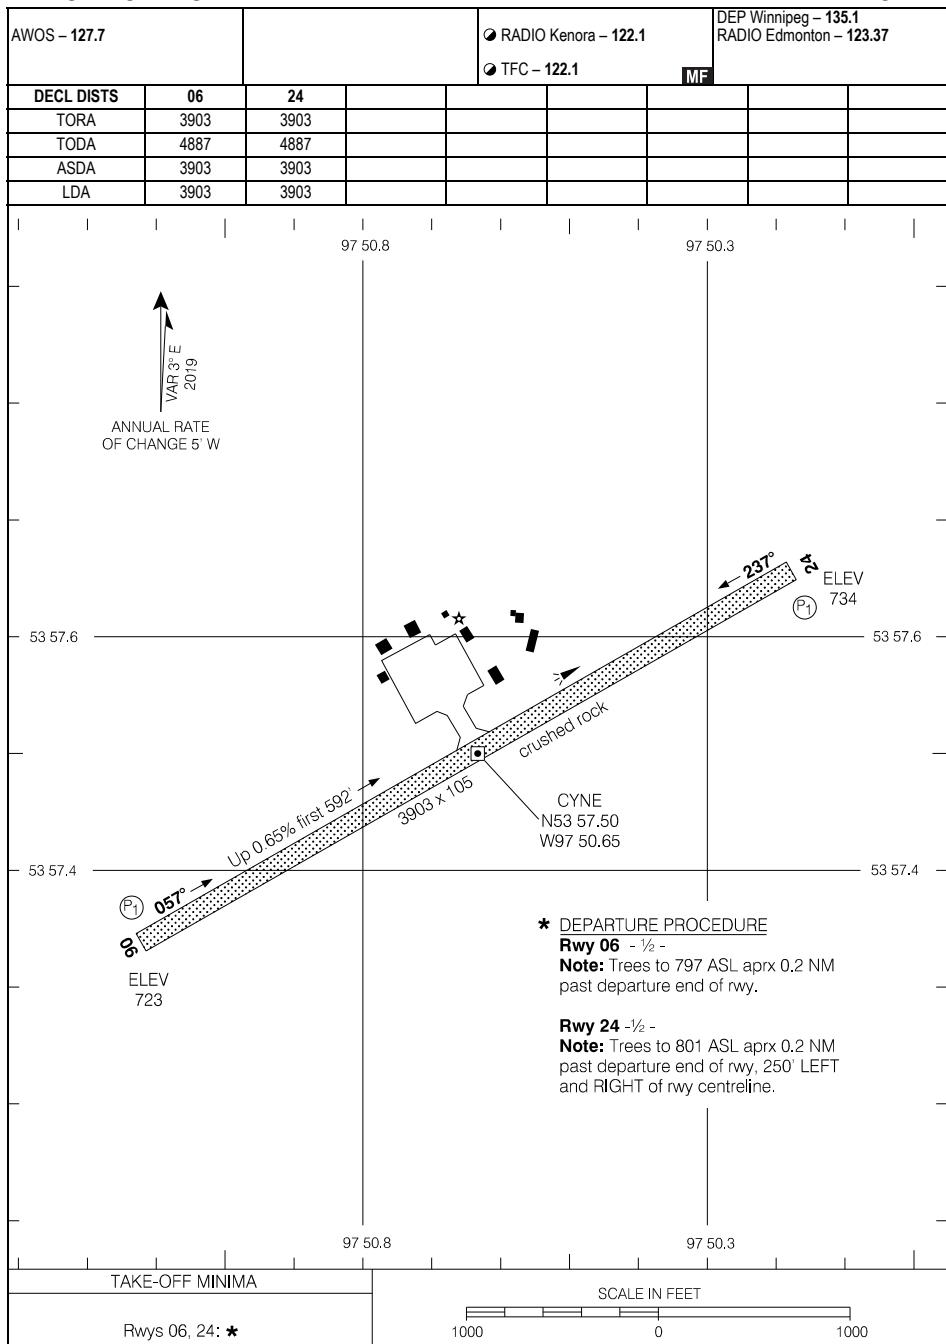


AERODROME CHART

EFF 17 APR 25

CYNE-AD

CYNE

AERODROME CHART

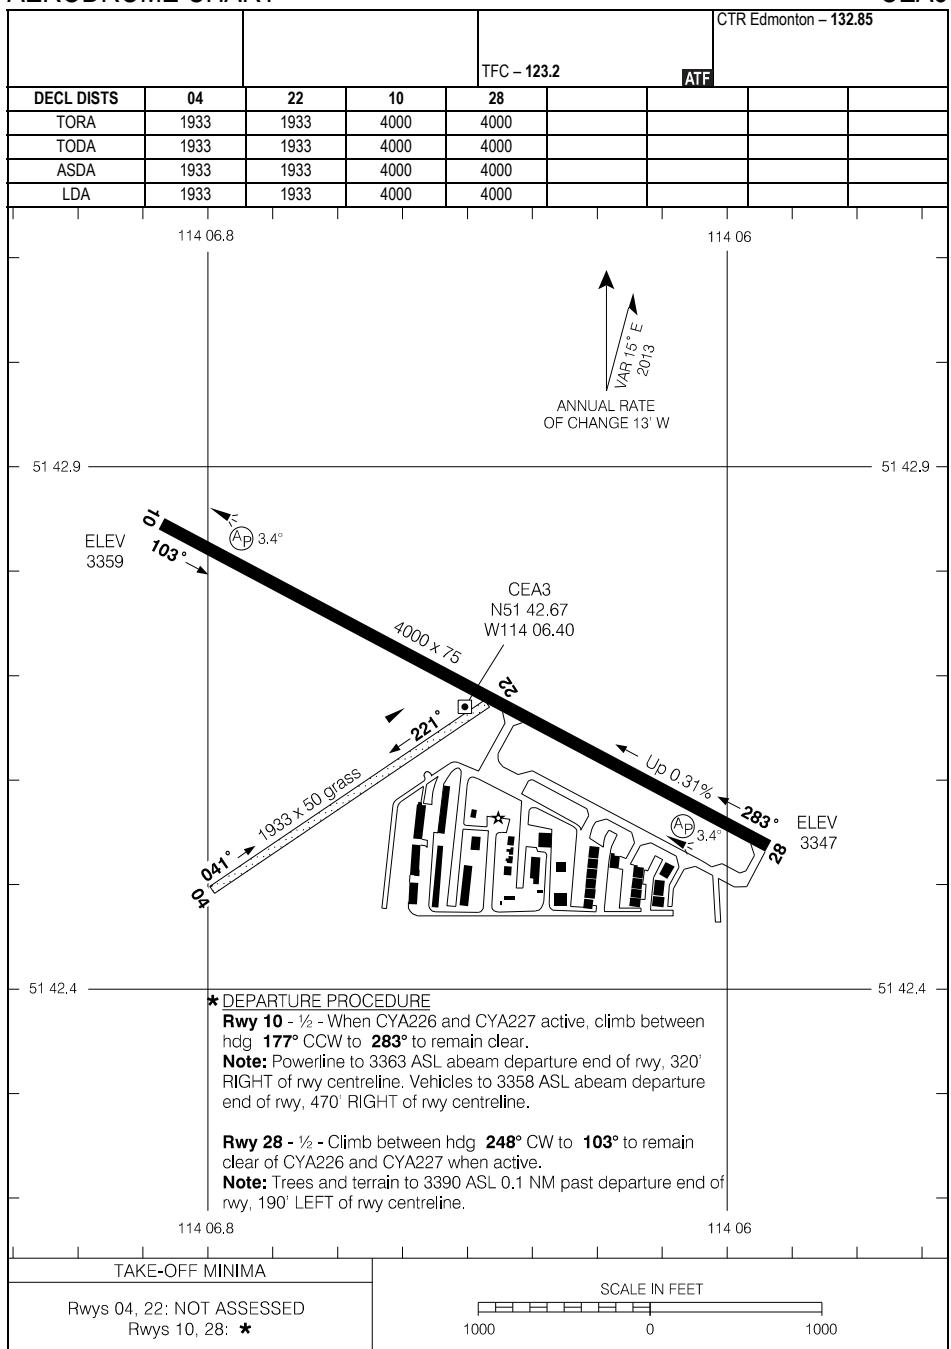

AERODROME CHART


EFF 7 AUG 25

CEA3

CYOH-AD

OXFORD HOUSE, MB
CYOH

AERODROME CHART

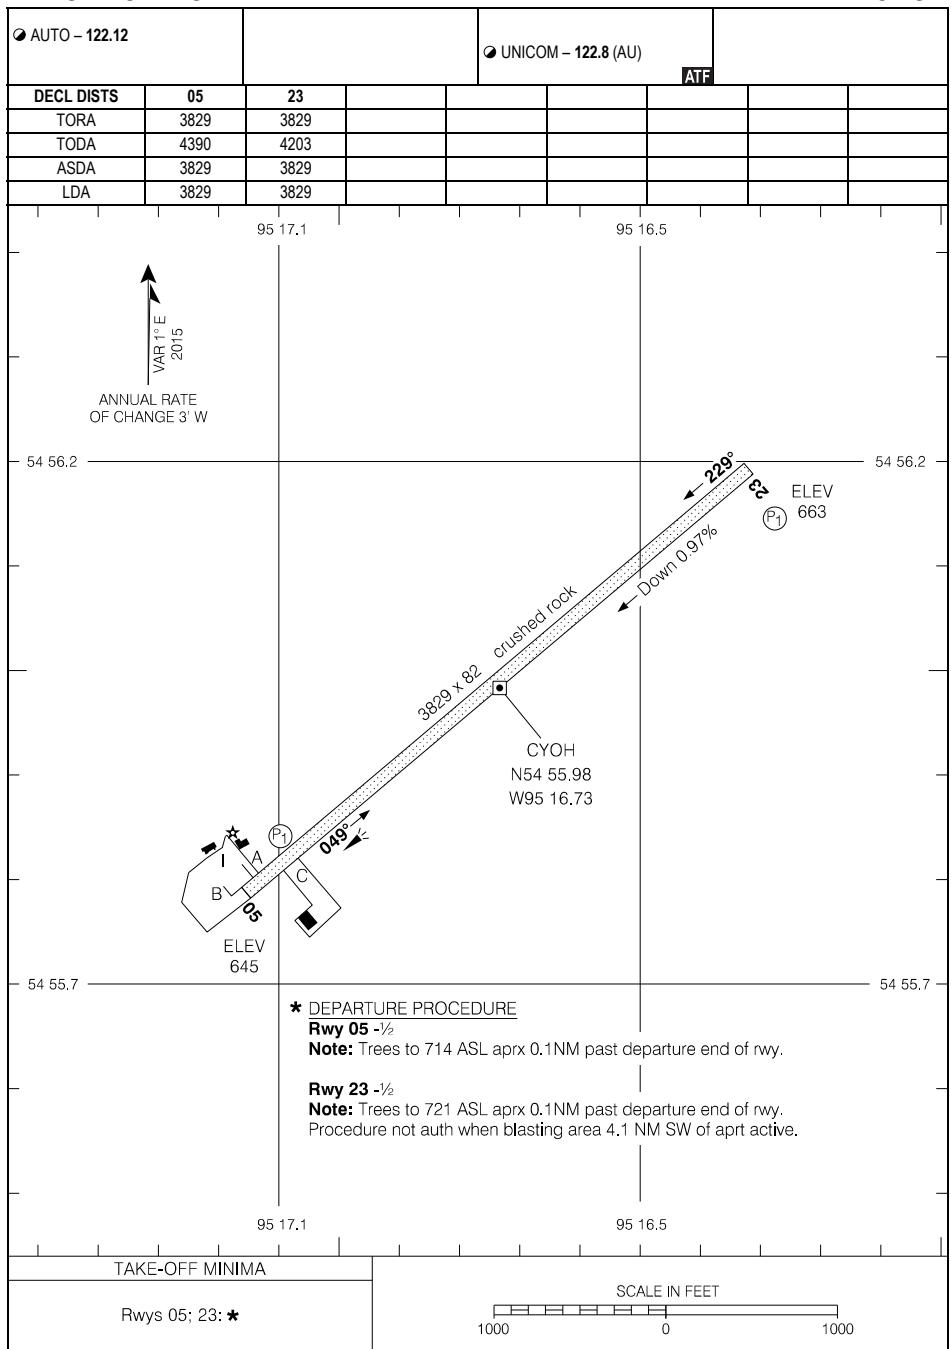


AERODROME CHART

EFF 7 AUG 25

CYOH-AD

CYOH

AERODROME CHART

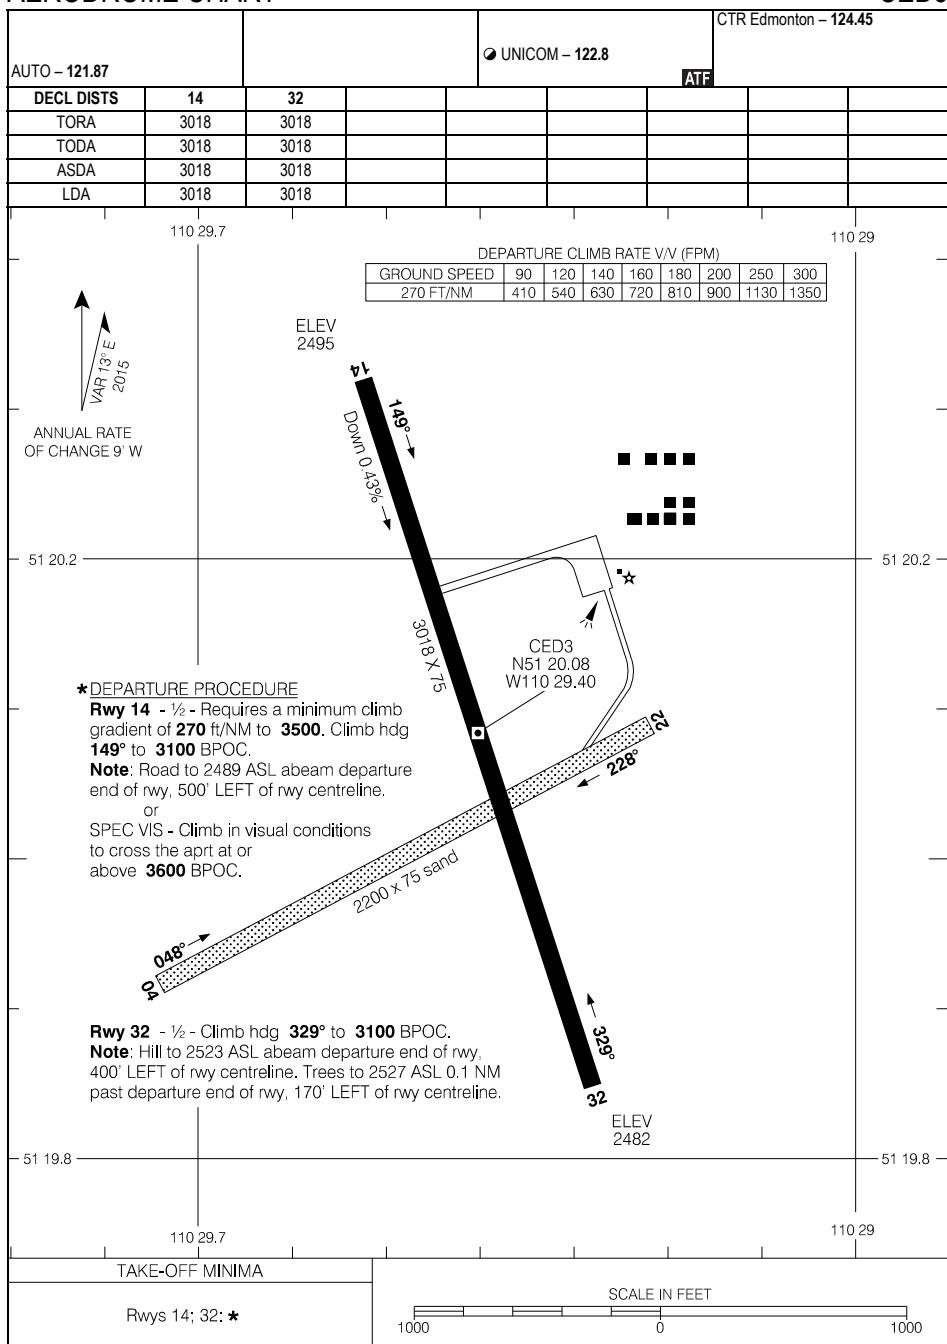

AERODROME CHART


EFF 12 JUN 25

CED3

CYPE-AD

PEACE RIVER, AB
CYPE

AERODROME CHART

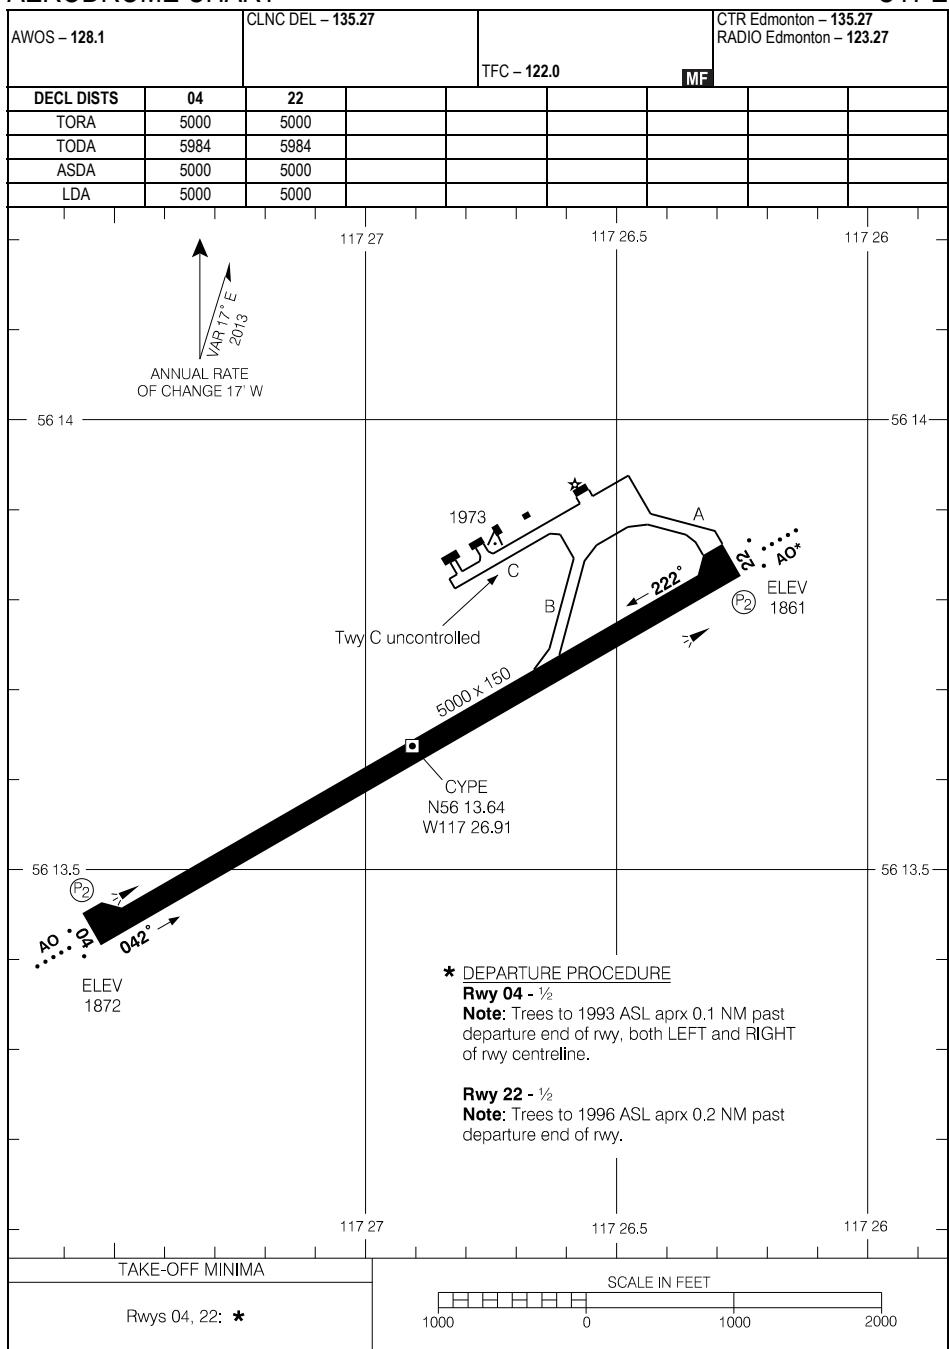

AERODROME CHART

EFF 17 APR 25

CYPE-AD


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CZMN-AD

PIKWITONEI, MB
CZMN

AERODROME CHART

				<input checked="" type="checkbox"/> UNICOM – 122.8 (AU)	
DECL DISTS	05	23			ATF
TORA	2192	2192			
TODA	2963	3176			
ASDA	2192	2192			
LDA	2192	2192			

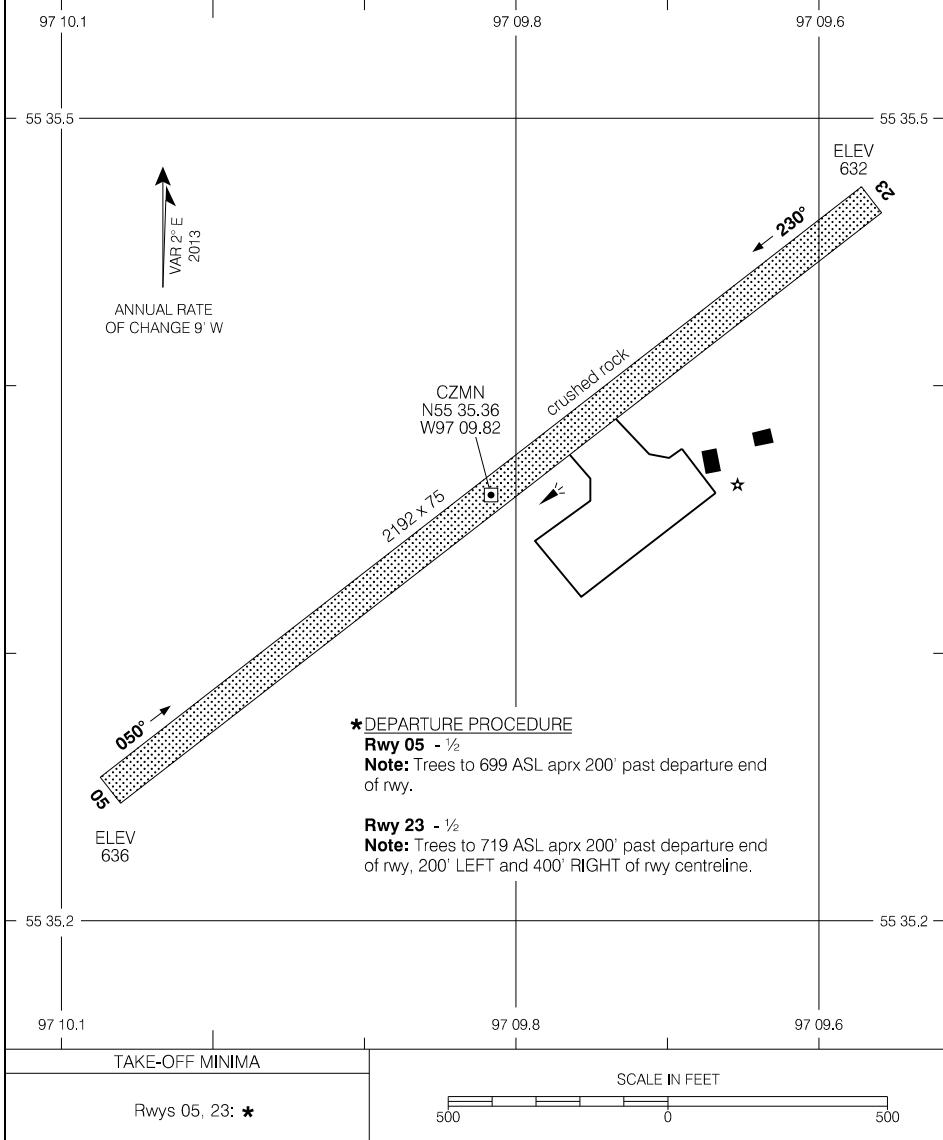


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 10 SEP 20

CZMN-AD

AERODROME CHART

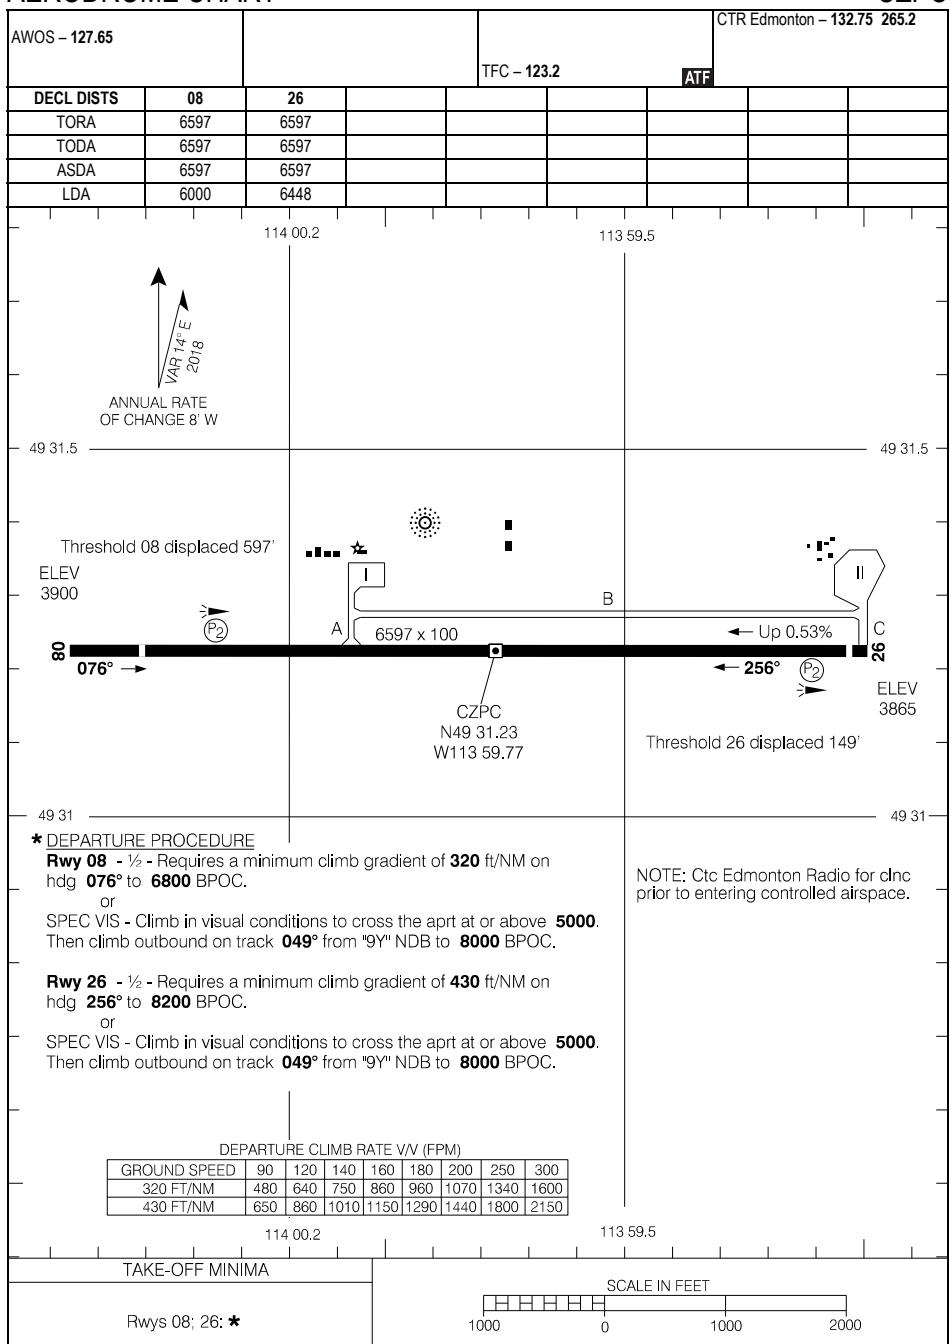

AERODROME CHART


EFF 25 JAN 24

CZPC

CYNL-AD

POINTS NORTH LANDING, SK
CYNL

AERODROME CHART

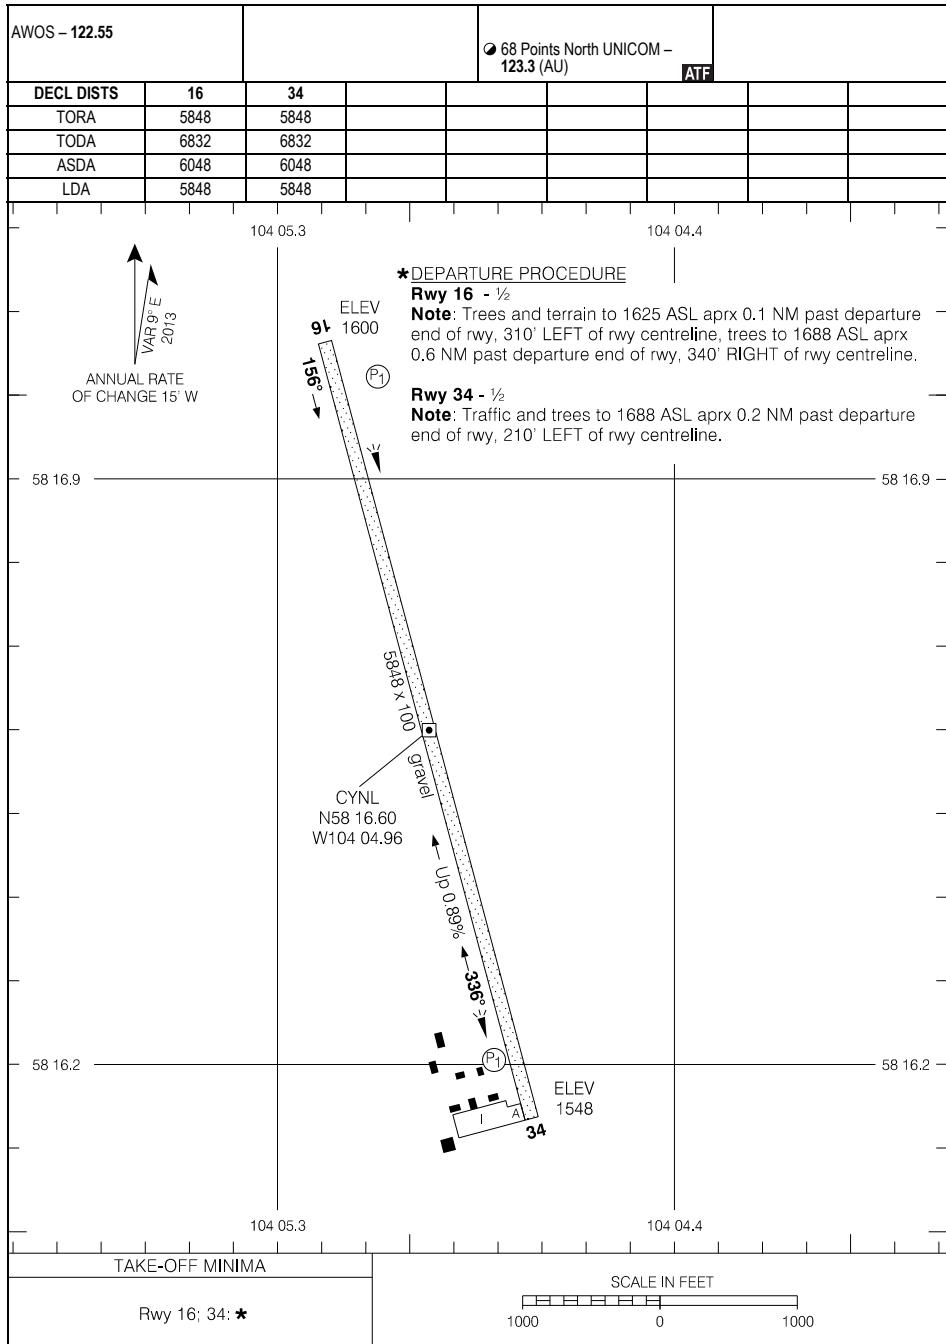

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 26 DEC 24


CYNL-AD

CYNL

CEH3-AD

PONOKA (LABRIE FIELD), AB
CEH3

AERODROME CHART

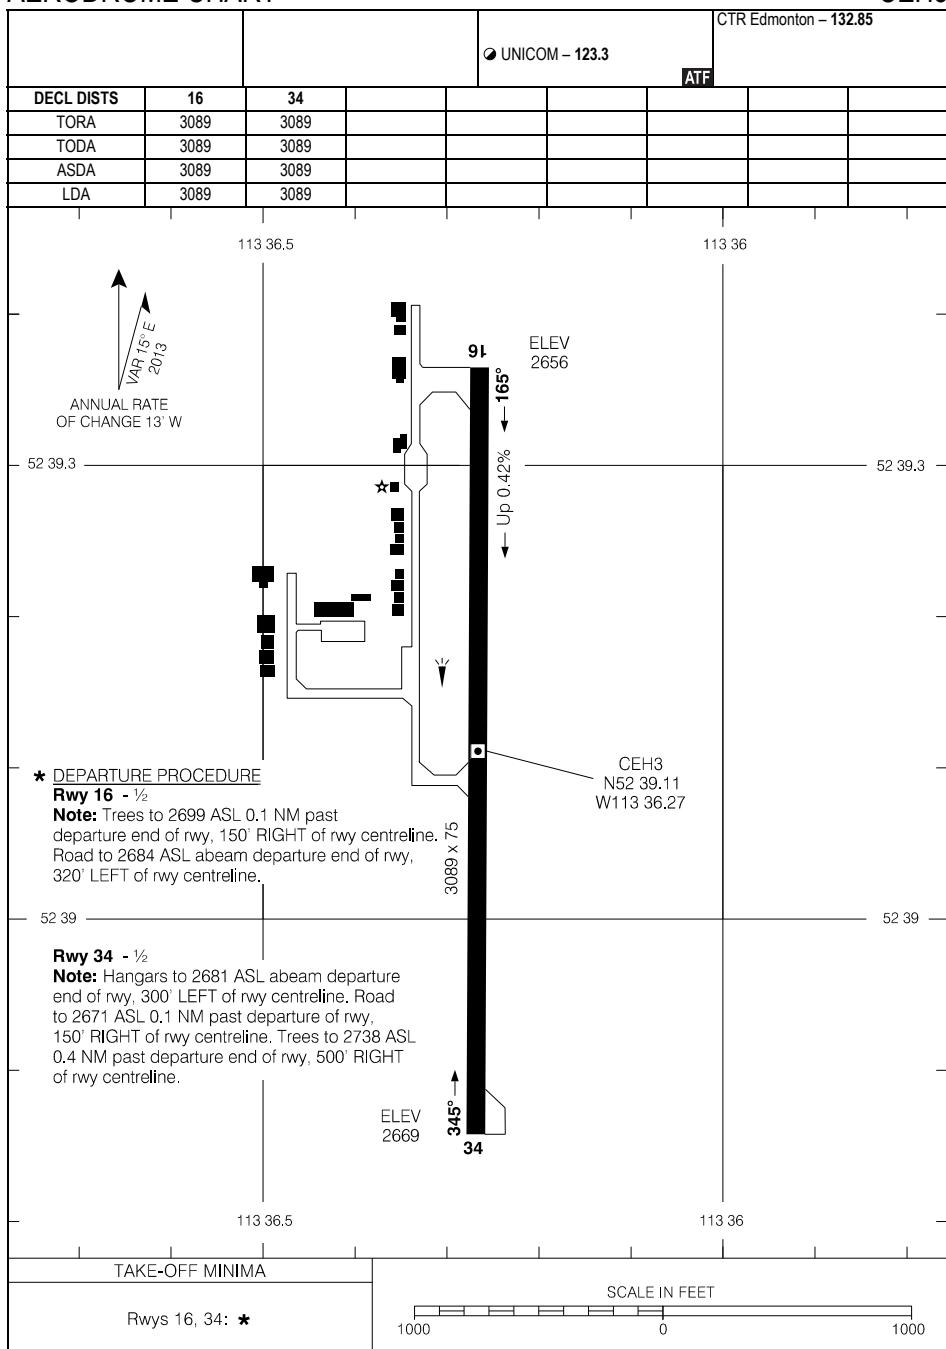

AERODROME CHART

EFF 14 JUL 22

CEH3-AD

CEH3

CZNG-AD

POPLAR RIVER, MB
CZNG

AERODROME CHART

CTR Winnipeg – 135.1

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 17 APR 25

CZNG

CZNG-AD


CYPG-AD

**PORTAGE LA PRAIRIE/SOUTHPORT, MB
CYPG**

AERODROME CHART

● ATIS – 120.85		● GND – 121.7		● TWR – 126.2		TML Winnipeg – 121.0		
				● TFC – 126.2		● ATF*		
DECL DISTS	13R	31L	13L	31R	02	20	09	27
TORA	7000	7000	3120	3120	3033	3033	2670	2670
TODA	7984	7984	4120	4120	4033	4033	3654	3654
ASDA	7000	7000	3120	3120	3033	3033	2670	2670
LDA	7000	7000	3120	3120	3033	3033	2670	2670

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

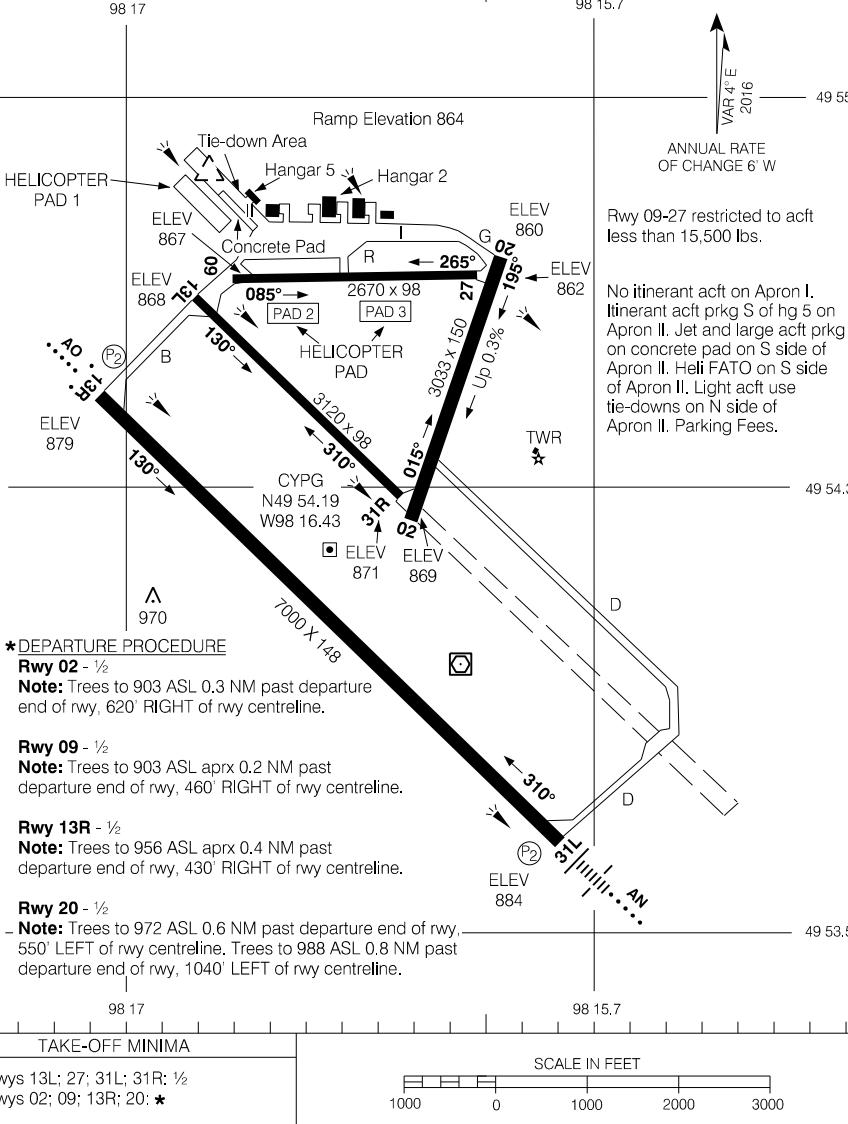

AERODROME CHART

EFF 23 FEB 23


CYPG-AD

CYPA-AD

PRINCE ALBERT (GLASS FIELD), SK

CYPA

AERODROME CHART

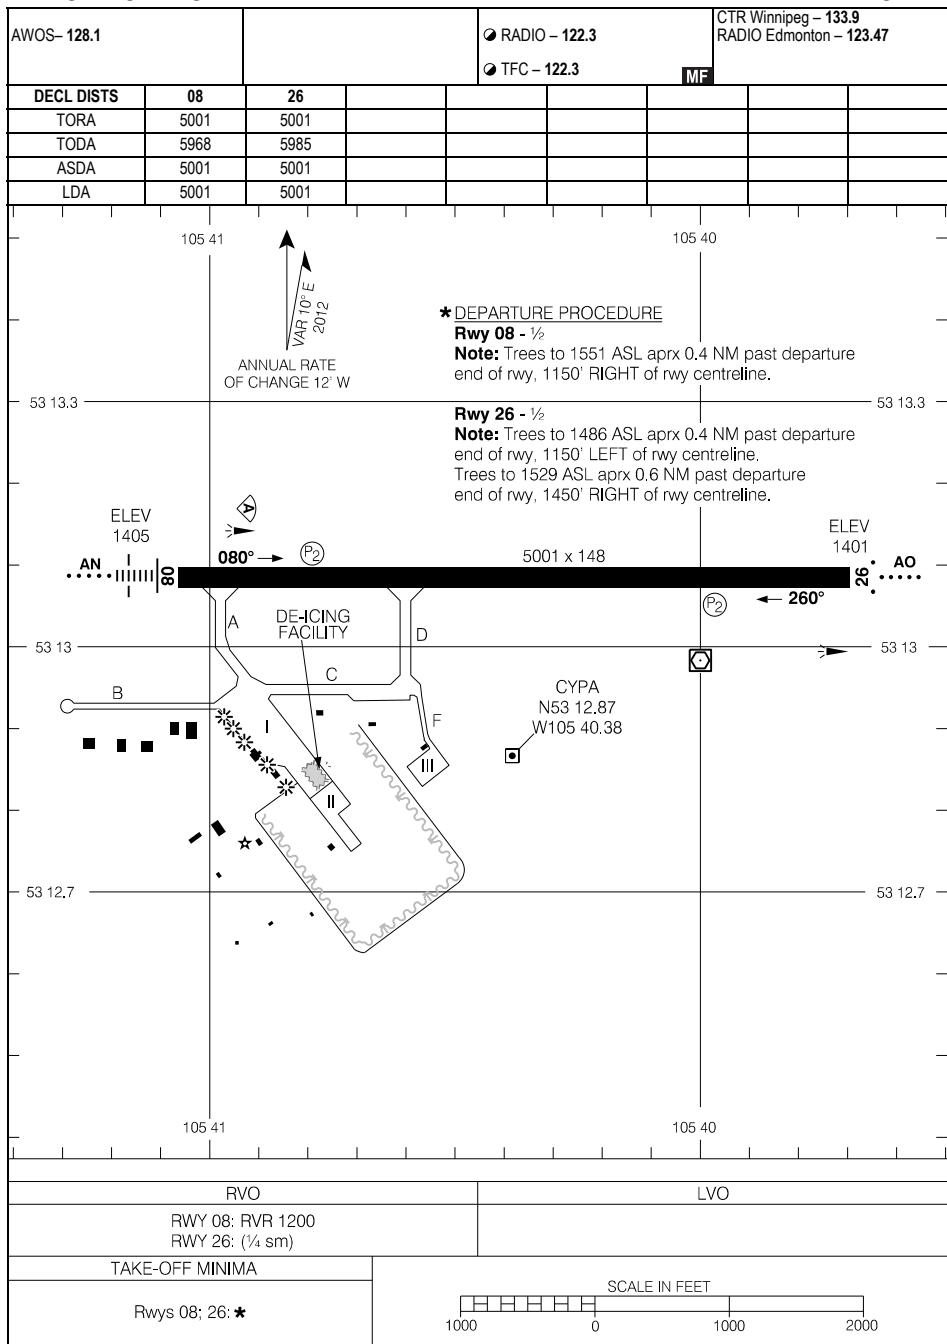

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved


AERODROME CHART

EFF 7 AUG 25

CYPA

CYPA-AD

AERODROME CHART

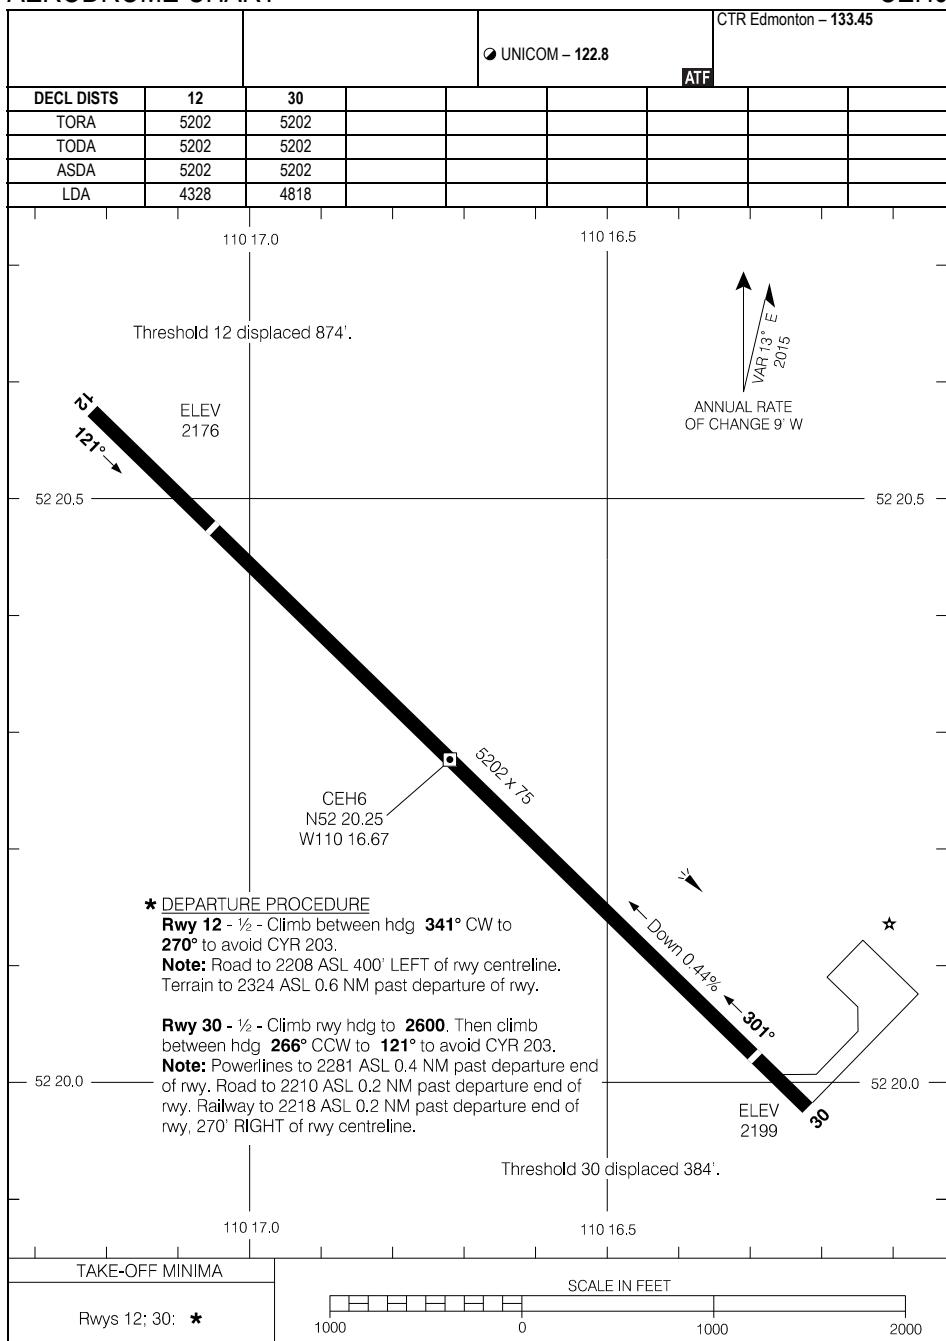

AERODROME CHART


EFF 25 JAN 24

CEH6

CZFG-AD

PUKATAWAGAN, MB
CZFG

AERODROME CHART

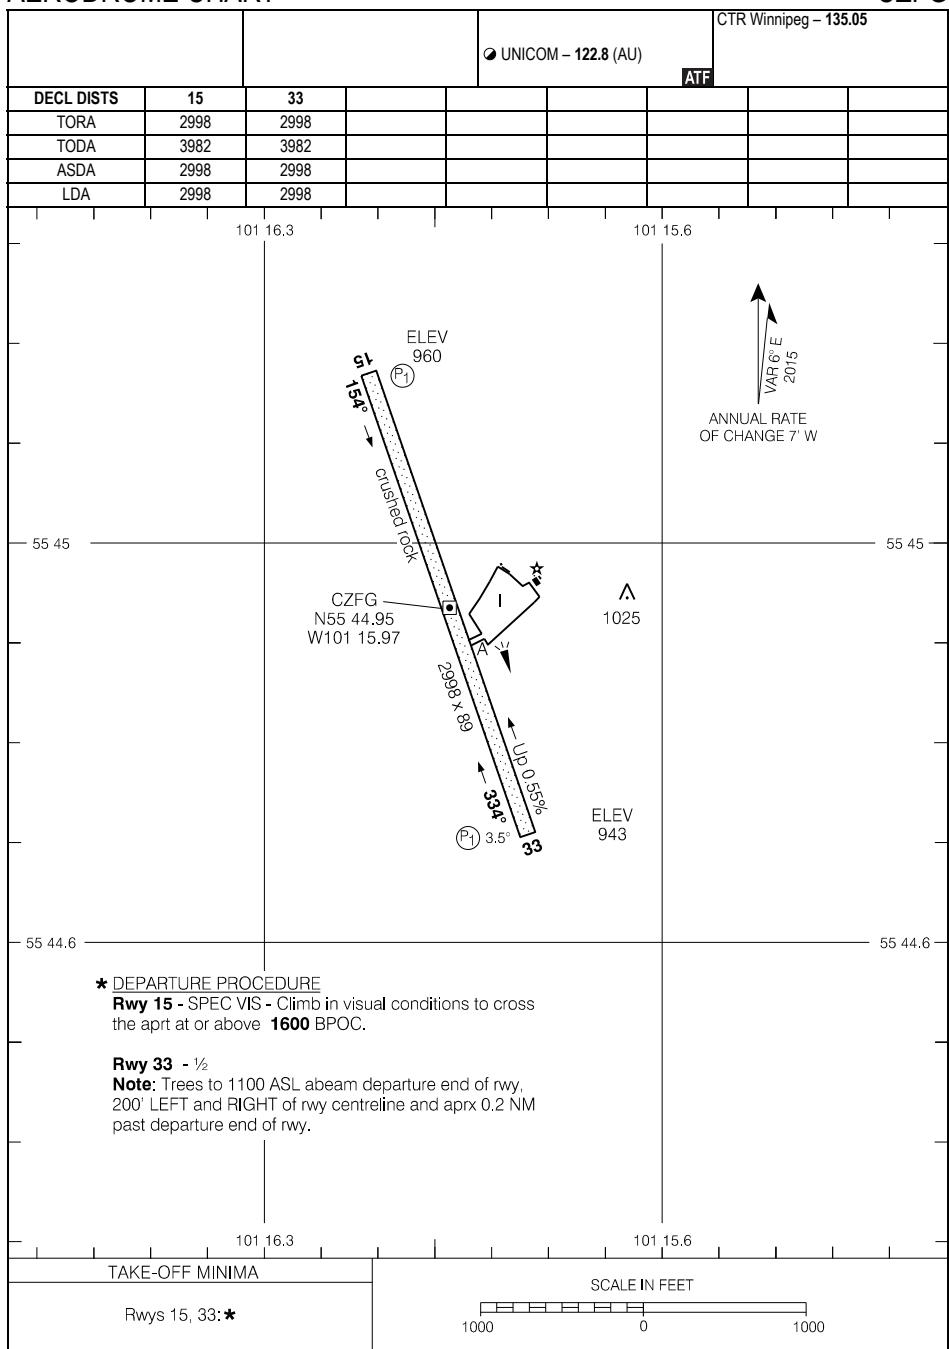

AERODROME CHART

EFF 30 JAN 20


CZFG

CZFG-AD

CYOP-AD

RAINBOW LAKE, AB
CYOP

AERODROME CHART

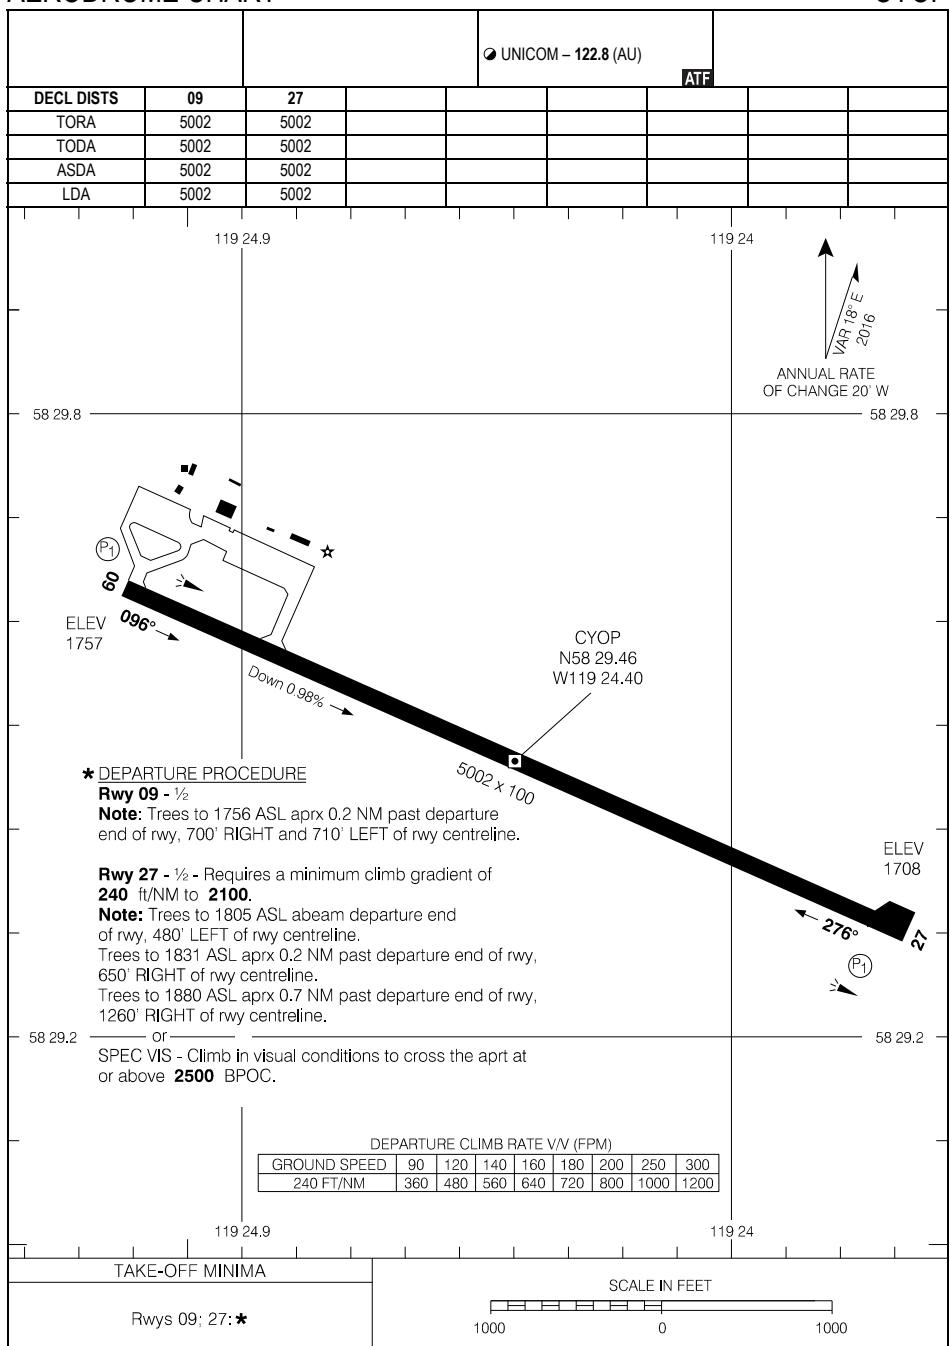

AERODROME CHART

EFF 20 FEB 25


CYOP

CYOP-AD

CYQF-AD

RED DEER REGIONAL, AB
CYQF

AERODROME CHART

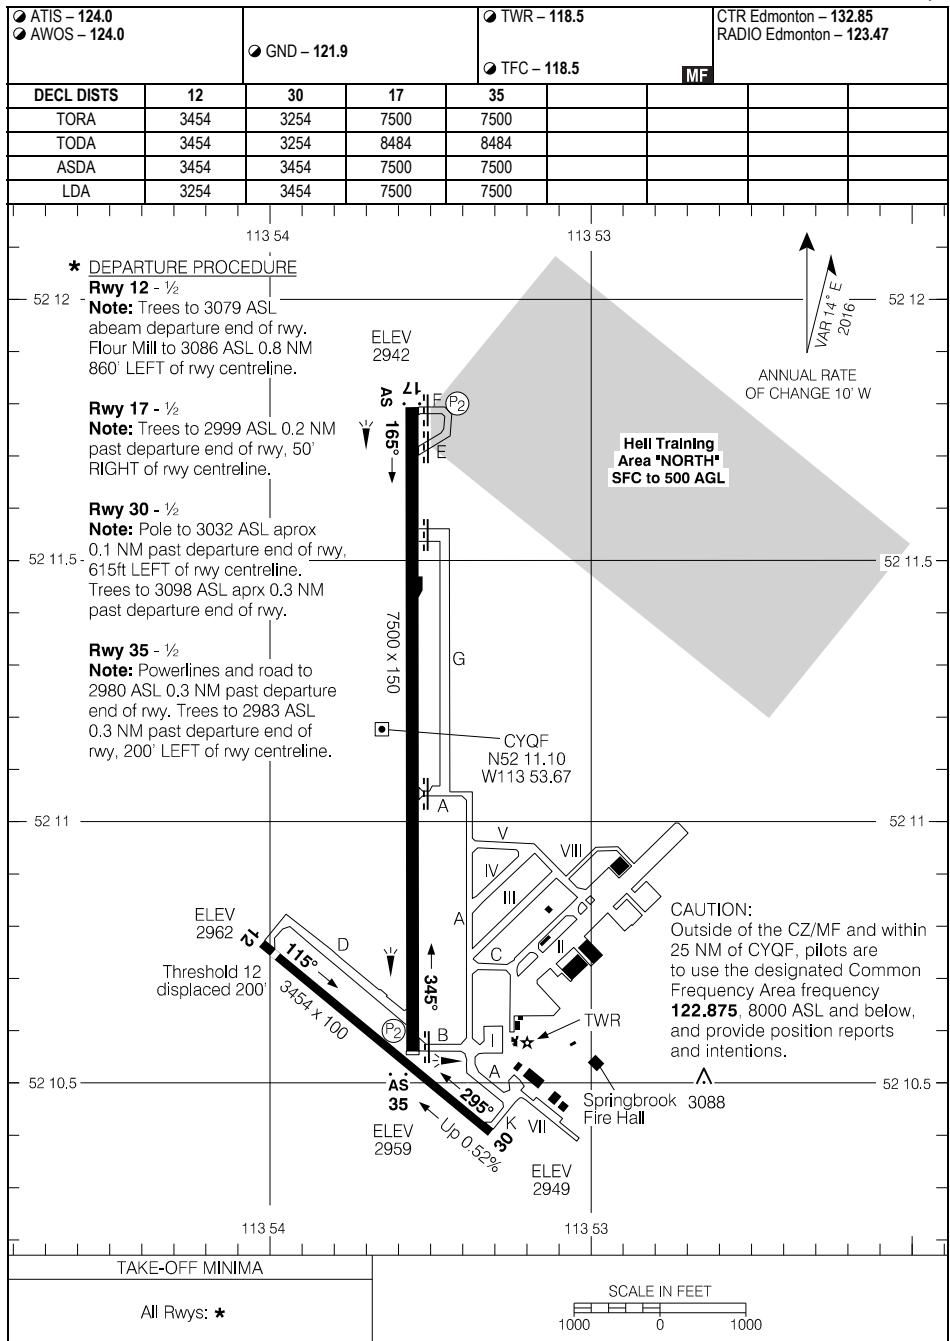


AERODROME CHART

EFF 17 APR 25

CYQF-AD

CYQF

AERODROME CHART

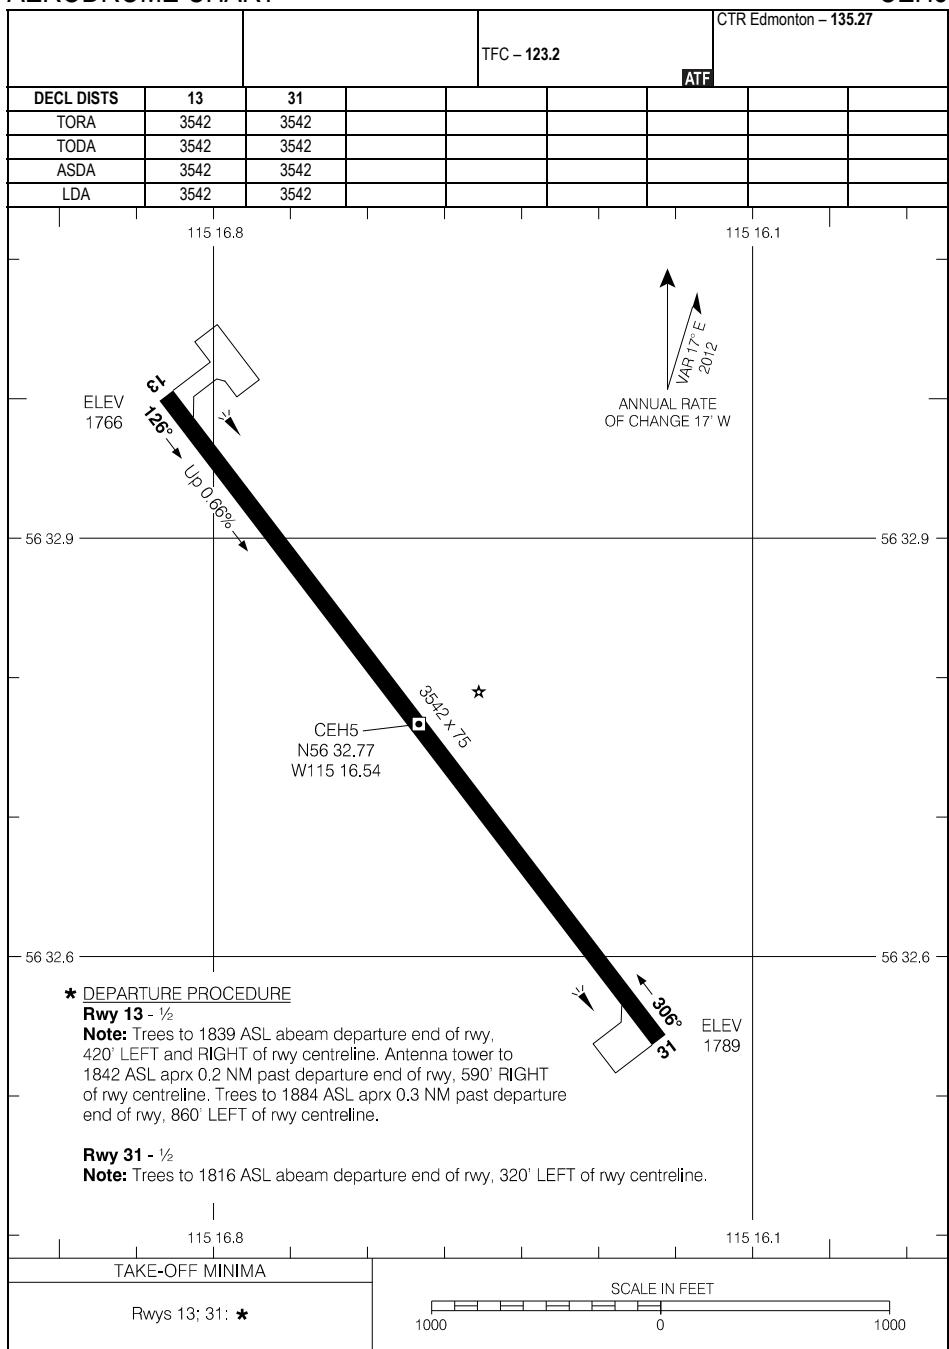

AERODROME CHART


EFF 12 AUG 21

CEH5

CYRS-AD

RED SUCKER LAKE, MB
CYRS

AERODROME CHART

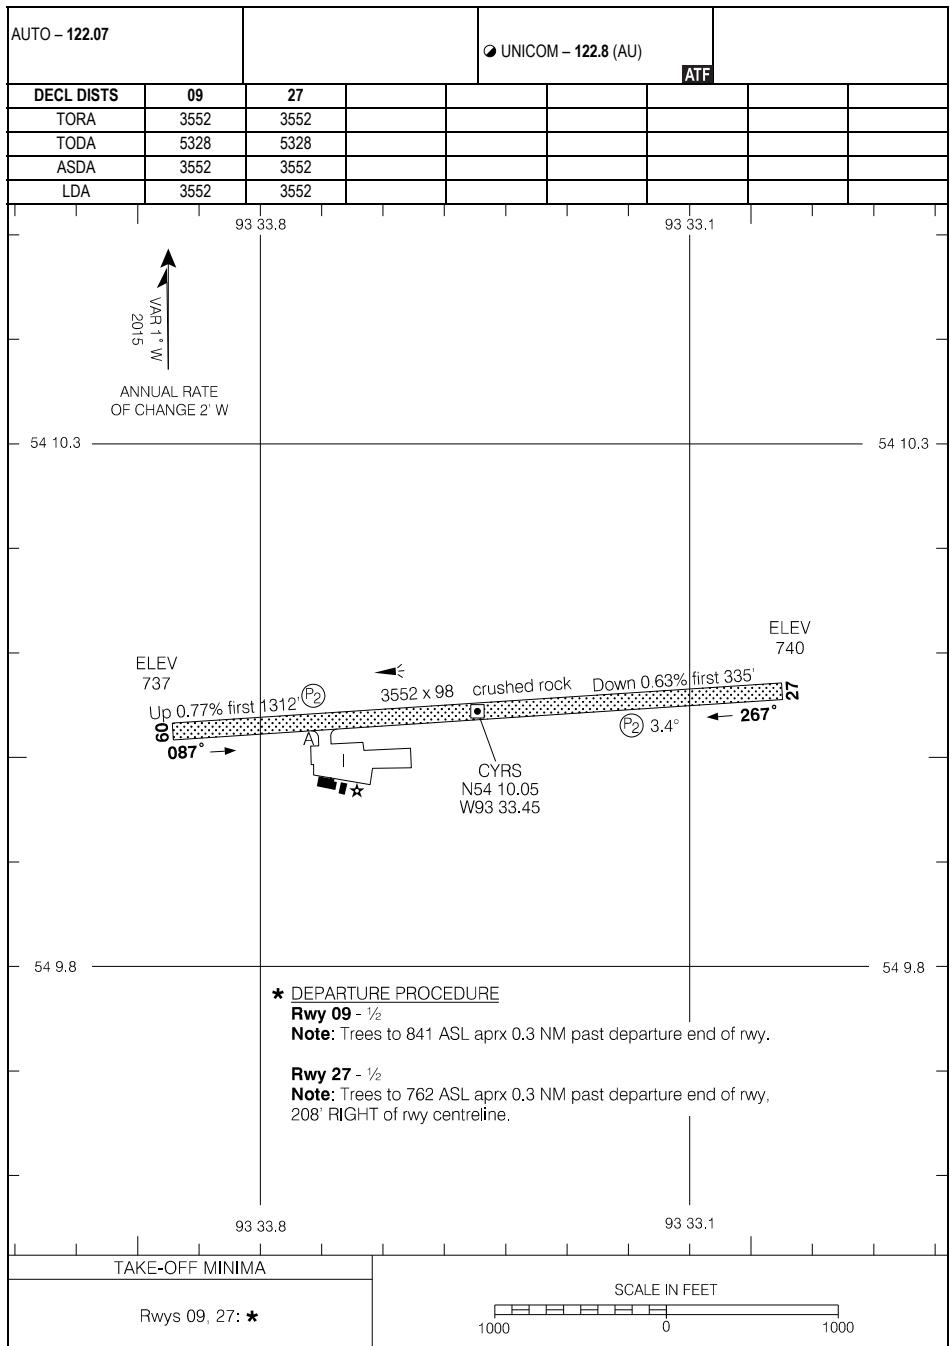

AERODROME CHART

EFF 12 JUN 25


CYRS-AD

CYRS

CYQR-AD

REGINA INTL, SK
CYQR

AERODROME CHART

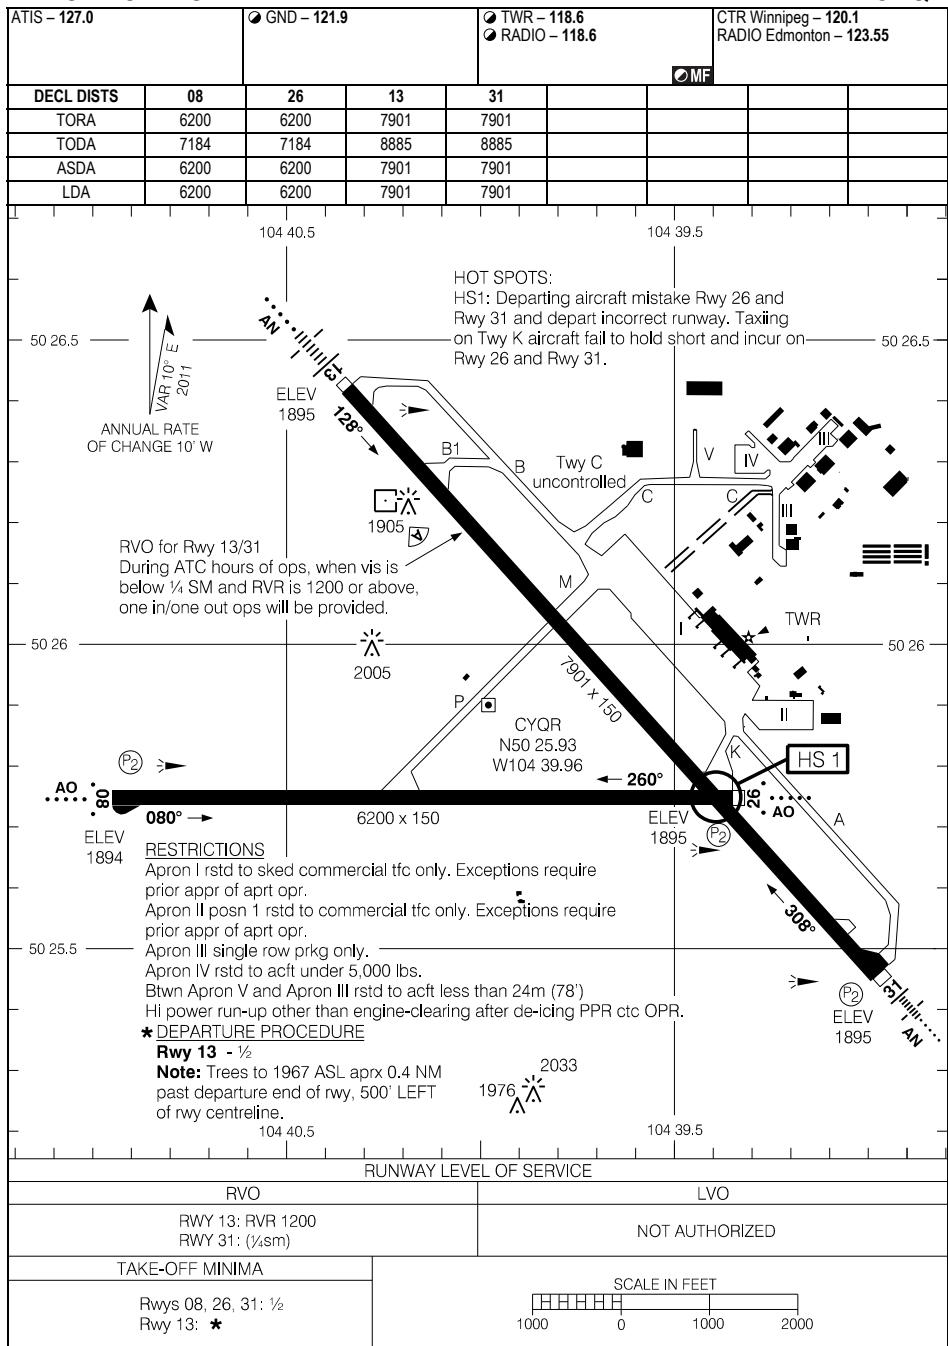

AERODROME CHART


CYQR-AD

CYQR

CYQR-APD

REGINA INTL, SK
CYQR

PARKING AREAS

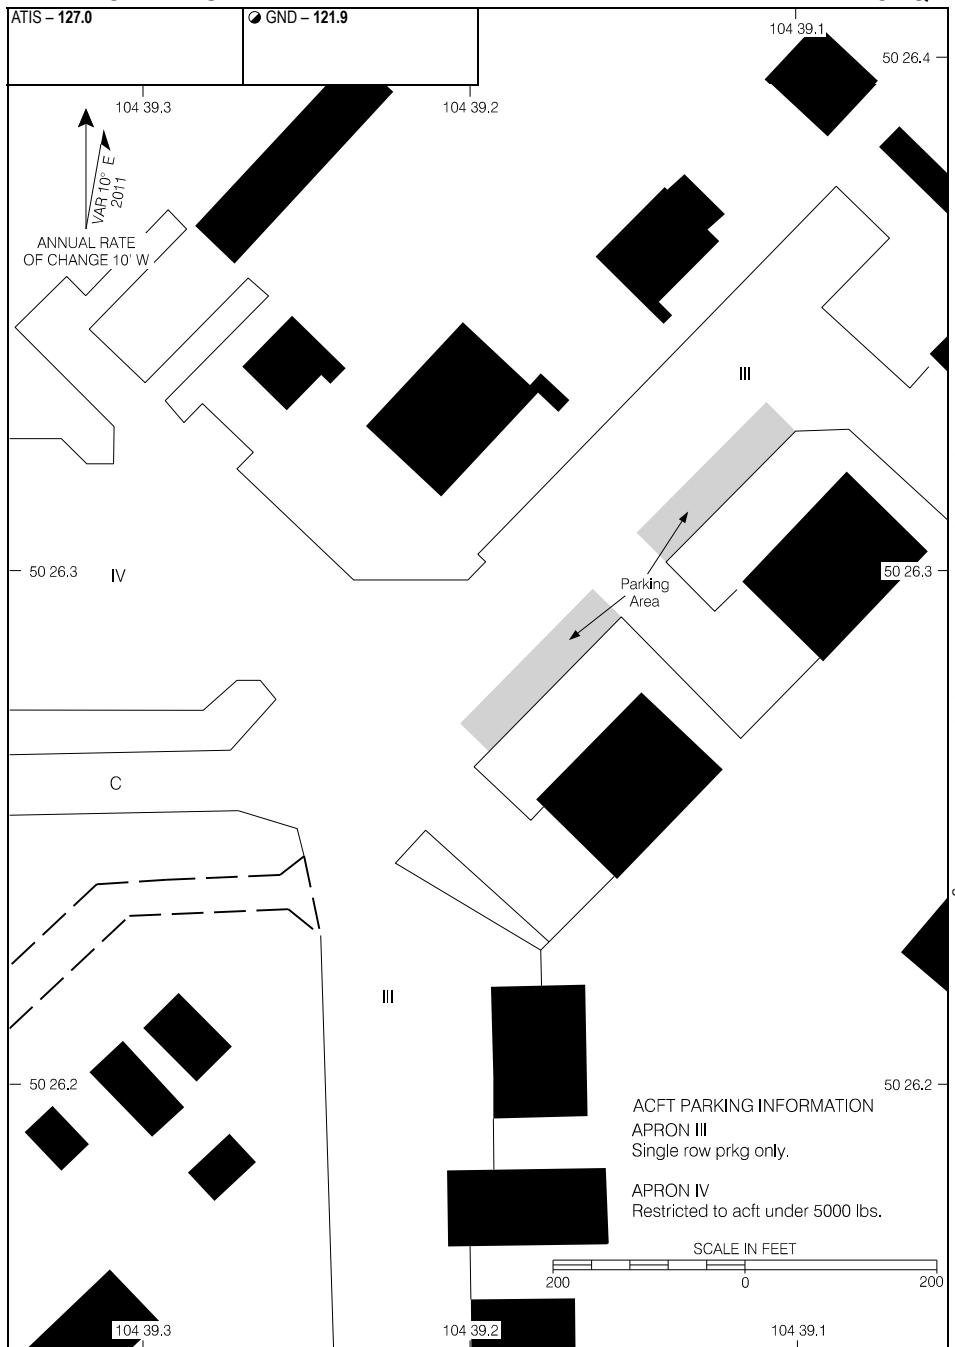

PARKING AREAS

EFF 24 MAR 22


CYQR

CYQR-APD

CYRM-AD

ROCKY MOUNTAIN HOUSE, AB
CYRM

AERODROME CHART

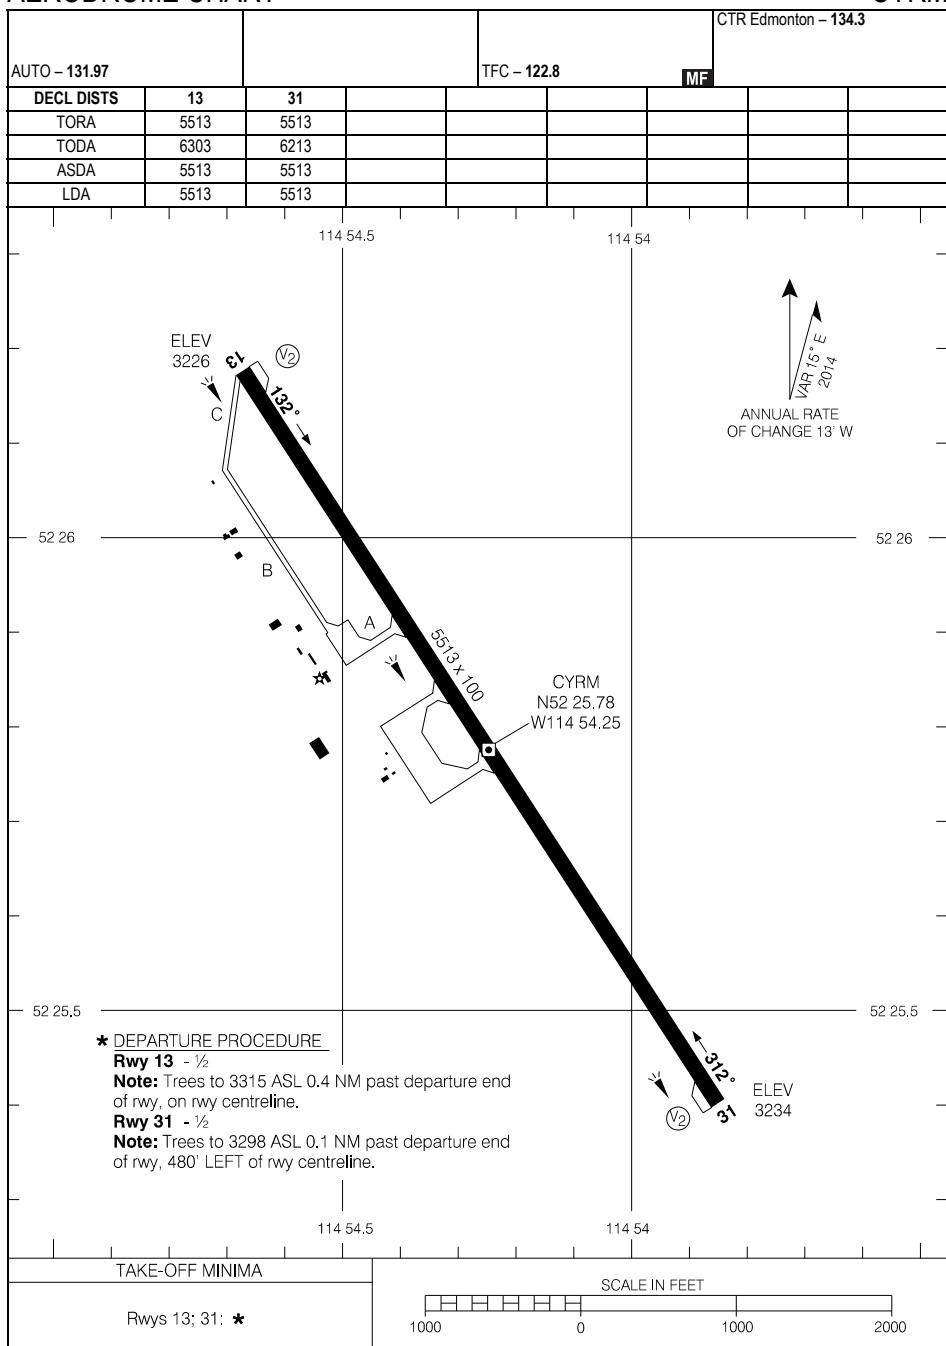

AERODROME CHART

EFF 23 FEB 23


CYRM-AD

CYRM

CJX4-AD

ROSETOWN, SK
CJX4

AERODROME CHART

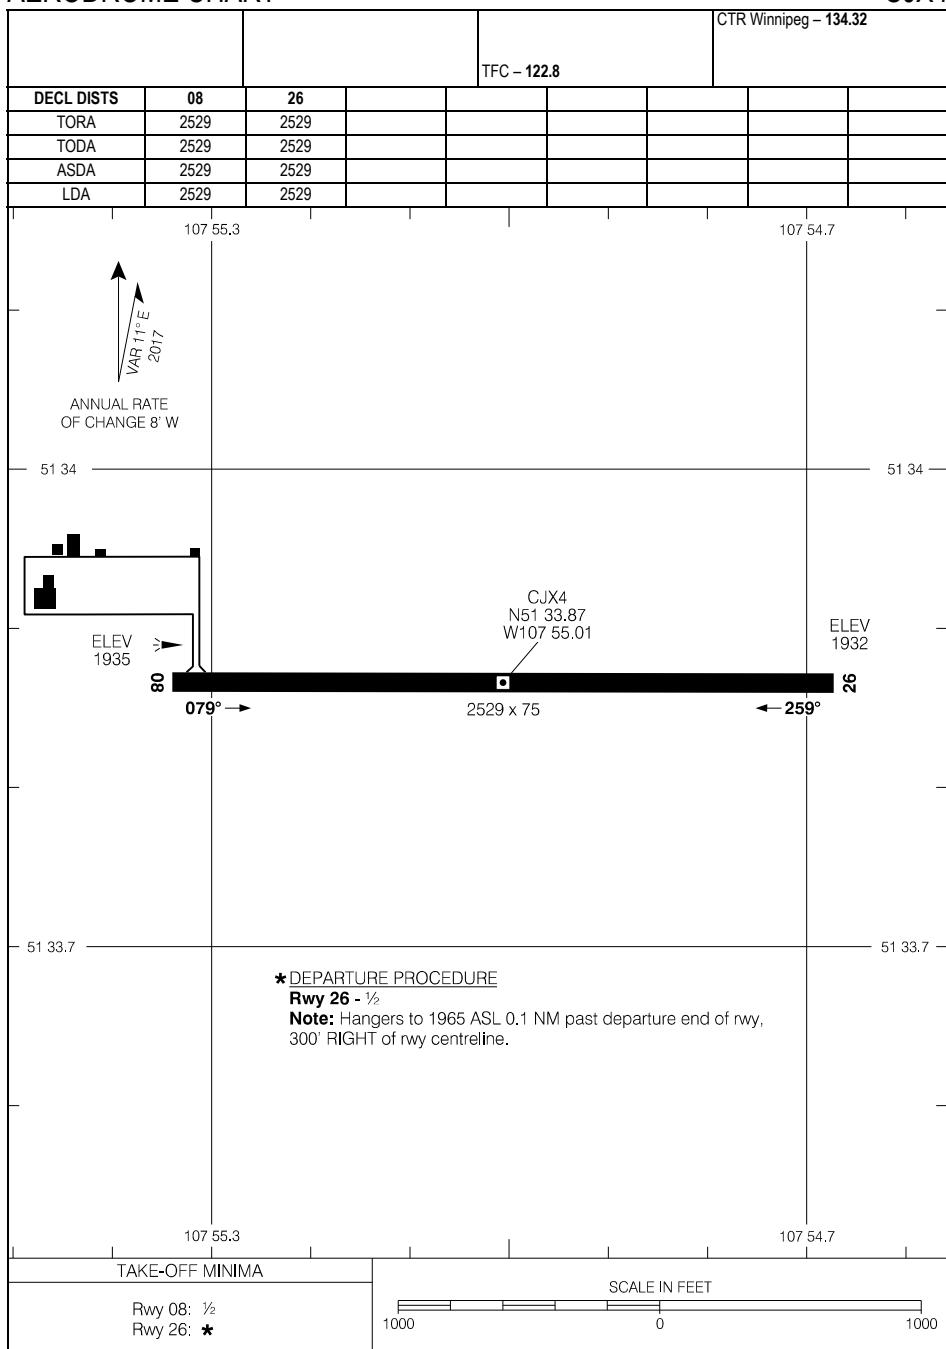


AERODROME CHART

EFF 24 MAR 22

CJX4

CJX4-AD

AERODROME CHART

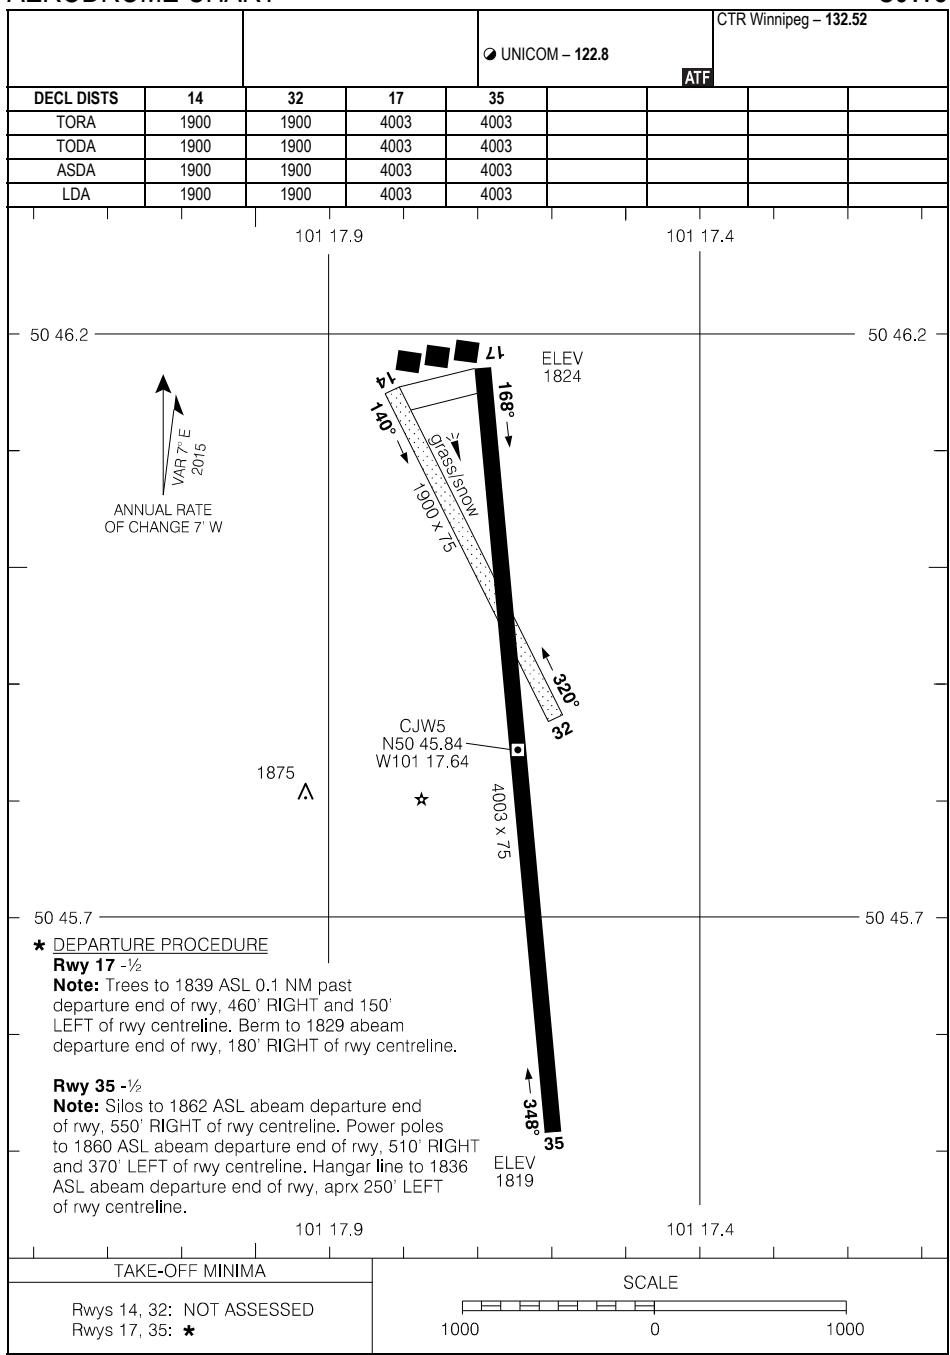

AERODROME CHART

EFF 11 JUL 24


CJW5

CYXE-AD

SASKATOON/JOHN G. DIEFENBAKER INT'L, SK

CYXE

AERODROME CHART

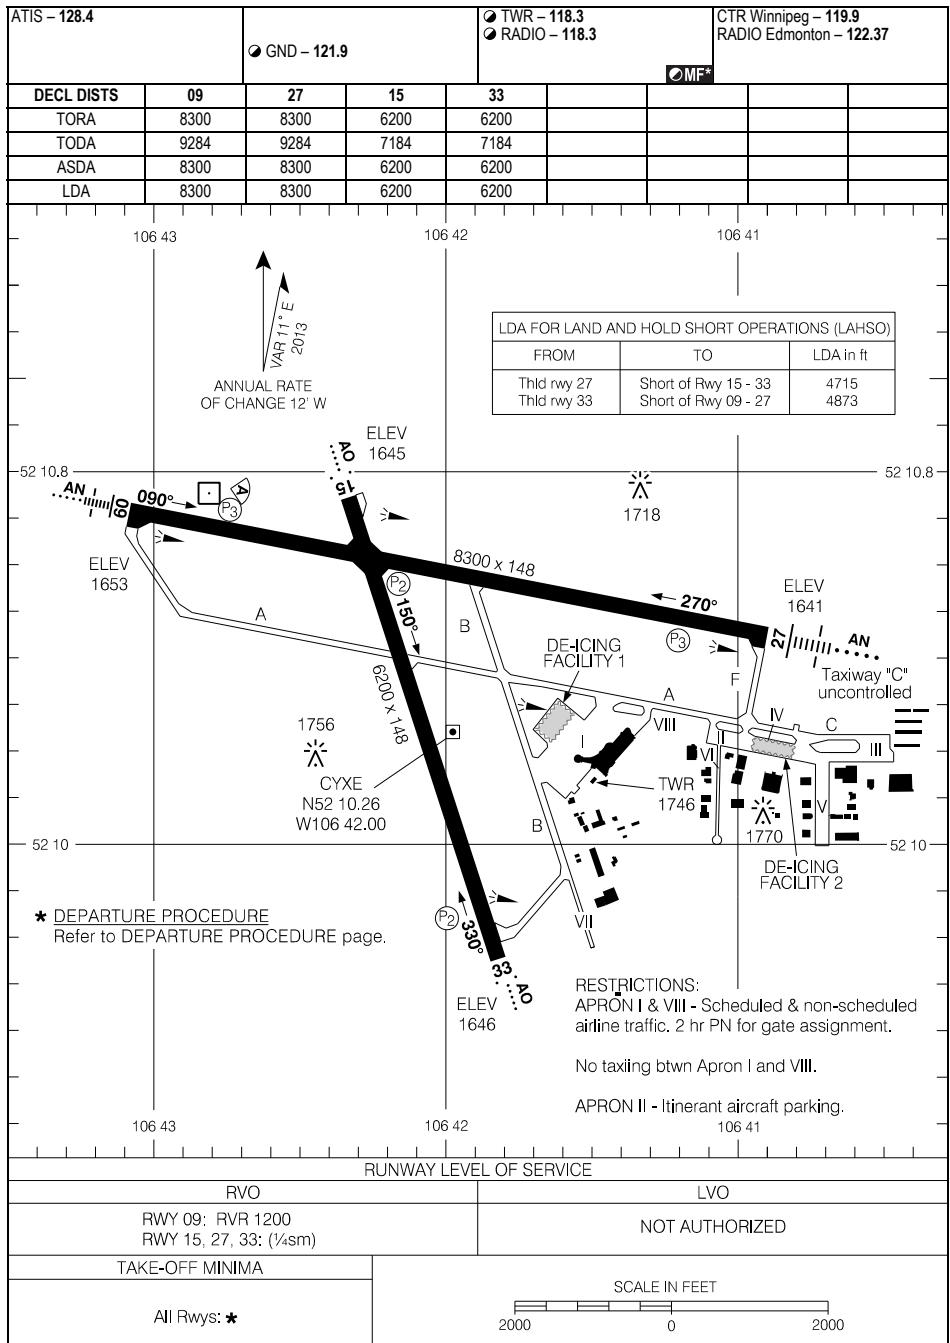

AERODROME CHART

EFF 5 SEP 24

CYXE

CYXE-AD

REDUCED VISIBILITY PROCEDURES

Reduced Visibility Procedures (RVR less than 2600 to 1200 ft)

If any portion of the airport drops below $\frac{1}{2}$ SM or 2600 RVR but is at or above $\frac{1}{4}$ SM or 1200 RVR, the airport is considered to be operating in RVOP with no restrictions to aircraft or vehicles.

If any portion of the airport drops below $\frac{1}{4}$ SM or 1200 RVR, provided the runway of intended use is at or above $\frac{1}{4}$ SM or 1200 RVR, the following procedures shall be implemented:

- Any runway that is below $\frac{1}{4}$ SM or 1200 RVR will not be used for arrivals or departures.
- Restrictions apply to vehicles and aircraft on the manoeuvring area. Only one aircraft, helicopter or vehicle will be given permission to operate on the manoeuvring area at any given time (except as permitted below under Vehicle Exceptions).
- Towing of aircraft on the manoeuvring area is not permitted.

Departures

An aircraft may be taxied for departure if the runway of intended use is at or above $\frac{1}{4}$ SM or 1200 RVR provided no other aircraft or vehicle is on the manoeuvring area.

If the visibility drops below $\frac{1}{4}$ SM or 1200 RVR after taxi clearance was issued, the aircraft may continue to taxi.

An aircraft may depart during RVOP operations provided the RVR serving the departure runway is at or above $\frac{1}{4}$ SM or 1200 RVR.

Arrivals

An aircraft may land and taxi if the runway of intended use is at or above $\frac{1}{4}$ SM or 1200 RVR provided no other aircraft or vehicle is on the manoeuvring area.

Arrivals will be in accordance with applicable approach minima or approach ban considerations. After landing, the aircraft may taxi provided no other aircraft or vehicle is on the manoeuvring area.

If the visibility for the runway of intended use drops below $\frac{1}{4}$ SM or 1200 RVR after an arriving aircraft crosses the final approach fix (FAF), the aircraft may land and taxi in.

Vehicle Exceptions

A group of vehicles may be considered one movement provided they are traveling together and use a single call sign.

Vehicles are permitted to operate on an inactive runway. Once vehicles are established and restricted to remain on the inactive runway, RVOP may resume on the remaining manoeuvring area.


Emergency vehicles responding to emergency situations are exempt.

REDUCED VISIBILITY PROCEDURES

CZTM-AD

SHAMATTAWA, MB
CZTM

AERODROME CHART

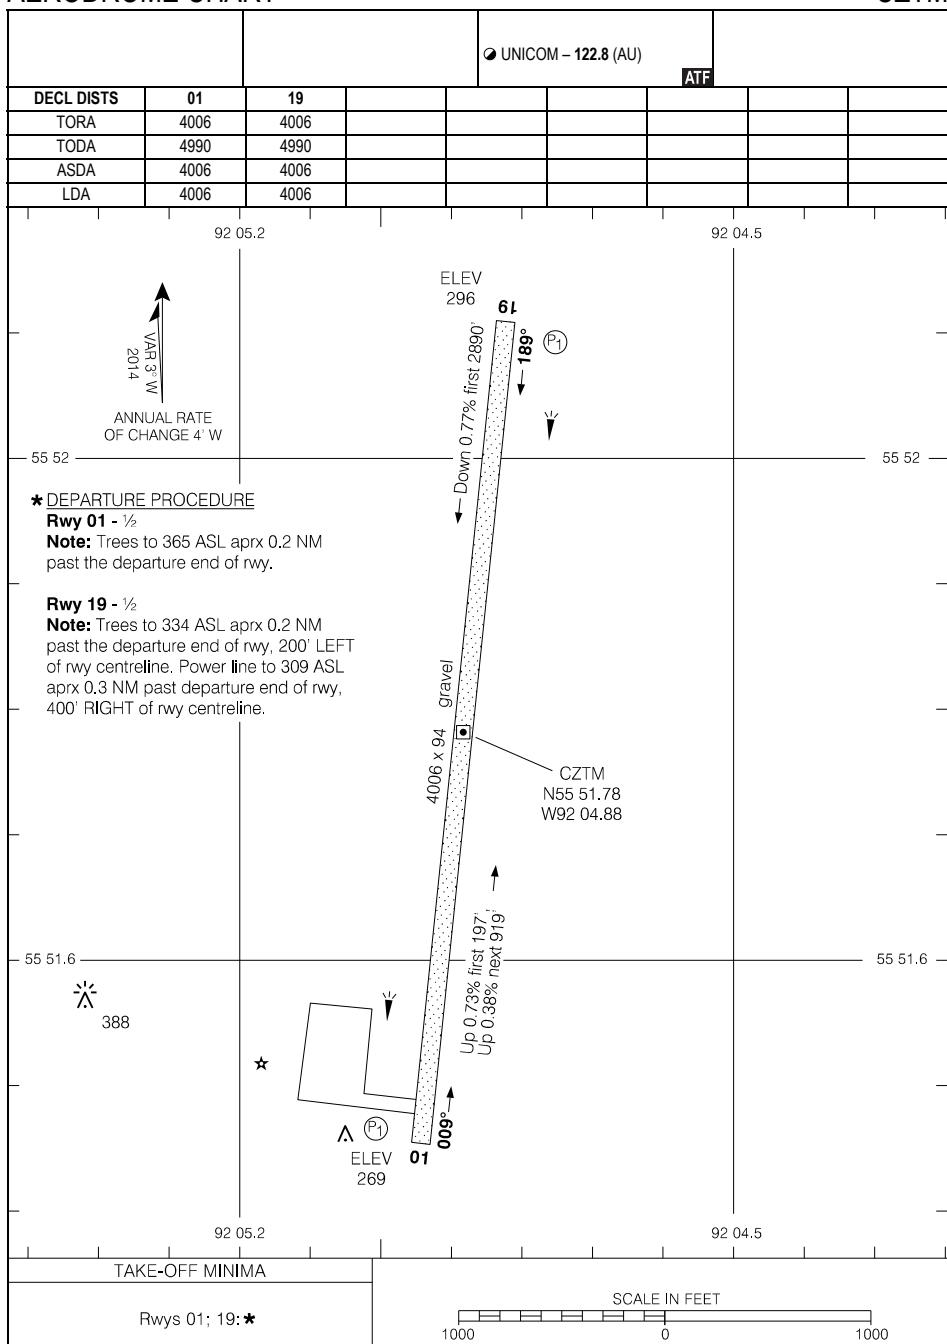


AERODROME CHART

EFF 20 FEB 25

CZTM-AD

CZTM

AERODROME CHART

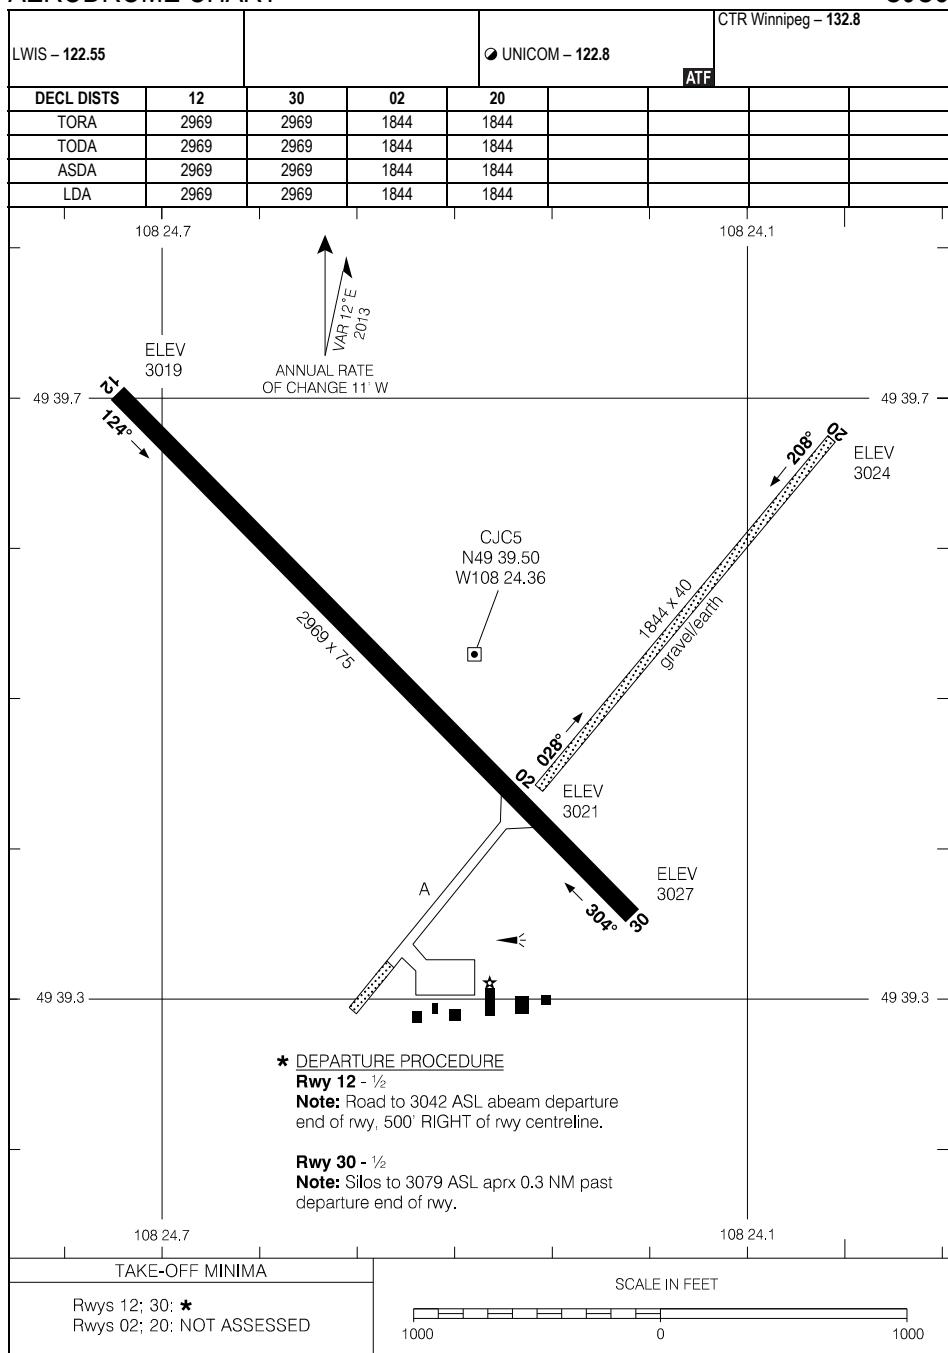

AERODROME CHART


EFF 14 JUL 22

CJC5

CYZH-AD

SLAVE LAKE, AB
CYZH

AERODROME CHART

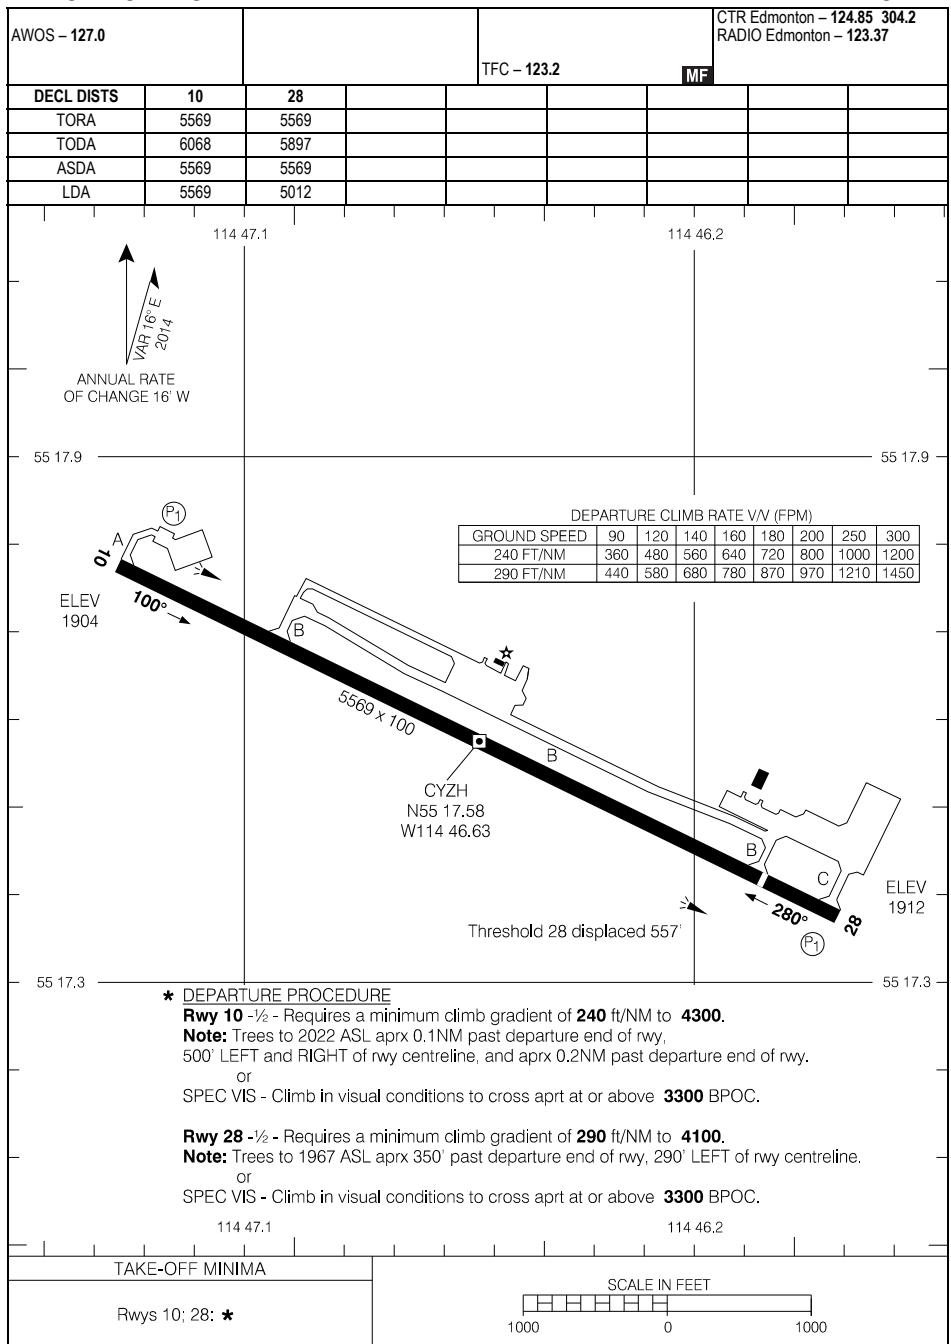

AERODROME CHART

EFF 5 SEP 24

CYZH-AD

CYZH

SPIRIT RIVER, AB
CFS5

AERODROME CHART

CTR Edmonton – 134.5

			TFC - 123.2	ATF
DECL DISTS	06	24		
TORA	3003	3003		
TODA	3003	3003		
ASDA	3003	3003		
LDA	3003	3003		

118 51

118 50

ANNUAL RATE
OF CHANGE 17' W

DEPARTURE CLIMB RATE V/V (FPM)							
GROUND SPEED	90	120	140	160	180	200	250
270 FT/NM	410	540	630	720	810	900	1130

ELEV
2043

CFS5
N55 47.03
W118 50.45

Down 0.67%
90 072° →

ELEV
2023

* DEPARTURE PROCEDURE

Rwy 06 - ½ - Climb hdg 072° to 2700 BPOC.

Note: Buildings to 2063 ASL abeam dep

end of rwy, 500' RIGHT of rwy centreline.
Powerlines to 2060 ASL, 0.1 NM past departure
end of rwy, 500' RIGHT of rwy centreline.

Rwy 24 - $\frac{1}{2}$ - Requires a minimum climb gradient of **270** ft/NM to **2500**. Climb hdg **252°** to **2800** BPOC.

Note: Buildings to 2096 ASL 0.1 NM past departure end of rwy. 570' LEFT of rwy centreline. Powerlines to 2102 ASL 0.2 NM past departure end of rwy. 300' RIGHT of rwy centreline. Trees to 2173 ASL 0.6 NM past departure end of rwy. 1300' LEFT of rwy centreline.

SPEC VIS - Climb in visual conditions to cross the
aprt at or above **3000** BPOC

TAKE-OFF MINIMA

SCALE IN FEET

Rwy 06; 24: *


AERODROME CHART

CFS5

CEW3-AD

ST. PAUL, AB
CEW3

AERODROME CHART

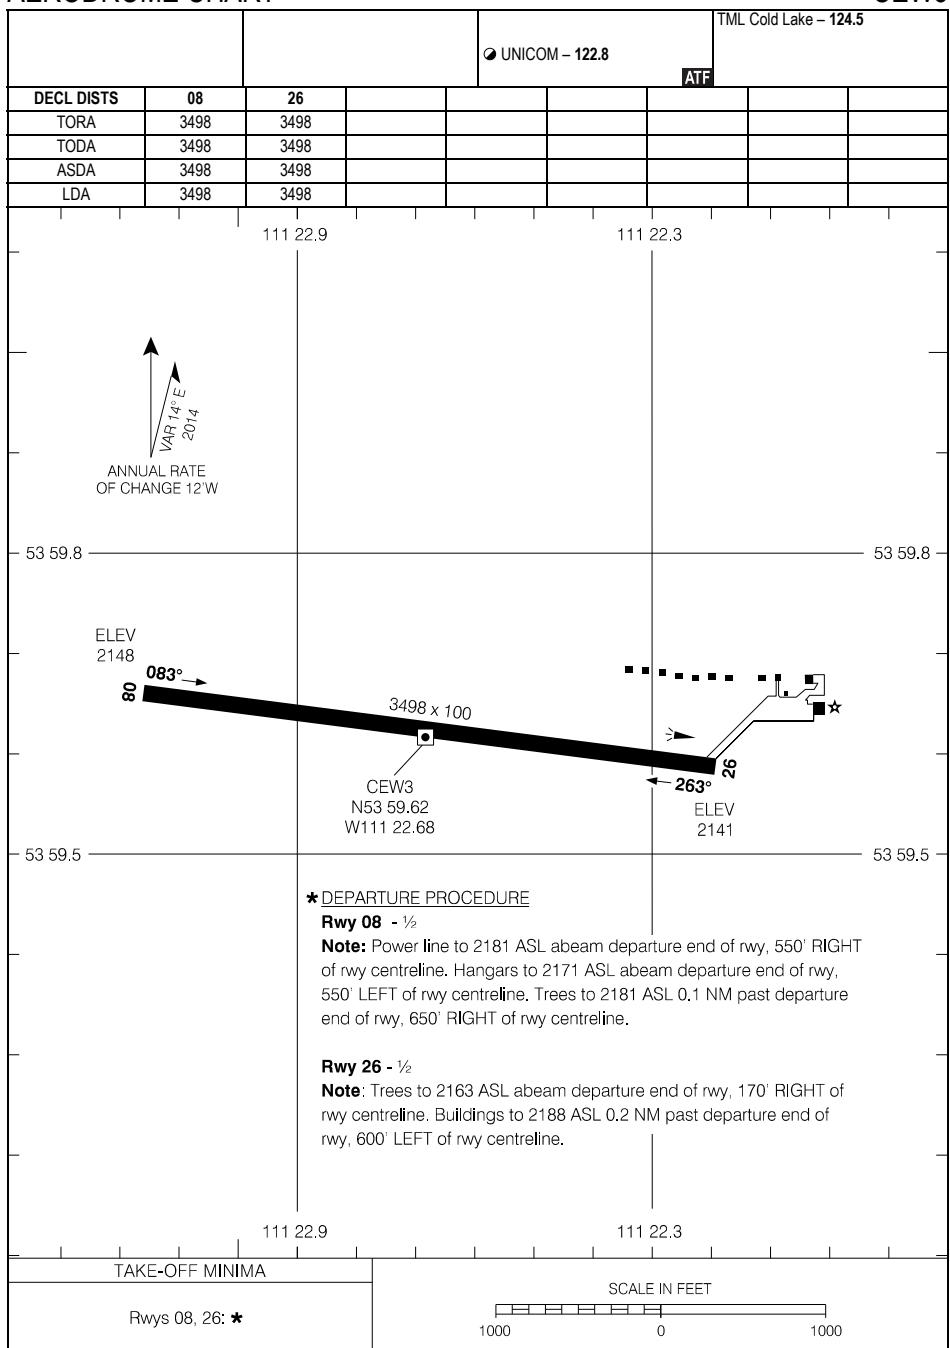

AERODROME CHART

EFF 24 MAR 22

CEW3

CEW3-AD

CYST-AD


ST. THERESA POINT, MB
CYST

AERODROME CHART

AWOS Island Lake – 128.1				RADIO Thunder Bay – 122.2			
						MF	
DECL DISTS	04	22					
TORA	3393	3393					
TODA	4377	4377					
ASDA	3393	3393					
LDA	3393	3393					

ANNUAL RATE
OF CHANGE 3% W

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

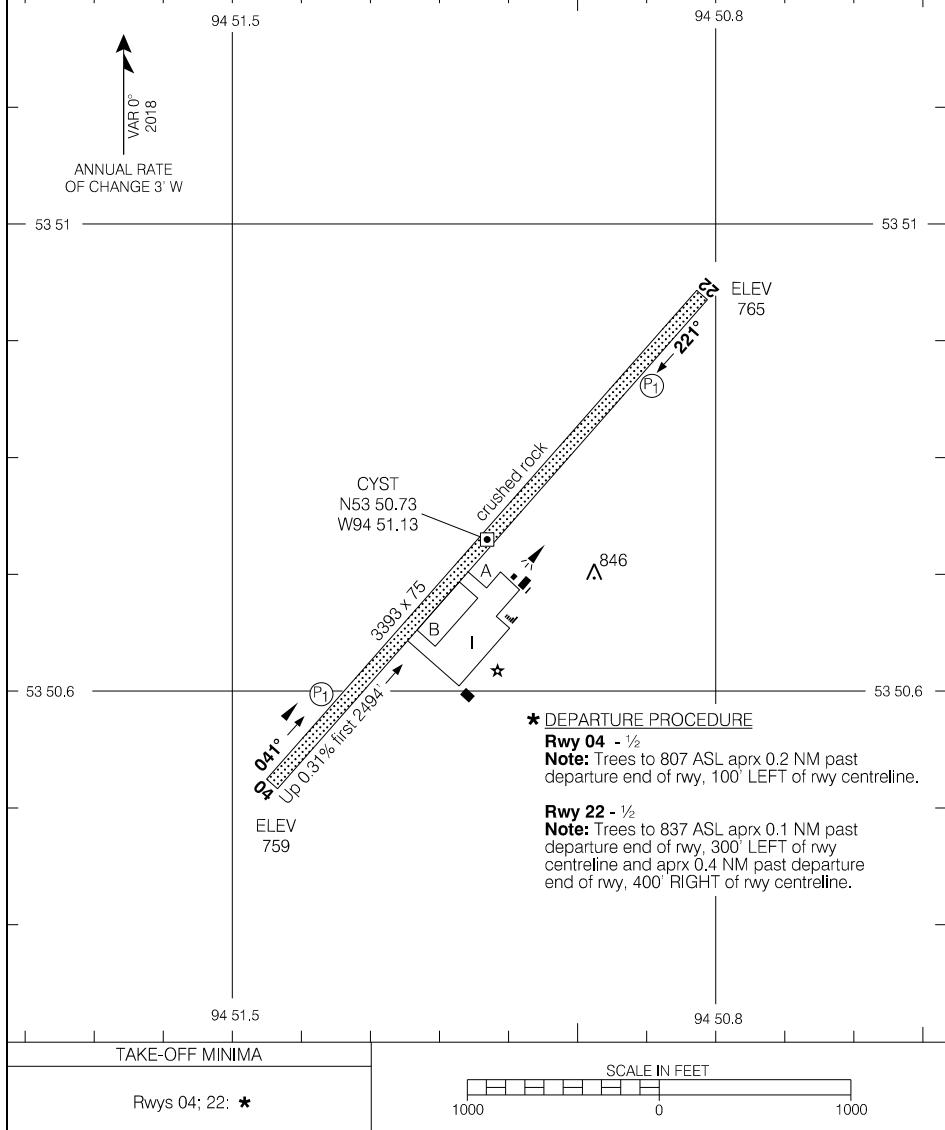

AERODROME CHART

EFF 20 FEB 25


CYST-AD

CKK7-AD

STEINBACH (SOUTH), MB
CKK7

AERODROME CHART

				● UNICOM – 122.7		TML Winnipeg – 119.9	
						ATF	
DECL DISTS	07	25	18	36			
TORA	1834	1834	3112	3112			
TODA	1834	1834	3112	3112			
ASDA	1834	1834	3112	3112			
LDA	1834	1834	3112	3112			

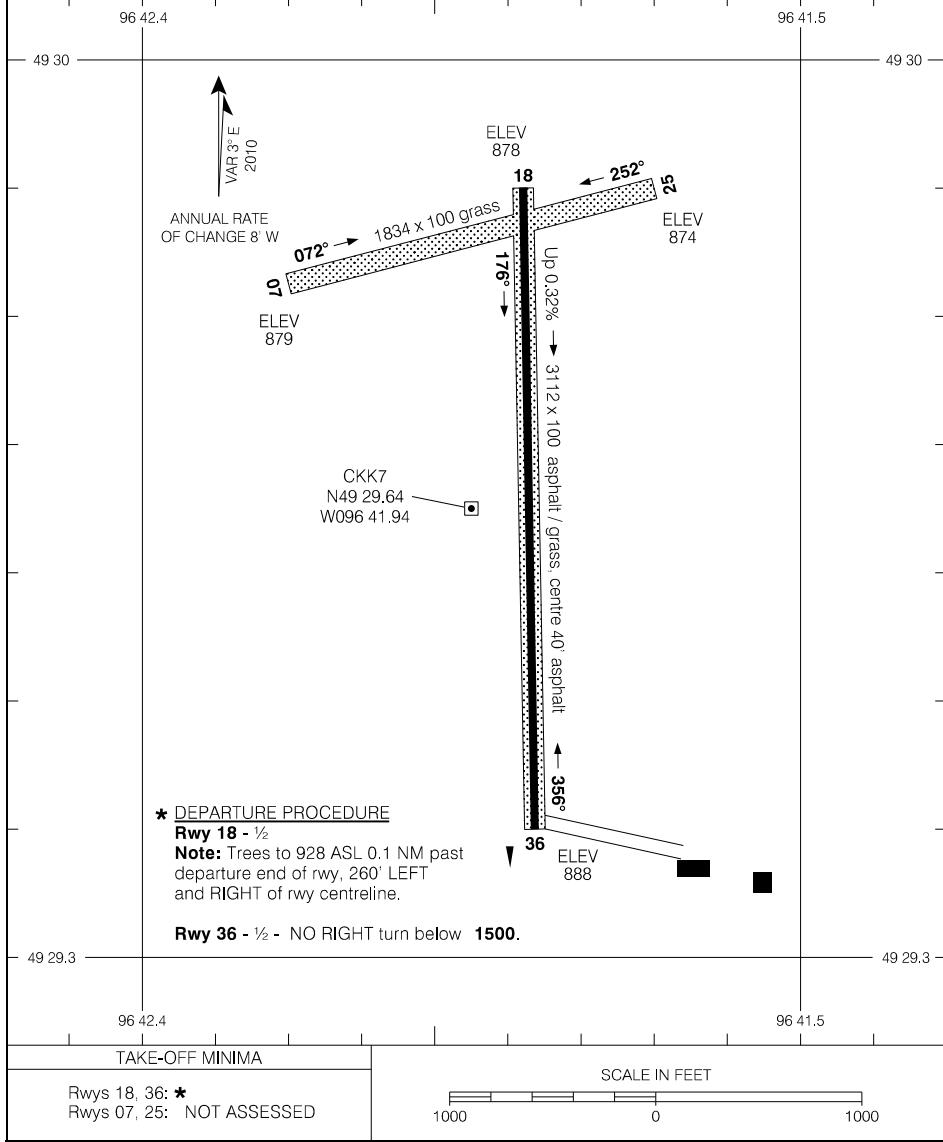

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 23 FEB 23


CKK7-AD

CKK7

CEJ3-AD

STETTLER, AB
CEJ3

AERODROME CHART

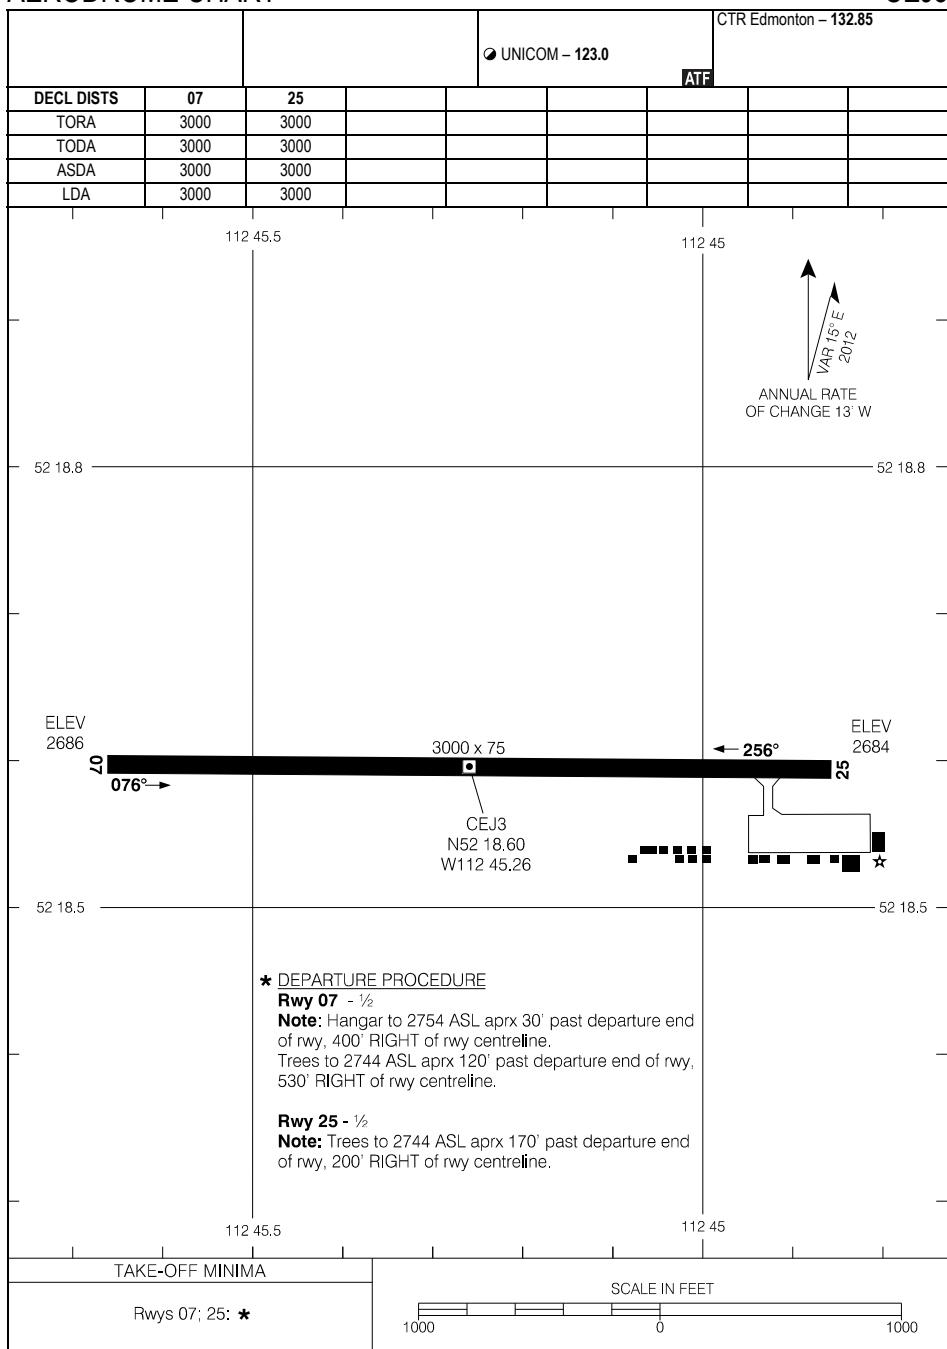

AERODROME CHART

EFF 5 OCT 23


CEJ3

CEJ3-AD

CYSF-AD

STONY RAPIDS, SK
CYSF

AERODROME CHART

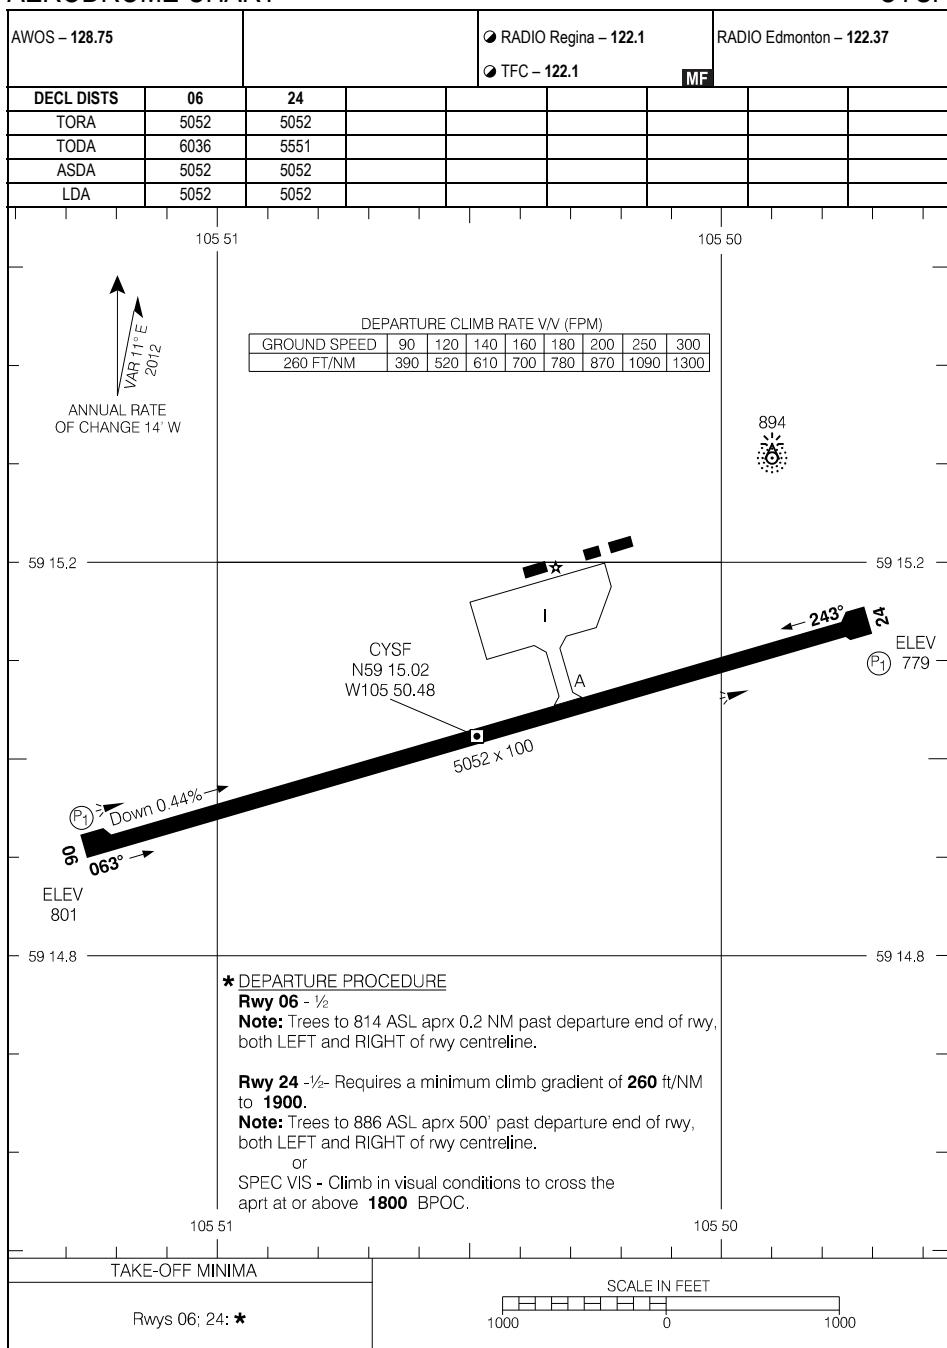


AERODROME CHART

EFF 17 APR 25

CYSF-AD

CYSF

AERODROME CHART

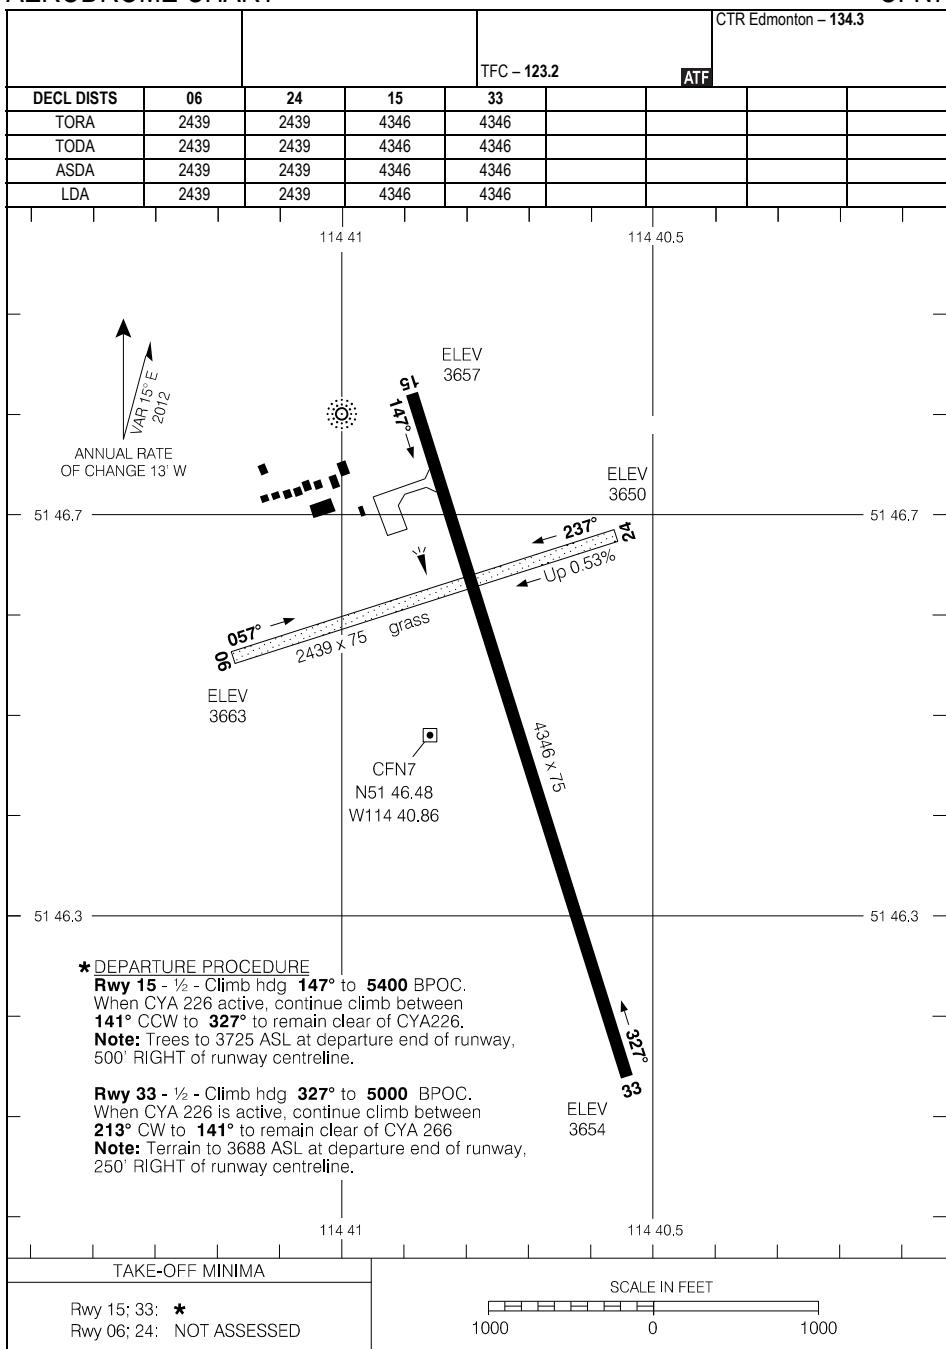

AERODROME CHART


EFF 15 JUN 23

CFN7

CZJN-AD

SWAN RIVER, MB
CZJN

AERODROME CHART

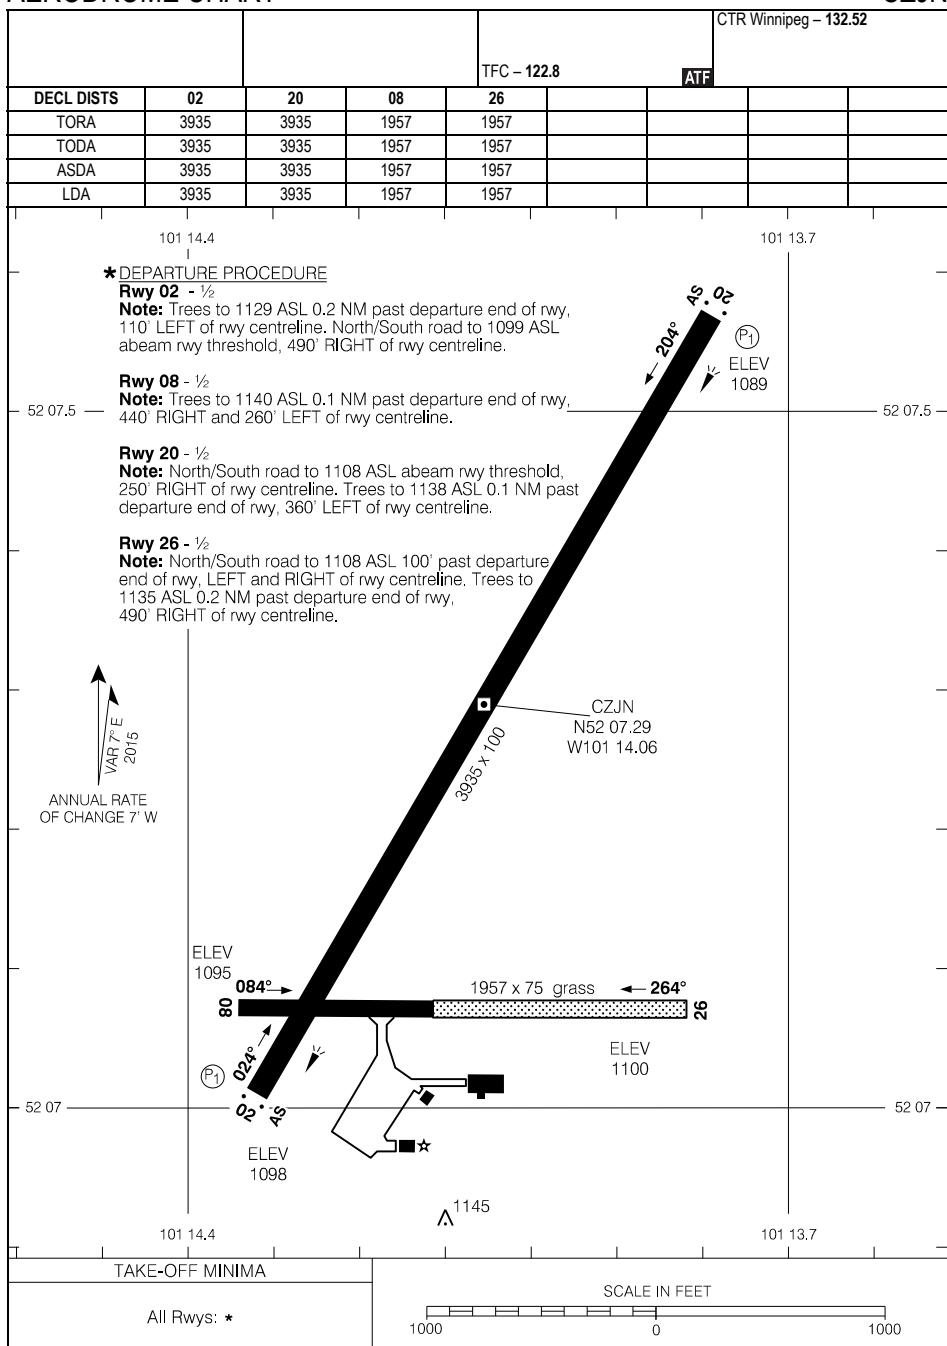

AERODROME CHART

EFF 12 JUN 25


CZJN-AD

CZJN

CYYN-AD

SWIFT CURRENT, SK
CYYN

AERODROME CHART

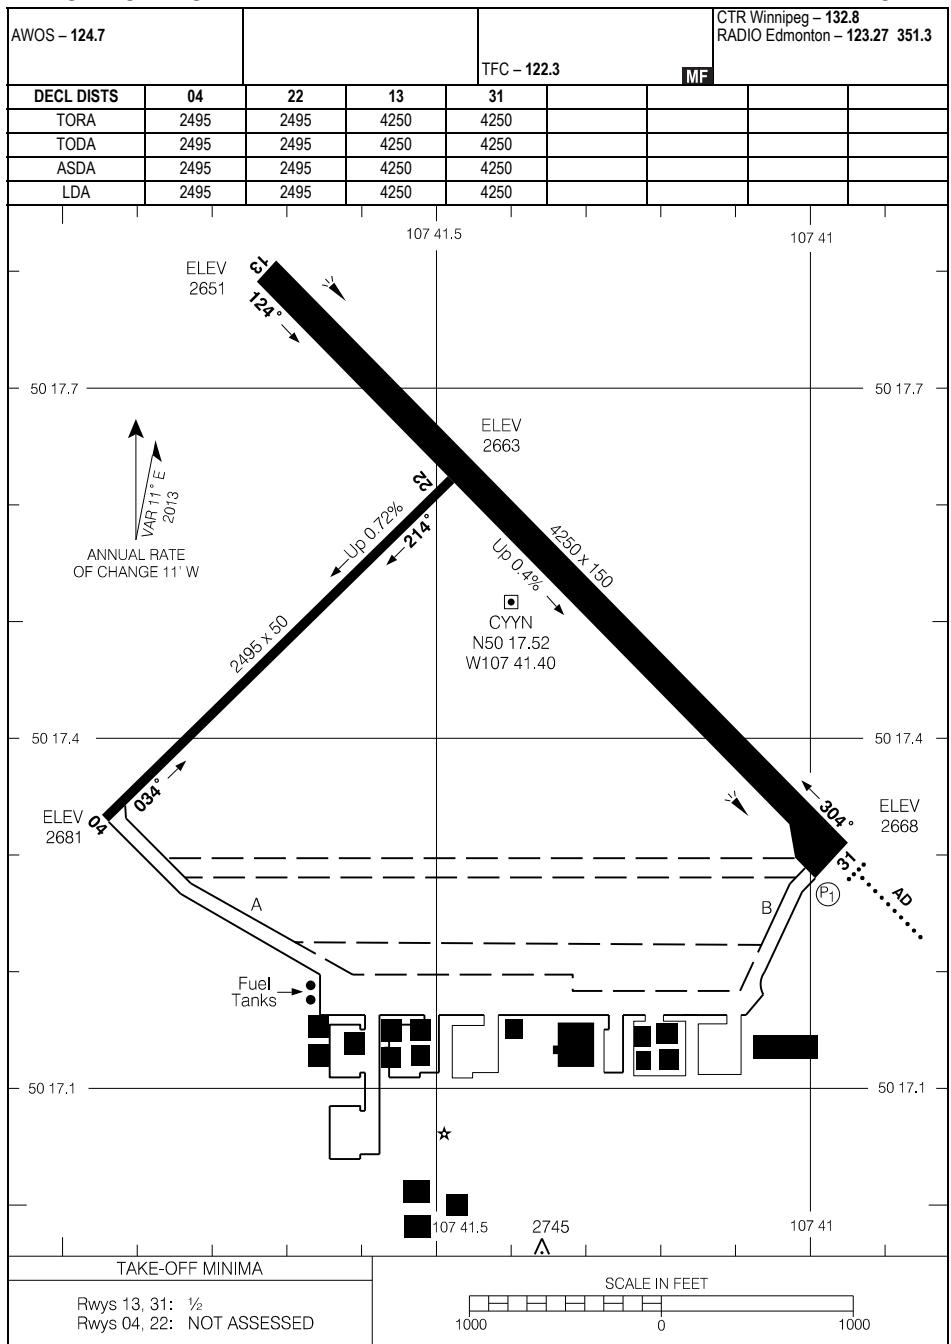

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved


AERODROME CHART

EFF 17 APR 25

CYYN-AD

CYYN

AERODROME CHART

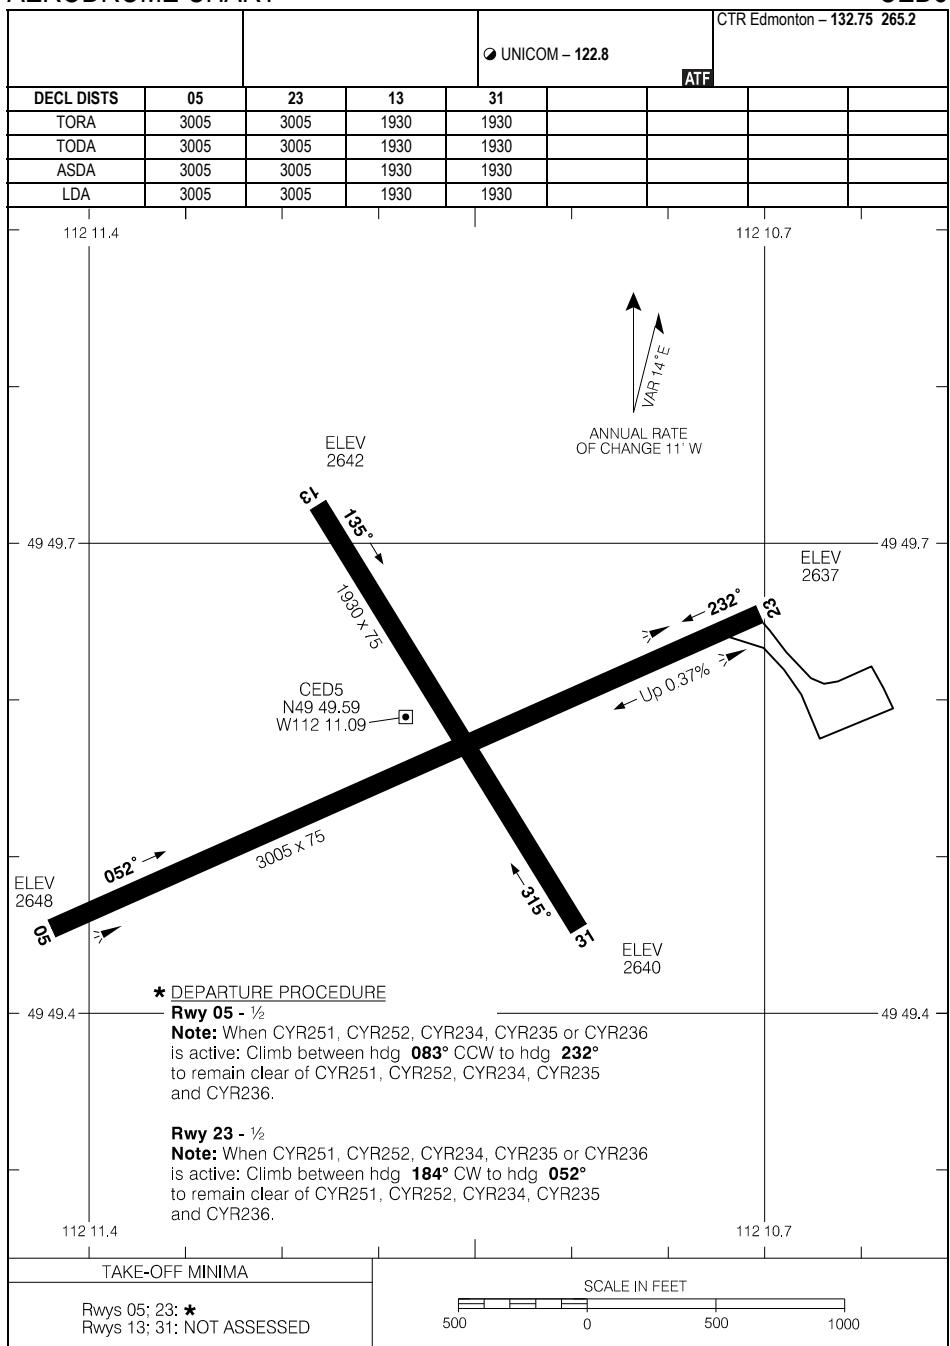

AERODROME CHART


EFF 7 AUG 25

CED5

CYBQ-AD

TADOULE LAKE, MB
CYBQ

AERODROME CHART

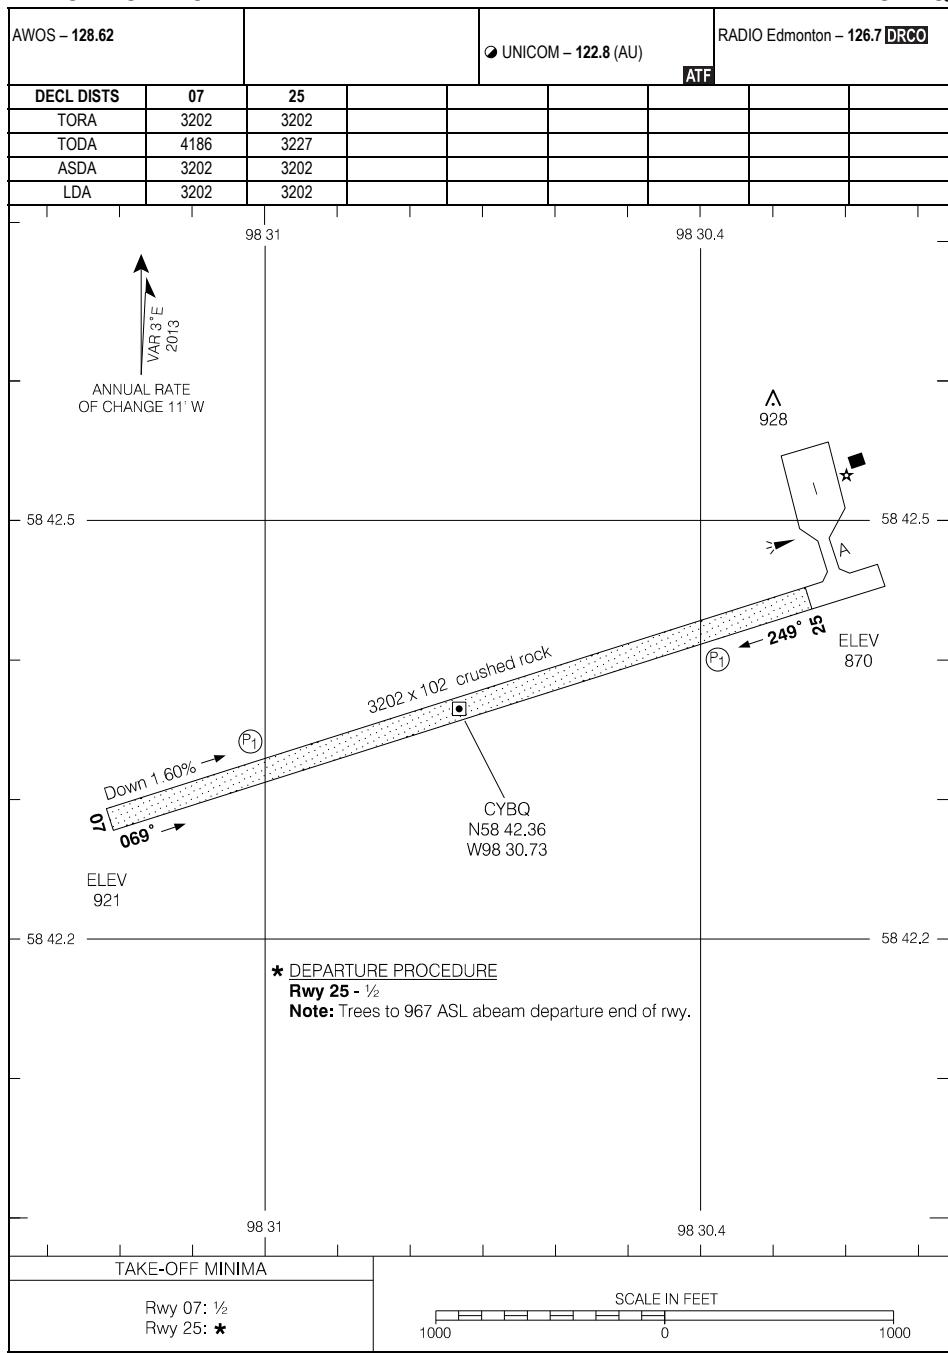

AERODROME CHART

EFF 12 JUN 25


CYBQ

CYBQ-AD

CYQD-AD

THE PAS, MB
CYQD

AERODROME CHART

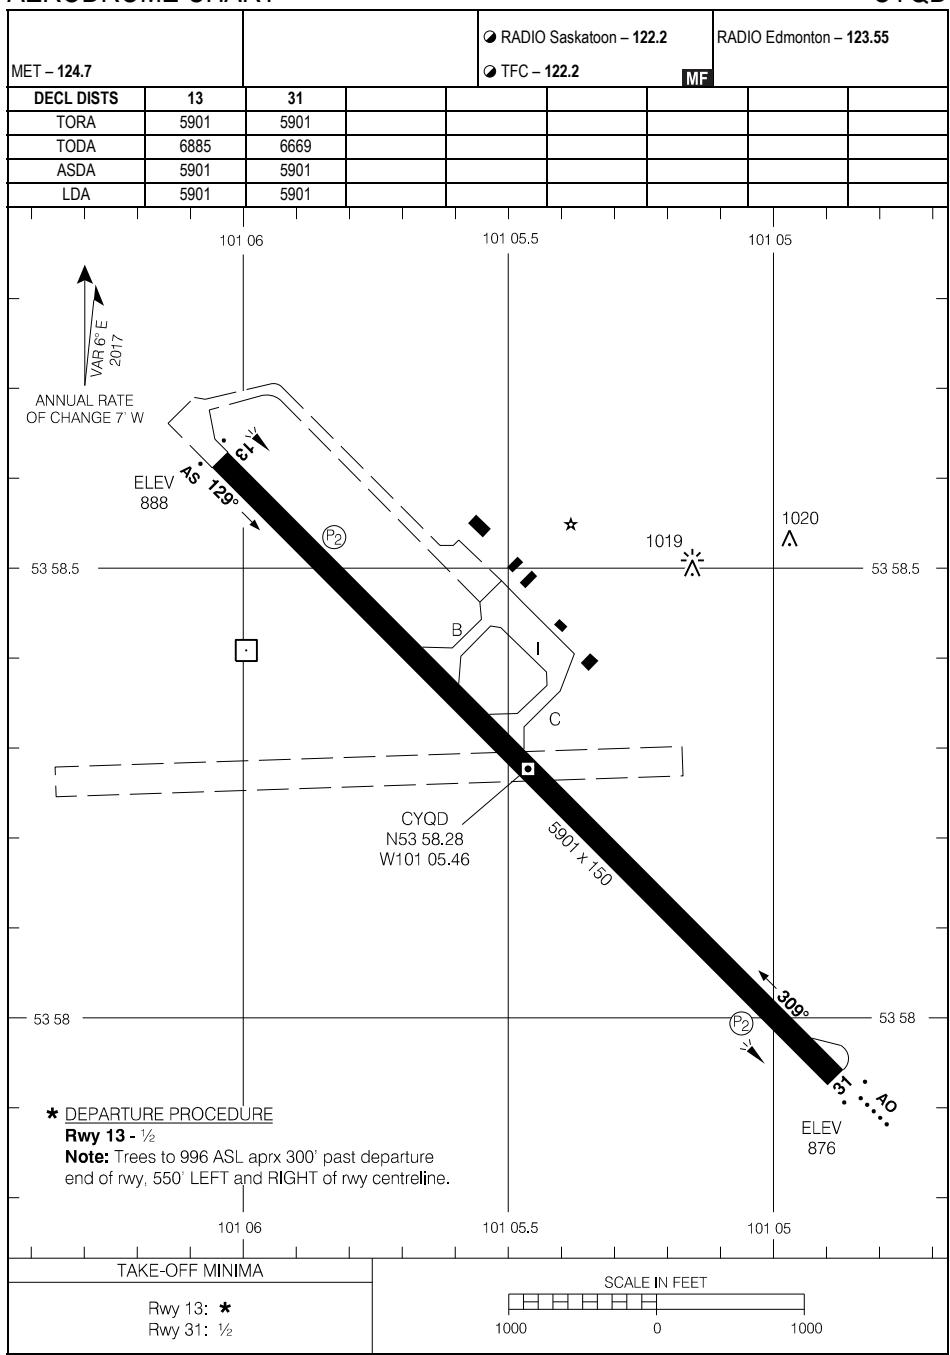


AERODROME CHART

EFF 15 JUN 23

CYQD

CYQD-AD

AERODROME CHART

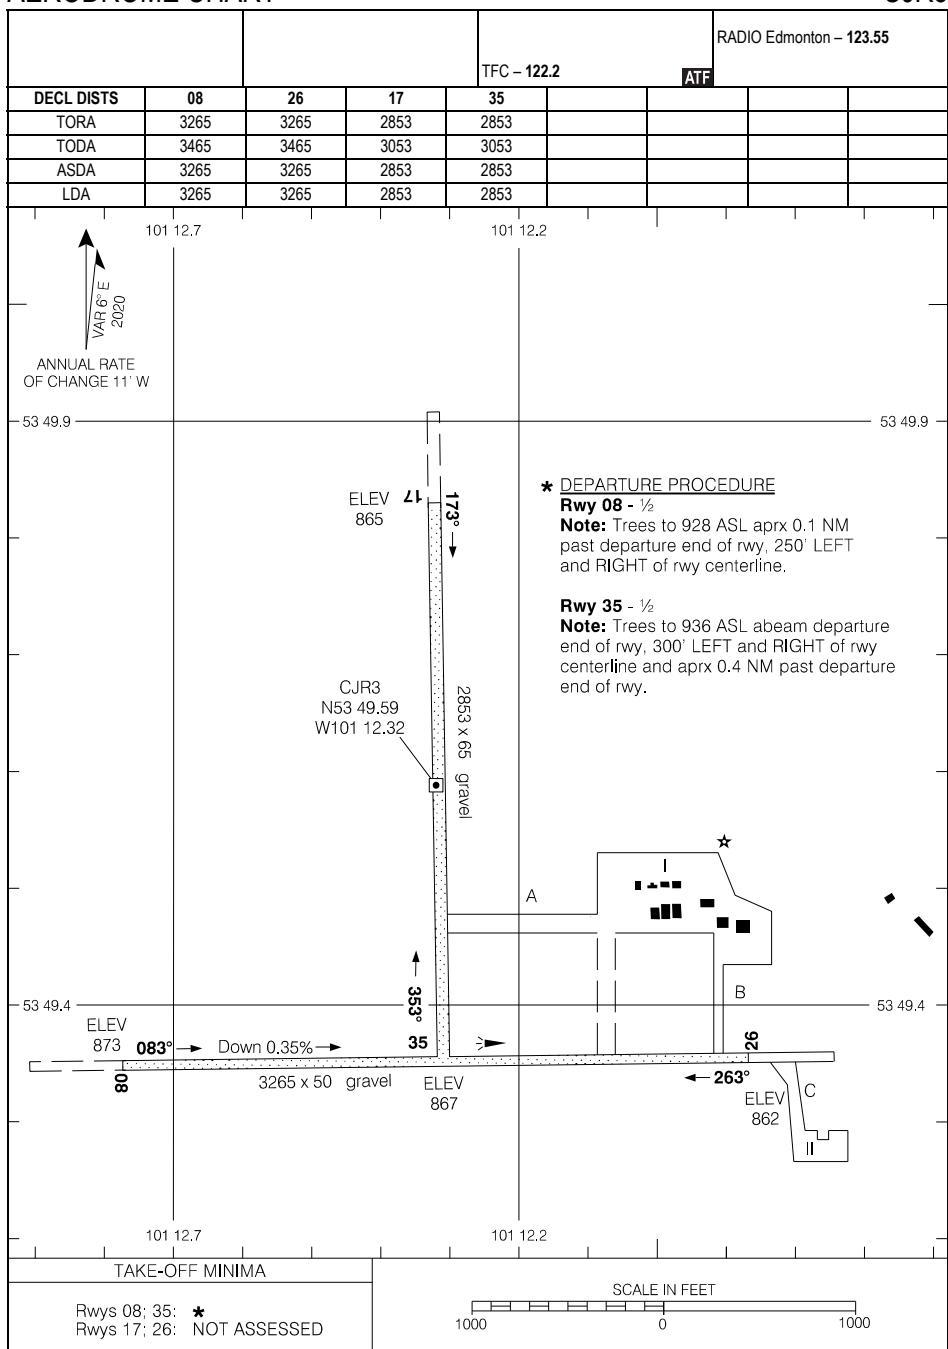


AERODROME CHART

EFF 20 FEB 25

CZLQ-AD

THICKET PORTAGE, MB
CZLQ

AERODROME CHART

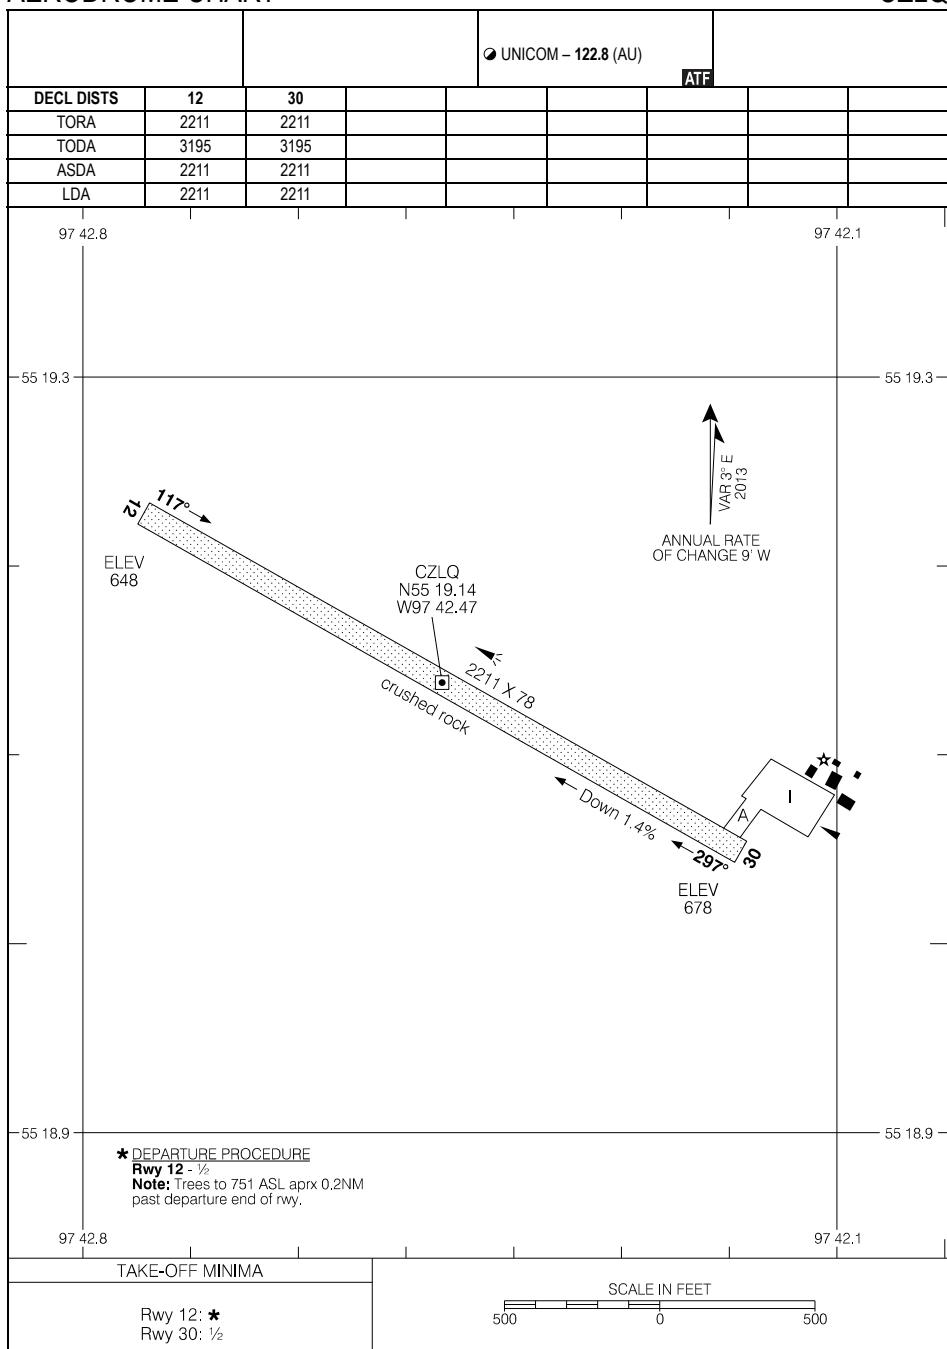

AERODROME CHART

EFF 16 JUL 20

CZLQ-AD

CZLQ

CYTH-AD

THOMPSON, MB
CYTH

AERODROME CHART

ATIS - 127.65				RADIO - 122.5		CTR Winnipeg - 133.15 RADIO Edmonton - 123.55	
DECL DISTS	06	24	15	33		MF*	
TORA	5800	5800	5079	5079			
TODA	6784	6784	5279	5279			
ASDA	5800	5800	5079	5079			
LDA	5800	5800	5079	5079			

* DEPARTURE PROCEDURE

Rwy 06 - $\frac{1}{2}$

Note: Trees to 779 ASL aprx 0.2 NM past departure end of rwy, 860' RIGHT of rwy centreline. Trees to 792 ASL aprx 0.4 NM past departure end of rwy, 960' LEFT of rwy centreline.

Rwy 15 - $\frac{1}{2}$

Note: Twr to 818 ASL aprx 0.3 NM past departure end of rwy, 1030' RIGHT of rwy centreline.


Rwy 24 -½

Note: Trees to 754 ASL aprx 0.2 NM past departure end of rwy, 830' RIGHT of rwy centreline. Trees to 776 ASL aprx 0.3 NM past departure end of rwy, 940' LEFT of rwy centreline.

Rwy 33 - $\frac{1}{2}$

Note: Trees to 787 ASL aprx 0.1 NM past departure end of rwy, 560' RIGHT of rwy centreline. Trees to 787' aprx 0.1 NM past departure end of rwy 600' LEFT of rwy centreline.

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

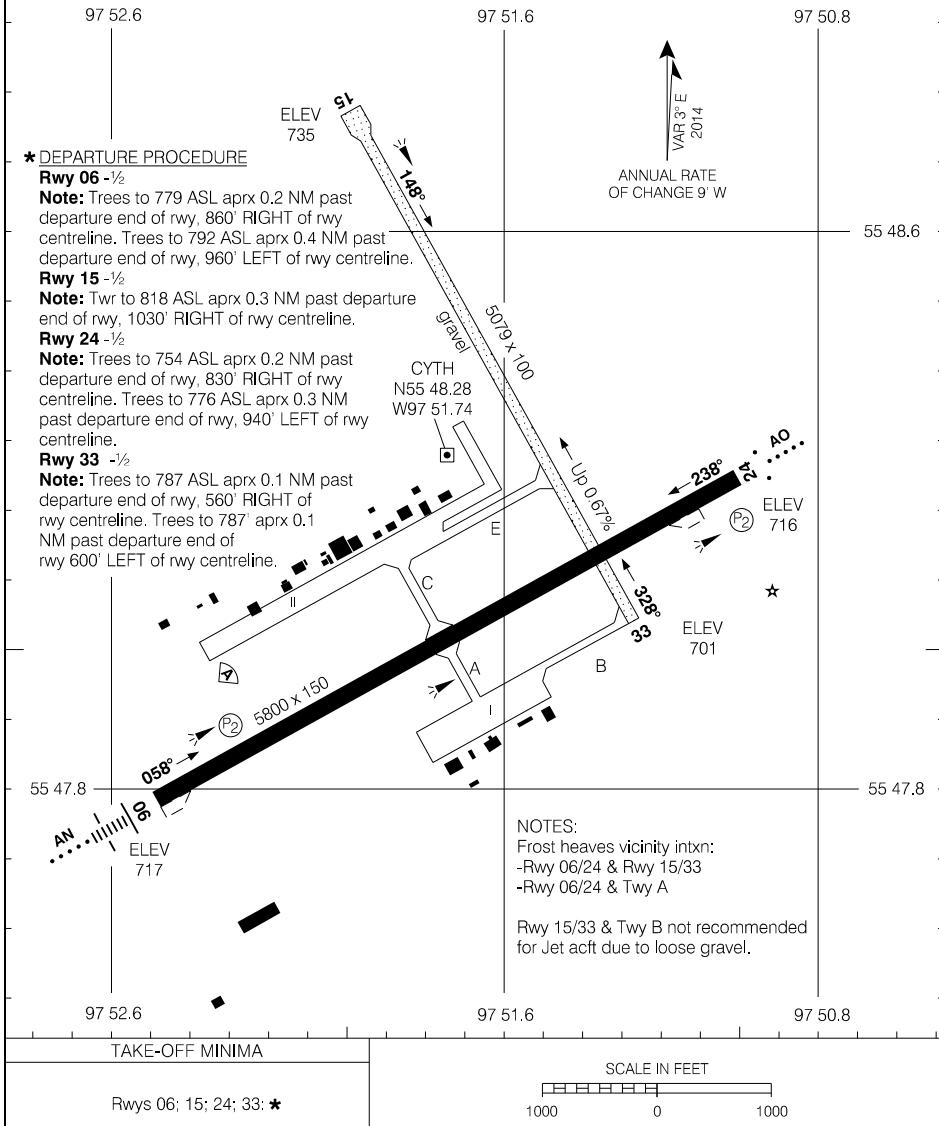

AERODROME CHART

EFF 26 DEC 24


CYTH

CYTH-AD

CEN3-AD

THREE HILLS, AB
CEN3

AERODROME CHART

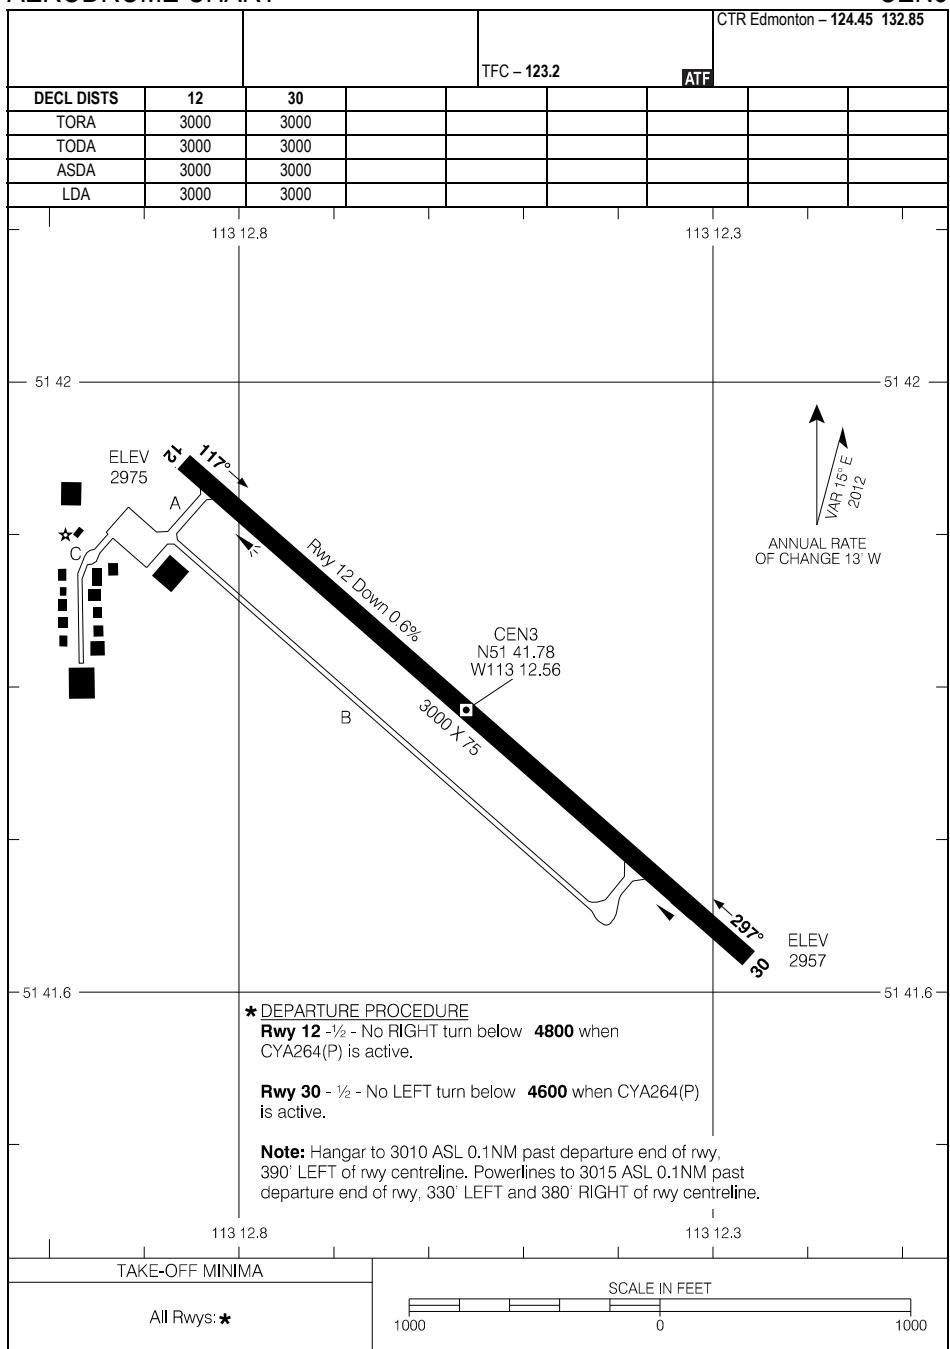


AERODROME CHART

EFF 26 DEC 24

CEN3

CEN3-AD

AERODROME CHART

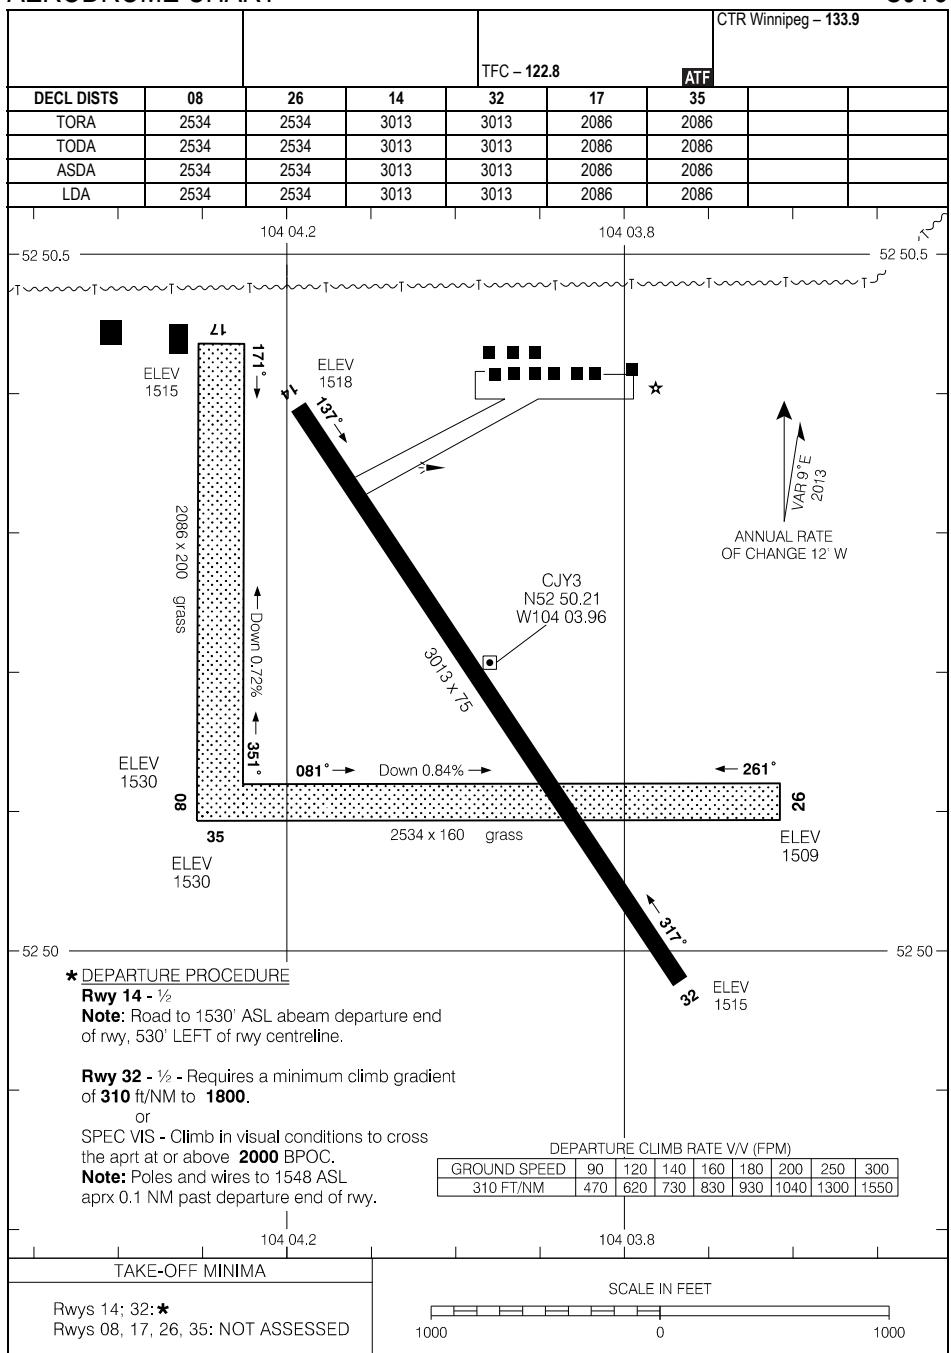

AERODROME CHART


EFF 23 FEB 23

CJY3

CYBE-AD

URANIUM CITY, SK
CYBE

AERODROME CHART

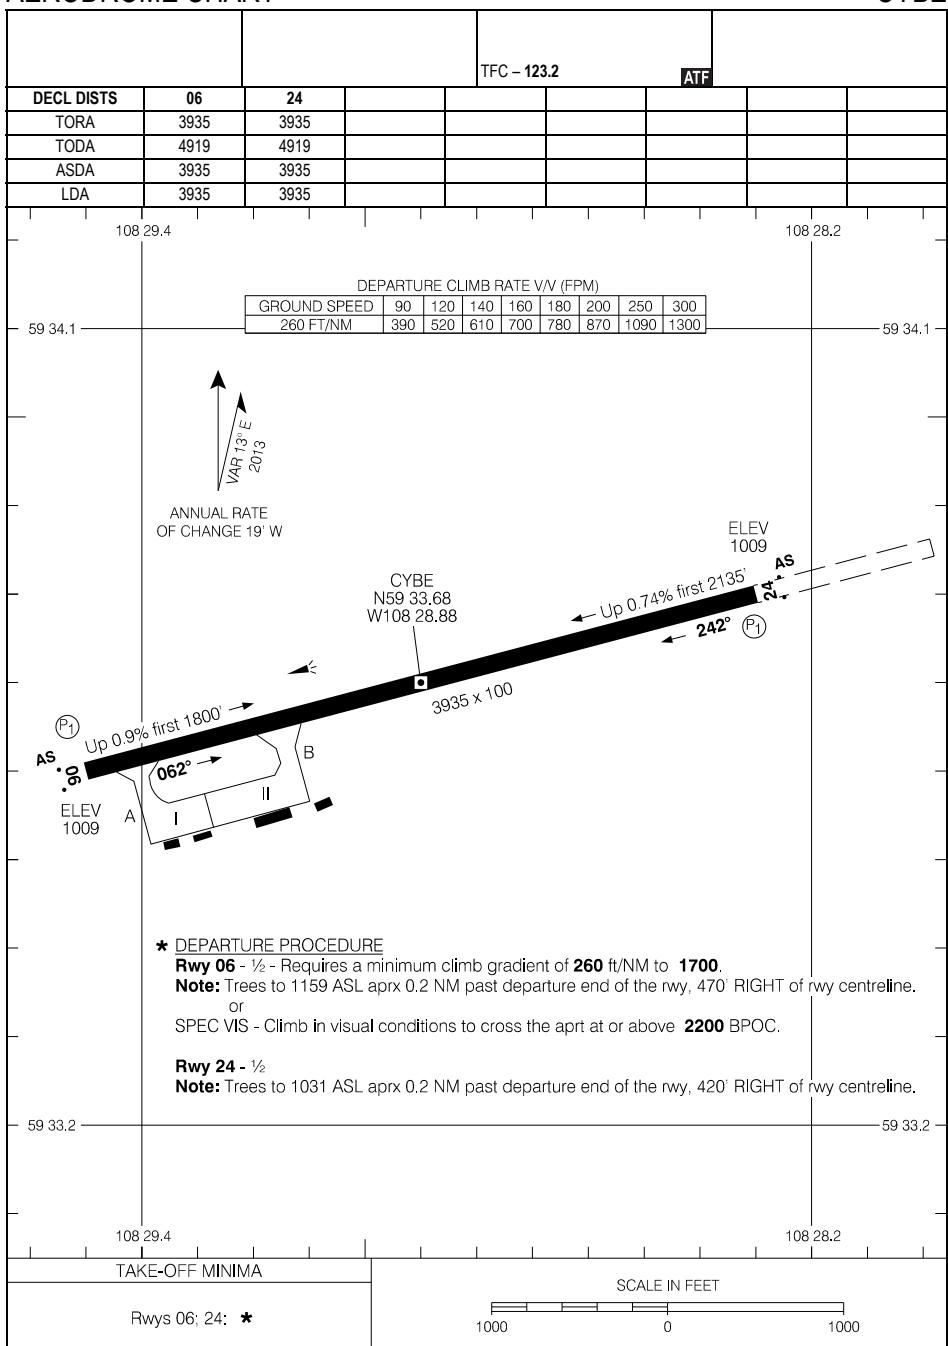

AERODROME CHART

EFF 29 DEC 22

CYBE

CYBE-AD

CEL5-AD


VALLEYVIEW, AB

CEL5

AERODROME CHART

CTR Edmonton - 134.5

ATF

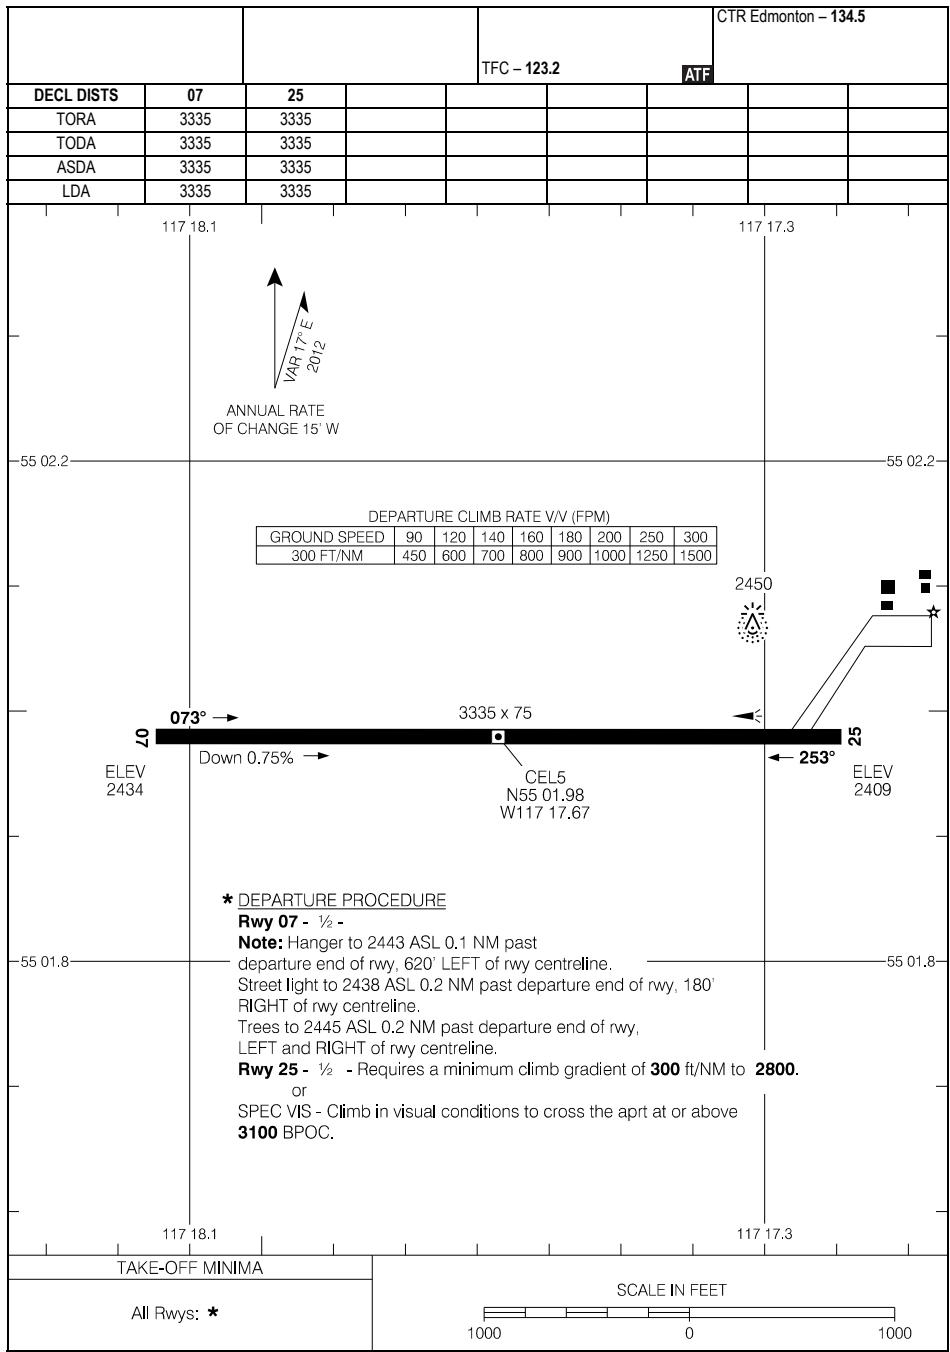

AERODROME CHART

EFF 15 JUN 23


CEL5

CEL5-AD

CEV3-AD

VEGREVILLE, AB
CEV3

AERODROME CHART

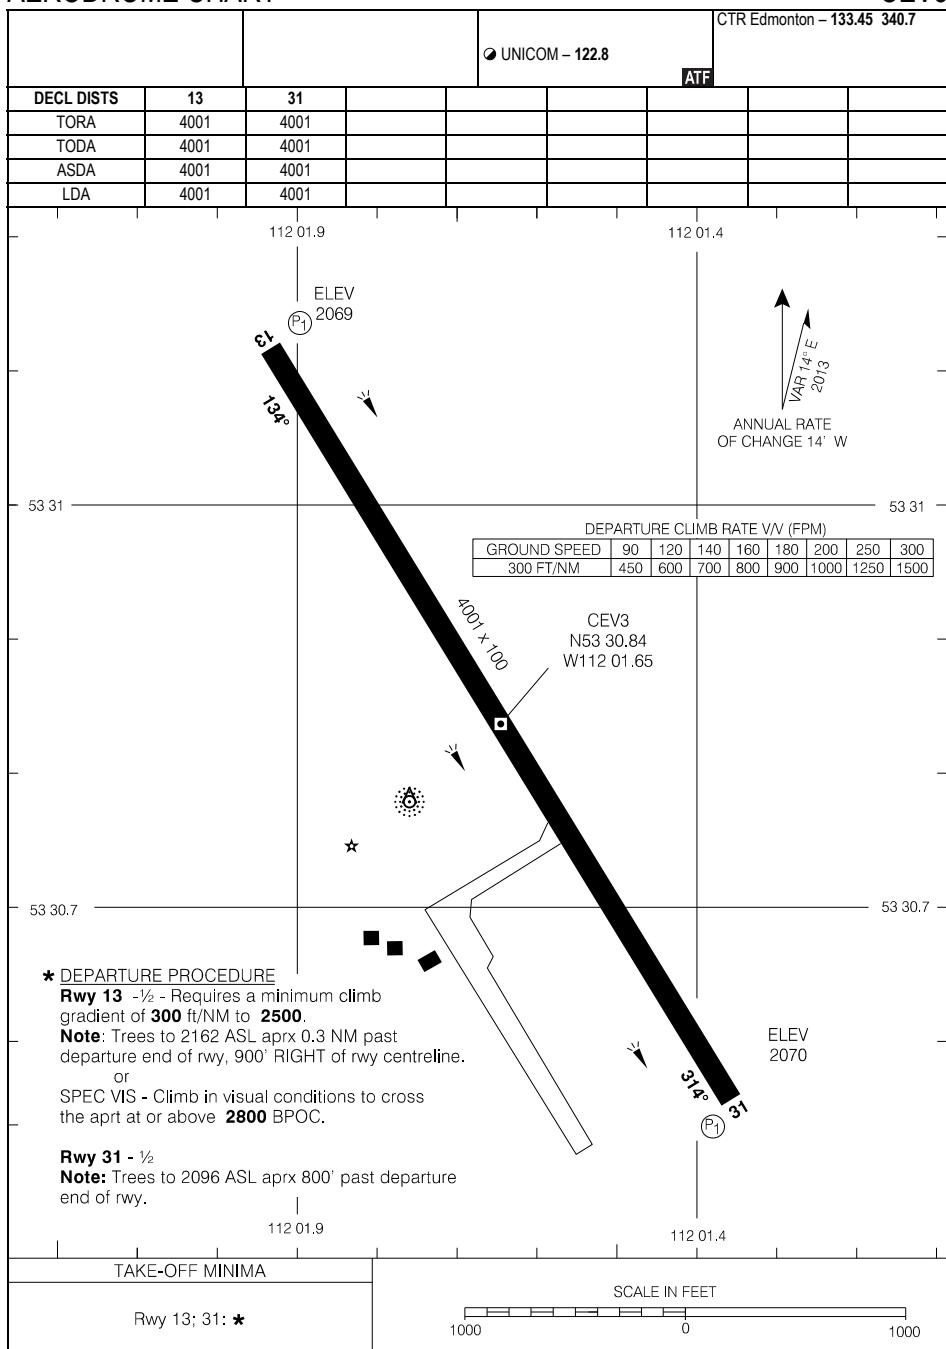

AERODROME CHART

EFF 20 APR 23


CEV3

CEV3-AD

CYVG-AD

VERMILION, AB
CYVG

AERODROME CHART

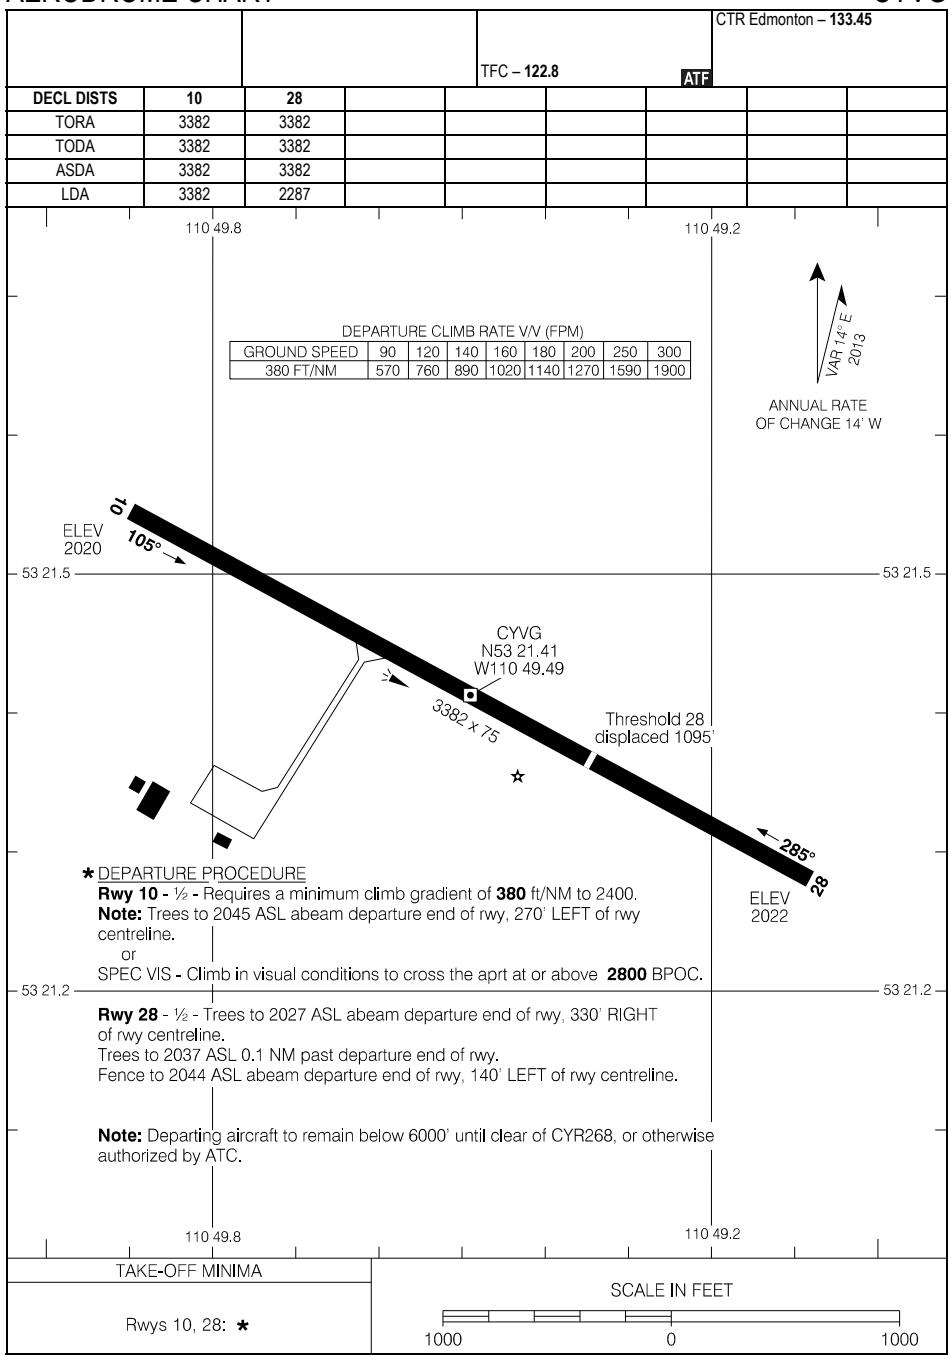

AERODROME CHART

EFF 17 APR 25

CYVG


CYVG-AD

CYVD-AD

VIRDEN/R.J. (BOB) ANDREW FIELD REGIONAL, MB

CYVD

AERODROME CHART

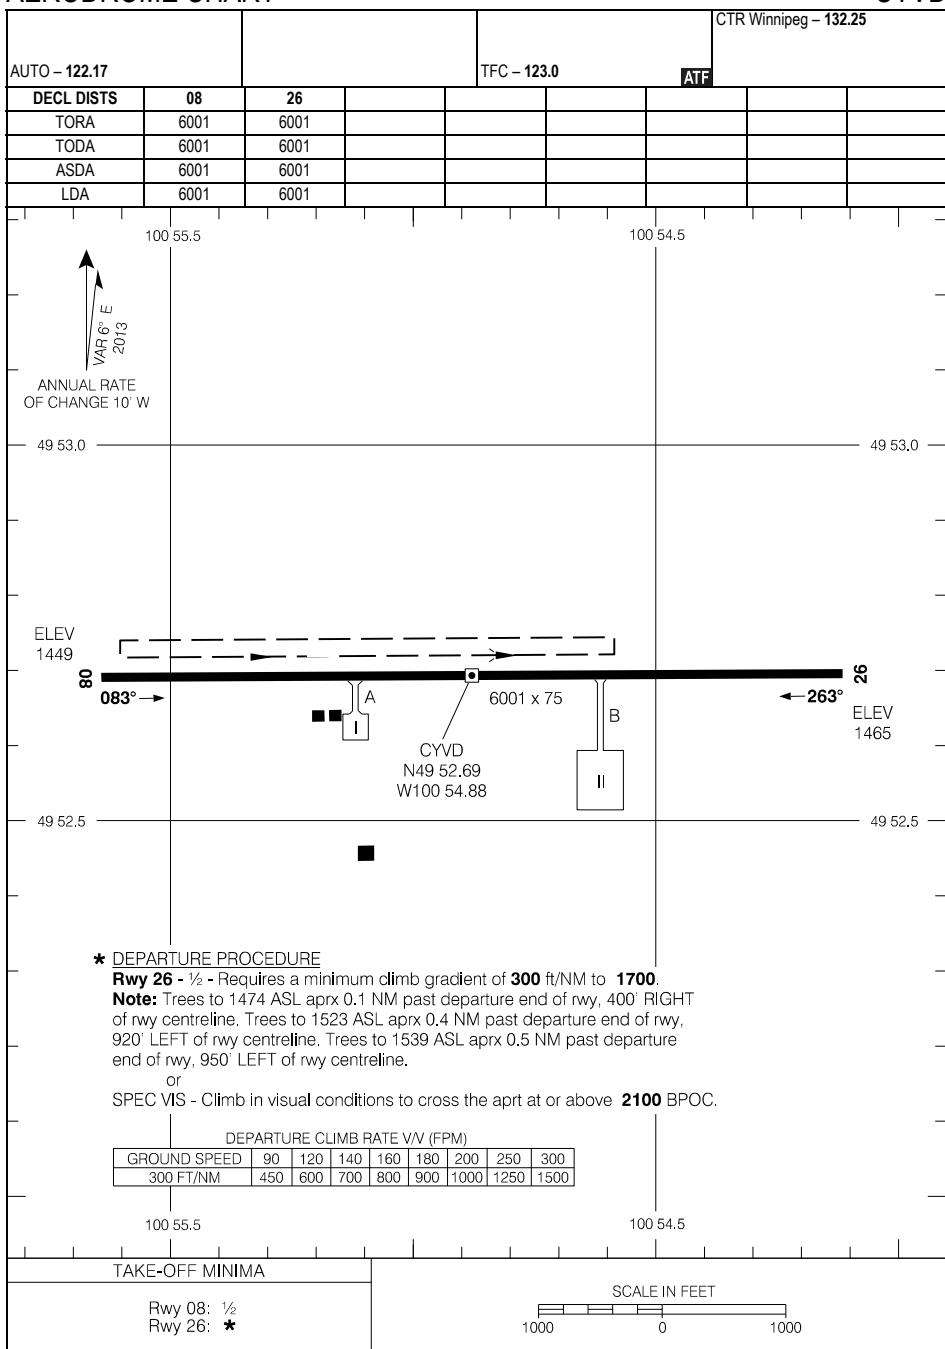

AERODROME CHART

EFF 12 JUN 25

CYVD-AD


CYVD

CYWV-AD

WAINWRIGHT, AB
CYWV

AERODROME CHART

				CTR Edmonton – 133.45
		TFC – 122.8		ATF*
DECL DISTS	13	31		
TORA	3000	3000		
TODA	3000	3000		
ASDA	3000	3000		
LDA	3000	3000		

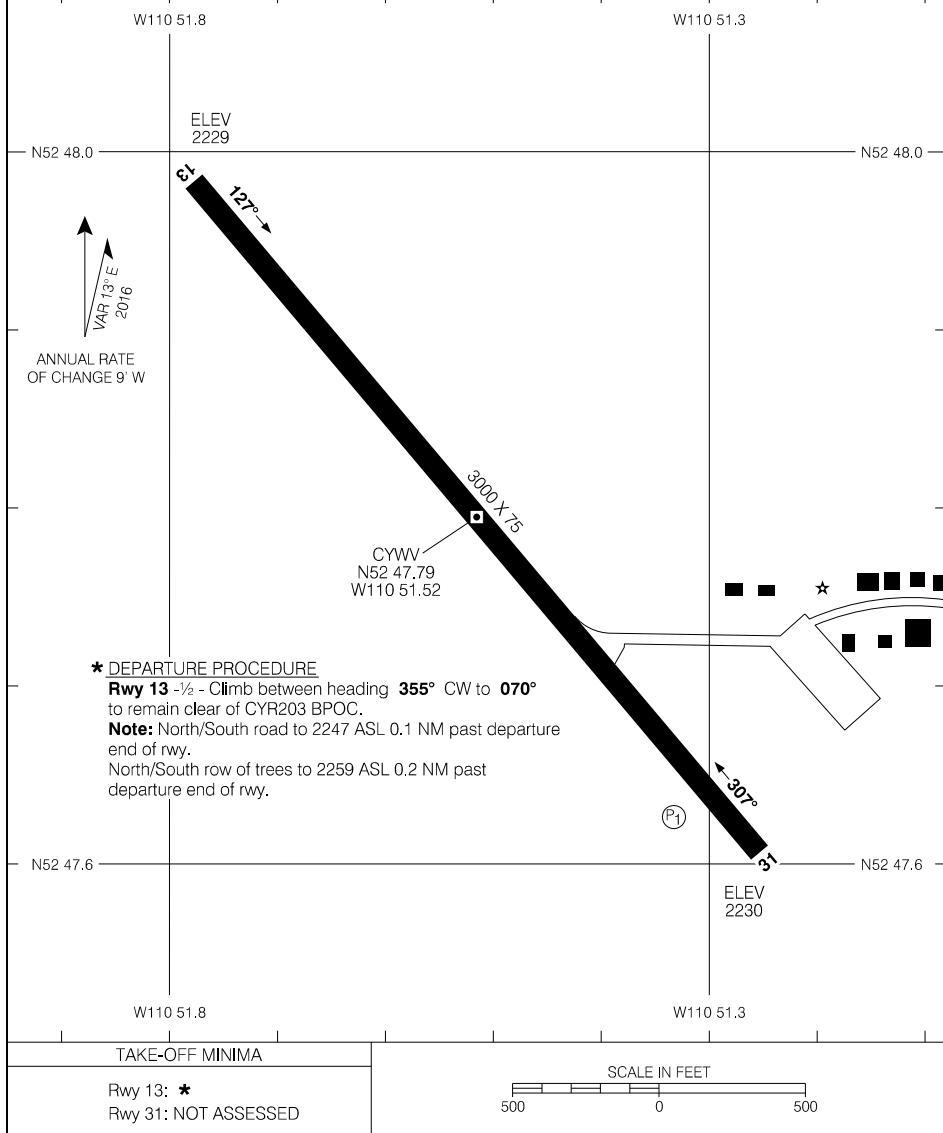

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved


AERODROME CHART

EFF 15 JUN 23

CYWW

CYWV-AD

AERODROME CHART

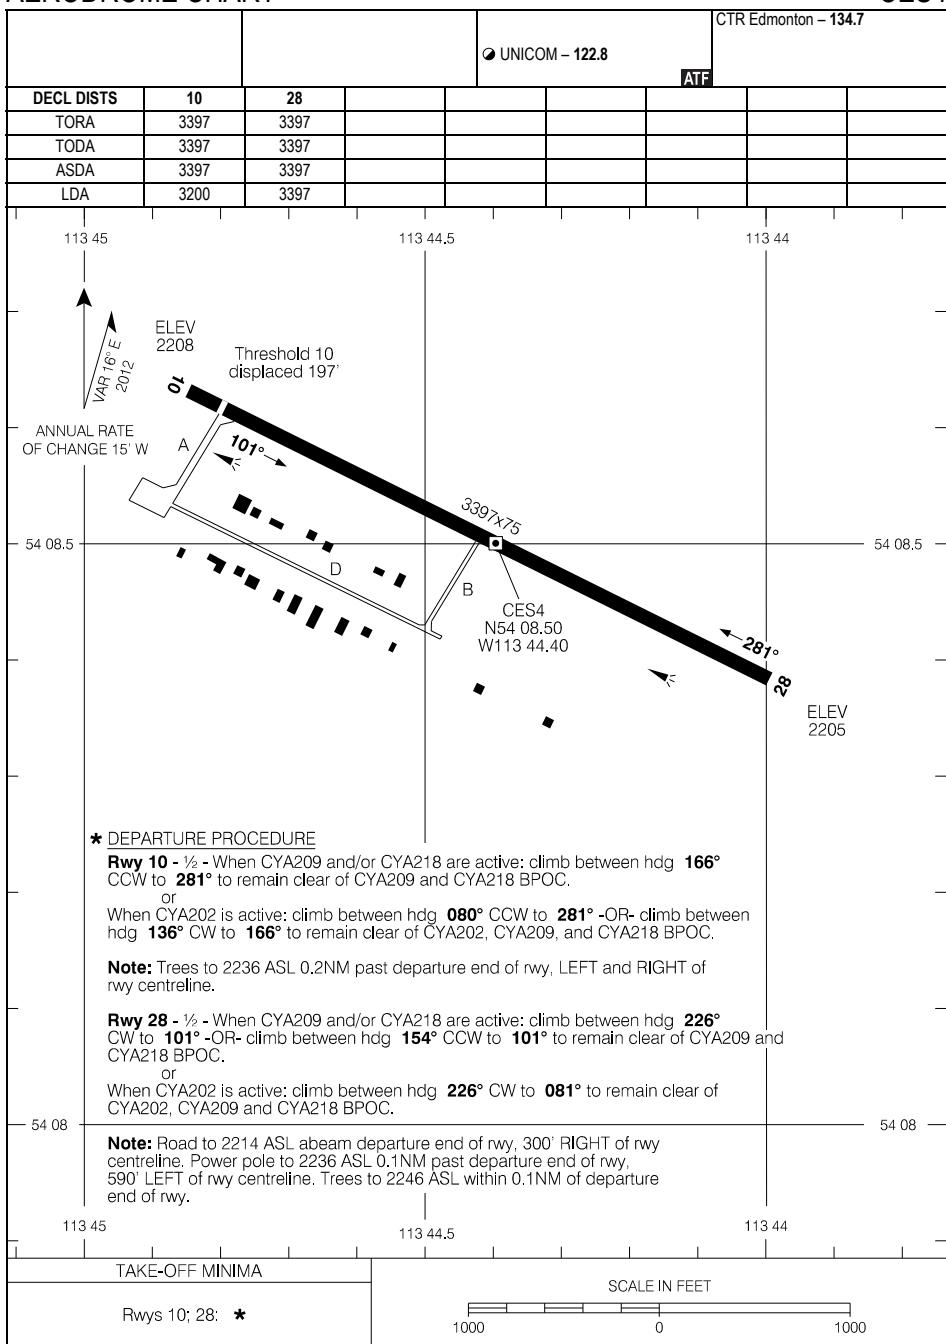


AERODROME CHART

EFF 20 FEB 25

CES4

AERODROME CHART

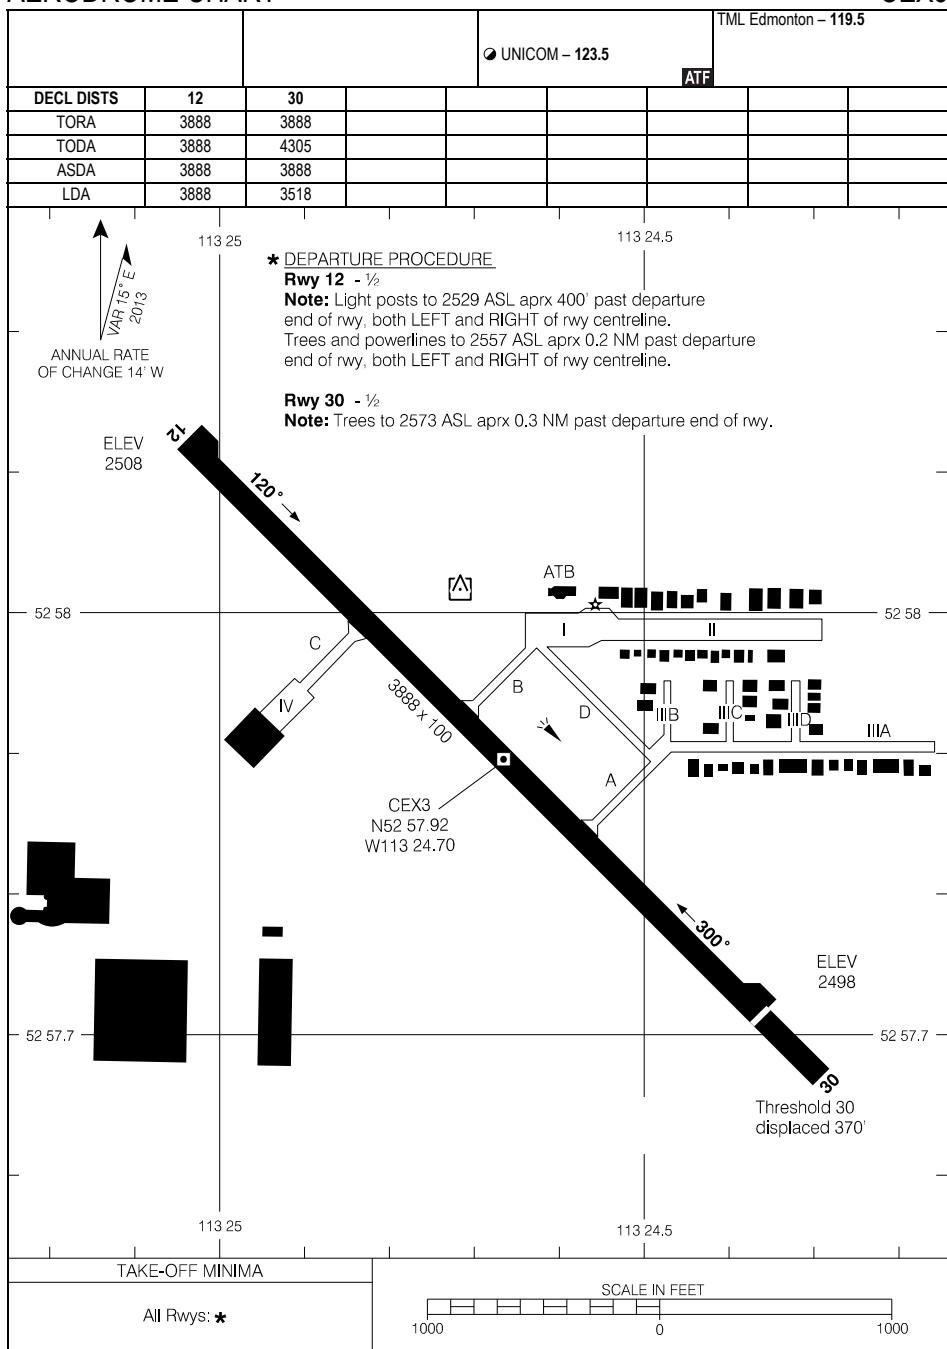

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART


EFF 5 OCT 23

CEX3

CJE3-AD

WEYBURN, SK
CJE3

AERODROME CHART

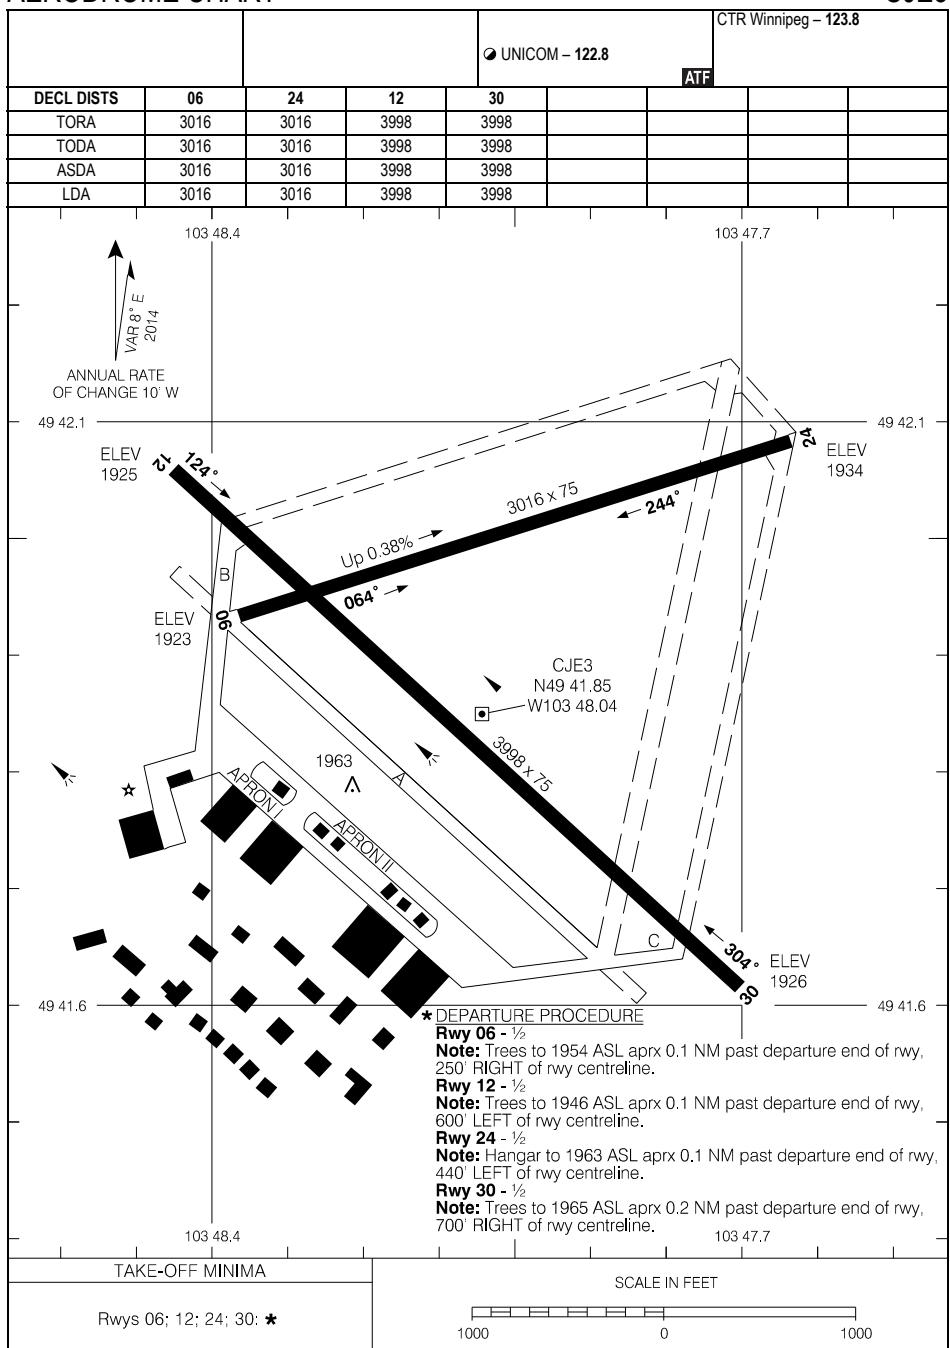

AERODROME CHART

EFF 14 JUL 22


CJE3

CJE3-AD

CYZU-AD

WHITECOURT, AB
CYZU

AERODROME CHART

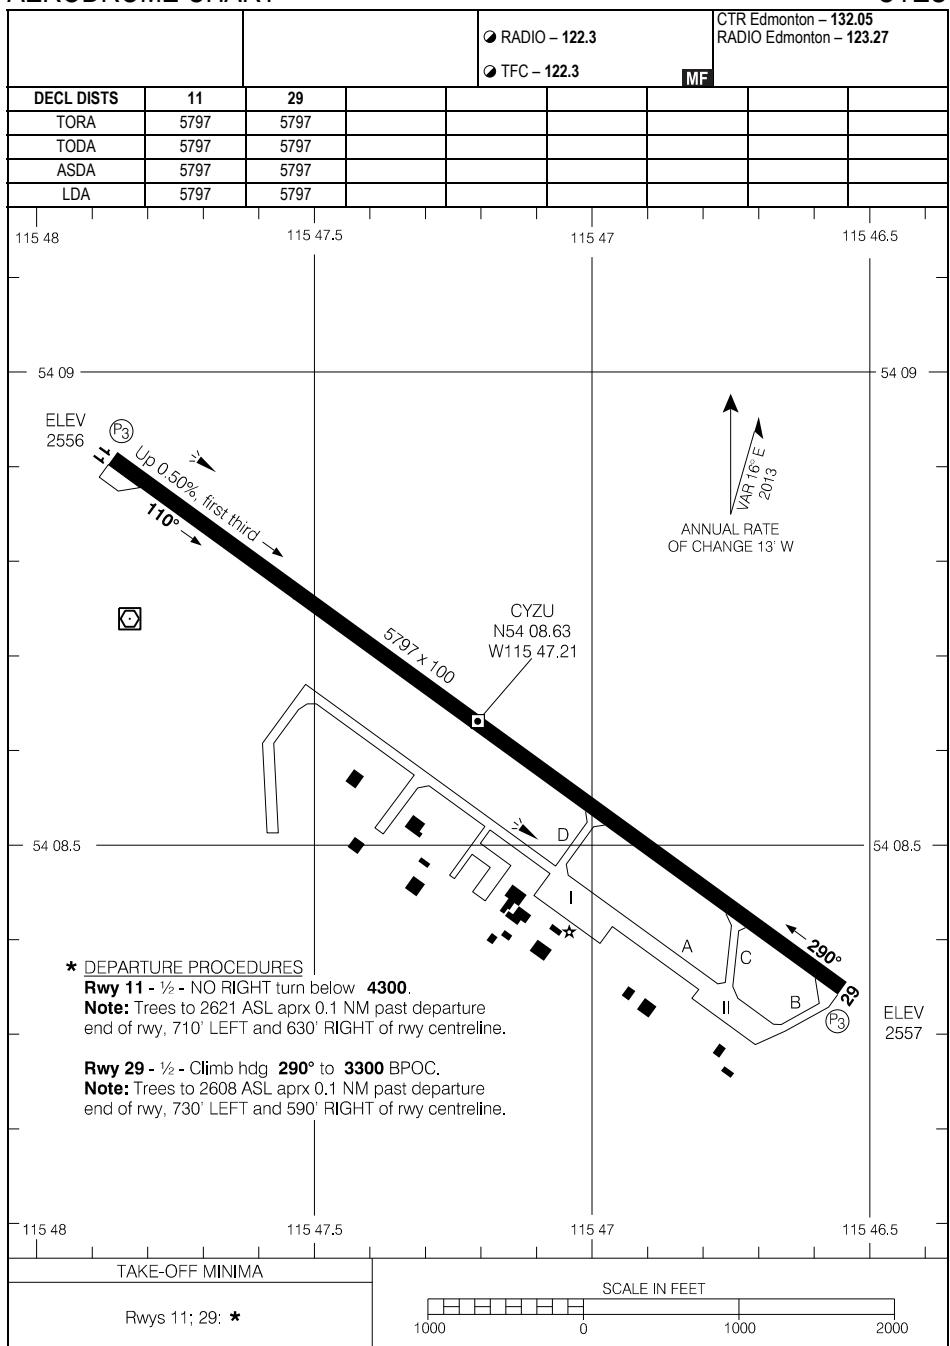

AERODROME CHART

EFF 11 JUL 24

CYZU-AD

CYZU

LOW VISIBILITY PROCEDURES

Low Visibility Procedures (RVR less than 1200 to 600 ft)

Expect Delays

When low visibility procedures are in effect, ATC will restrict operations to one aircraft on the maneuvering area at a time (1 departure or 1 arrival at a time).

Departures

Only departures on Runway 36 or 18 shall be permitted. Intersection departures will not be permitted.

Although Winnipeg Tower does not control aircraft push backs or taxiing on aprons, pilots are recommended to contact Winnipeg Tower before maneuvering on Apron I.

Contact ATC for a start / taxi time.

Sequencing of Ground Movements for Take-off

Do not request start, push back or call for taxi clearance until the reported RVR is a minimum of:

Aircraft/Pilot Take-Off Minima	Minimum RVR for Start
1200 RVR	1000 RVR
600 RVR	600 RVR

"AT NO TIME SHALL A PILOT CROSS AN ILLUMINATED RED STOP BAR"

Arrivals

When Low Visibility Procedures are in effect the arrival RWY is 36 in accordance with applicable approach minima or approach ban considerations.

Winnipeg Tower will restrict operations to one aircraft on the maneuvering area at a time (1 departure or 1 arrival at a time). Approximately 6 movements per hour.

Airport Services and Equipment Available Under Low Visibility Operations

Airport Surface Detection Equipment (ASDE).

Runway Certification

Rwy	Certification
36	RVR 600
13	RVR 1200
31	RVR 1200
18	¼ SM (Based on reported visibility)

LOW VISIBILITY PROCEDURES

CENTRAL DE-ICING FACILITY

ATIS - 120.2

CLNC DEL - 121.3

GND – 121.9
PAD CTI – 122.92

LEGEND

- • • • • INSET LIGHT AIRCRAFT GUIDANCE (GREEN)
 - PAD CTL 122.925 GUIDANCE SIGN
 - AIRCRAFT HOLD LINE
 - 8 INSET LIGHT AIRCRAFT NOSE STOP LINE (YE)
 - CENTRAL DE-ICING FACILITY STOP LIGHT
(RED/AMBER)

ANNUAL RATE
OF CHANGE 8% W

ANNUAL


ANNUAL RATE
OF CHANGE 8% W

De-icing pad aircraft
exit to taxi hotel

De-icing pad

APRON

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

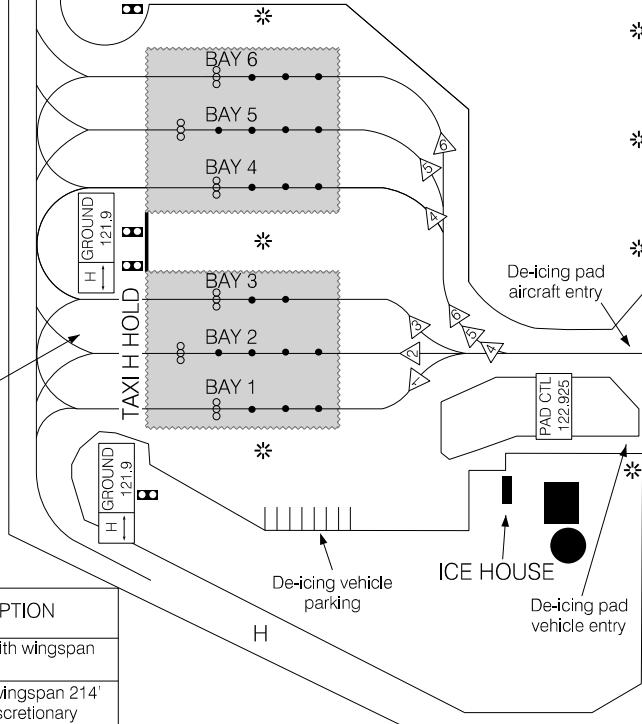

DE-ICING BAYS	DESCRIPTION
1, 3, 4, 6	Not avbl to acft with wingspan 118' or greater.
2	Avbl to acft with wingspan 214' or greater with discretionary oversteer at entrance.
5	Not avbl to acft with wingspan 214' or greater.

DE-ICING OPERATIONS

For more information, call Icehouse 204-987-9436

1. Prior to push back, notify PAD CONTROL (122.925) and WINNIPEG GND when de-icing is required.
 2. Hold short of Central De-icing Facility (CDF) and cto PAD CONTROL on 122.925

Note: In the event that the "Hold" light and/or inset Igts cannot be utilized, the CDF will deploy a "Follow Me" vehicle.

3. All de-icing operations are performed with acft engines running, unless otherwise advised by PAD CONTROL

CAUTION: all operating engines must be maintained at gnd idle thrust settings. De-icing operation limited to maximum wind gusts of 40kts.

4. Once de-icing is complete, acft will be instructed to ctc WINNIPEG GND for taxi clnc. DO NOT ENTER TWY H WITHOUT ATC CLEARANCE. MINIMUM BREAKAWAY THRUST MUST BE USED.

CENTRAL DE-ICING FACILITY

CENTRAL DE-ICING FACILITY


EFF 21 MAR 24

CENTRAL DE-ICING FACILITY

CYWG

CYWG

PARKING AREAS (APRON I)

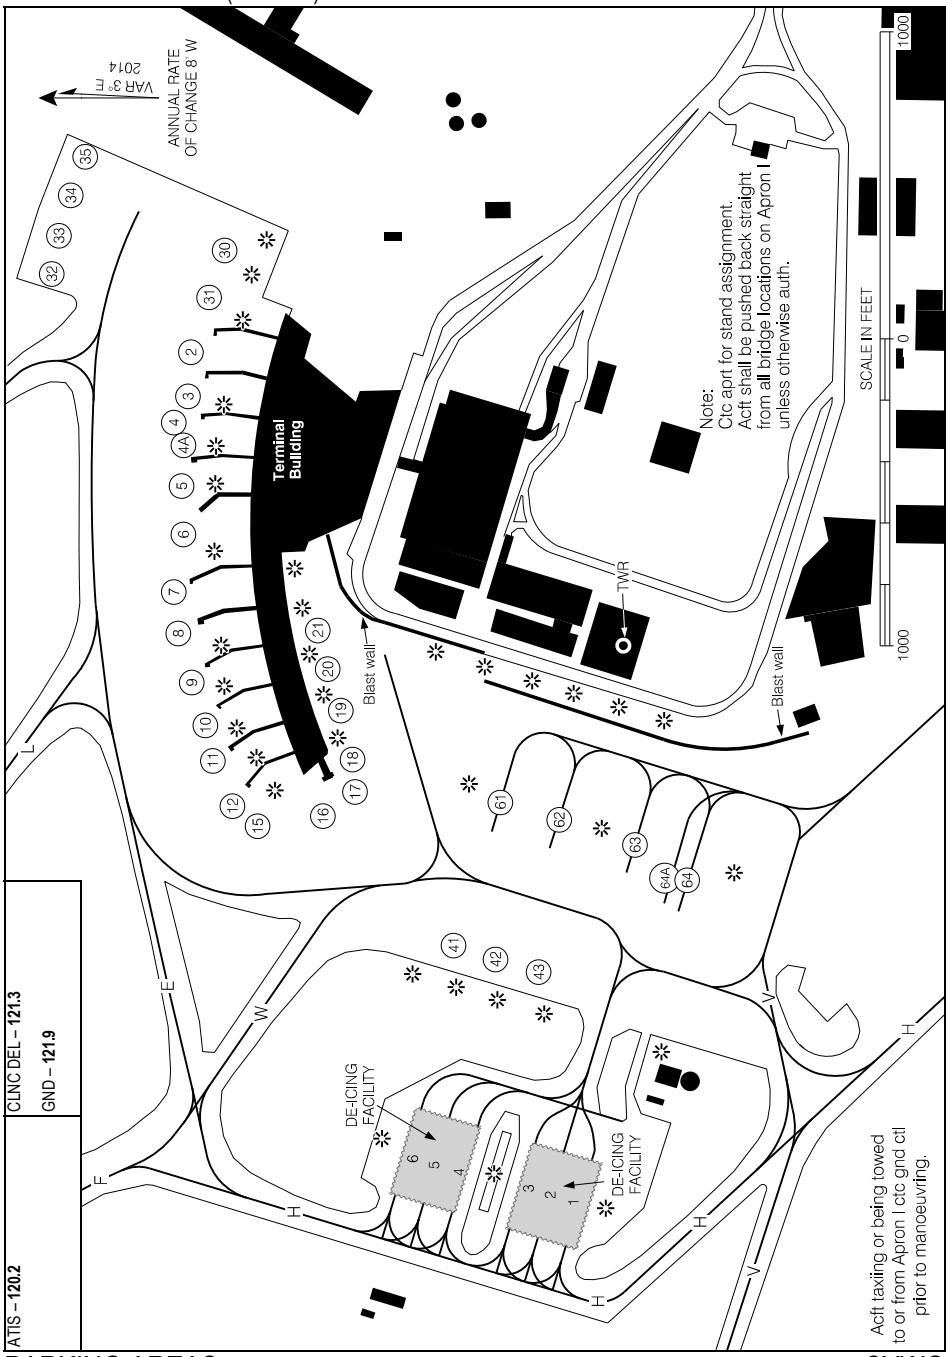


CYWG

ACft taxiiing or being towed
or from Apron I cnd ct!|
prior to manoeuvring.

PARKING AREAS (APRON I)

EFF 31 OCT 24

PARKING AREAS (APRON V)

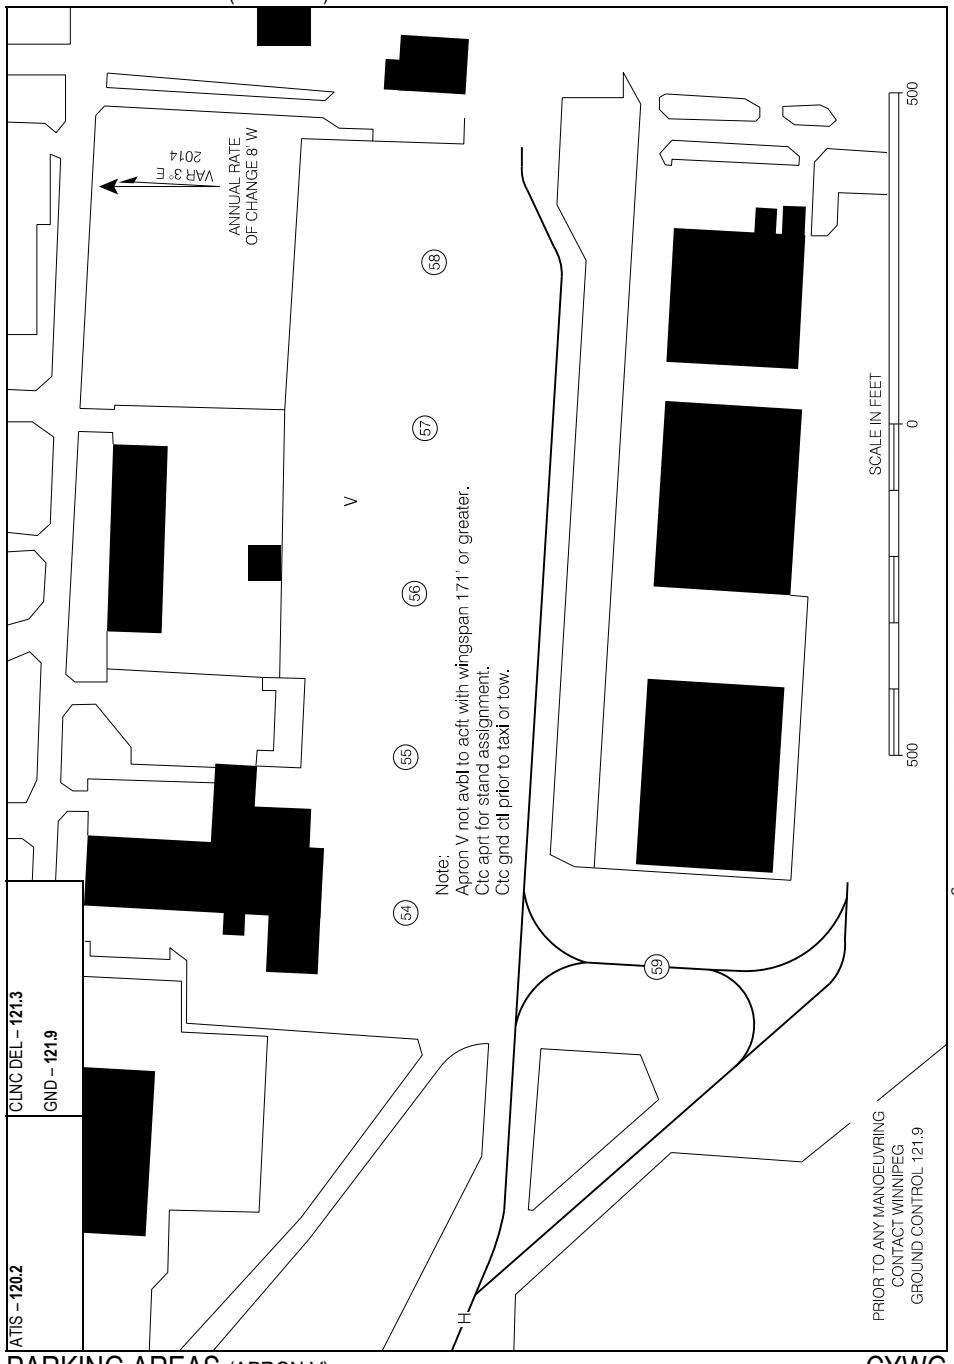


CYWG-APD-3

WINNIPEG/JAMES ARMSTRONG RICHARDSON INTL, MB

CYWG

PARKING AREAS (APRON VII)

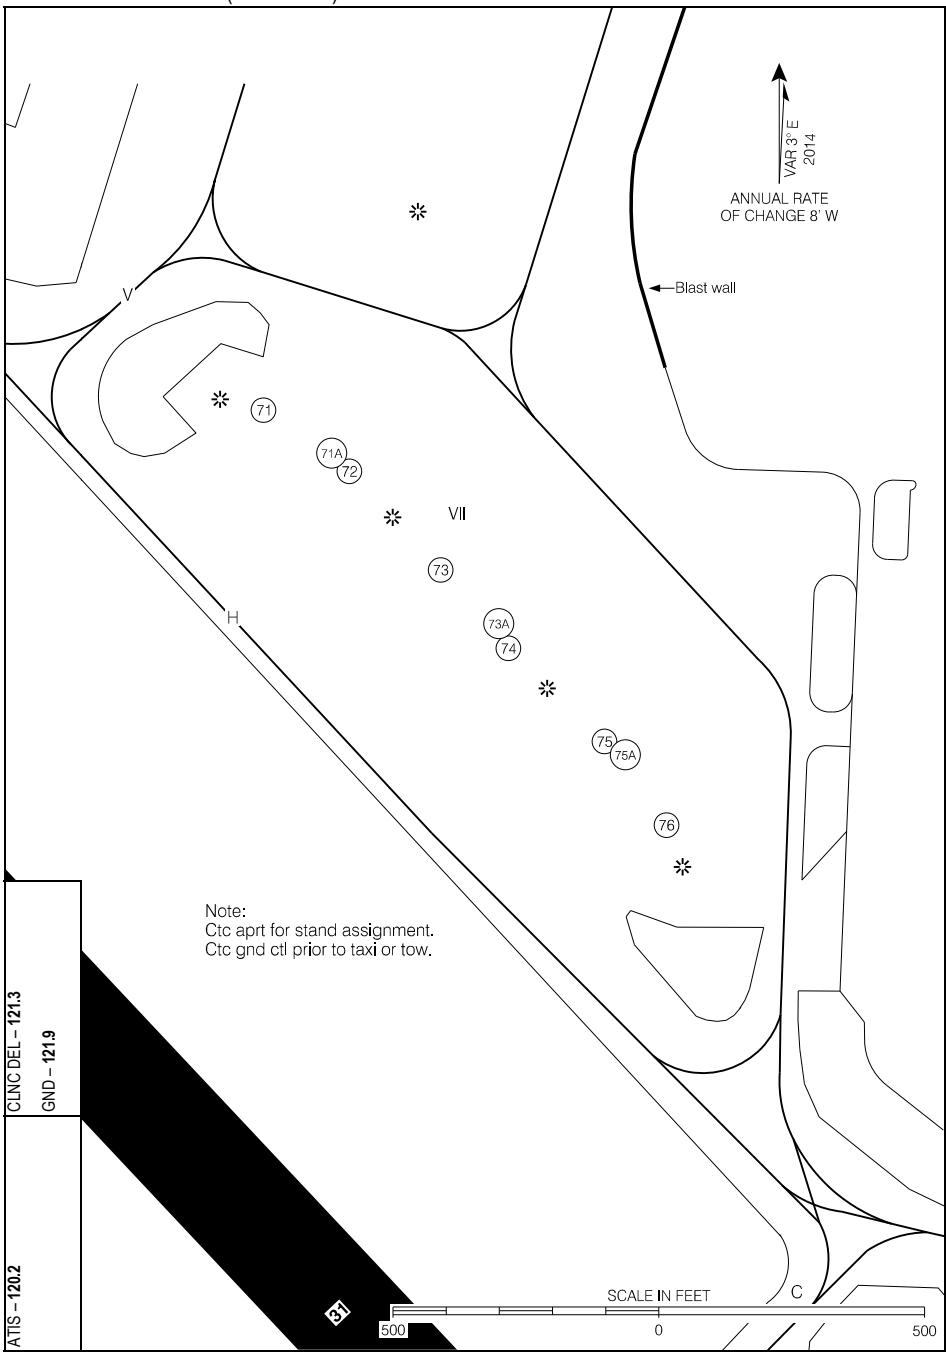

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

PARKING AREAS (APRON VII)

EFF 31 OCT 24

CYWG

CYWG-APD-3

PARKING AREAS

Aircraft Parking Positions (APRON I, APRON V and APRON VII)


Position	Coordinates	Position	Coordinates
2	495424.27N 0971317.65W	35	495427.73N 0971309.19W
3	495424.57N 0971319.76W	41	495416.13N 0971347.23W
4	495424.75N 0971321.91W	42	495414.80N 0971347.92W
4A	495424.48N 0971322.45W	43	495413.46N 0971348.61W
5	495424.96N 0971324.06W	54	495349.26N 0971320.58W
6	495424.65N 0971326.94W	55	495349.28N 0971317.01W
7	495424.92N 0971329.94W	56	495349.13N 0971313.21W
8	495424.76N 0971332.10W	57	495348.99N 0971309.41W
9	495424.49N 0971334.23W	58	495348.84N 0971305.60W
10	495424.13N 0971336.33W	59	495345.54N 0971321.83W
11	495423.71N 0971338.39W	61	495414.82N 0971340.50W
12	495423.15N 0971340.41W	62	495413.00N 0971341.45W
15	495421.91N 0971341.59W	63	495410.63N 0971342.68W
16	495420.51N 0971341.0W	64	495408.97N 0971344.38W
17	495419.14N 0971340.74W	64A	495409.39N 0971343.72W
18	495419.09N 0971338.53W	71	495404.16N 0971348.39W
19	495419.48N 0971336.44W	71A	495403.31N 0971346.43W
20	495419.85N 0971334.38W	72	495402.97N 0971345.97W
21	495420.20N 0971332.28W	73	495401.10N 0971343.40W
30	495423.42N 0971313.54W	73A	495400.08N 0971341.75W
31	495423.89N 0971315.57W	74	495359.61N 0971341.50W
32	495429.06N 0971314.87W	75	495357.83N 0971338.80W
33	495428.67N 0971312.94W	75A	495357.56N 0971338.20W
34	495428.23N 0971311.05W	76	495356.25N 0971337.06W

PARKING AREAS

CYAV-AD

WINNIPEG/ST. ANDREWS, MB
CYAV

AERODROME CHART

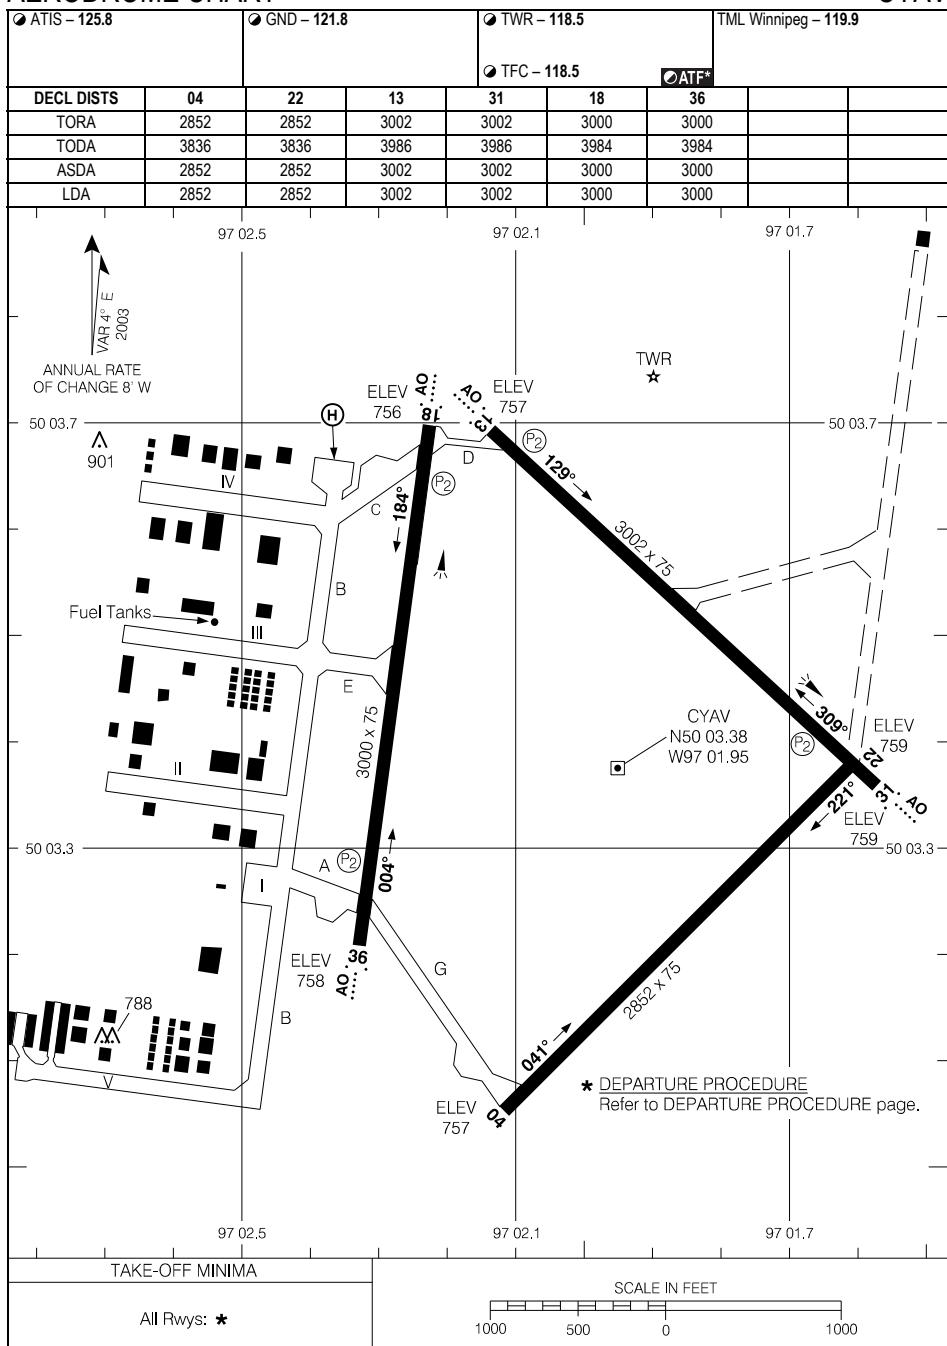

AERODROME CHART

EFF 17 APR 25

CYAV-AD

CYAV

CZWL-AD

WOLLASTON LAKE, SK
CZWL

AERODROME CHART

AUTO - 122.07

TFC - 123.3

ATE

RADIO Edmonton – 123.55 DRCO

ANNUAL RATE
OF CHANGE 15' W

ELEV
1322

17
AP

CZWL
N58 06.42
W103 10.35

93 x 75

ELEV
1357

* DEPARTURE PROCEDURE

Rwy 35 - 1/2 |
Navaid Report (25)

Note: Power Lines to 1351 ASL aprx 0.1 NM past departure end of rwy, 250' RIGHT of rwy centreline.

103 10.7

103 10

TAKE-OFF MINIMA

Rwy 17: ½
Rwy 35: *

SCALE IN FEET

AFRODROME CHART

EEE 17 APR 25


GZWI

CZWL-AD

CZAC-AD

YORK LANDING, MB
CZAC

AERODROME CHART

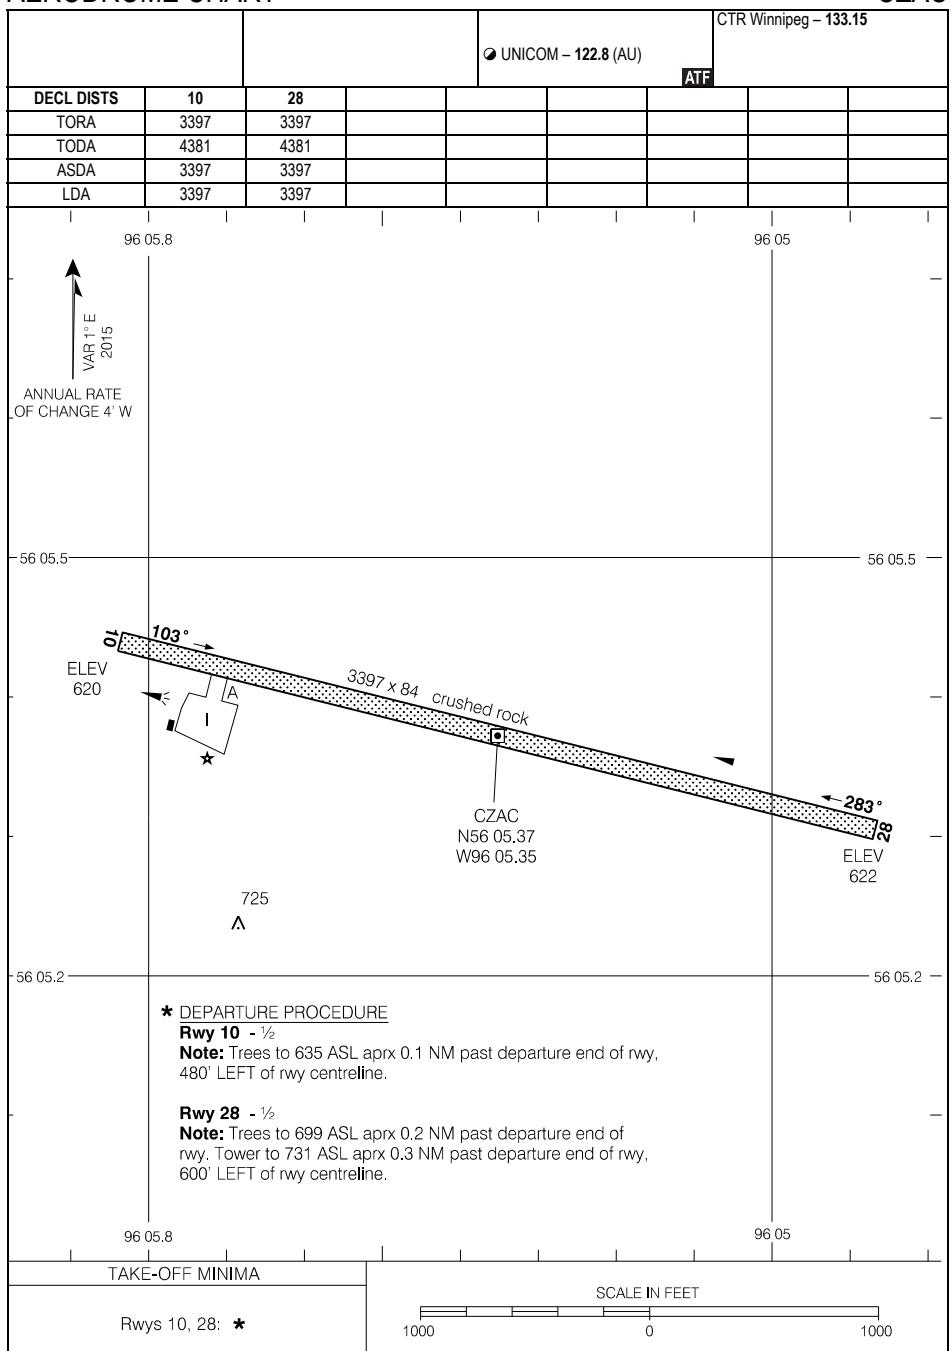

AERODROME CHART

EFF 11 JUL 24


CZAC

CZAC-AD

CYQV-AD

YORKTON REGIONAL, SK
CYQV

AERODROME CHART

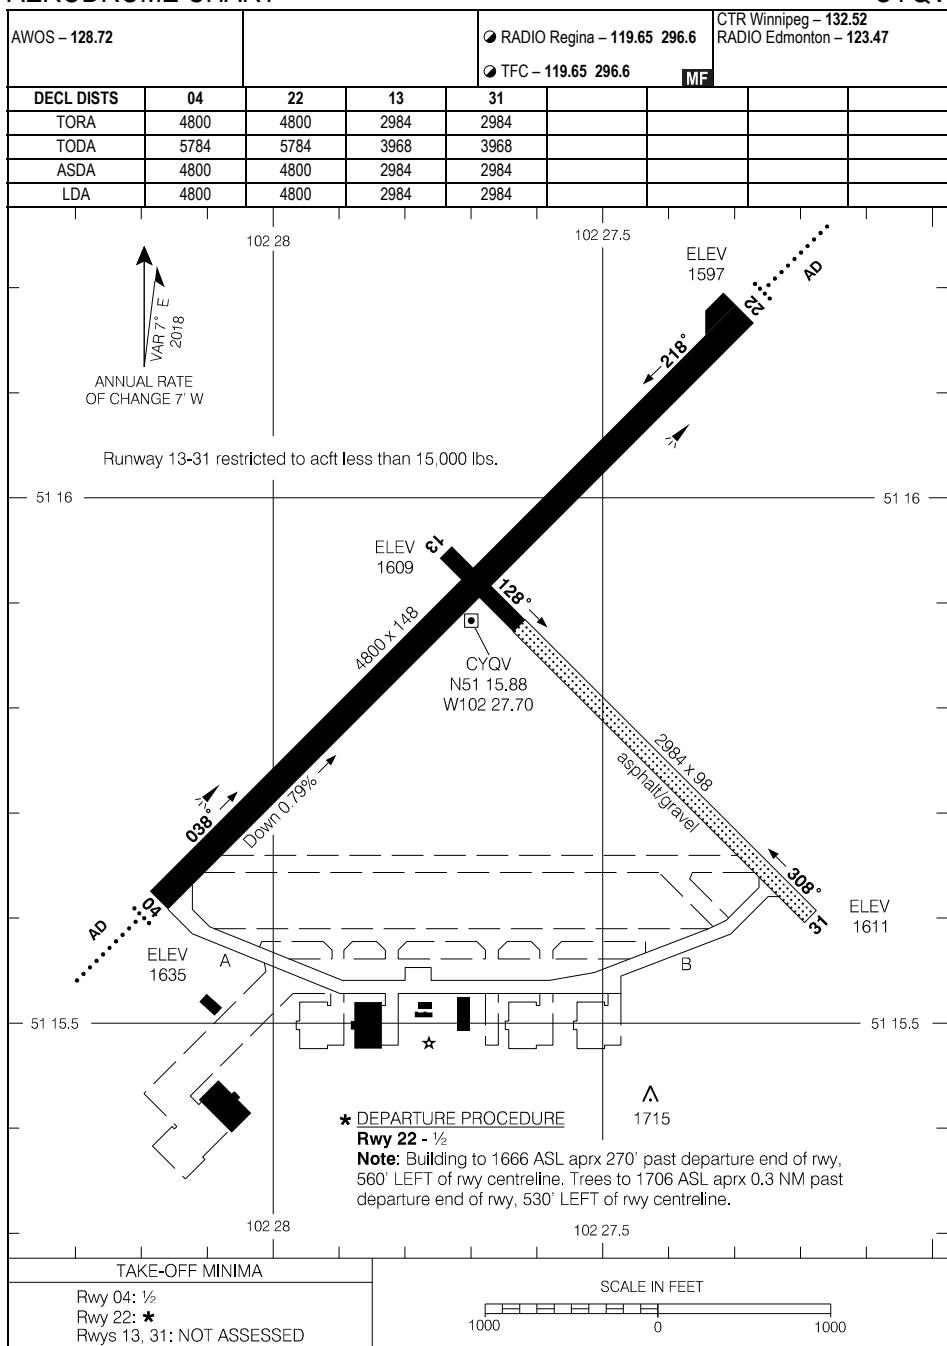

AERODROME CHART

EFF 31 OCT 24


CYQV

CYQV-AD

CKB6-AD

ANGLING LAKE/WAPEKEKA, ON
CKB6

AERODROME CHART

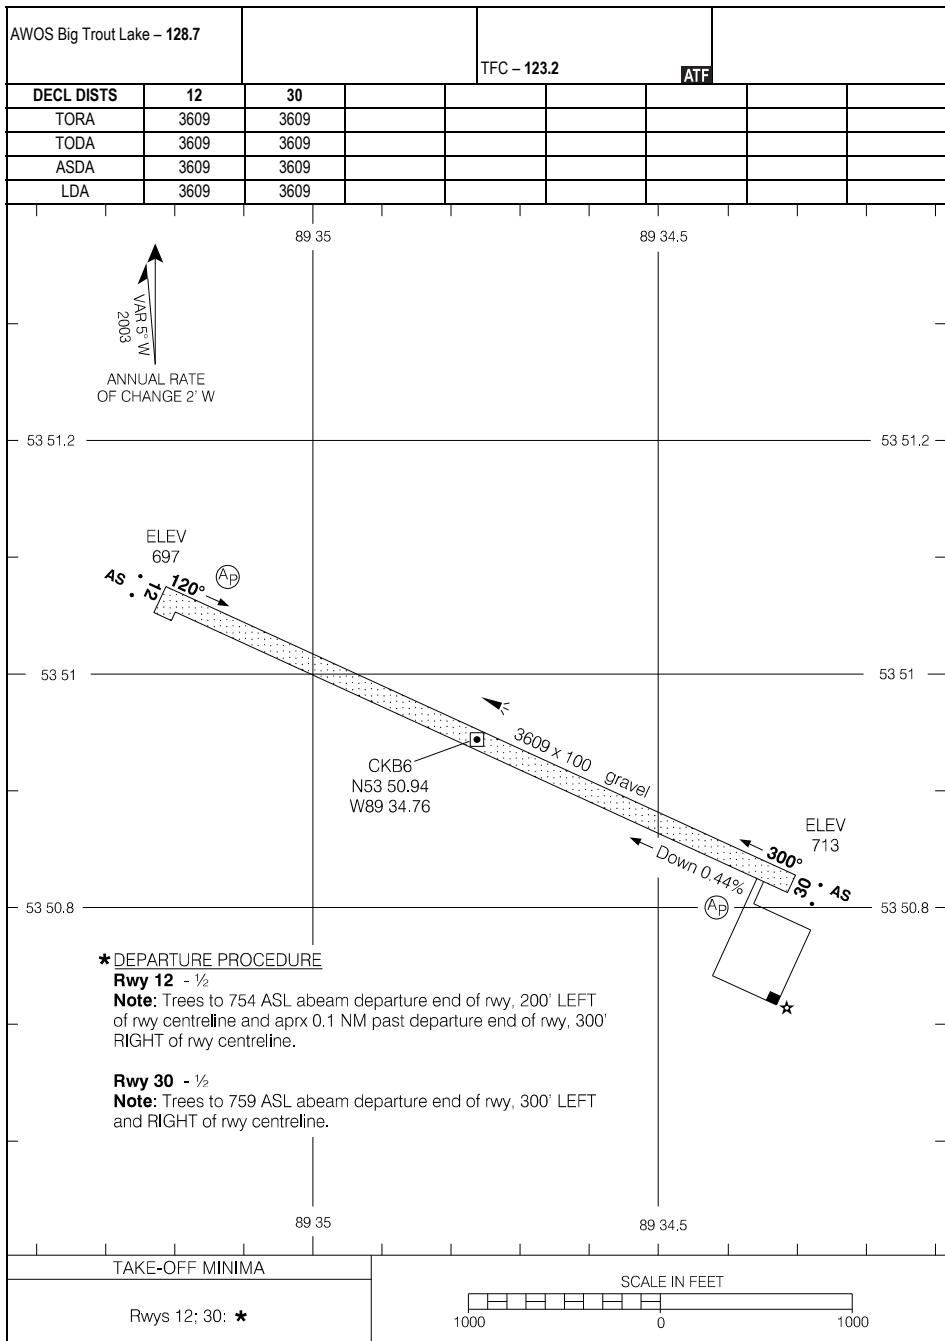

AERODROME CHART

EFF 25 JAN 24


CKB6

CKB6-AD

CYYW-AD

ARMSTRONG, ON
CYYW

AERODROME CHART

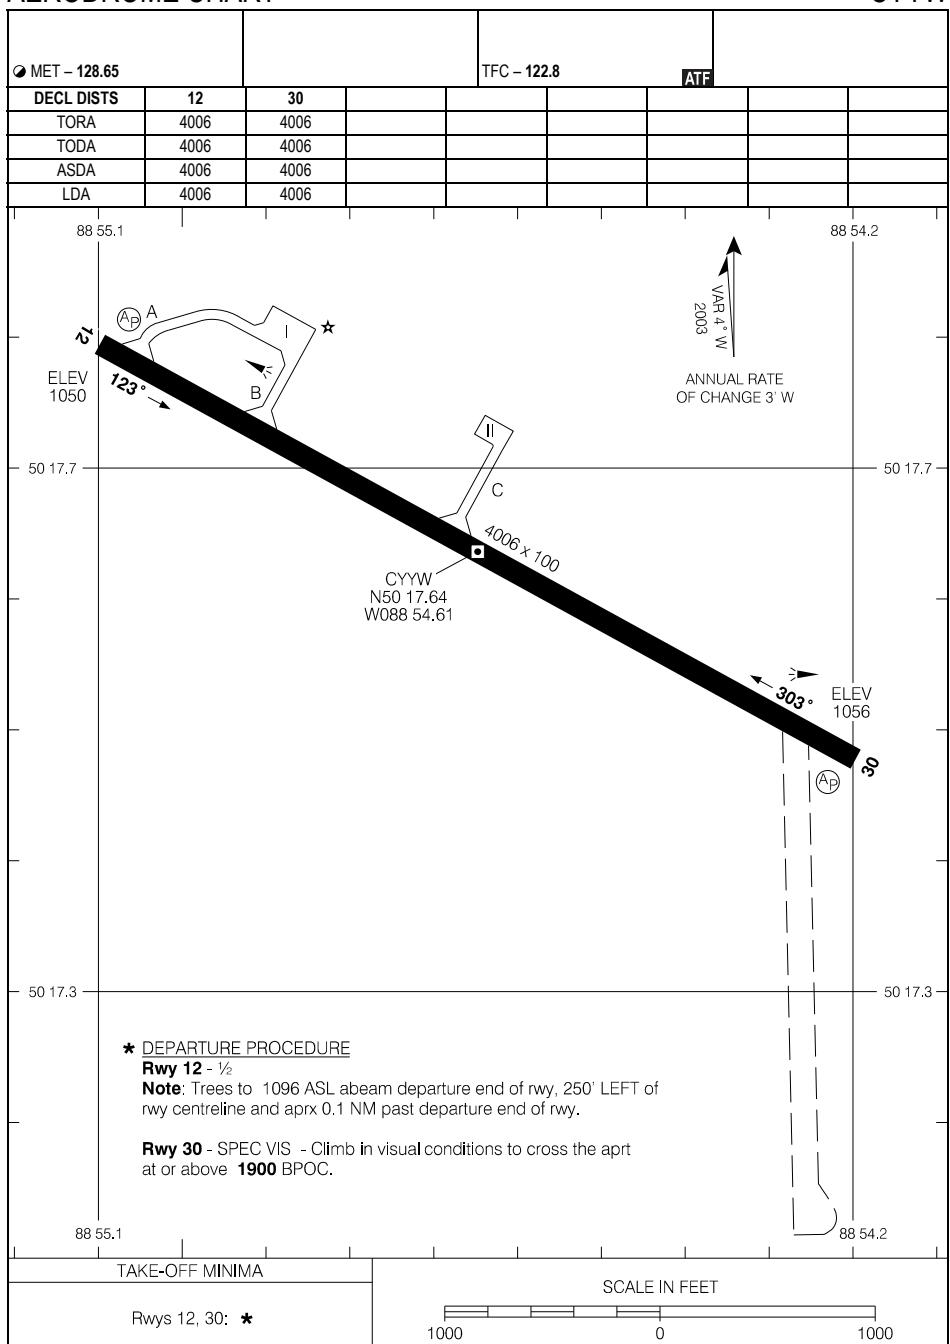


AERODROME CHART

EFF 24 MAR 22

CYYW-AD

CYYW

AERODROME CHART

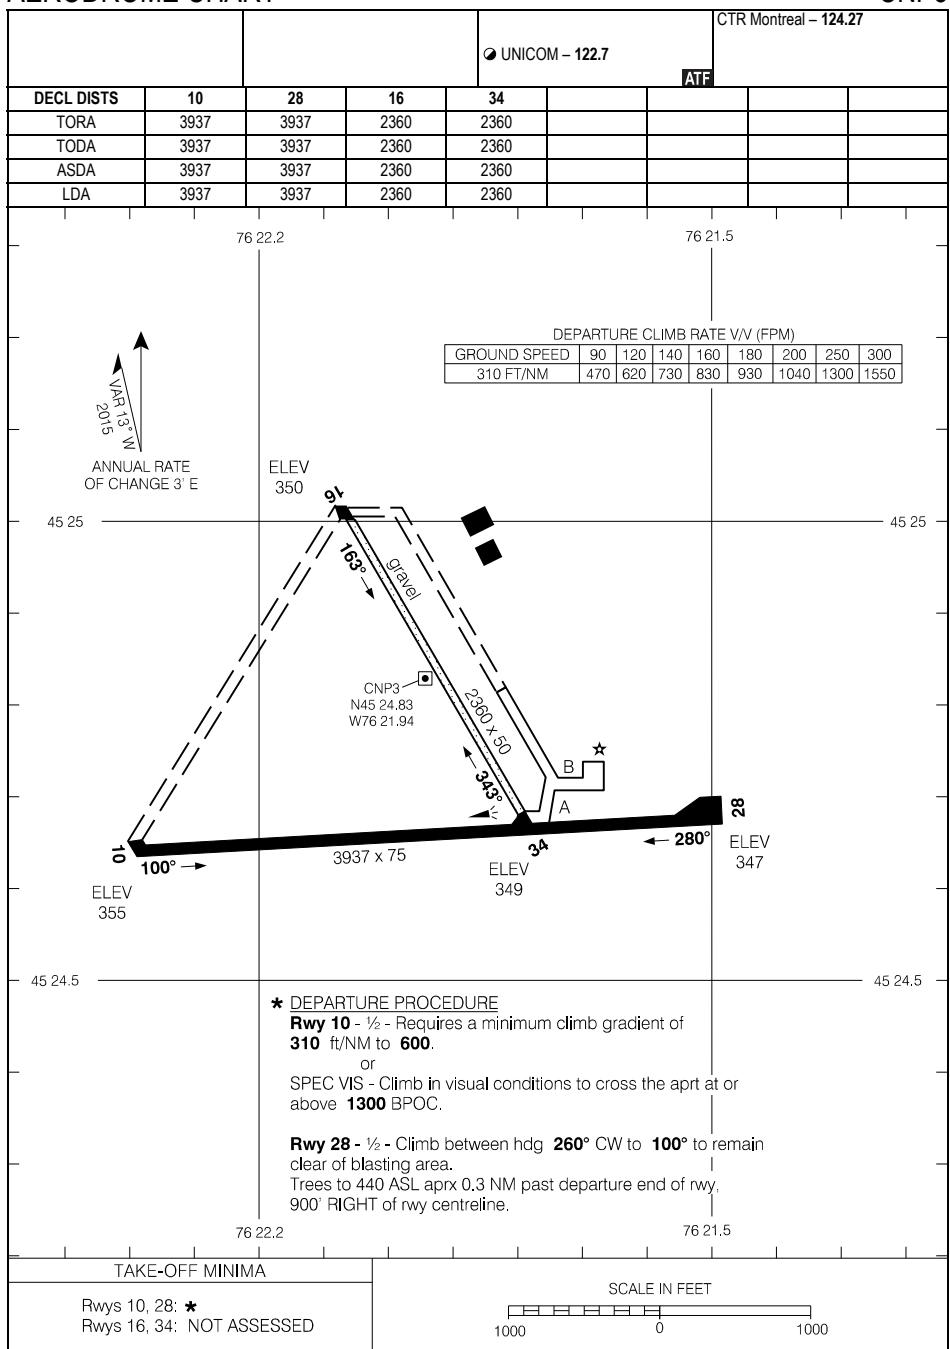

AERODROME CHART


EFF 12 JUN 25

CNP3

CYAT-AD

ATTAWAPISKAT, ON
CYAT

AERODROME CHART

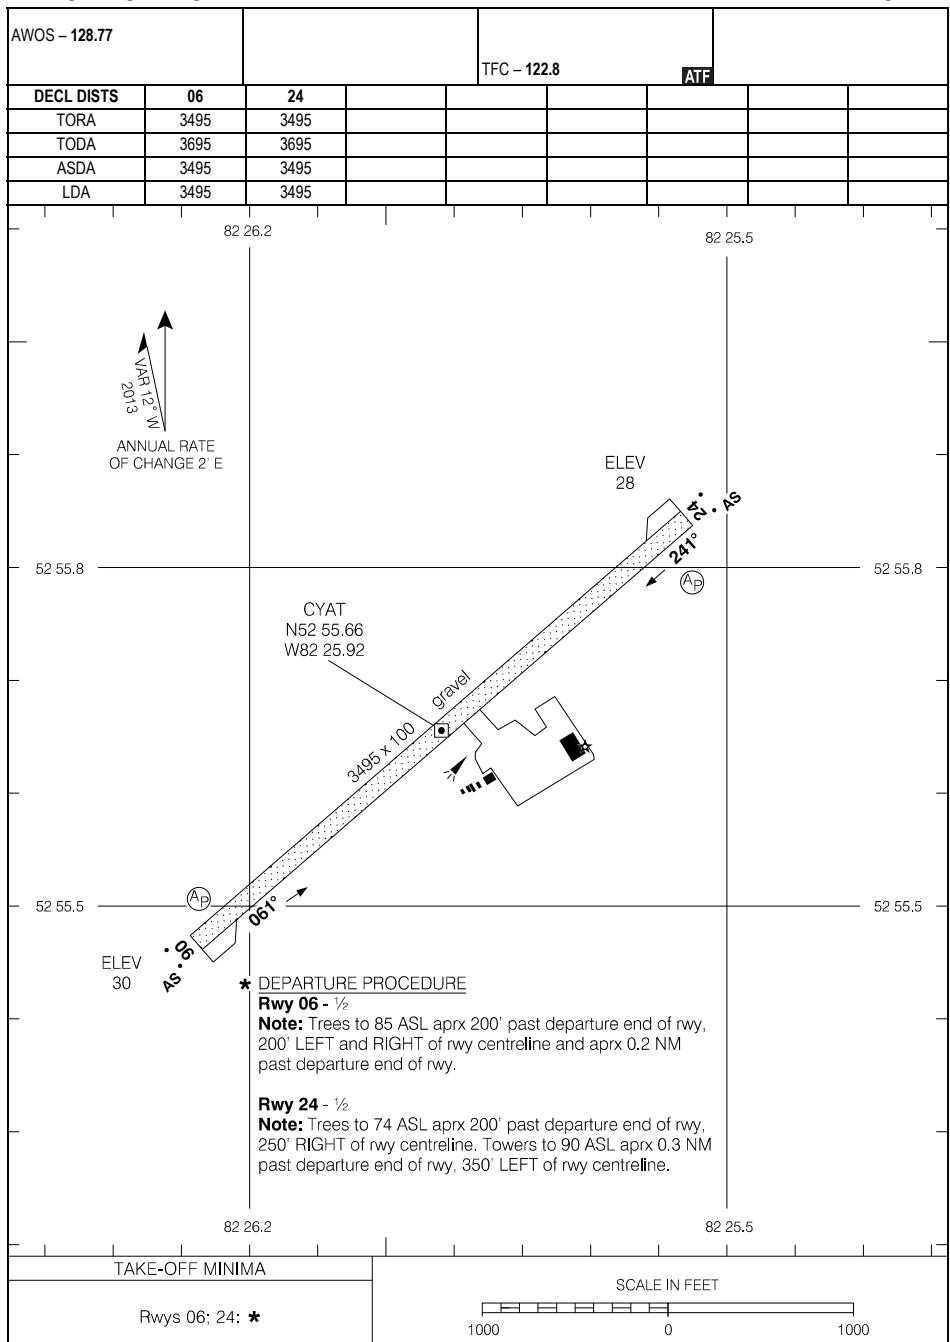

AERODROME CHART

EFF 12 JUN 25


CYAT-AD

CYAT

CPF2-AD

BAR RIVER, ON
CPF2

AERODROME CHART

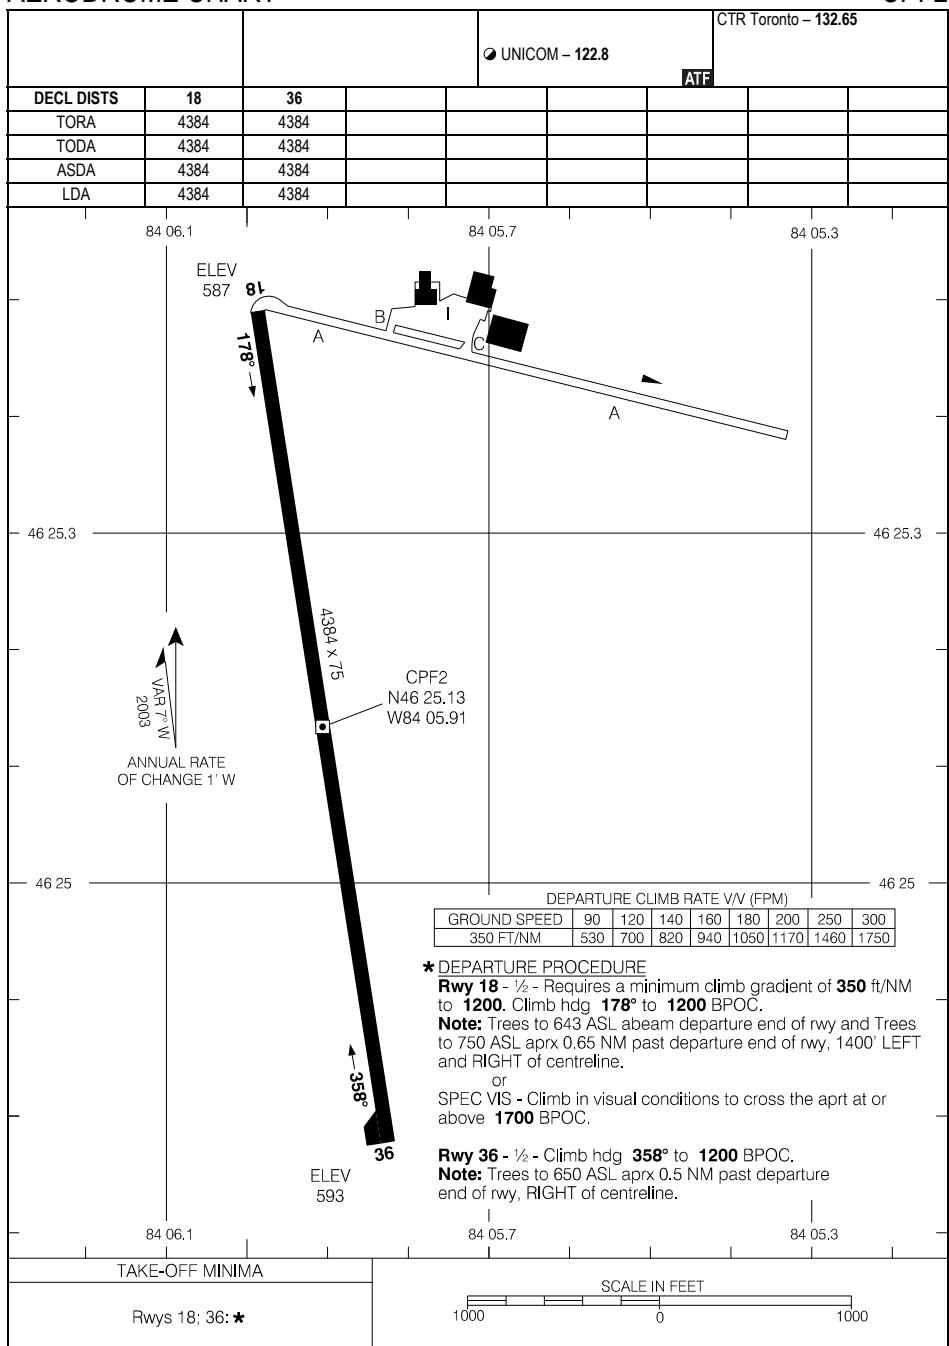

AERODROME CHART

EFF 7 AUG 25


CPF2

CPF2-AD

CYLS-AD

BARRIE-ORILLIA/LAKE SIMCOE, ON
CYLS

AERODROME CHART

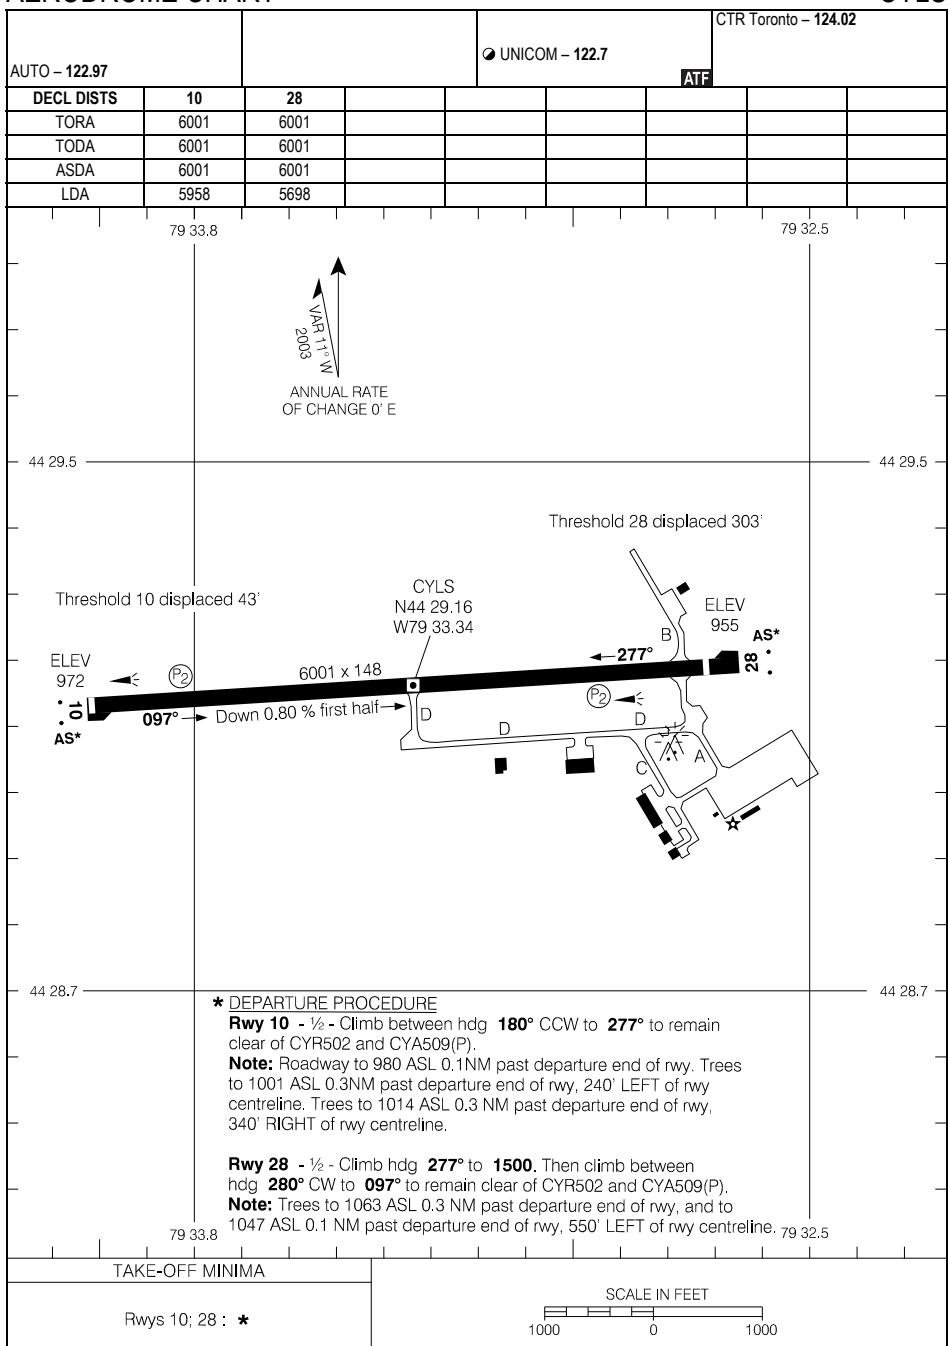

AERODROME CHART

EFF 17 APR 25


CYLS-AD

CYLS

CNE3-AD

BEARSKIN LAKE, ON
CNE3

AERODROME CHART

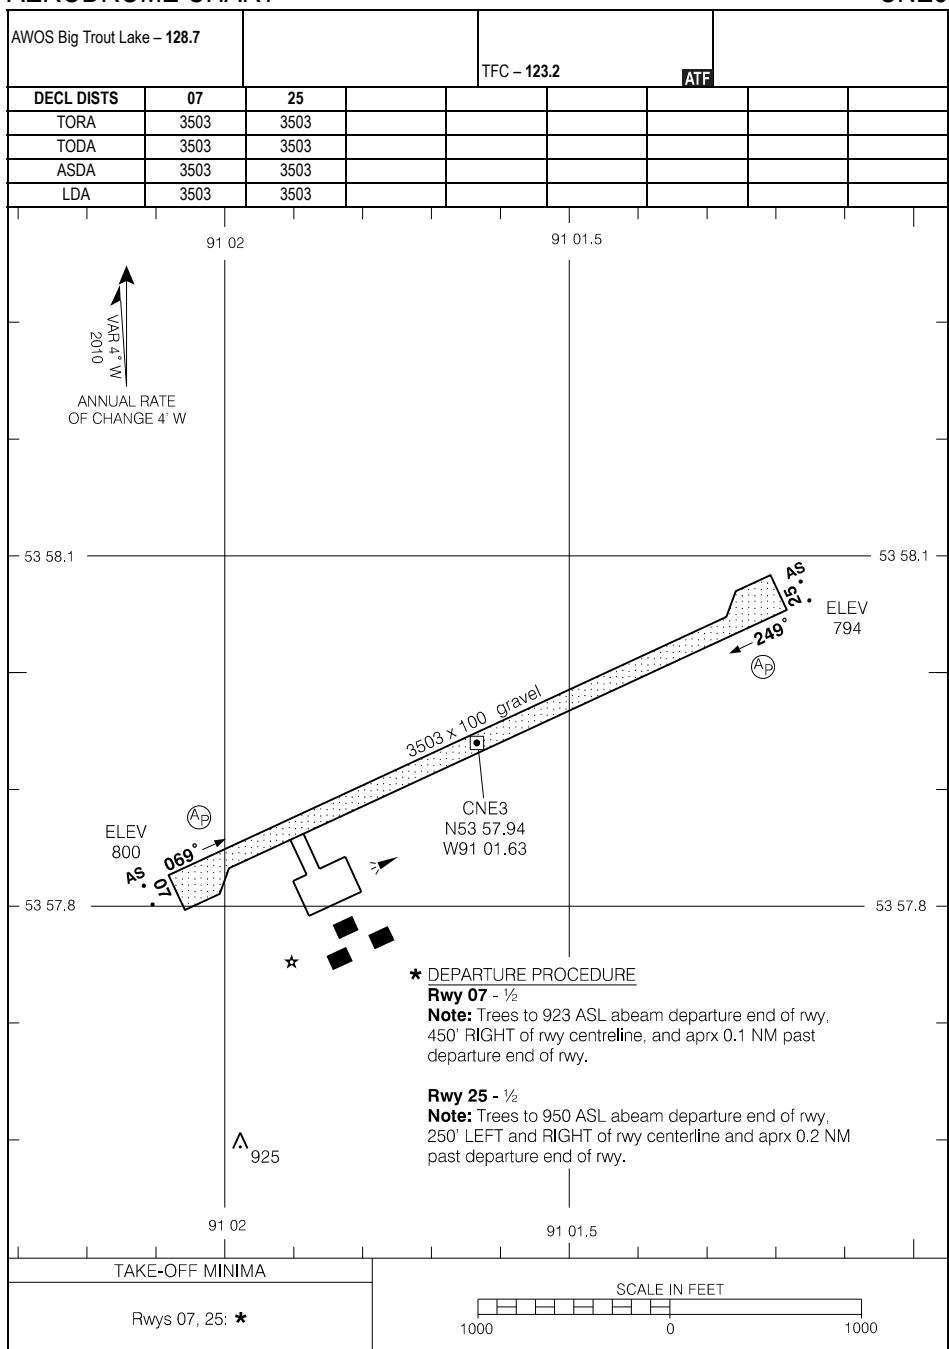


AERODROME CHART

EFF 30 JAN 20

CNE3-AD

CNE3

AERODROME CHART

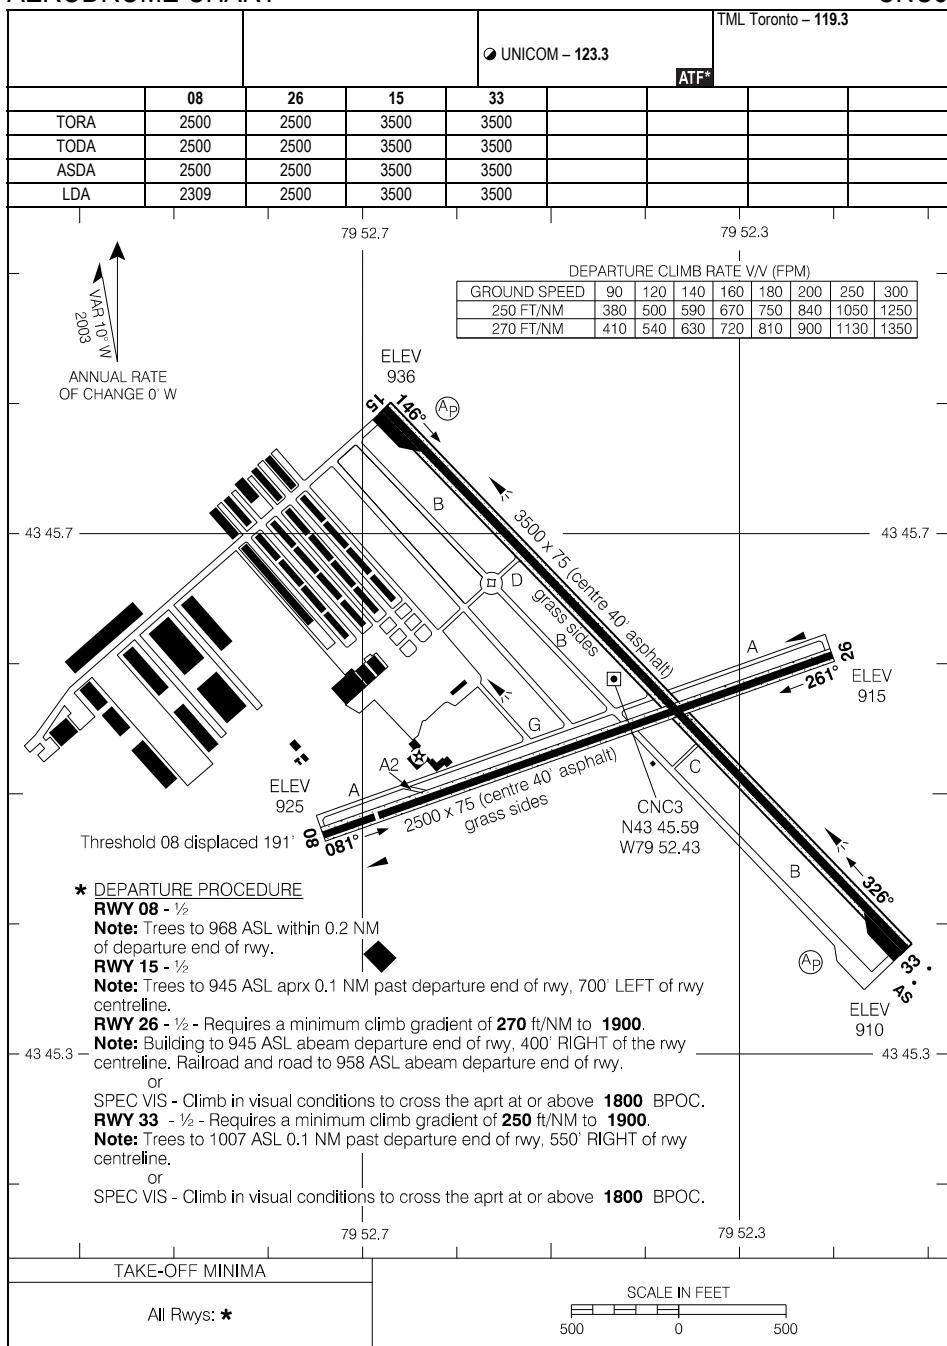

AERODROME CHART


EFF 30 NOV 23

CNC3

CYFD-AD

BRANTFORD, ON
CYFD

AERODROME CHART

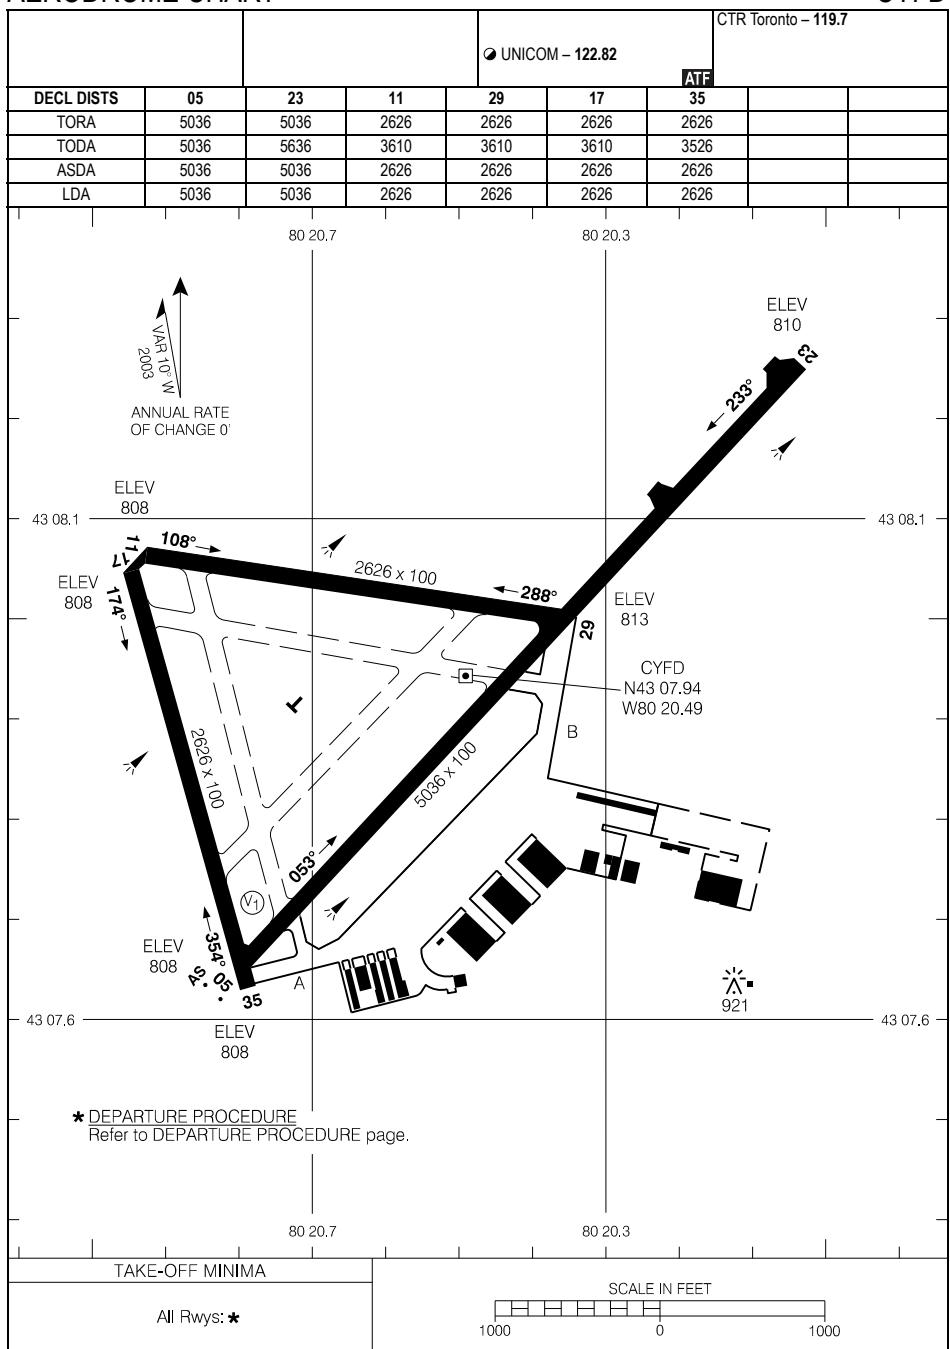

AERODROME CHART

EFF 17 JUN 21


CYFD

CYFD-AD

CNL3-AD

BROCKVILLE REGIONAL TACKABERRY APRT, ON
CNL3

AERODROME CHART

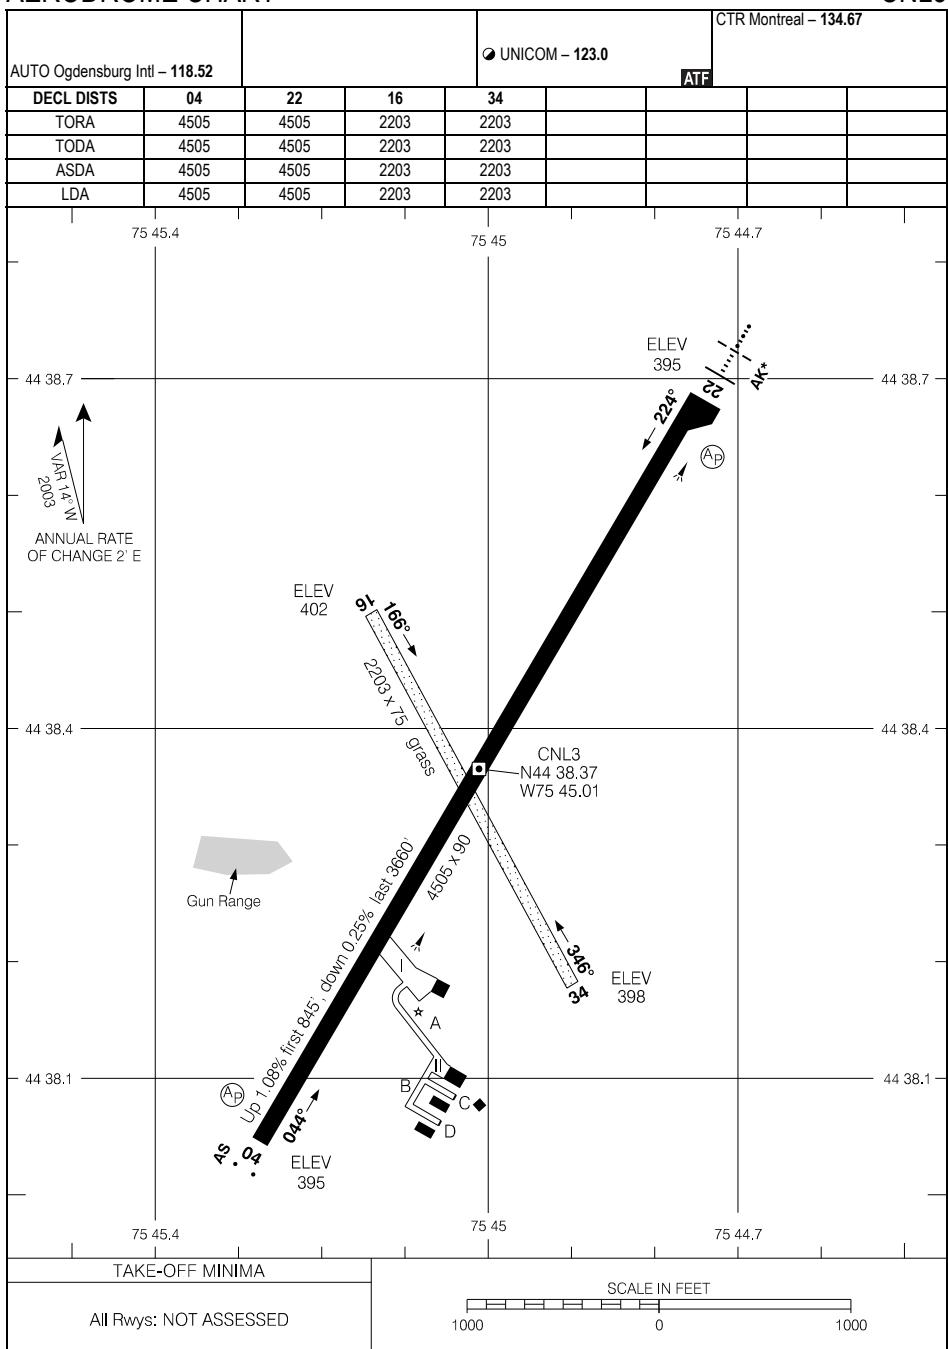


AERODROME CHART

EFF 23 FEB 23

CNL3-AD

CNL3

AERODROME CHART

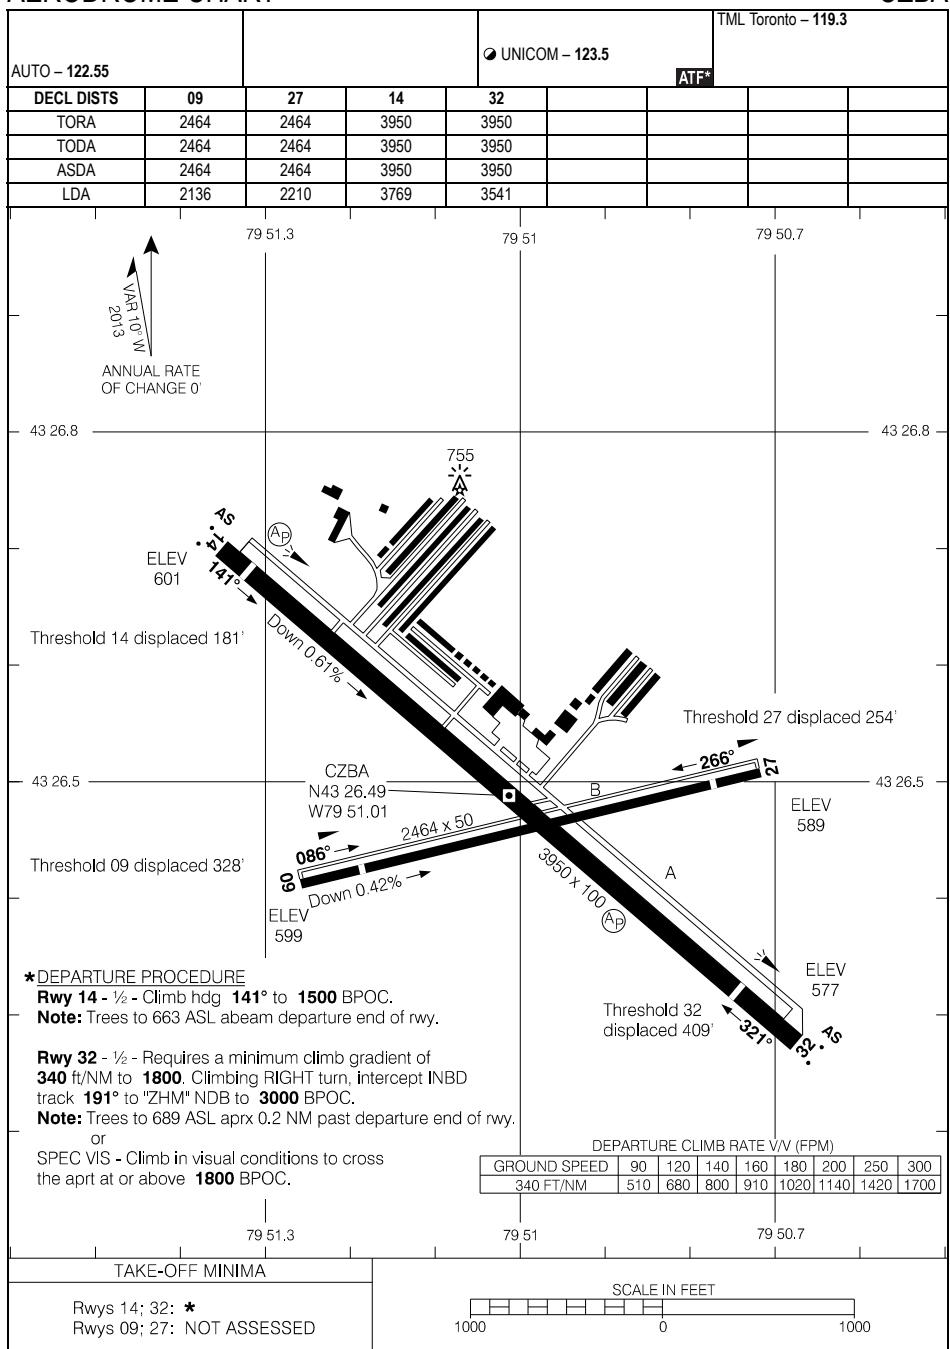


AERODROME CHART

EFF 2 DEC 21

CYAC-AD

CAT LAKE, ON
CYAC

AERODROME CHART

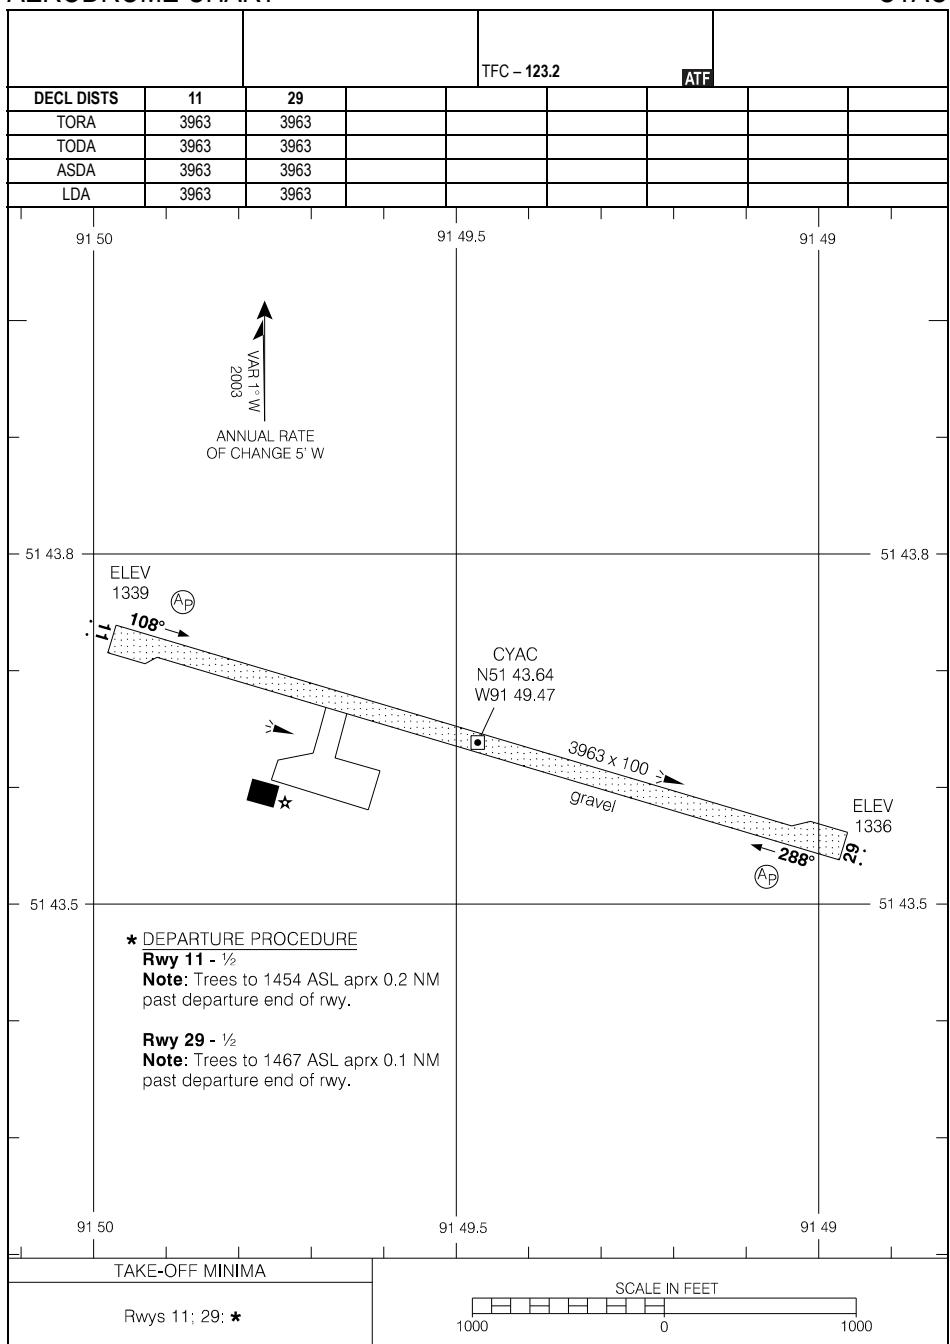

AERODROME CHART

EFF 24 MAR 22


CYAC

CYAC-AD

CYCE-AD

CENTRALIA/JAMES T. FIELD MEMORIAL, ON
CYCE

AERODROME CHART

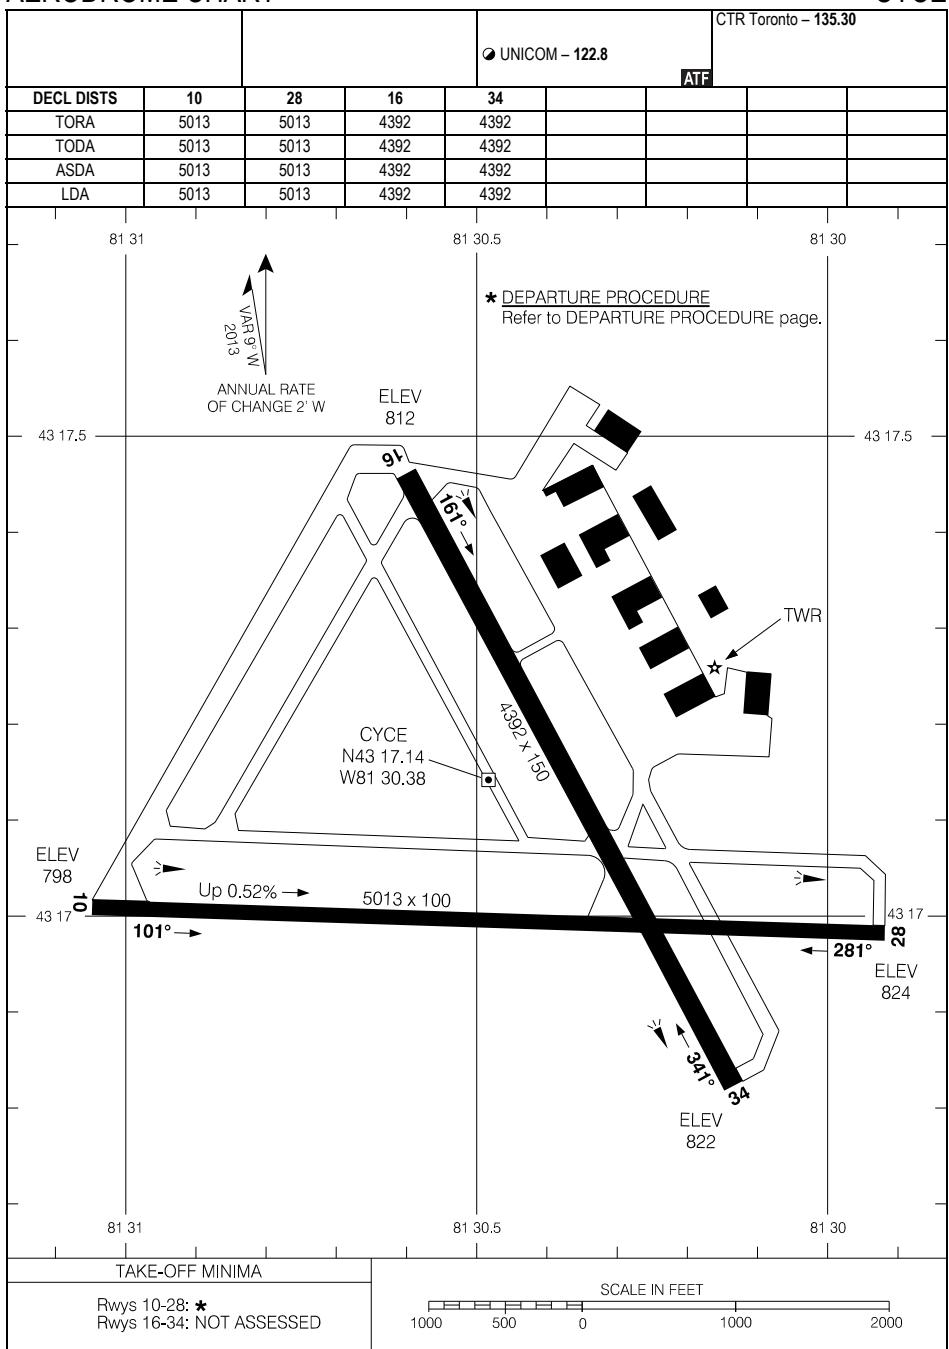

AERODROME CHART

EFF 8 SEP 22


CYCE-AD

CYCE

CYLD-AD

CHAPLEAU, ON
CYLD

AERODROME CHART

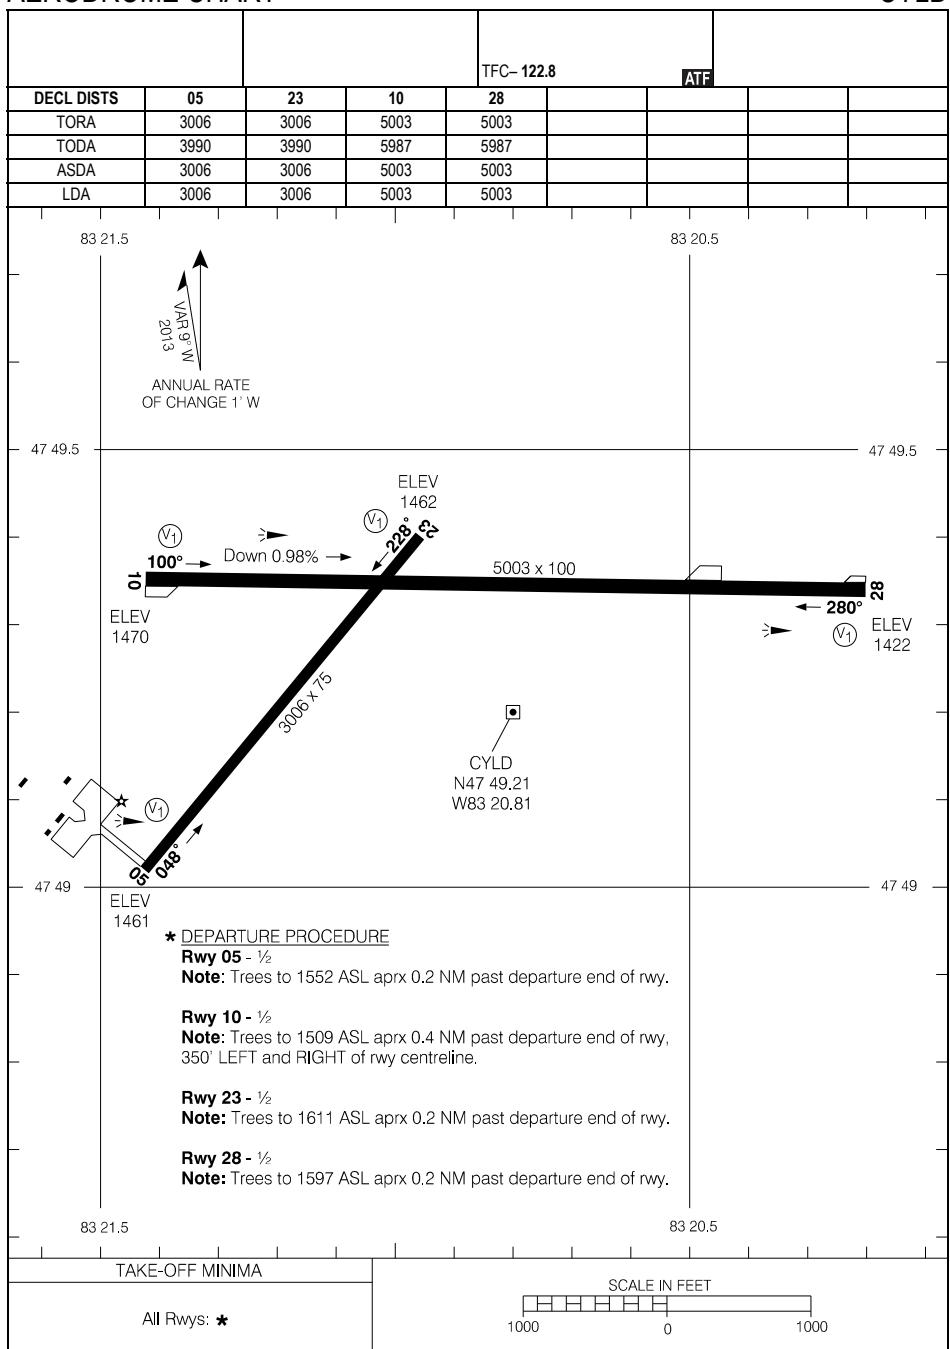

AERODROME CHART

EFF 11 JUL 24


CYLD-AD

CYLD

CYCK-AD

CHATHAM-KENT, ON
CYCK

AERODROME CHART

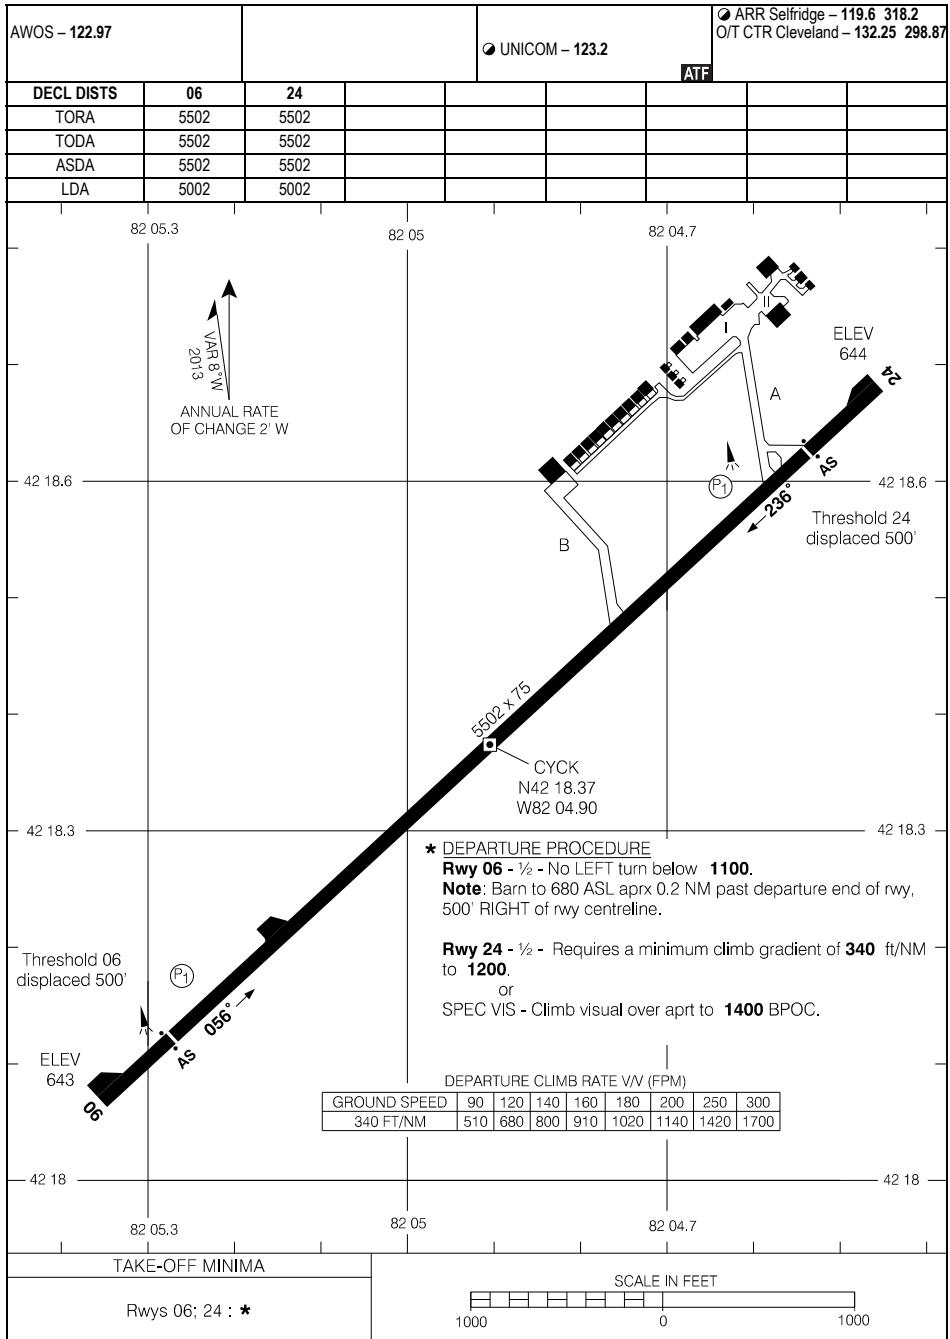

AERODROME CHART

EFF 16 MAY 24

CYCK

CYCK-AD

CYCN-AD

COCHRANE, ON
CYCN

AERODROME CHART

AUTO - 122.55


CTR Toronto – 128.3

TFC – 122.8

ATF

DECL DISTS		13	31						ATR
TORA	4484	4484							
TODA	4484	4484							
ASDA	4484	4484							
LDA	4484	4484							

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

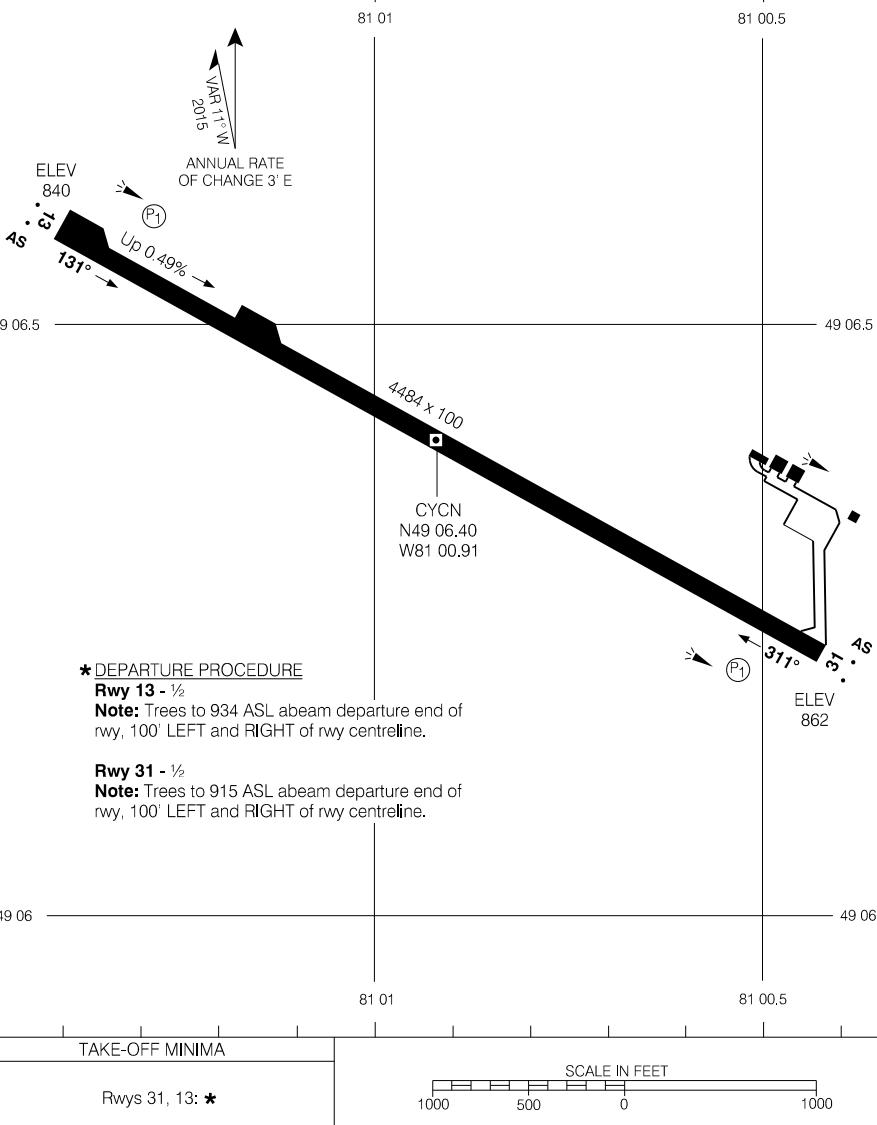

AERODROME CHART

EFF 11 JUL 24


CYCN

CYCN-AD

CNY3-AD

COLLINGWOOD, ON
CNY3

AERODROME CHART

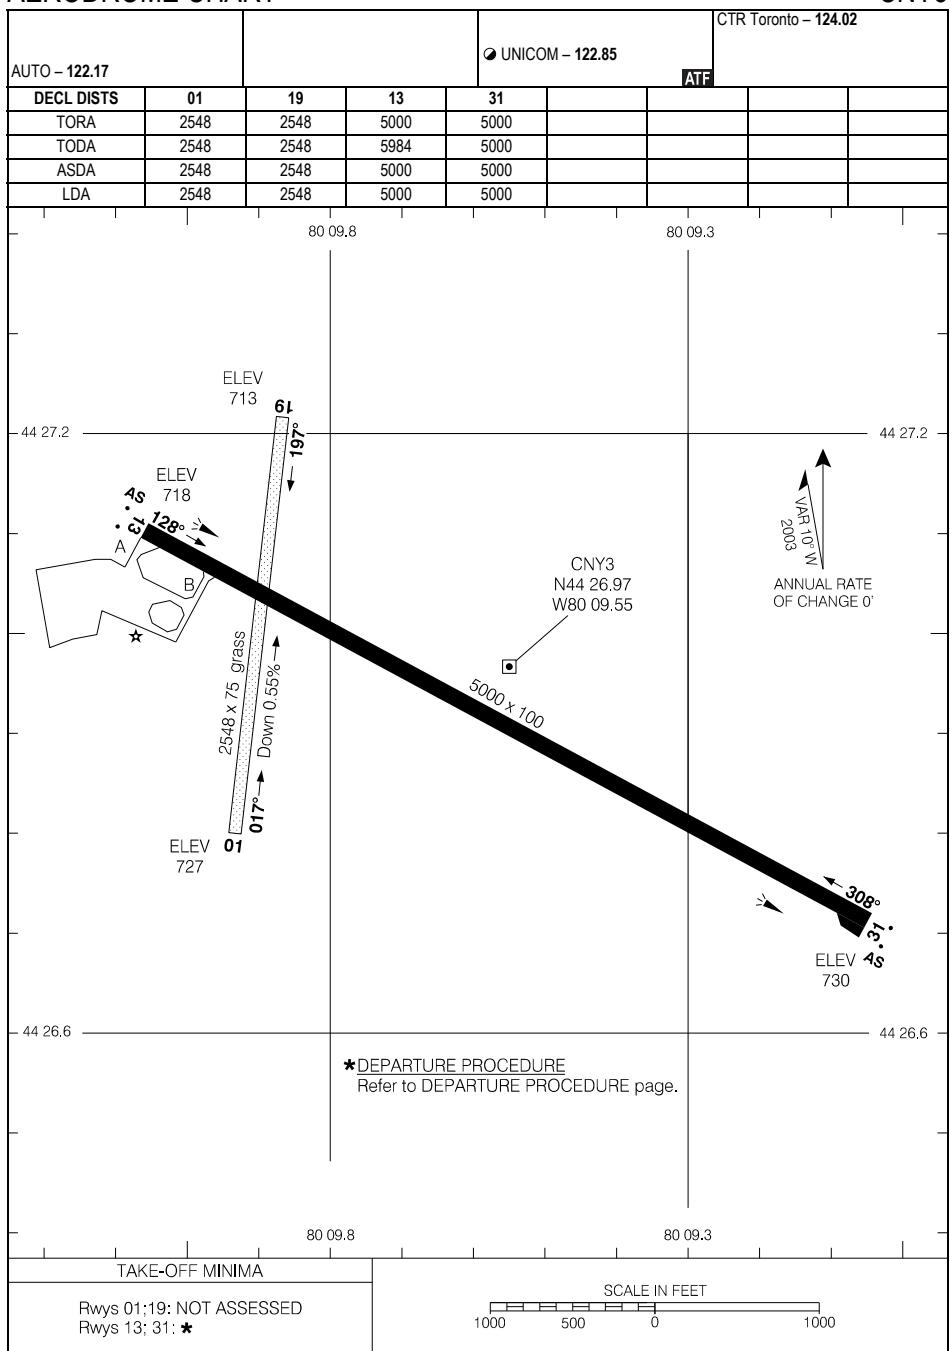


AERODROME CHART

EFF 7 AUG 25

CNY3

CNY3-AD

AERODROME CHART

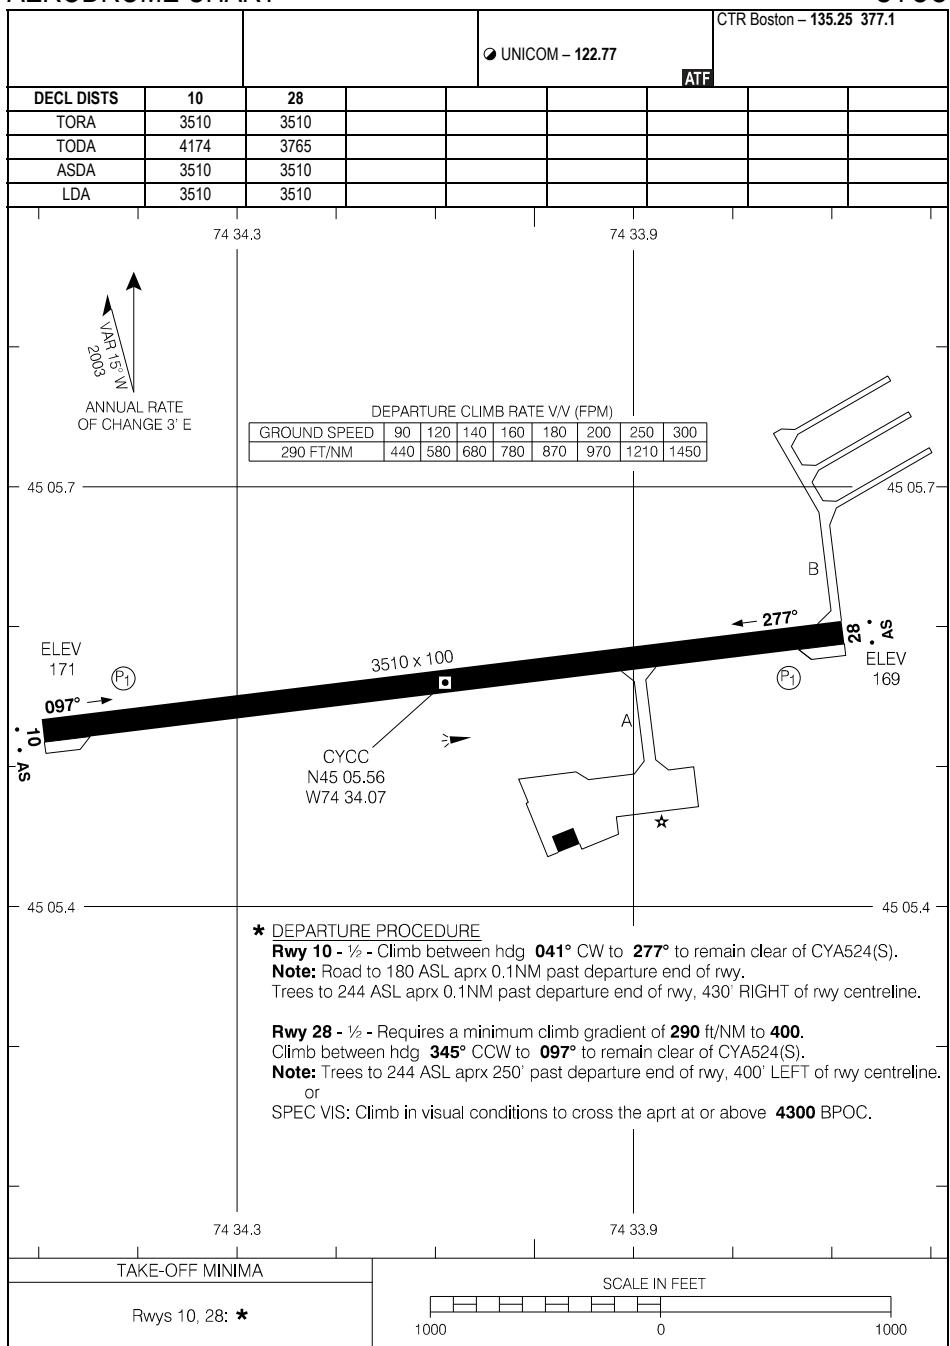

AERODROME CHART


EFF 7 AUG 25

CYCC

CYVZ-AD

DEER LAKE, ON
CYVZ

AERODROME CHART

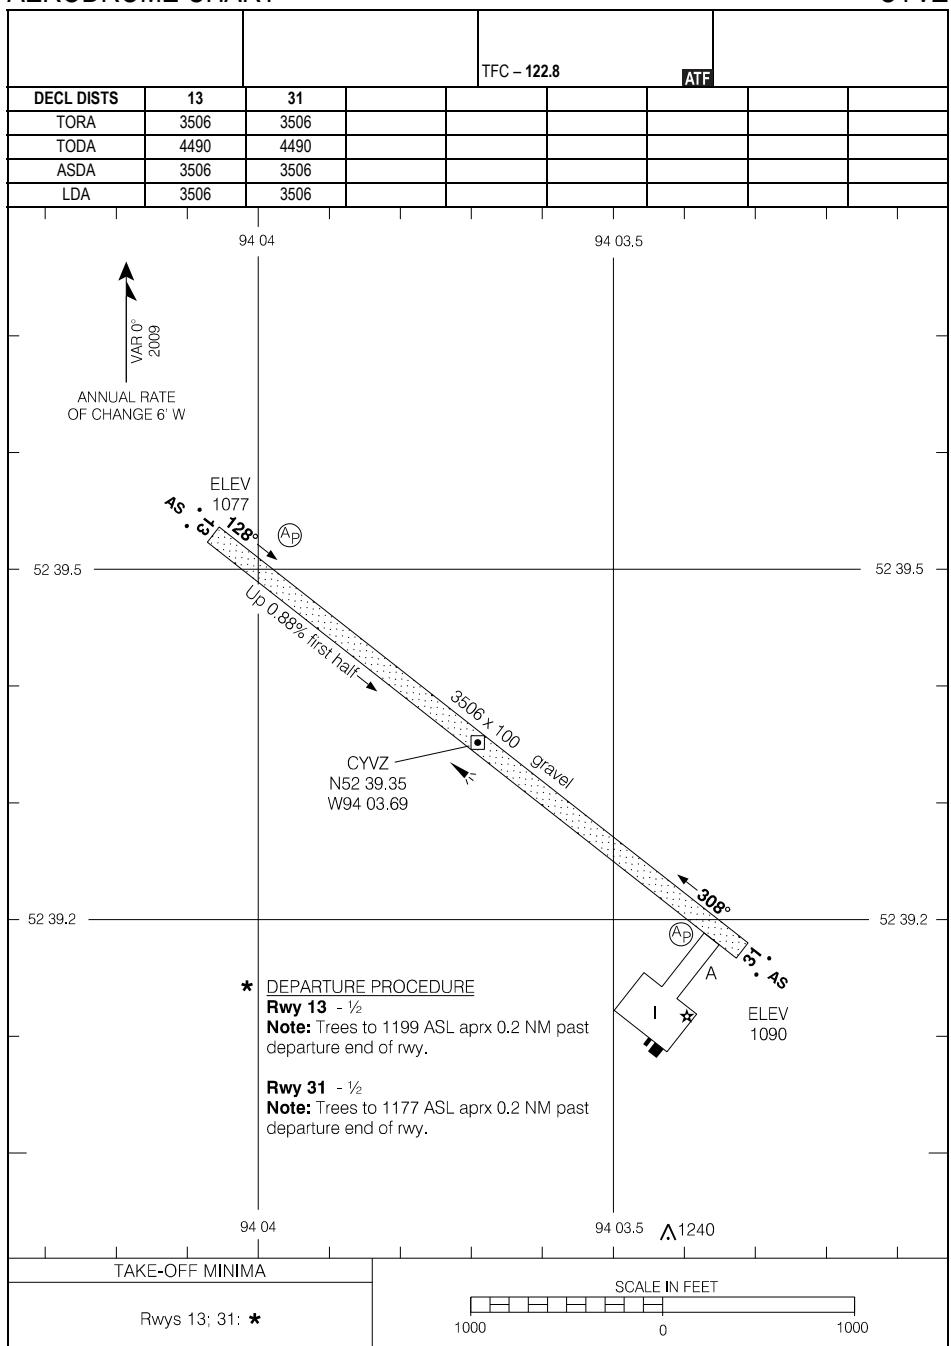

AERODROME CHART

EFF 12 JUN 25


CYVZ-AD

CYVZ

CDT9-AD

DETOUR LAKE, ON
CDT9

AERODROME CHART

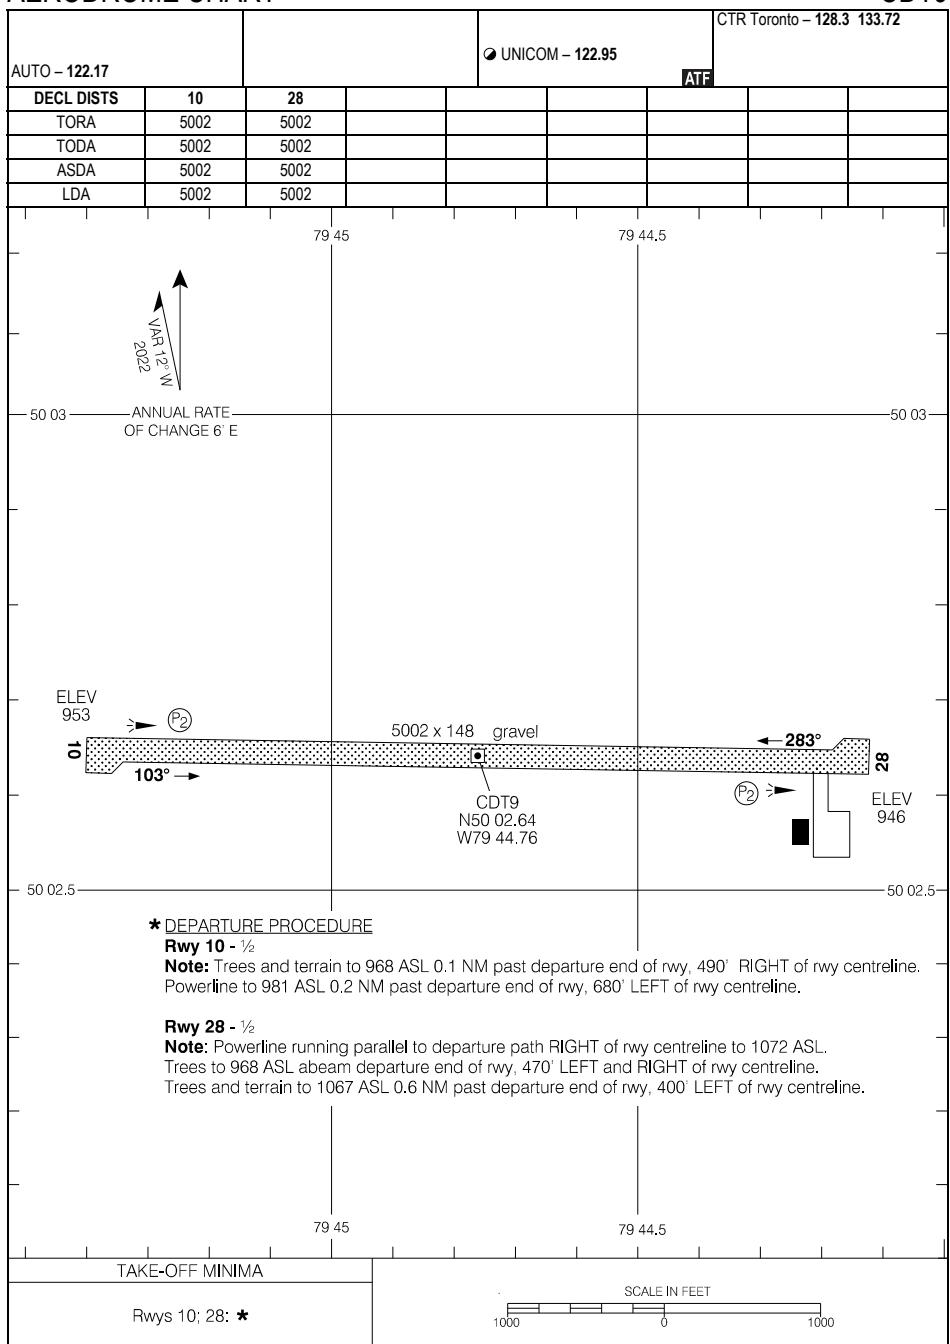

AERODROME CHART

EFF 15 JUN 23

CDT9-AD

CDT9

CYHD-AD

DRYDEN REGIONAL, ON
CYHD

AERODROME CHART

AWOS – 128.7				RADIO Sioux Lookout – 122.1		CTR Winnipeg – 132.2	
						MF	
DECL DISTS	12	30					
TORA	5993	5993					
TODA	6193	6977					
ASDA	5993	5993					
LDA	5993	5796					

92 45

92 44

ANNUAL RATE
OF CHANGE 4% W

ELEV
1354

334

*** DEPARTURE PROCEDURE**
Rwy 12 - ½ - Requires a minimum climb gradient of **390 ft/NM**
to **1600**

Note: Trees to 1407 ASL aprx 0.1NM past departure end of rwy, 500' RIGHT of rwy centreline.

SPEC VIS - Climb in visual conditions to cross
the apt at or above 1900 RPOC

Rwy 30 - 1/2

Note: Trees to 1381 ASL aprx 0.2 NM past departure end of rwy.

49

CYHD
N10-10-20

49 49.89

92 44.02

Threshold 30
displaced 197

NOTE: Twy C asphalt, 1000' mid-section gravel sfc

DEPARTURE CLIMB RATE VV (FPM)

GROUND SPEED	90	120	140	160	180	200	250	300
390 FT/NM	590	780	910	1040	1170	1300	1630	1950

92 45

92 44

TAKE-OFF MINIMA

SCALE IN FEET

AFRODROME CHART

EEE 12 AUG 21

CYHD

CYHD-AD

CYXR-AD

EARLTON (TIMISKAMING REGIONAL), ON
CYXR


AERODROME CHART

AWOS - 128.6

TEC - 122.0

RADIO London – 123.3FM

DECL DISTS	08	26	16	34	MF
TORA	5998	5998	3019	3019	
TODA	6598	6898	3119	3119	
ASDA	5998	5998	3019	3019	
LDA	5998	5998	3019	3019	

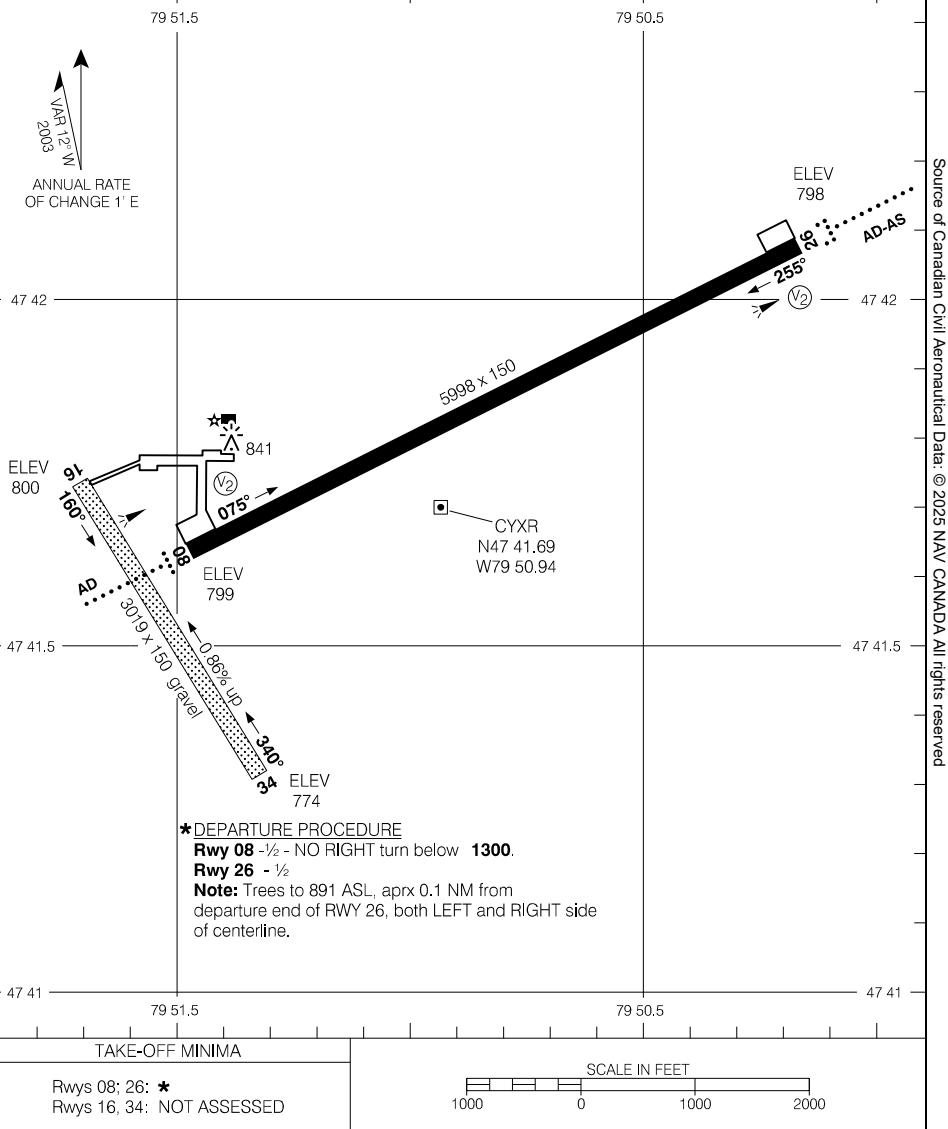

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 17 APR 25


CYXR

CYXR-AD

CNV8-AD

EDENVALE, ON
CNV8

AERODROME CHART

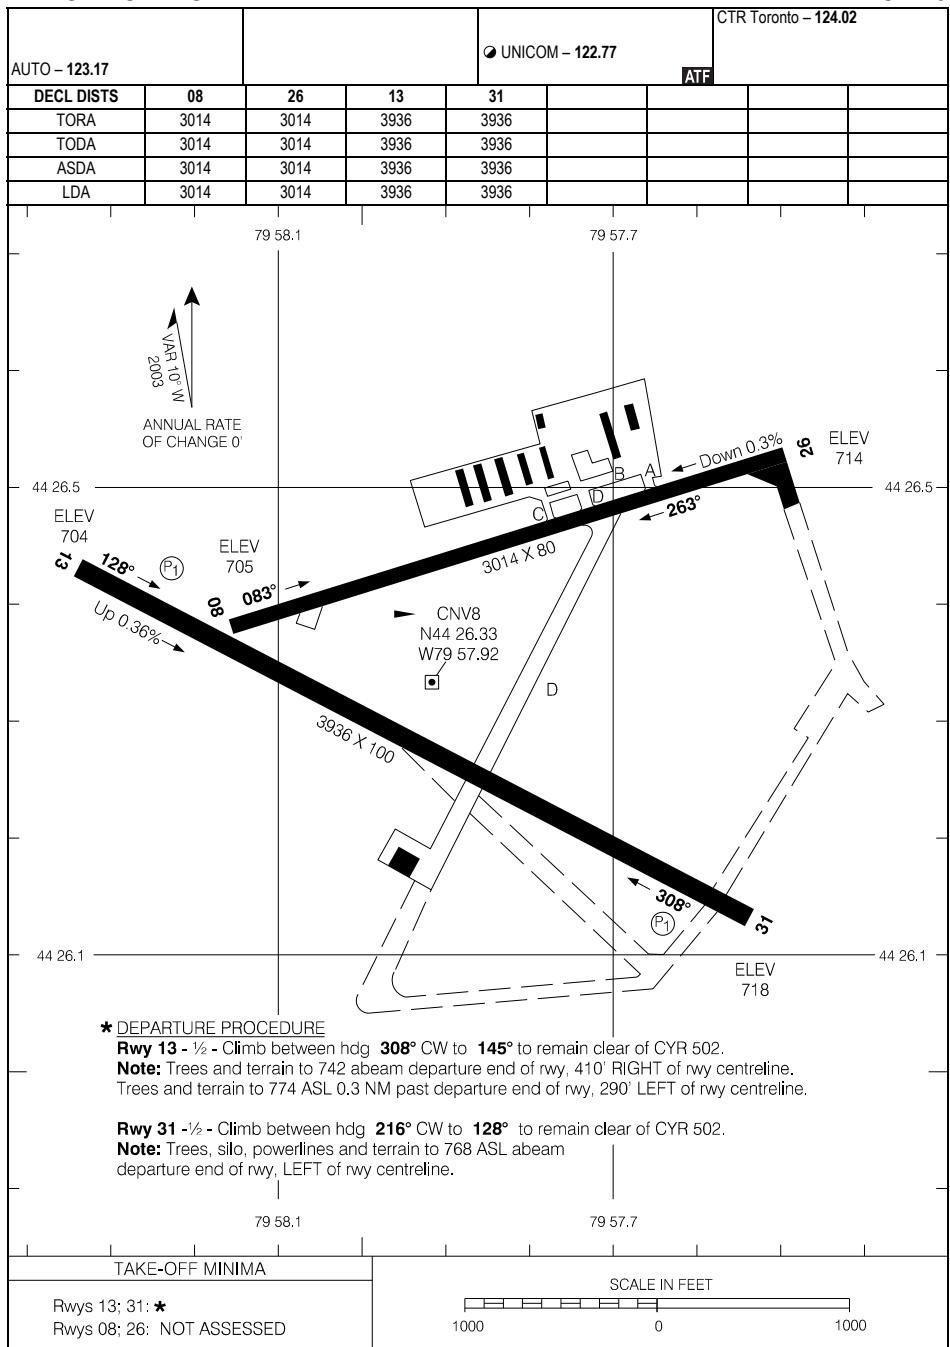

AERODROME CHART

EFF 15 JUN 23


CNV8-AD

CNV8

CYEL-AD

ELLiot Lake Muni, ON
CYEL

AERODROME CHART

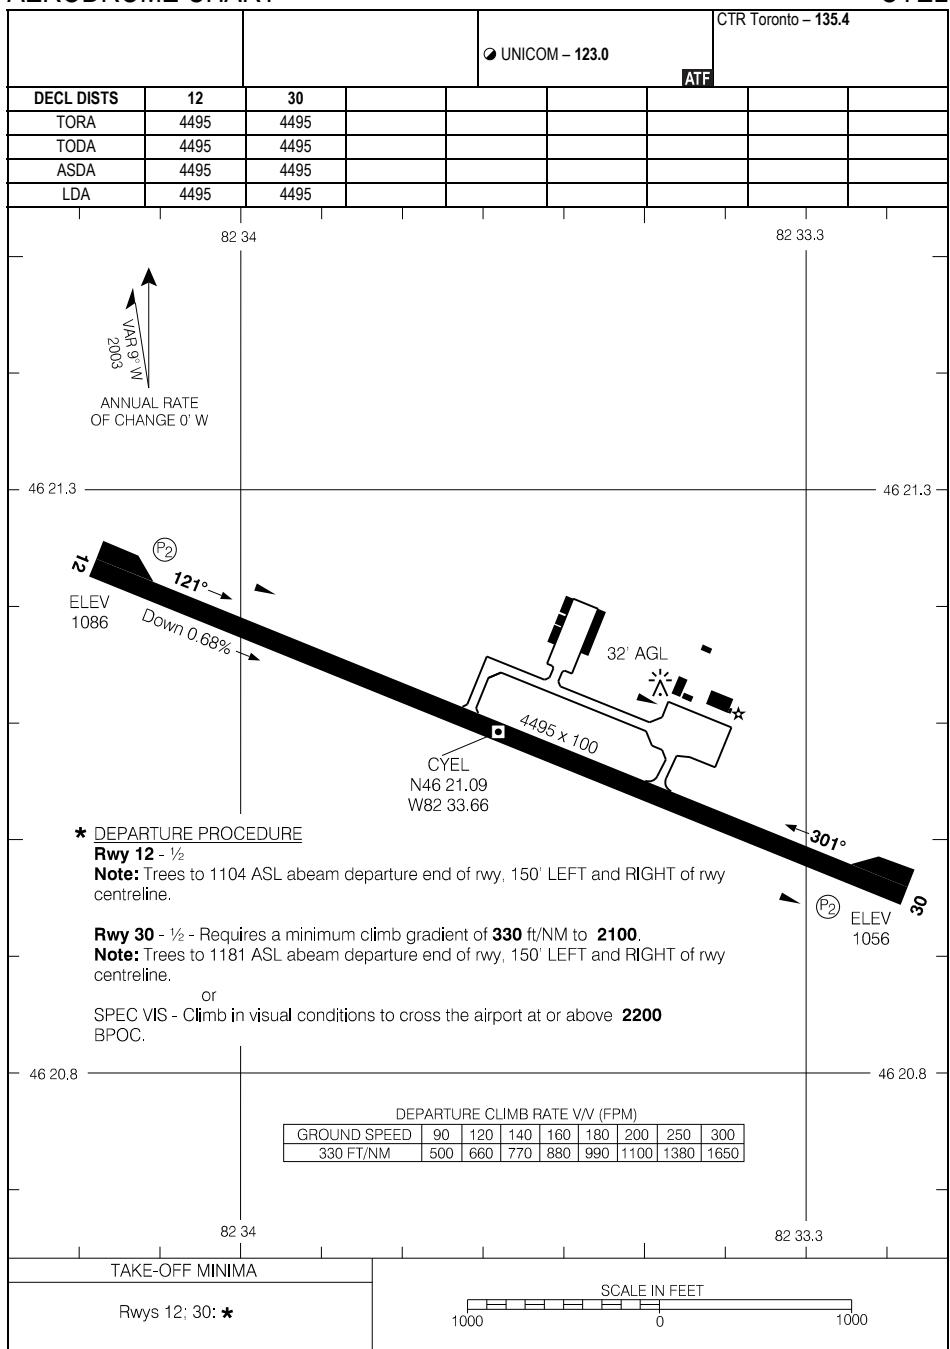

AERODROME CHART

EFF 7 AUG 25


CYEL-AD

CYEL

CYFA-AD

FORT ALBANY, ON
CYFA

AERODROME CHART

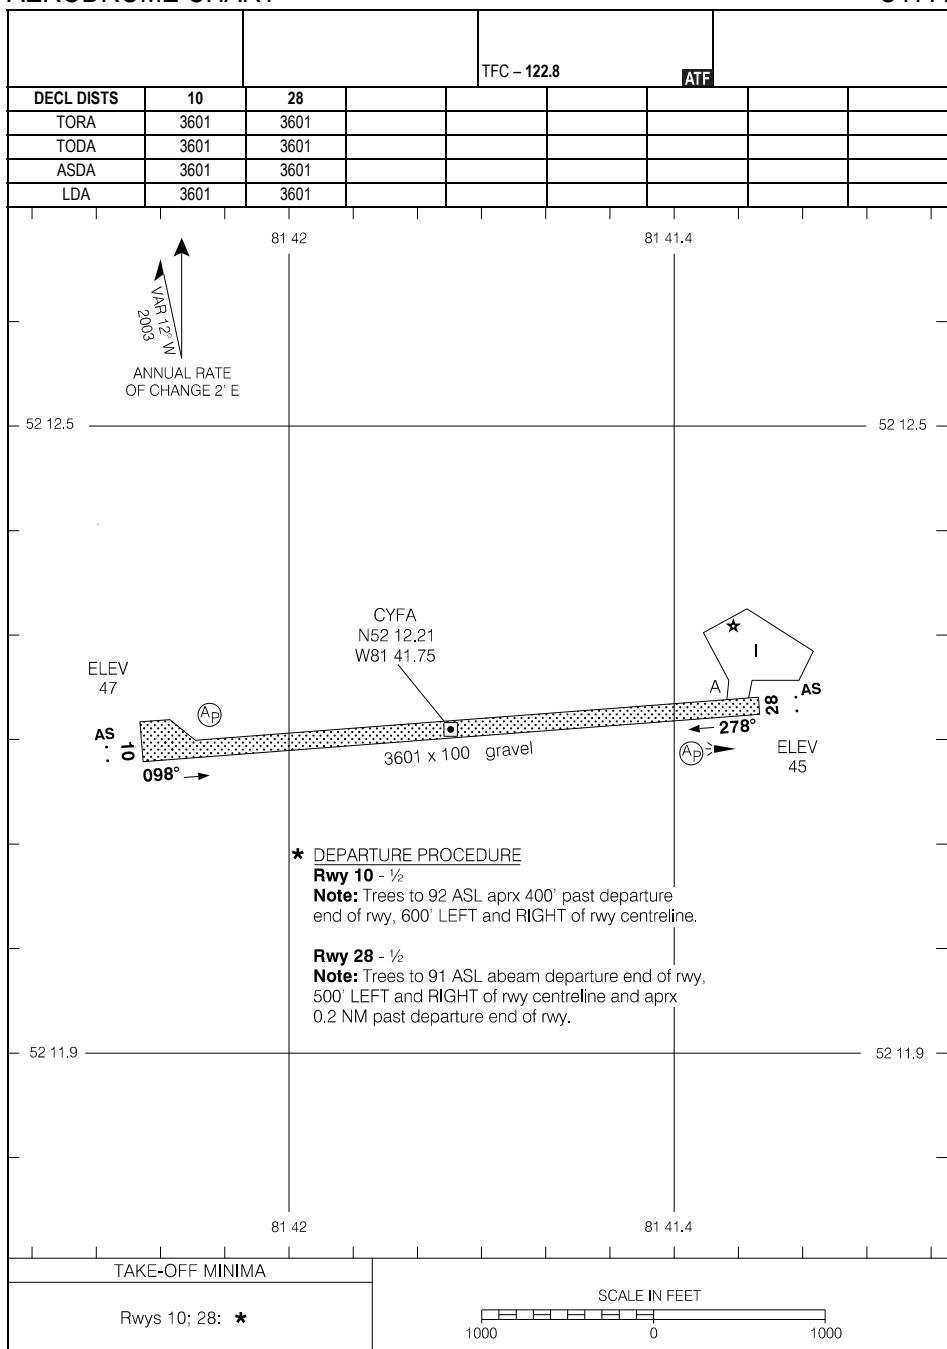

AERODROME CHART

EFF 5 OCT 23

CYFA

CYFA-AD

CYAG-AD

FORT FRANCES MUNI, ON
CYAG

AERODROME CHART

AUTO Falls Intl – 120.0				UNICOM – 122.8		CTR Minneapolis – 120.9 RADIO London – 123.55	
DECL DISTS	12	30				ATF	
TORA	4493	4493					
TODA	5477	5477					
ASDA	4493	4493					
LDA	4493	4493					

93 27 93 26

* DEPARTURE PROCEDURE

Rwy 12 - 1/2

Note: Trees to 1189 ASL aprx 0.2NM past departure end of rwy.

Rwy 30 - 1/2

Note: Trees to

Note: Needs to 1249 ASL apx 0.2NM past departure end of Iwy.

ANNUAL RATE
OF CHANGE 6% W

ELEV
1123

1

CYAG
N48 39.26
W93 26.43

Fire Training Centre

2

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

TAKE-OFF MINIMA

SCALE IN FEET

1000

CYAG


AEROD
EEE 3 AUG 05

CYAG-AD

CYFH-AD

FORT HOPE, ON
CYFH

AERODROME CHART

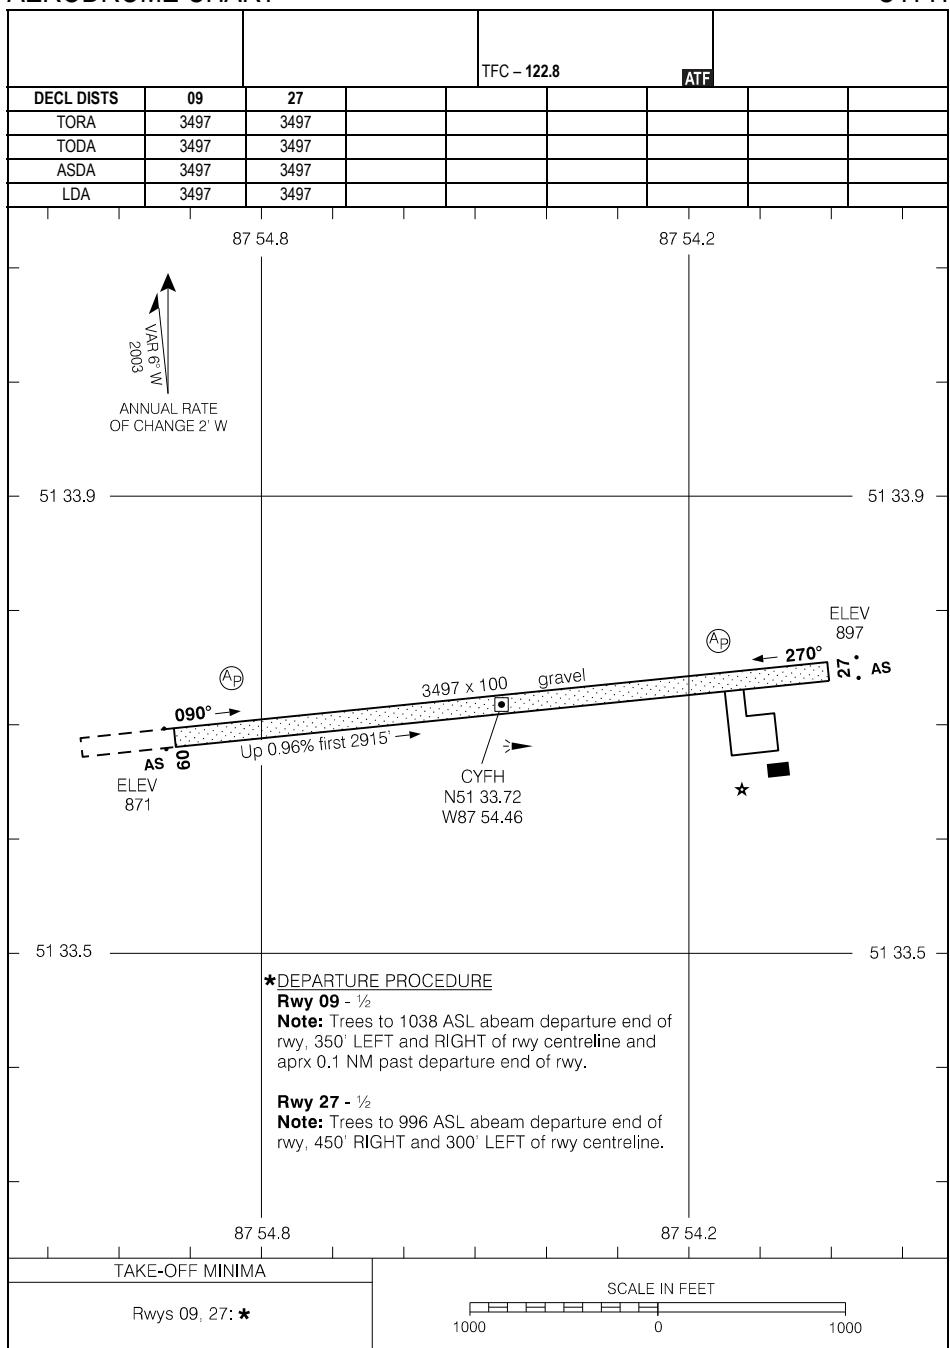

AERODROME CHART

EFF 24 MAR 22


CYFH

CYFH-AD

CYER-AD

FORT SEVERN, ON
CYER

AERODROME CHART

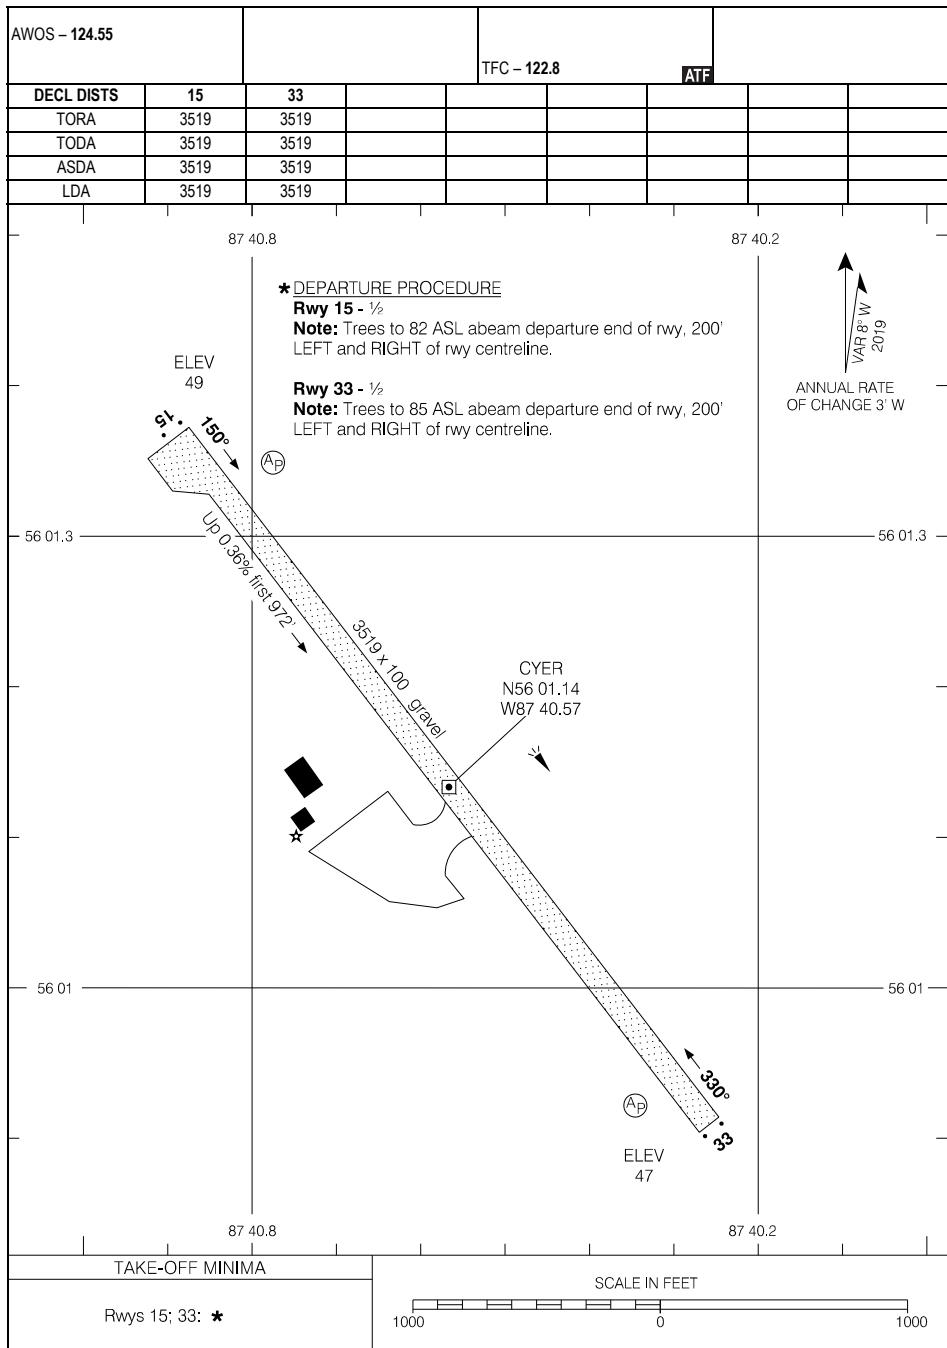

AERODROME CHART

EFF 5 OCT 23

CYER-AD

CYER

CPJ4-HP

GERALDTON (DISTRICT HOSPITAL), ON
CPJ4

HELIPORT CHART

				● UNICOM – 122.8	RADIO London – 123.47
DECL DISTS				ATF CYQQ	
TORA					
TODA					
ASDA					
LDA					

86 57.5

86 57.3


—

49 43

VAR 6° W
2003

ANNUAL RATE
OF CHANGE 2' W

ELEV
1101



86' dia

CF 54
N49 43.43
W86 57.41

- 49 43.4

943.4

86 57.5

86 57.3

TAKE-OFF MINIMA

NOT ASSESSED

SCALE IN FEET

HFI IMPORT CHART

CPJ4

FFF 24.III.14


CPJ4-HP

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CYGQ-AD

GERALDTON (GREENSTONE REGIONAL), ON
CYGQ

AERODROME CHART

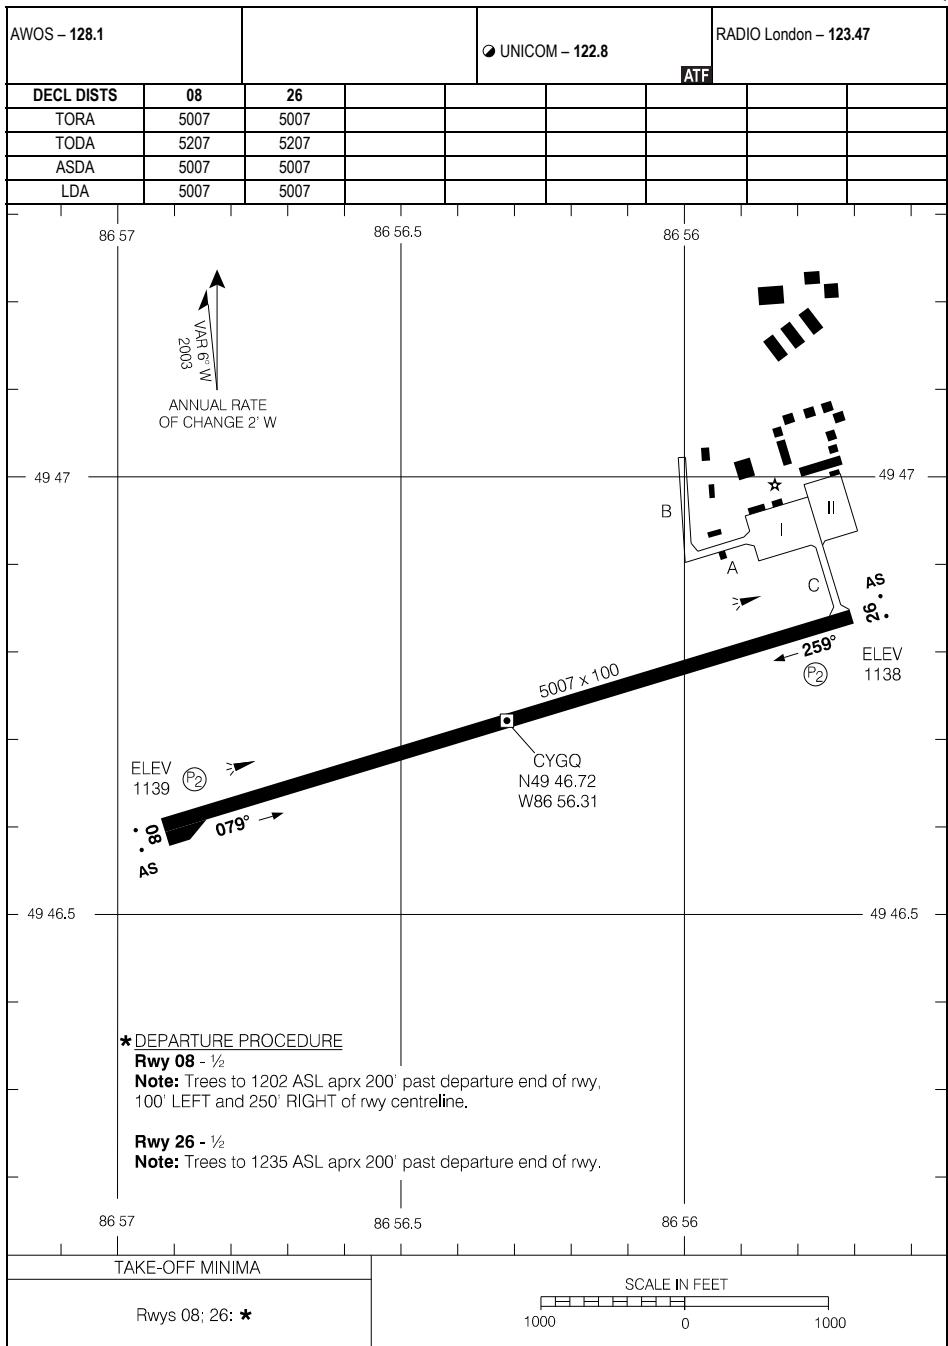

AERODROME CHART

EFF 11 JUL 24


CYGQ-AD

CYGQ

CYGD-AD

GODERICH, ON
CYGD

AERODROME CHART

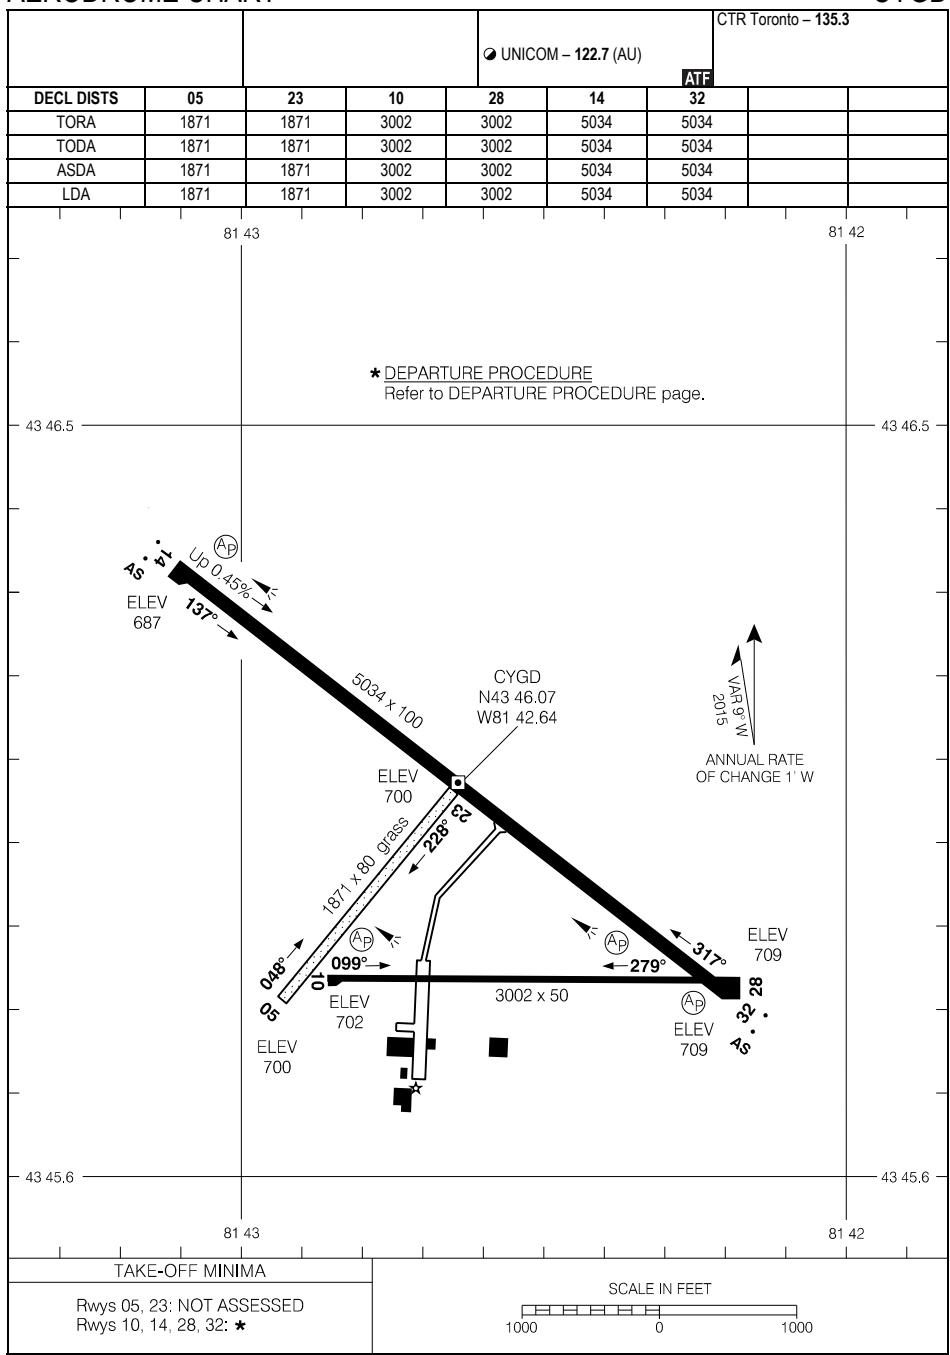

AERODROME CHART

EFF 23 FEB 23


CYGD-AD

CYGD

CYZE-AD

GORE BAY-MANITOULIN, ON
CYZE

AERODROME CHART

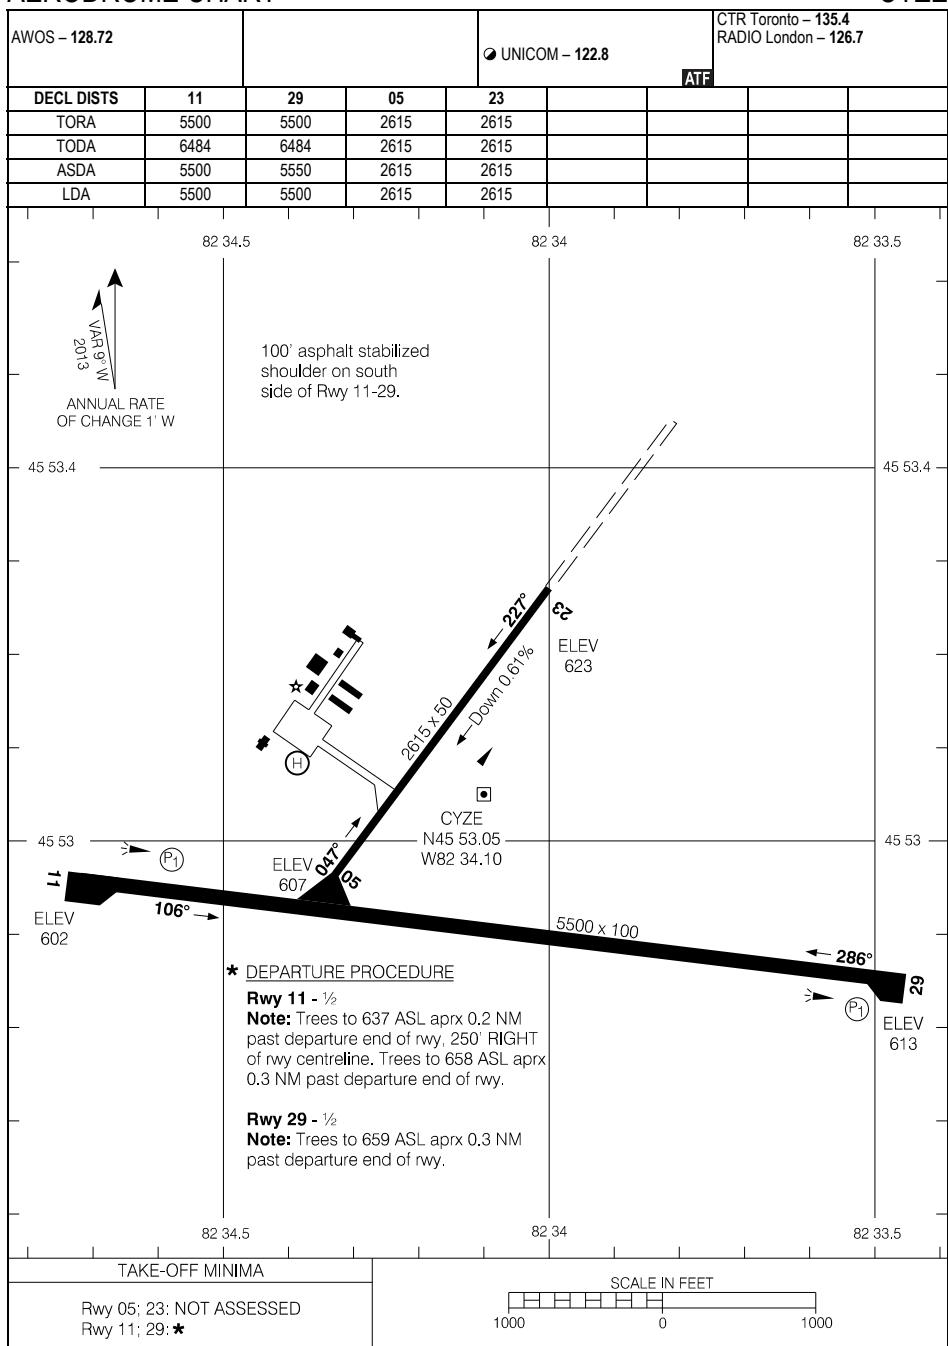

AERODROME CHART

EFF 12 JUN 25


CYZE-AD

CYZE

CYHM-AD

HAMILTON, ON
CYHM

AERODROME CHART

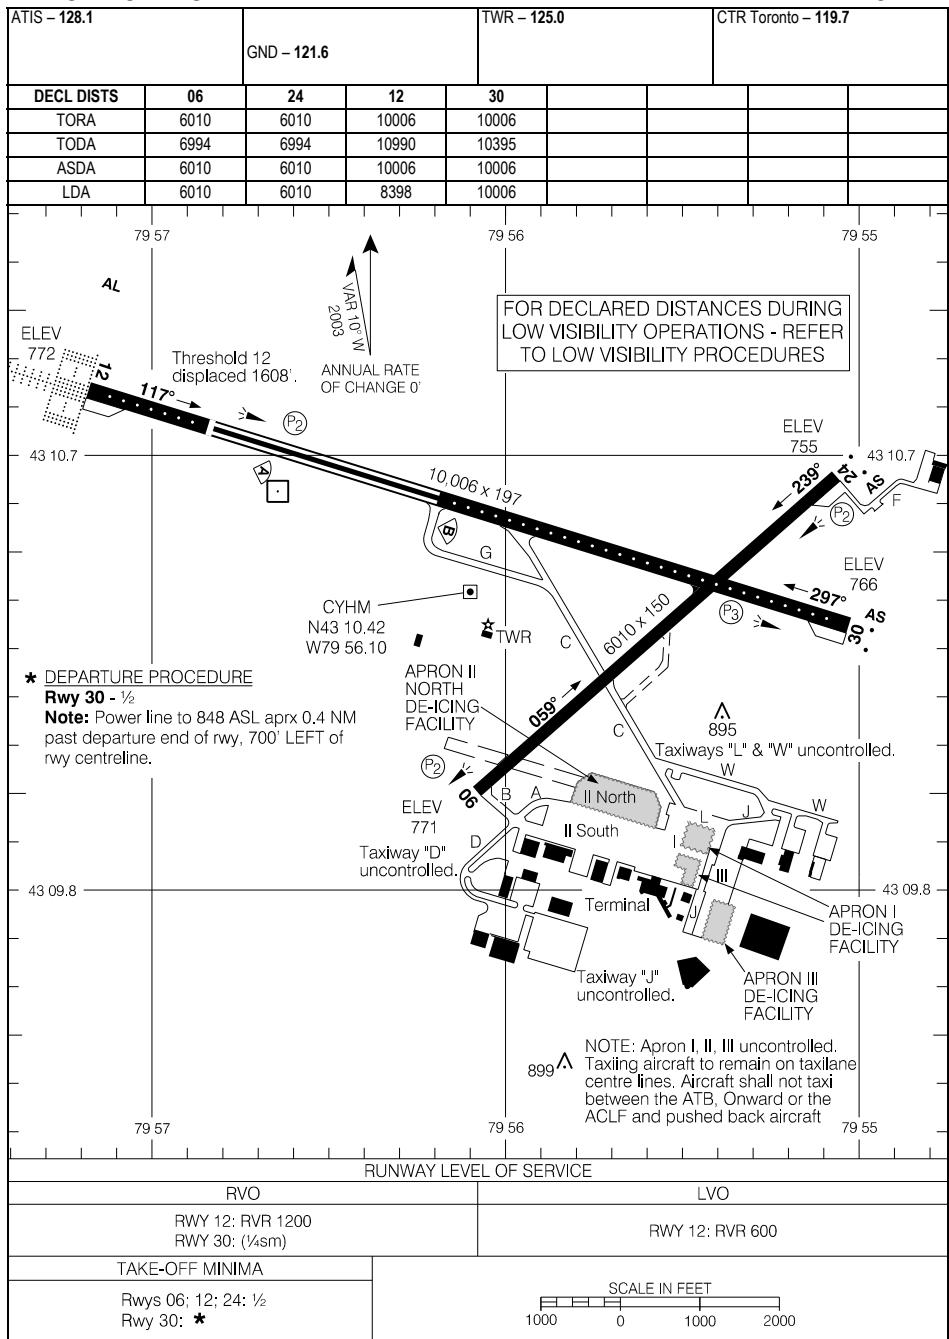


AERODROME CHART

EFF 12 JUN 25

CYHM-AD

CYHM

TAXI CHART

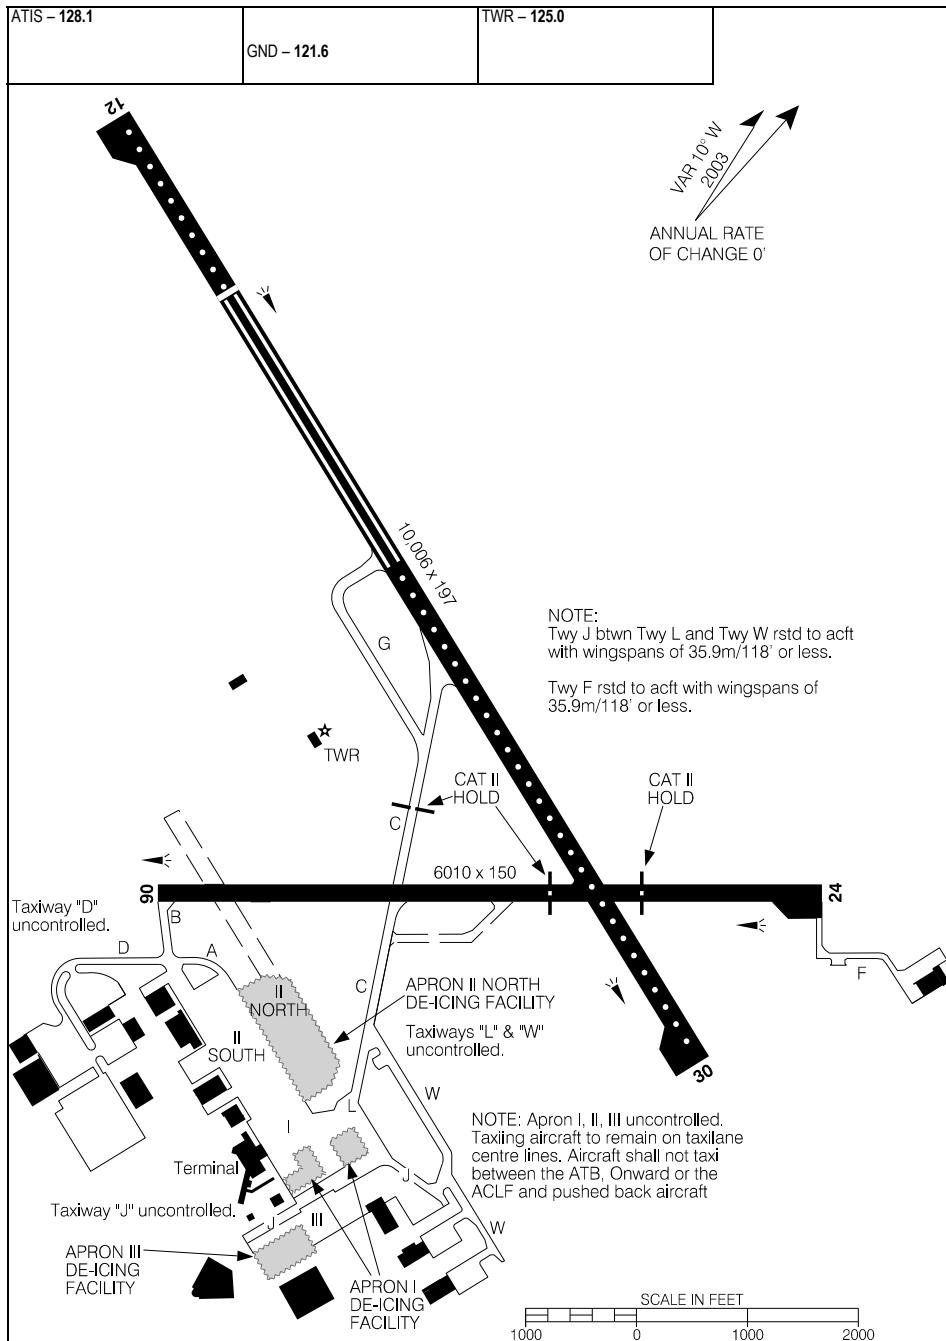

TAXI CHART

EFF 12 JUN 25

CYHM

LOW VISIBILITY PROCEDURES

Low Visibility Procedures (Less than RVR 1200 to RVR 600)

Application

These procedures apply to ground movements of aircraft departing under low visibility conditions. Departures below RVR 600 are not authorized. When weather conditions indicate visibility below RVR 1200 is imminent, procedures will be implemented restricting aircraft and vehicle operations on the movement area. The following message will be added to the ATIS broadcast.

"LOW VISIBILITY PROCEDURES IN EFFECT"

General

Low Visibility Taxi Routes

Taxi routes during low visibility operations are exclusive to the following routes:

1. Route 1 – Taxiway C
2. Route 2 – Taxiway B, rwy 06, taxiway C.
3. Taxiway surfaces are painted with enhanced yellow and black centreline markings. Aircraft restricted to one movement in or out at any time during low visibility operations. Alternate routing may be specified by ATC as required.

ATC may find it necessary to suspend, restrict, or terminate low visibility operations.

Departures

Sequencing of Aircraft Ground Movements for Take-off.

Do not request taxi clearance until the reported RVR is greater than:


Aircraft/Pilot Take-off Minima	Minimum RVR for Start
1200 RVR	1000 RVR
600 RVR	600 RVR

Arrivals

Taxi route will be specified by ATC.

LOW VISIBILITY PROCEDURES

PARKING AREAS

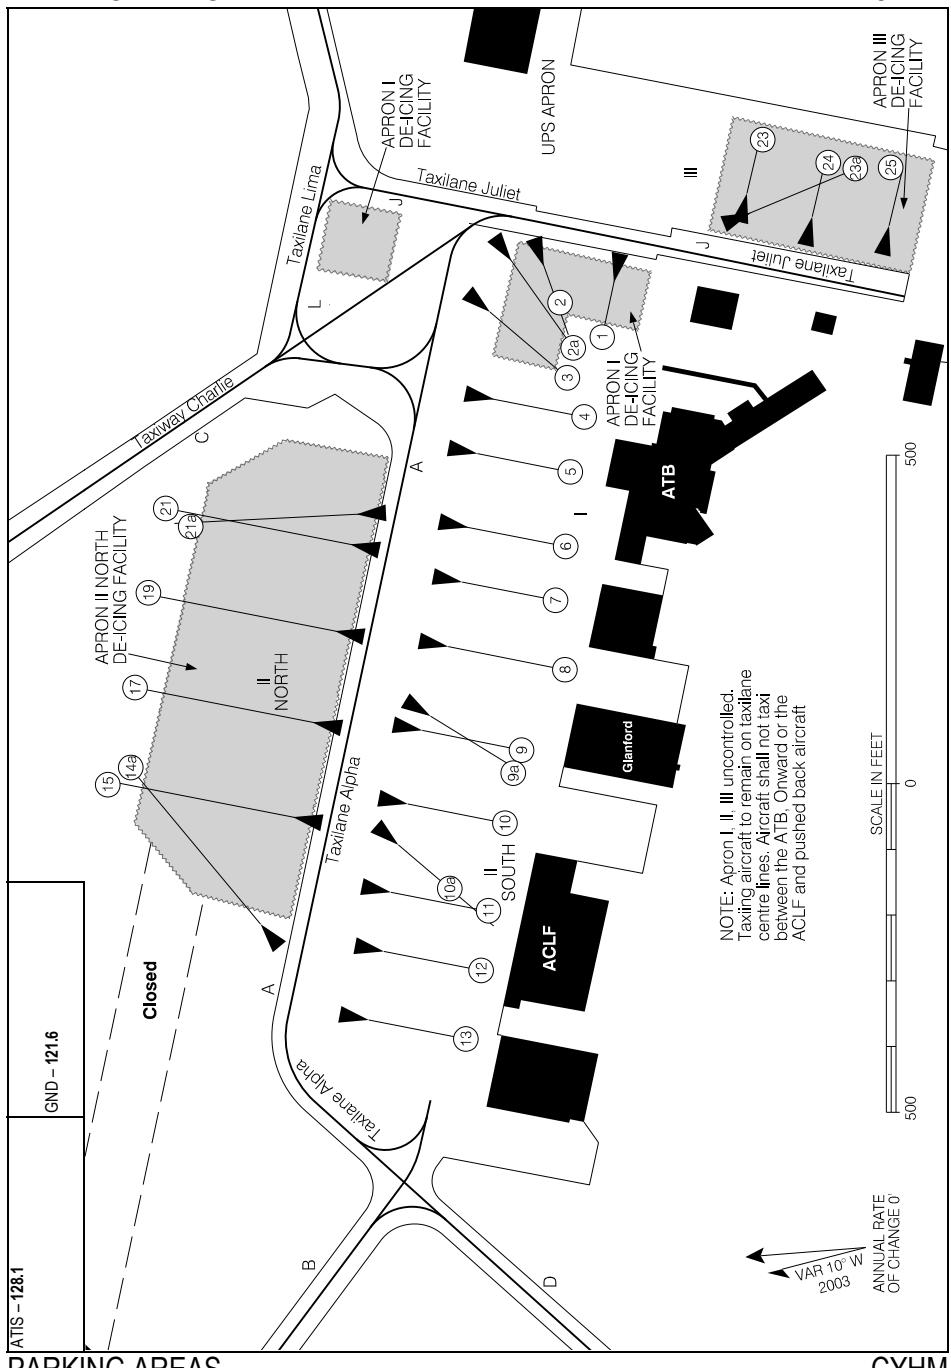

PARKING AREAS

Aircraft Parking Position


Position	Coordinates	Position	Coordinates
1	430949.20N 0795529.86W	11	430954.72N 0795548.15W
2	430950.45N 0795529.28W	12	430955.28N 0795550.61W
2A	430950.15N 0795530.61W	13	430955.84N 0795553.09W
3	430950.94N 0795530.90W	14A	431001.46N 0795544.80W
4	430950.70N 0795532.63W	15	431001.64N 0795545.36W
5	430951.63N 0795534.37W	17	431000.94N 0795542.30W
6	430951.59N 0795536.52W	19	431000.24N 0795539.24W
7	430952.52N 0795538.26W	21	430959.55N 0795536.19W
8	430952.47N 0795540.41W	21A	430959.72N 0795536.95W
9	430954.03N 0795543.37W	23	430945.60N 0795523.68W
9A	430953.17N 0795543.75W	23A	430943.58N 0795524.51W
10	430954.15N 0795545.68W	24	430943.78N 0795524.45W
10A	430954.46N 0795548.34W	25	430941.97N 0795525.21W

PARKING AREAS

CYHS-AD

HANOVER/SAUGEEN MUNI, ON
CYHS

AERODROME CHART

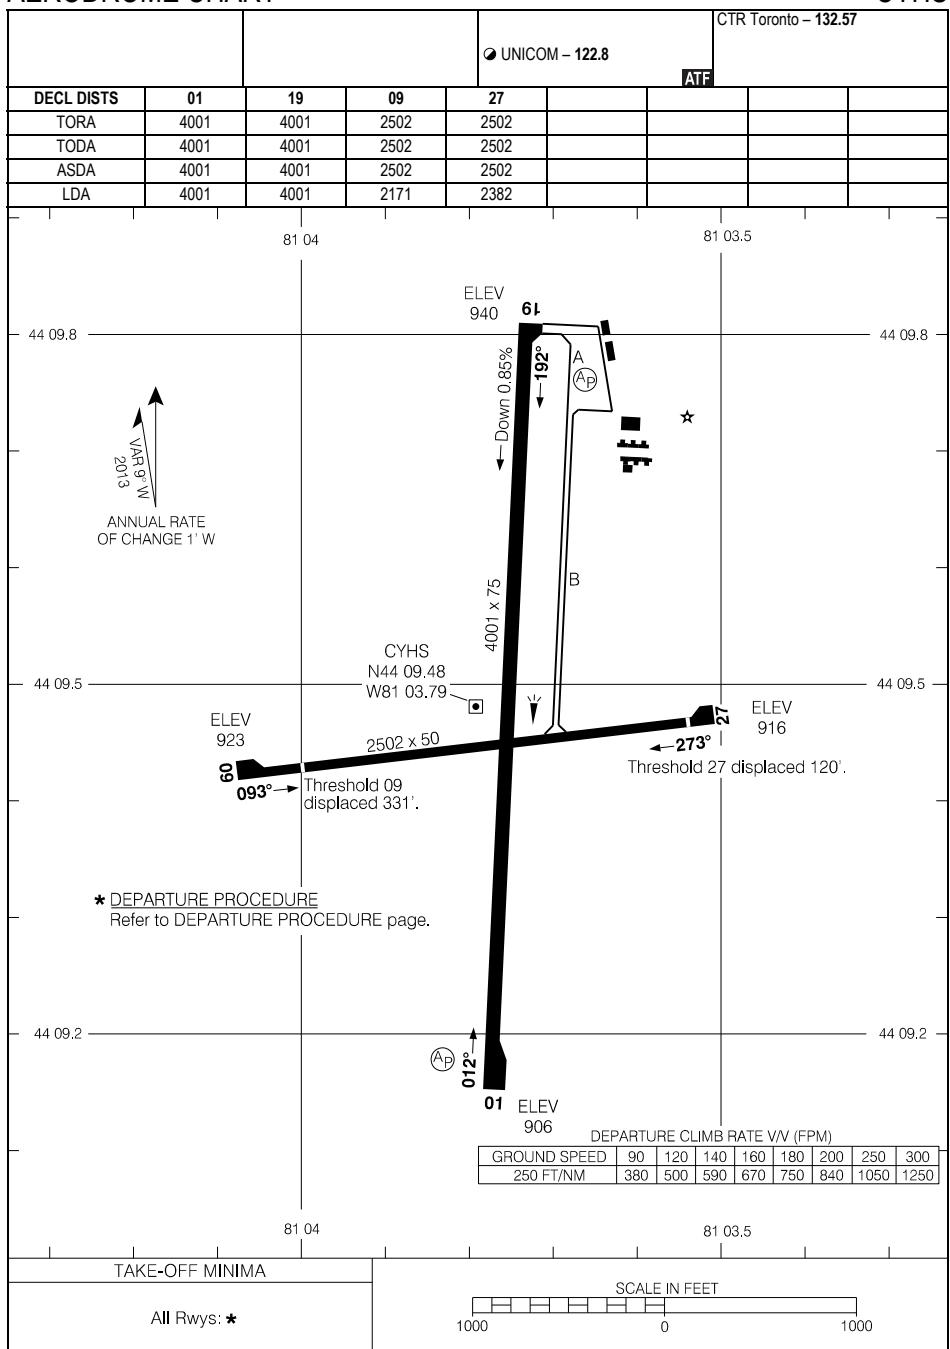

AERODROME CHART

EFF 25 JAN 24


CYHS-AD

CYHS

CYHF-AD

HEARST (RENE FONTAINE) MUNI, ON
CYHF

AERODROME CHART

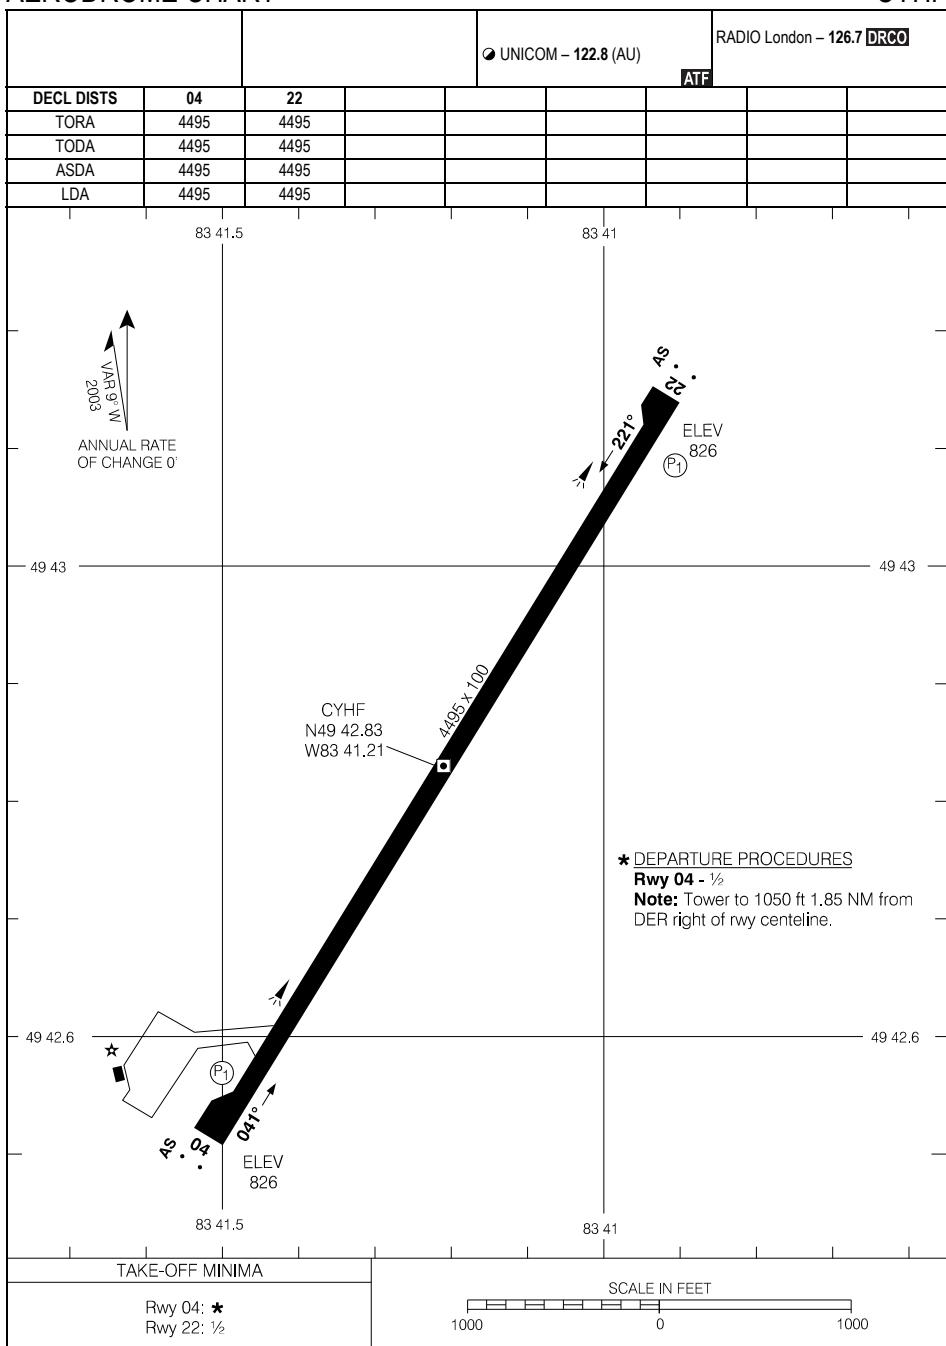

AERODROME CHART

EFF 25 JAN 24


CYHF

CYHF-AD

CYHN-AD

HORNEPAYNE MUNI, ON
CYHN

AERODROME CHART

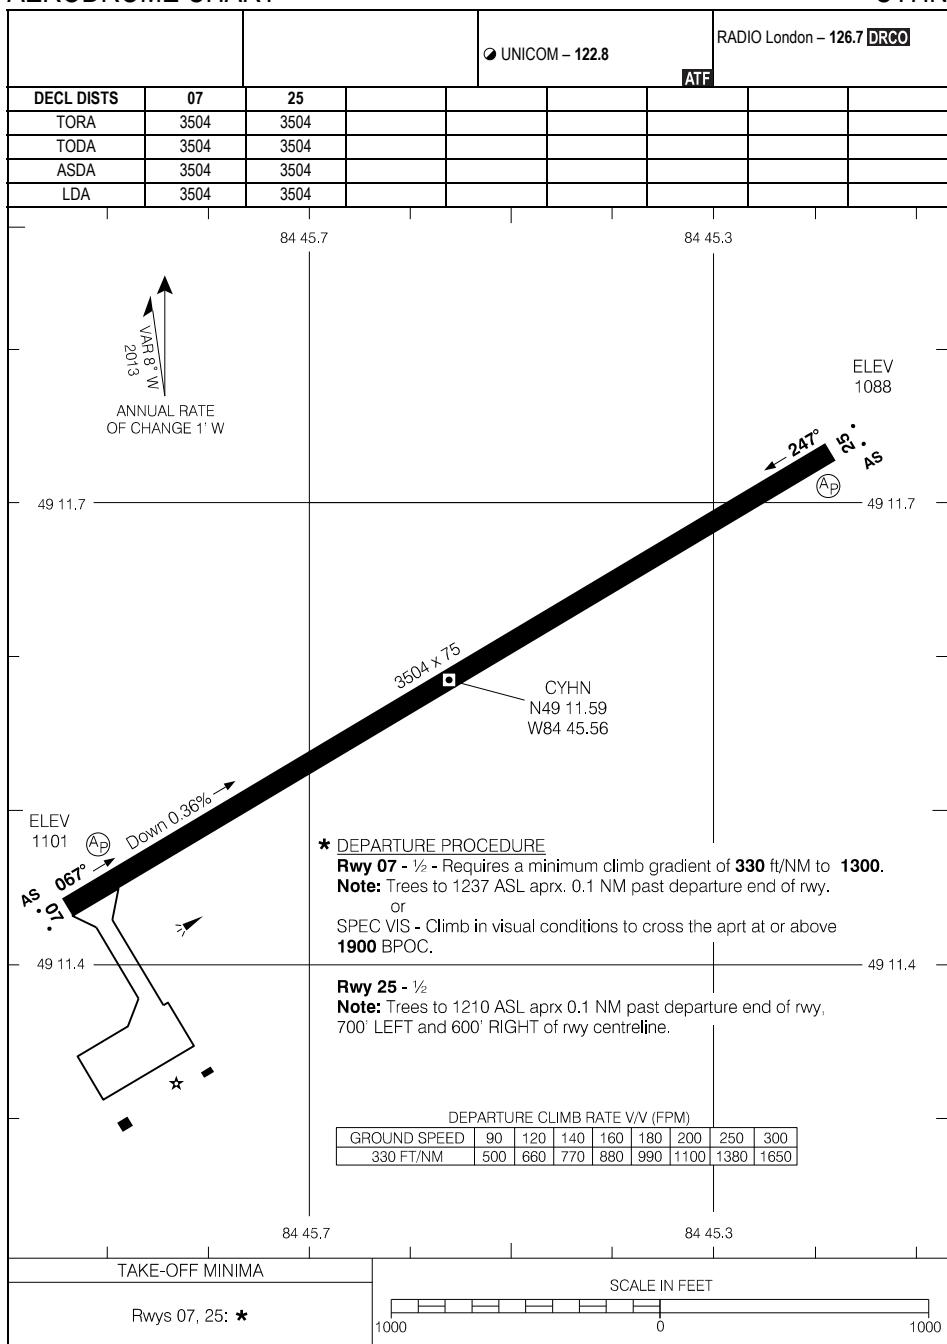

AERODROME CHART

EFF 31 OCT 24


CYHN-AD

CYHN

CNE4-AD

IROQUOIS FALLS, ON
CNE4

AERODROME CHART

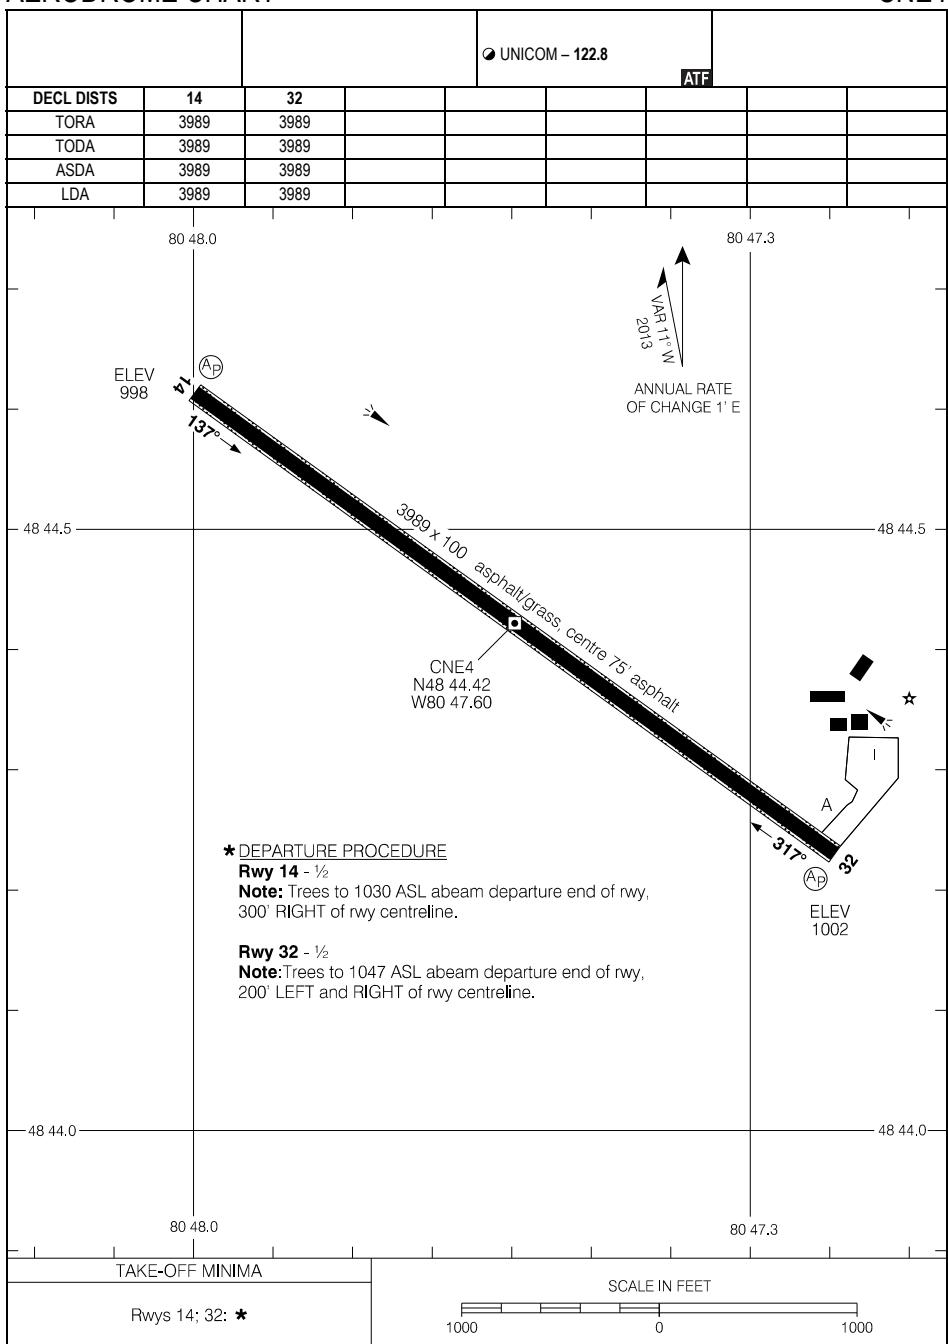

AERODROME CHART

EFF 11 JUL 24


CNE4

CNE4-AD

CYYU-AD

KAPUSKASING, ON
CYYU

AERODROME CHART

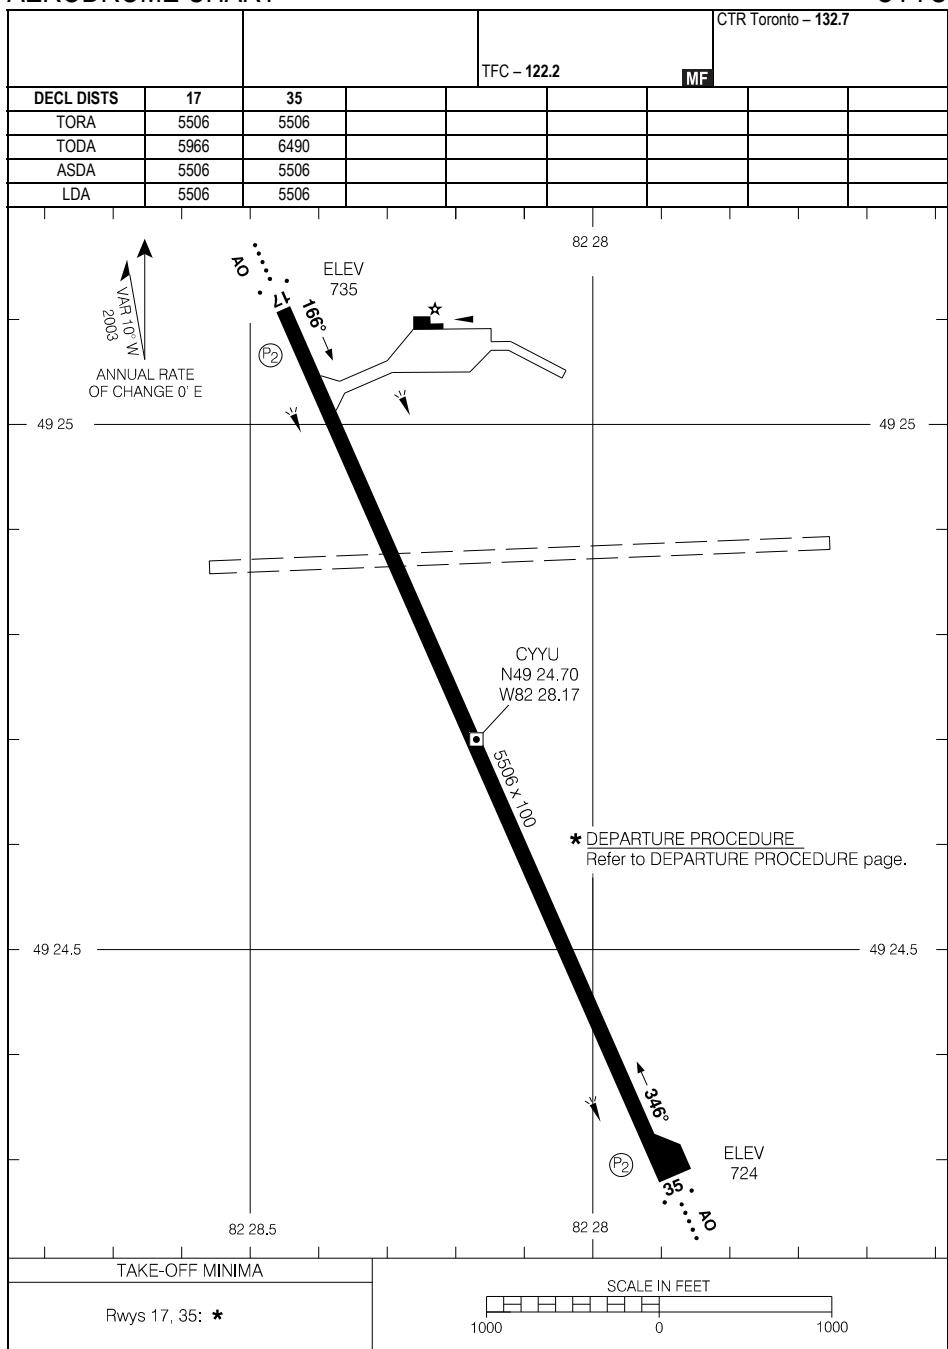

AERODROME CHART

EFF 5 OCT 23


CYYU-AD

CYYU-AD

CYAQ-AD

KASABONIKA, ON
CYAQ

AERODROME CHART

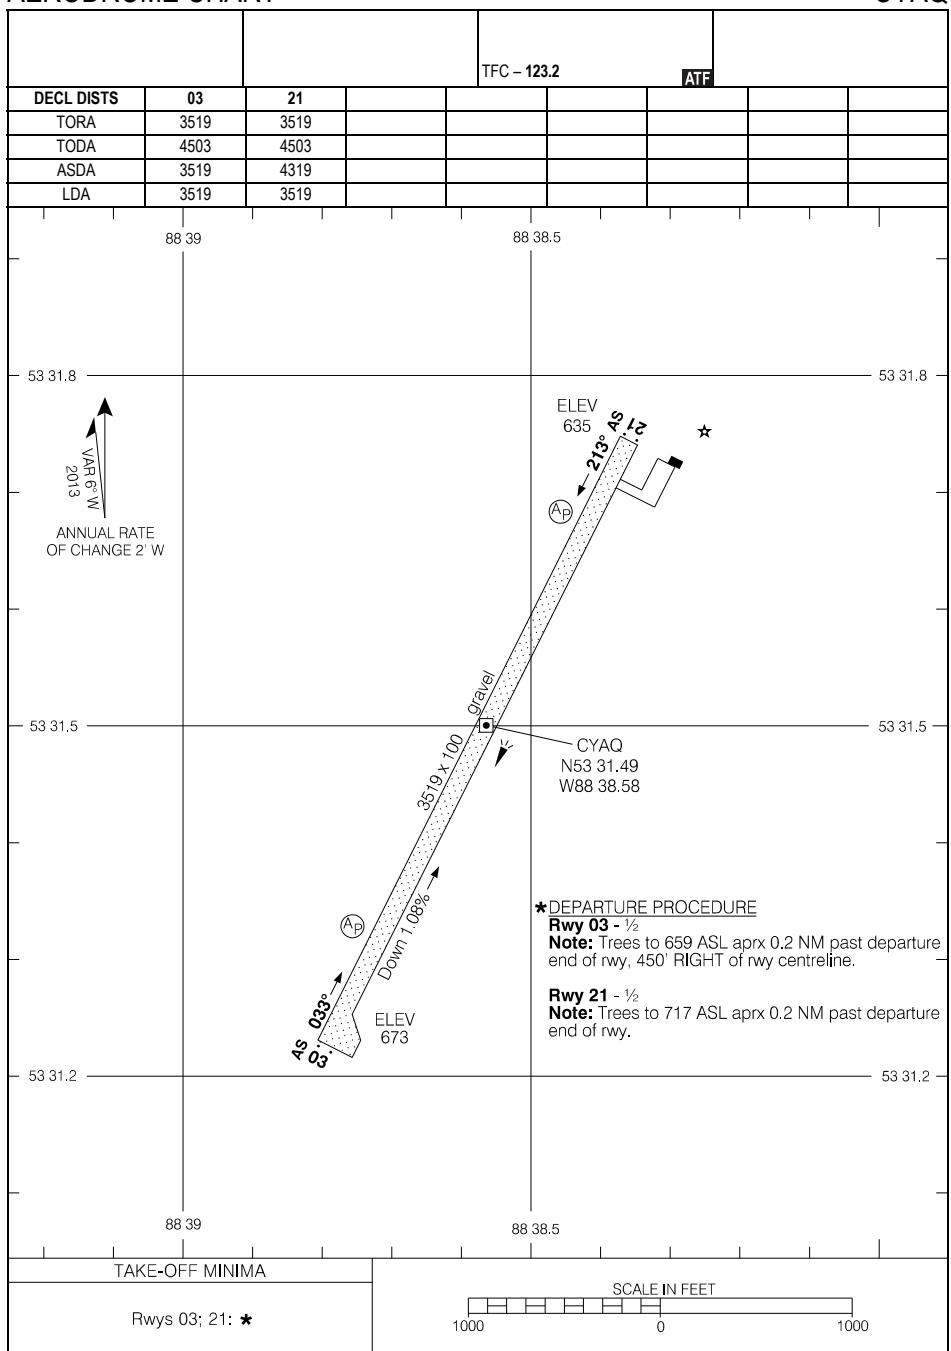

AERODROME CHART

EFF 10 AUG 23

CYAQ

CYAQ-AD

CZKE-AD

KASHECHEWAN, ON
CZKE

AERODROME CHART

			TFC - 122.8	ATF	
DECL DISTS	06	24			
TORA	3903	3903			
TODA	3903	3903			
ASDA	3903	3903			
LDA	3903	3903			

ANNUAL RATE OF CHANGE 4' E

DEPARTURE PROCEDURE

Rwy 06 - $\frac{1}{2}$
Note: Trees to 49 ASL abeam departure end of rwy, 180' LEFT of rwy centreline.

Rwy 24 - $\frac{1}{2}$
Note: Trees to 75 ASL abeam departure end of rwy, 120' LEFT and RIGHT of rwy centreline.

TAKE-OFF MINIMA

All Rwy's: *

SCALE IN FEET

1000 0 1000


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 10 AUG 23

CZKE-AD

AERODROME CHART

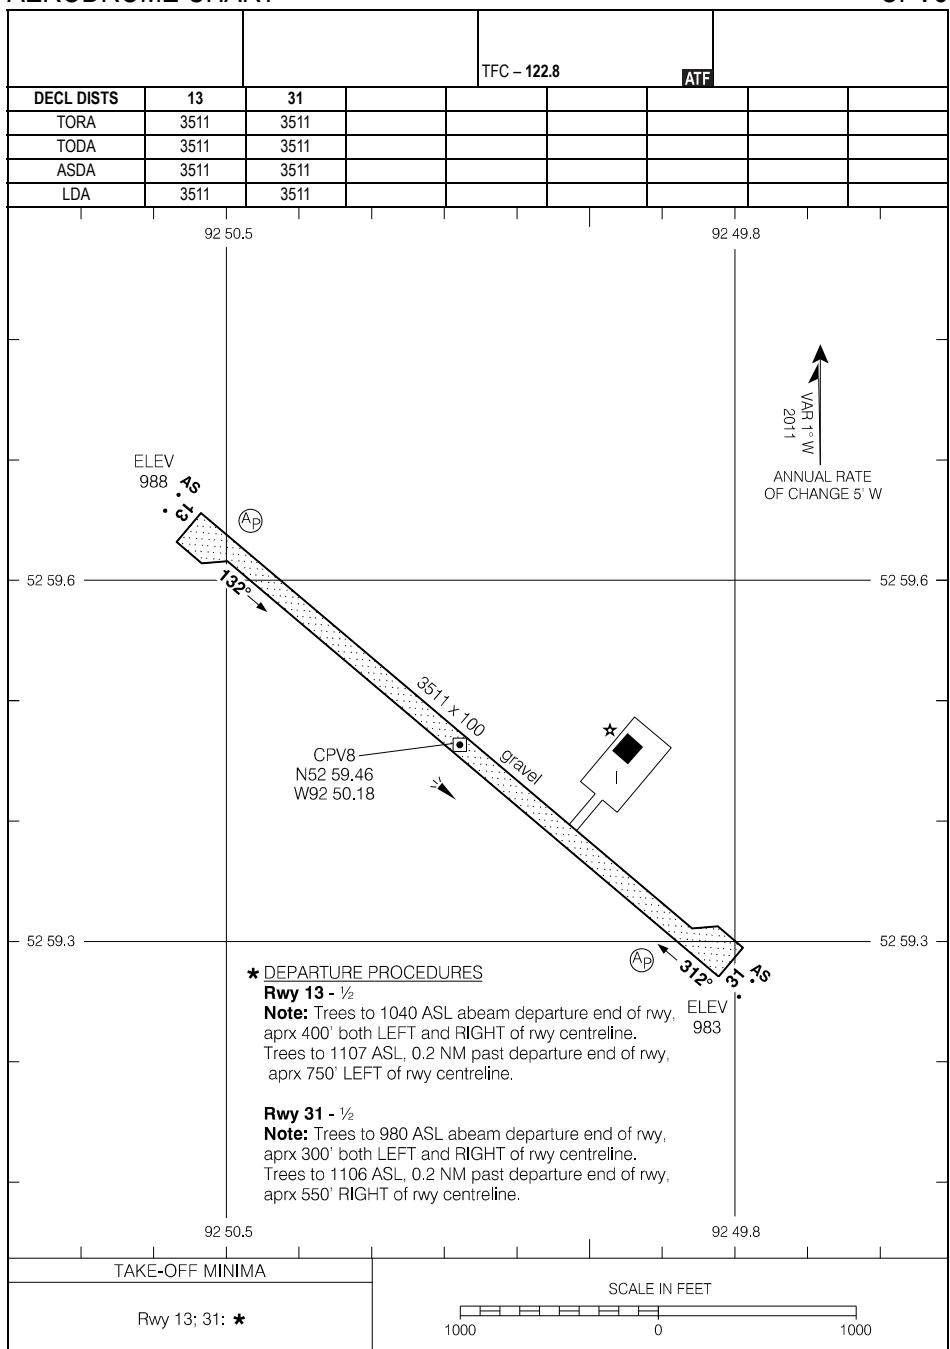

AERODROME CHART


EFF 24 MAR 22

CPV8

CYQK-AD

KENORA, ON
CYQK

AERODROME CHART

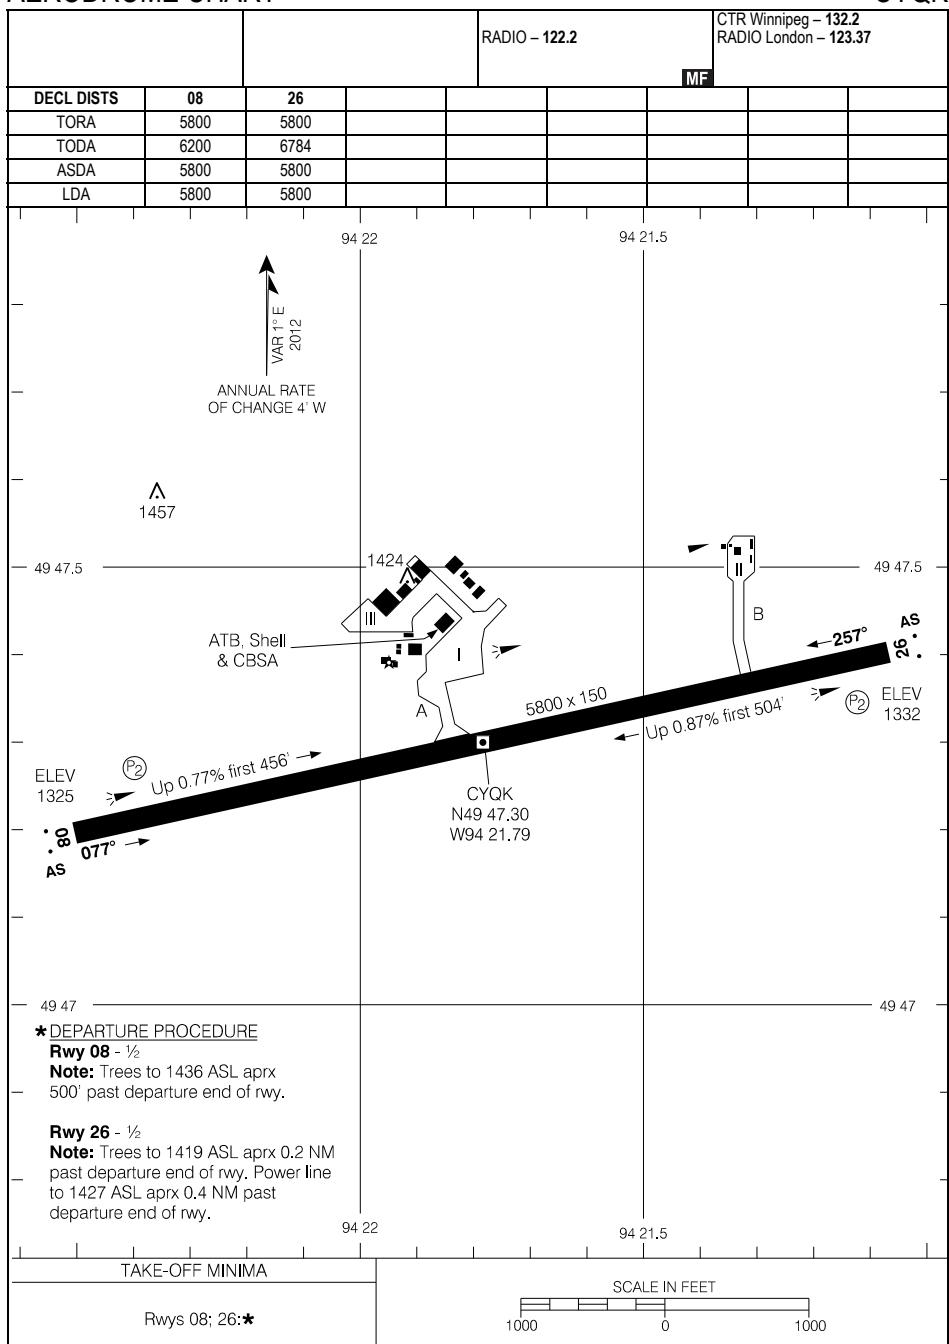

AERODROME CHART

EFF 5 SEP 24


CYQK-AD

CYQK

CYKM-AD

KINCARDINE, ON
CYKM

AERODROME CHART

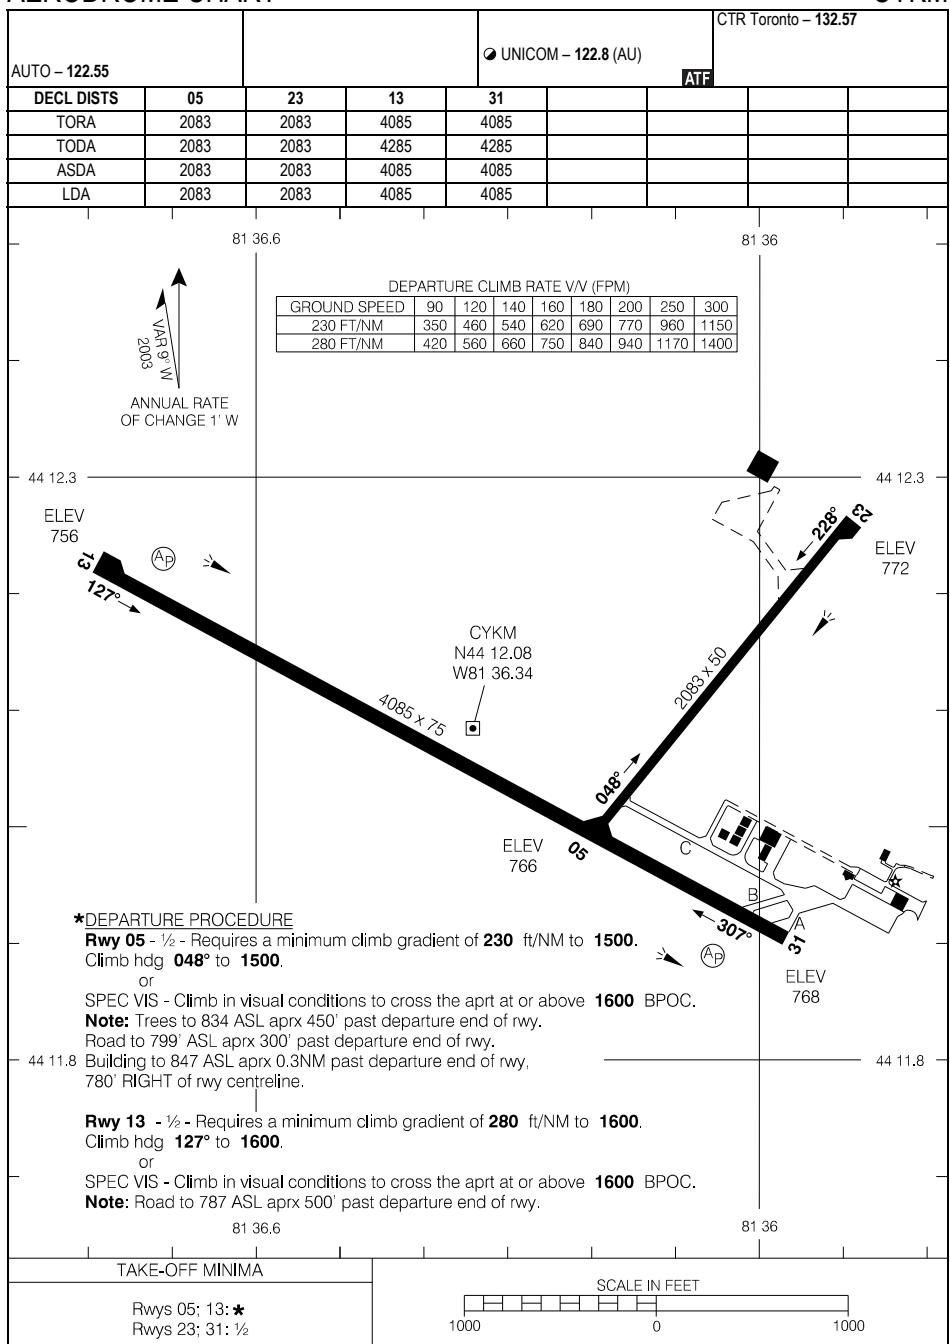

AERODROME CHART

EFF 20 FEB 25


CYKM-AD

CYKM

CNM5-AD

KINGFISHER LAKE, ON
CNM5

AERODROME CHART

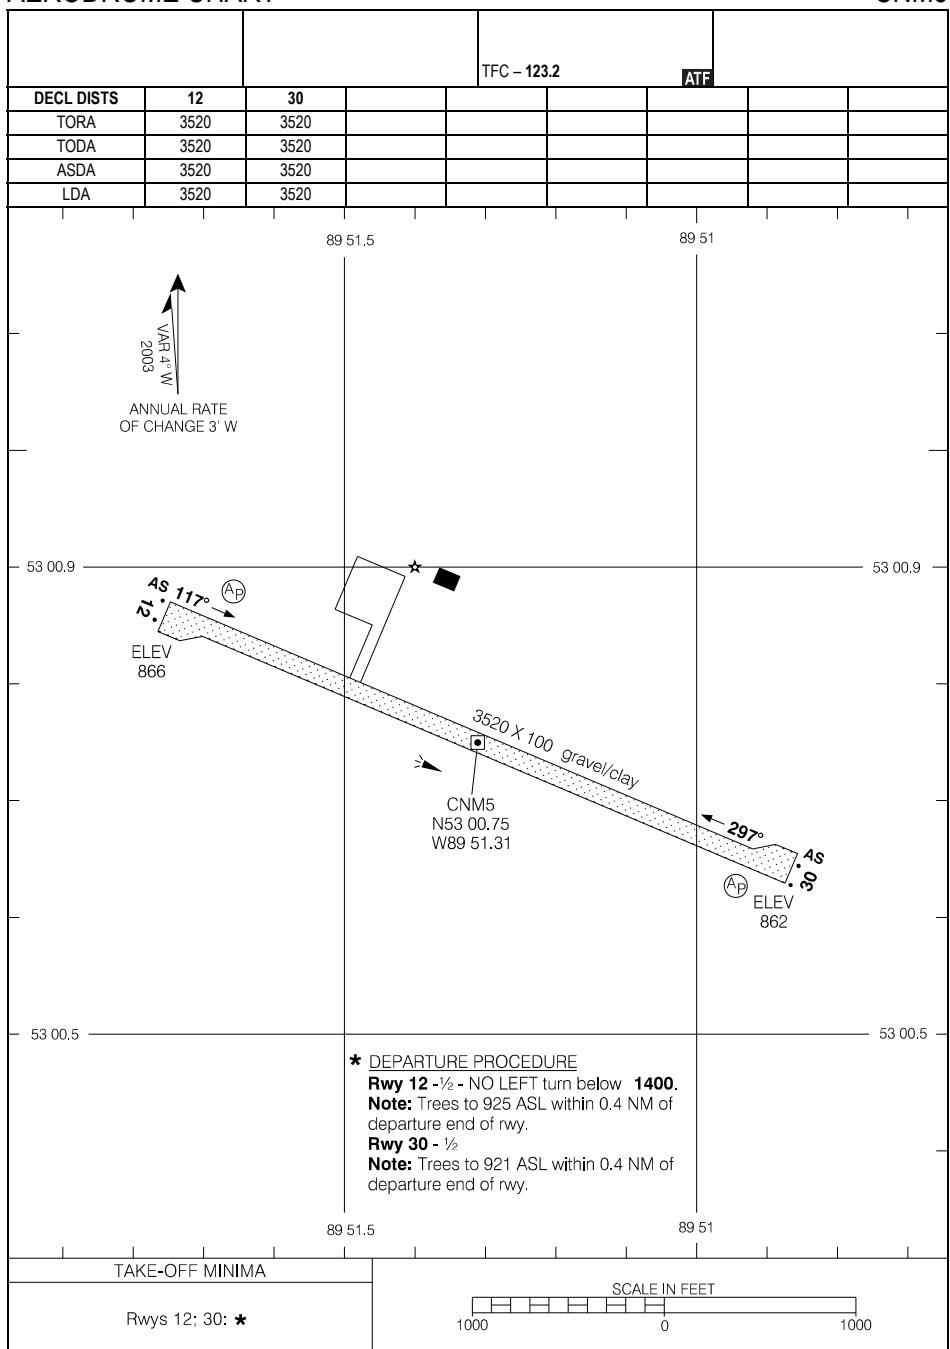

AERODROME CHART

EFF 24 MAR 22


CNM5

CNM5-AD

CYGK-AD

KINGSTON, ON
CYGK

AERODROME CHART

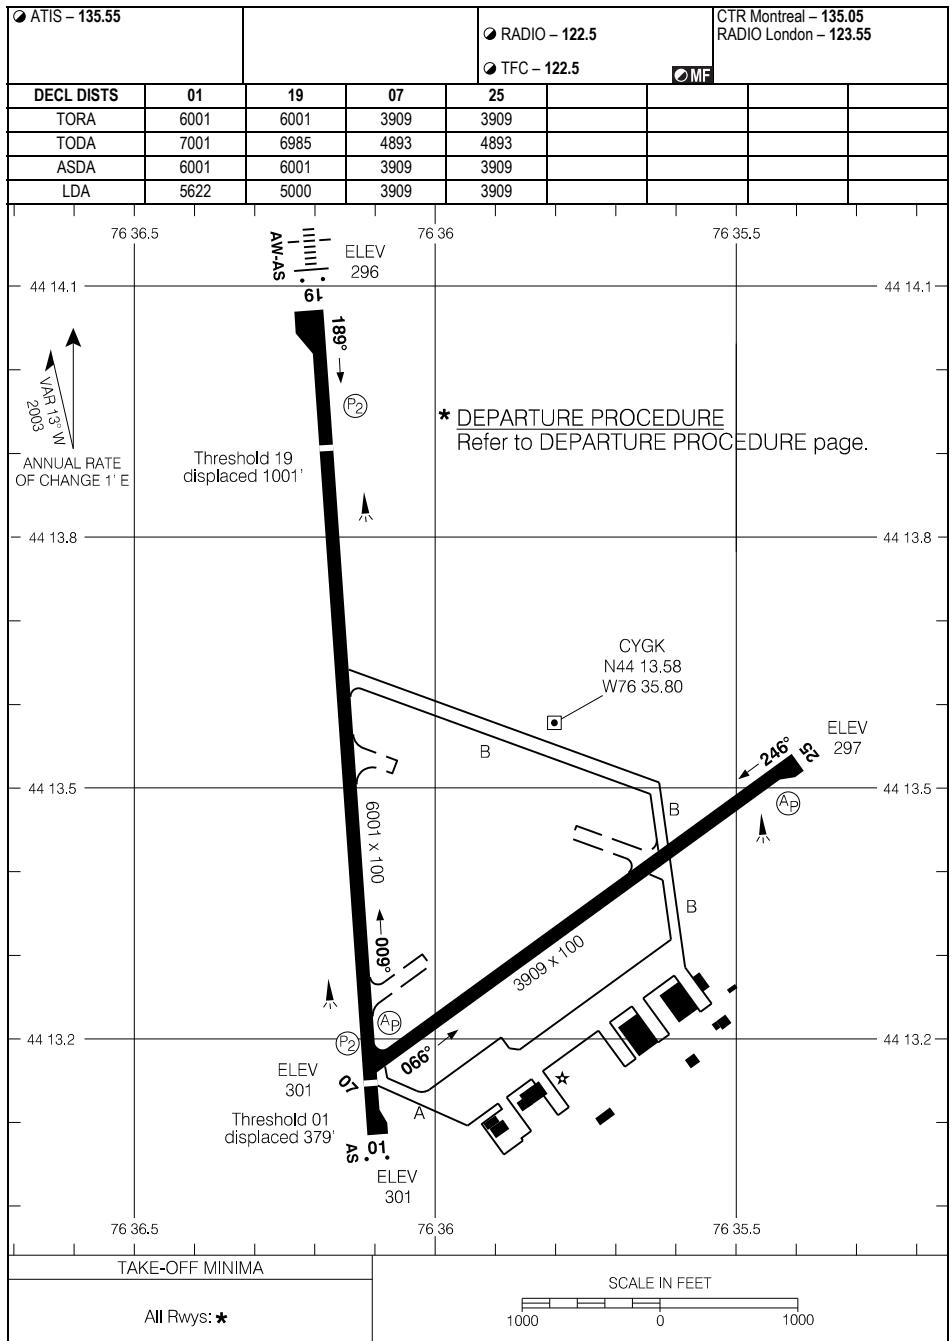

AERODROME CHART

EFF 17 APR 25


CYGK-AD

CYGK

CYKX-AD

KIRKLAND LAKE, ON
CYKX

AERODROME CHART

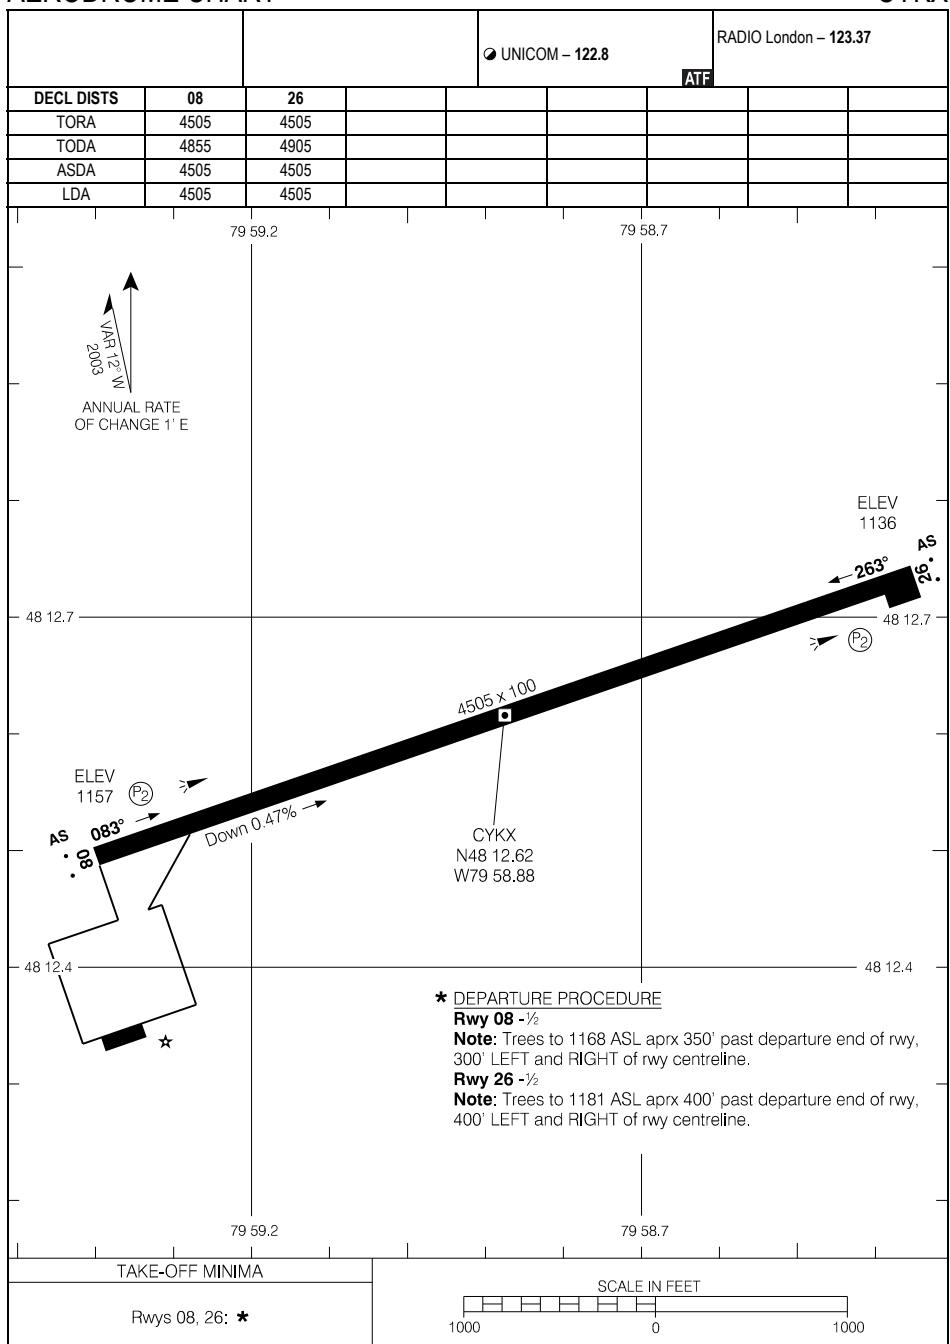

AERODROME CHART

EFF 17 APR 25


CYKX

CYKX-AD

CYKF-AD

KITCHENER/WATERLOO, ON
CYKF

AERODROME CHART

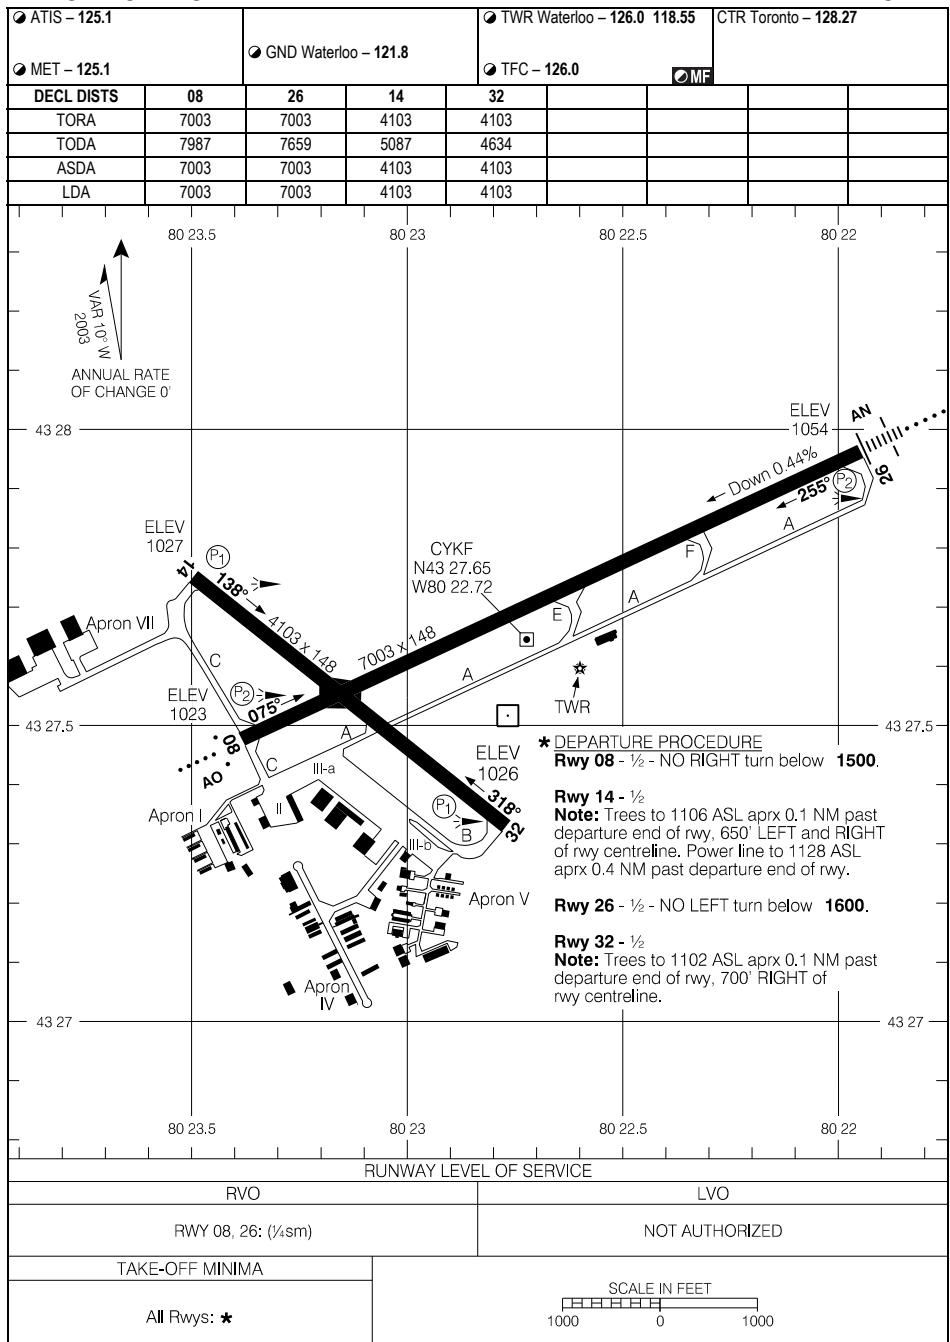

AERODROME CHART

EFF 7 AUG 25


CYKF

CYKF-AD

CYLH-AD

LANSDOWNE HOUSE, ON
CYLH

AERODROME CHART

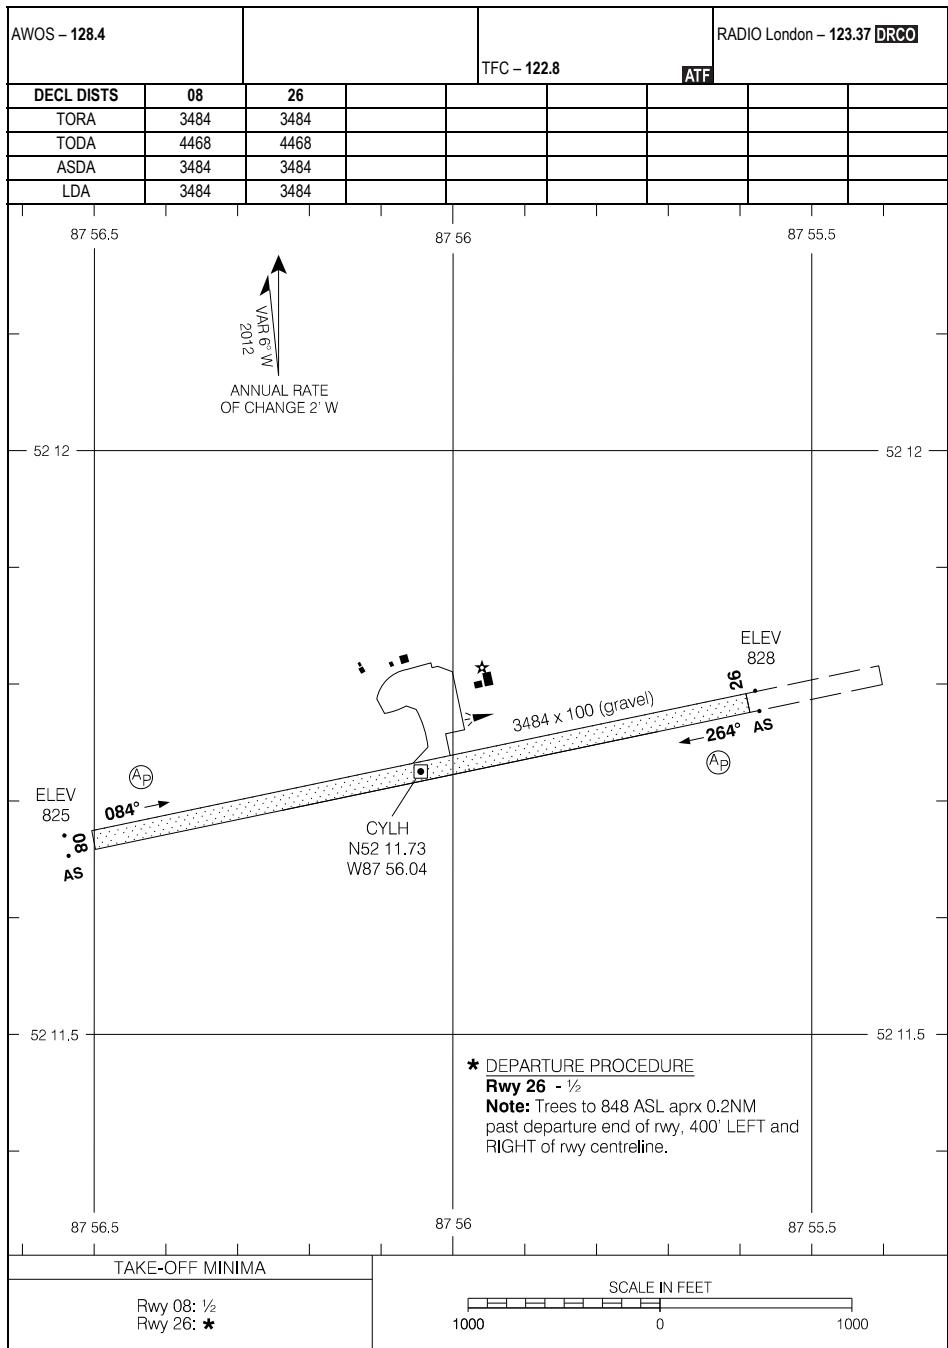

AERODROME CHART

EFF 17 APR 25


CYLH-AD

CYLH

CLM2-AD

LEAMINGTON, ON
CLM2

AERODROME CHART

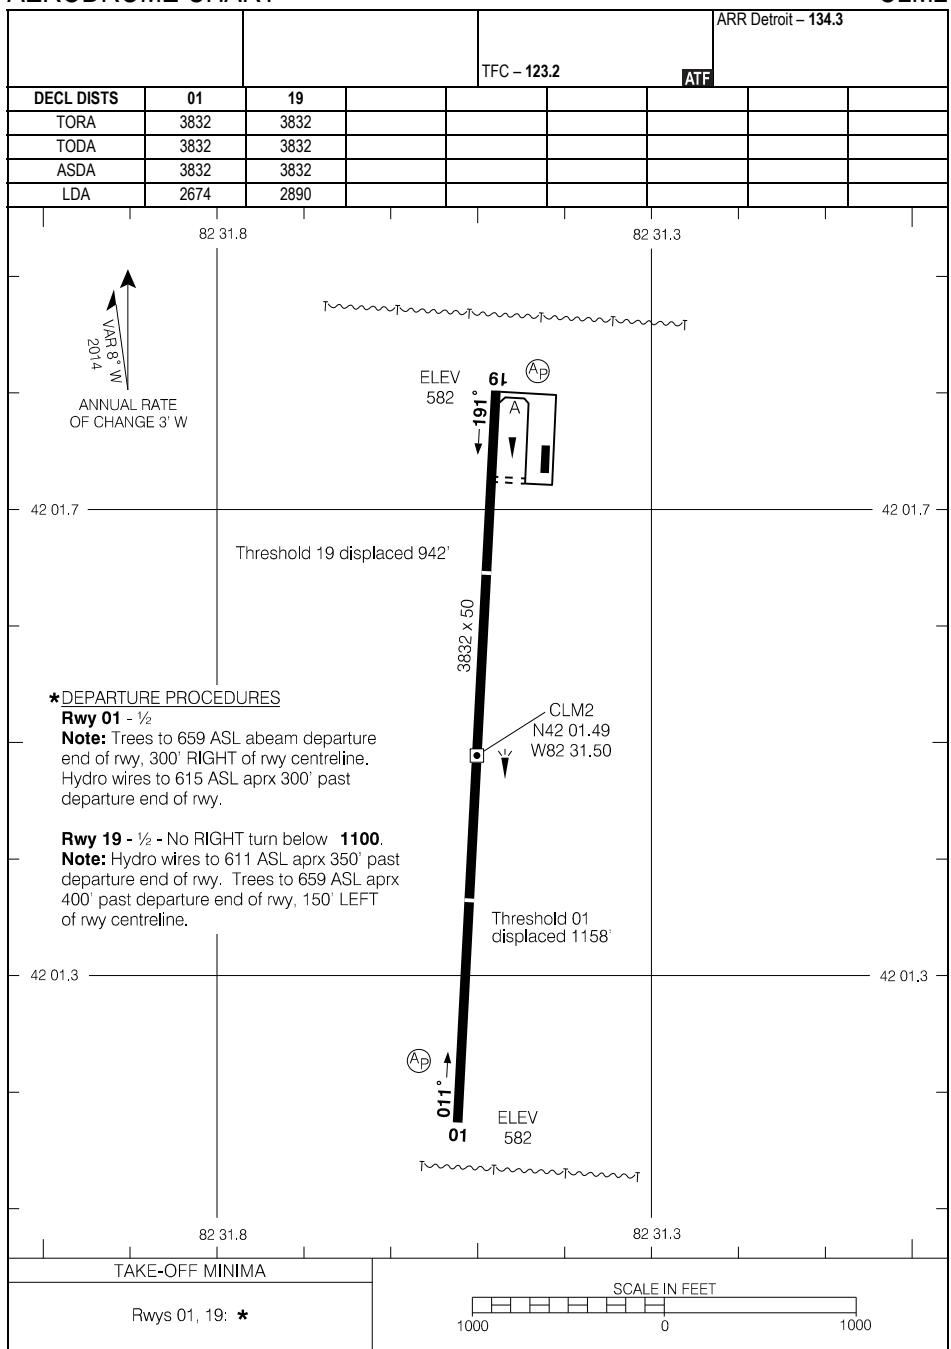

AERODROME CHART

EFF 11 JUL 24

CLM2


CLM2-AD

AERODROME CHART

CNF4-AD

LINDSAY/KAWARTHA LAKES MUNICIPAL AIRPORT, ON

CNF4

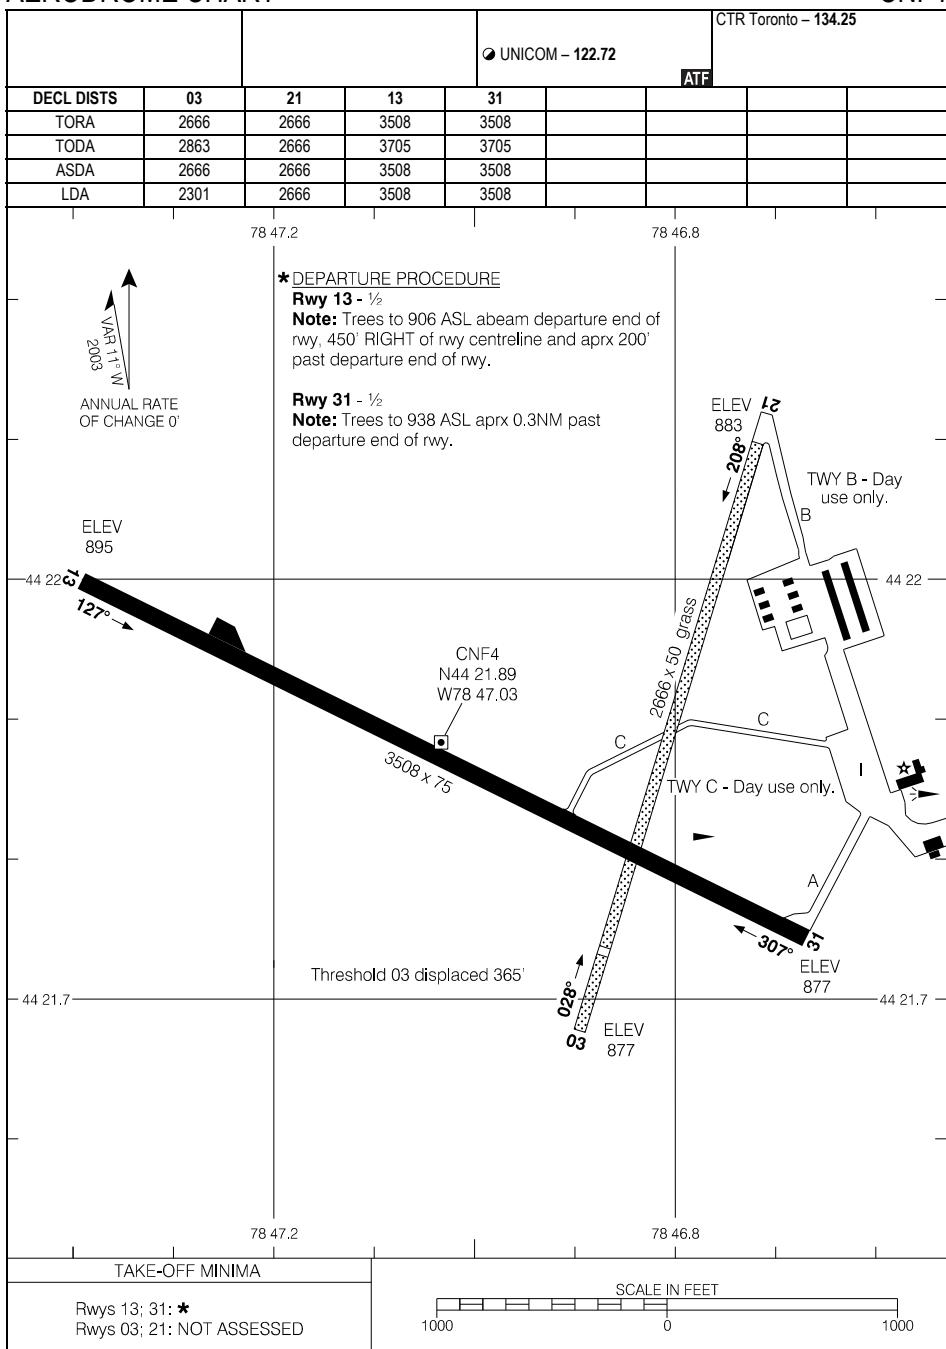

AERODROME CHART

EFF 21 MAR 24


CNF4-AD

CNF4

CYXU-AD

LONDON, ON
CYXU

AERODROME CHART

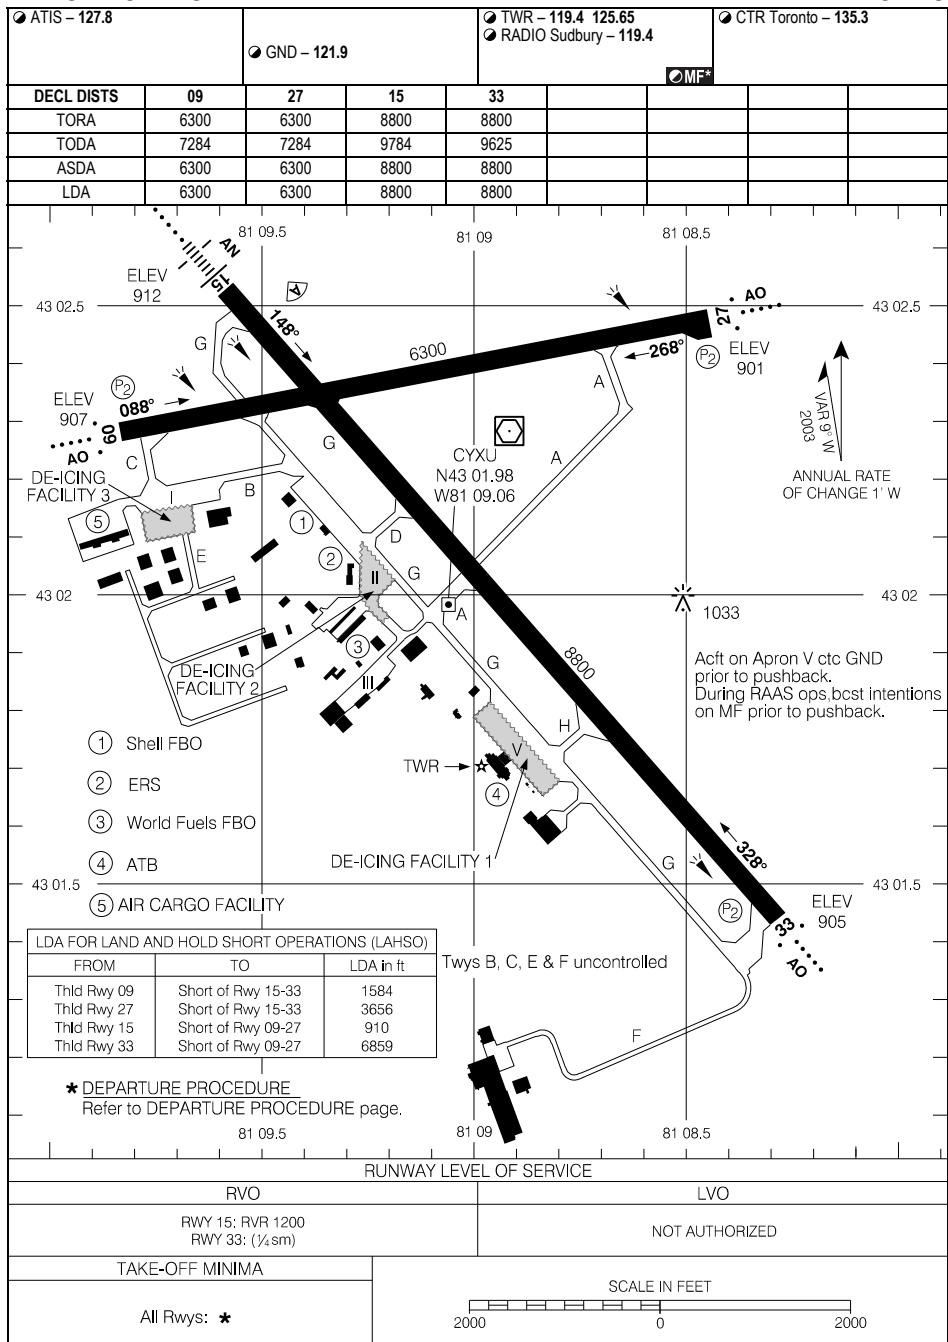

AERODROME CHART

EFF 12 JUN 25


CYXU-AD

CYXU-AD

CYXU-APD

LONDON, ON
CYXU

PARKING AREAS (APRON V)

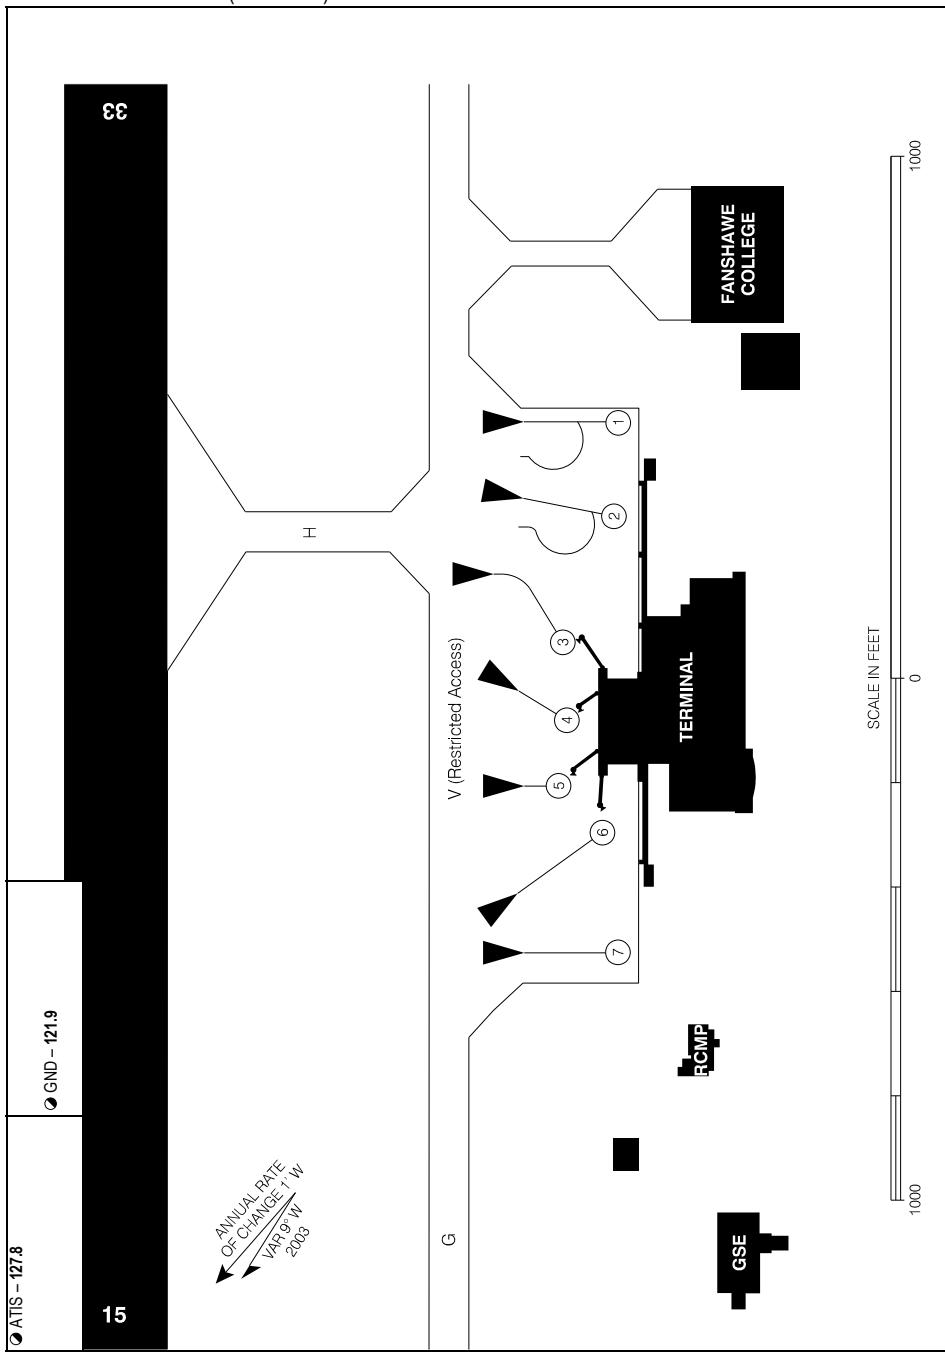


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CYMG-AD

MANITOUDAGE, ON
CYMG

AERODROME CHART

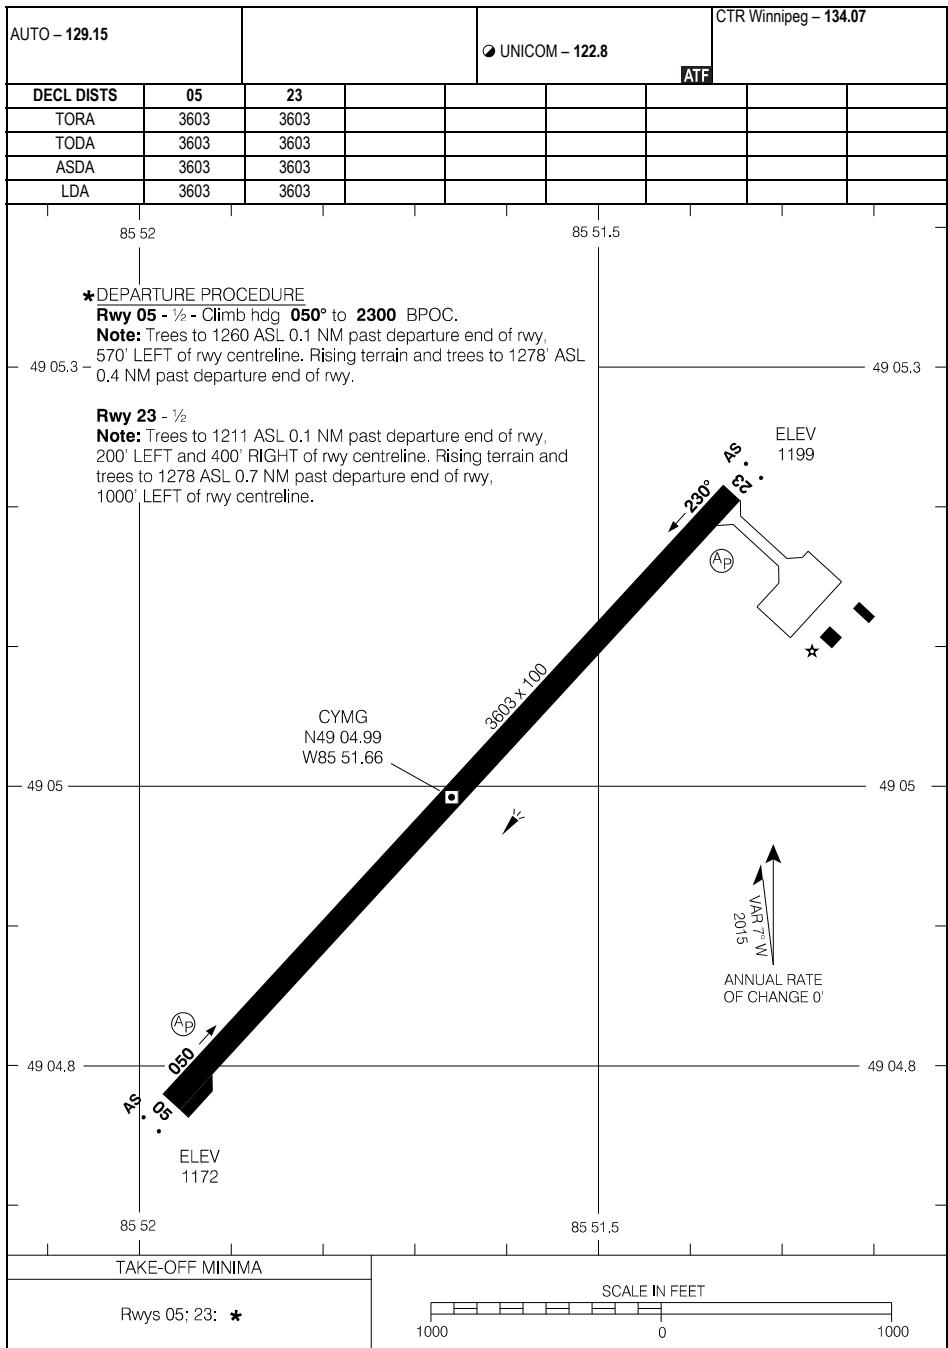

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 12 JUN 25


CYMG

CYMG-AD

CYEM-AD

MANITOWANING/MANITOULIN EAST MUNI, ON
CYEM

AERODROME CHART

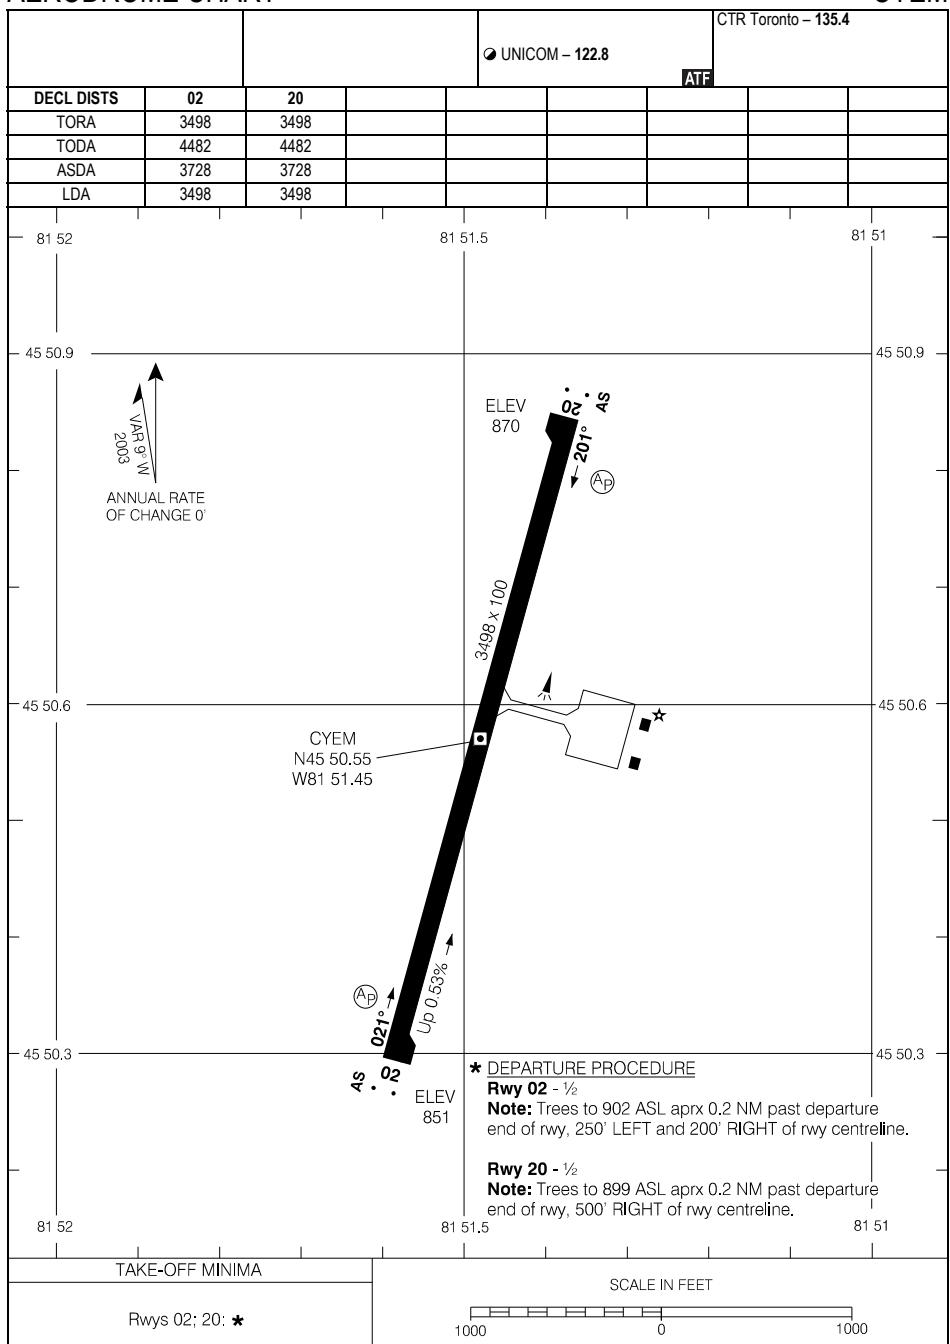

AERODROME CHART

EFF 7 AUG 25


CYEM

CYEM-AD

CYSP-AD

MARATHON, ON
CYSP

AERODROME CHART

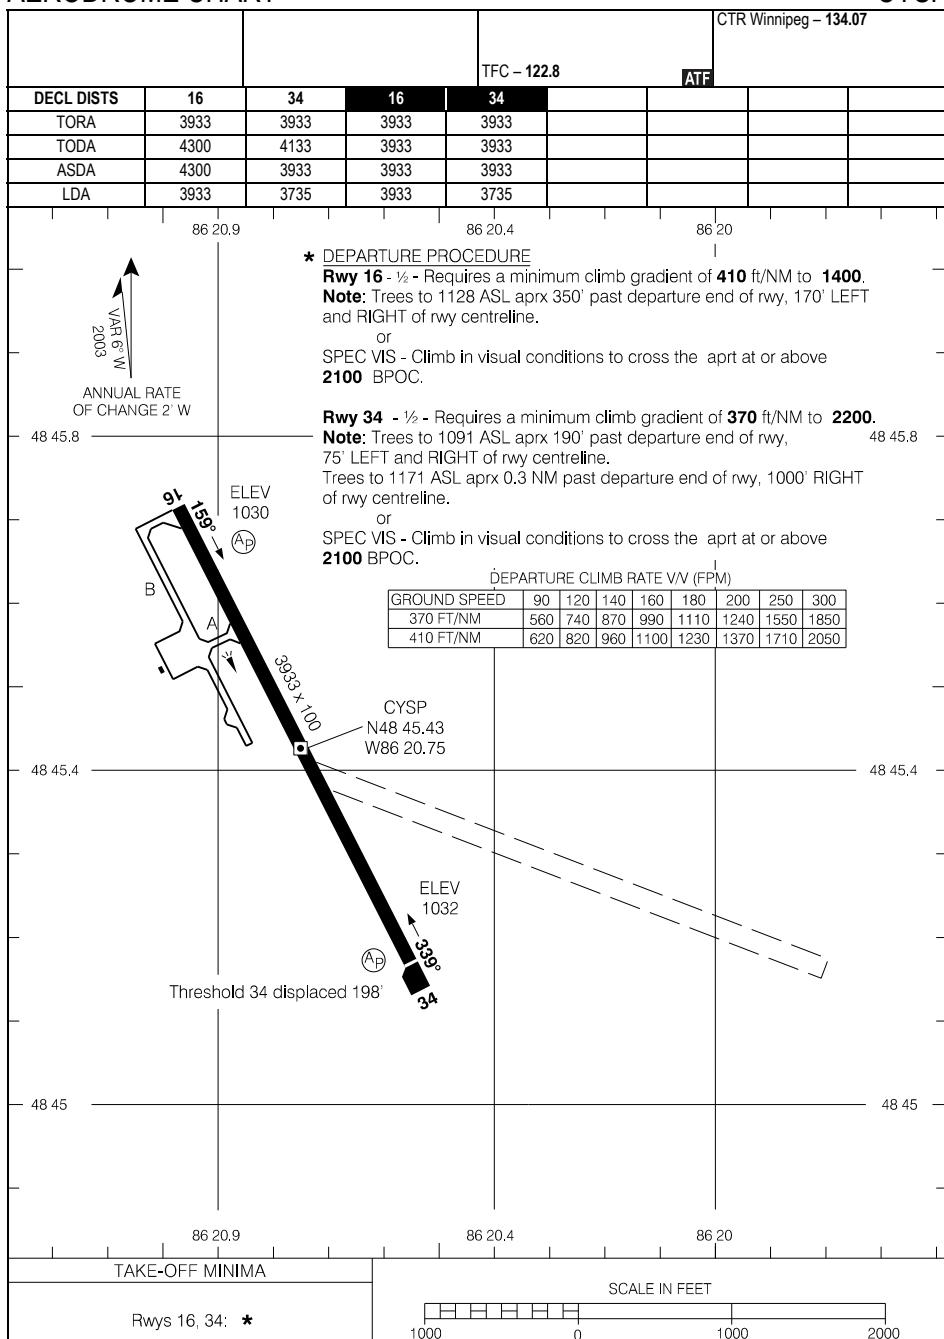

AERODROME CHART

EFF 12 JUN 25


CYSP-AD

CYSP

AERODROME CHART

CYOS-AD

MEAFORD/MAJOR-GENERAL RICHARD ROHMER, ON
CYOS

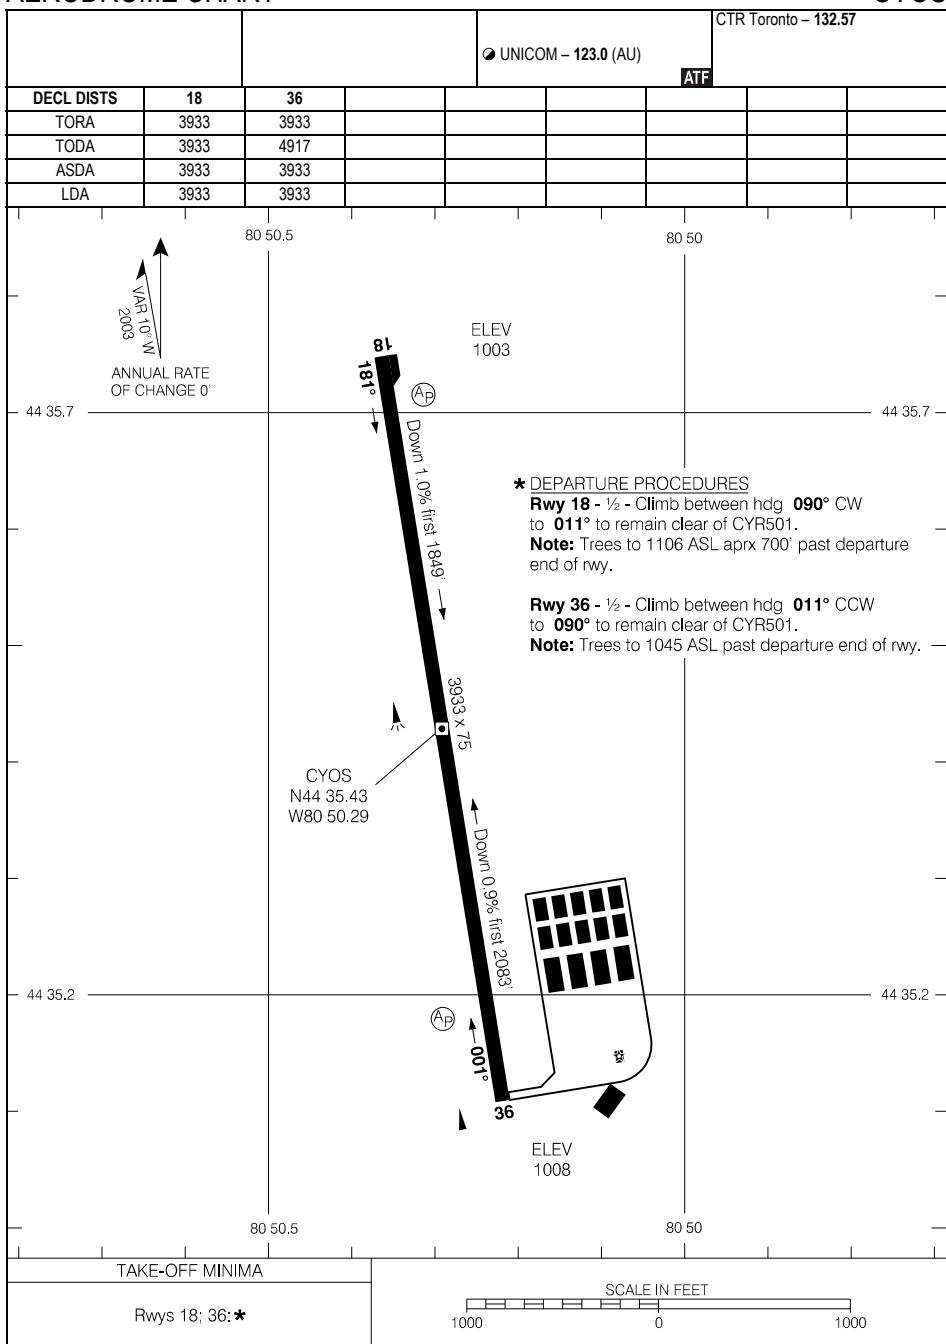

AERODROME CHART

EFF 17 APR 25


CYOS-AD

CYOS

CYEE-AD

MIDLAND/HURONIA, ON
CYEE

AERODROME CHART

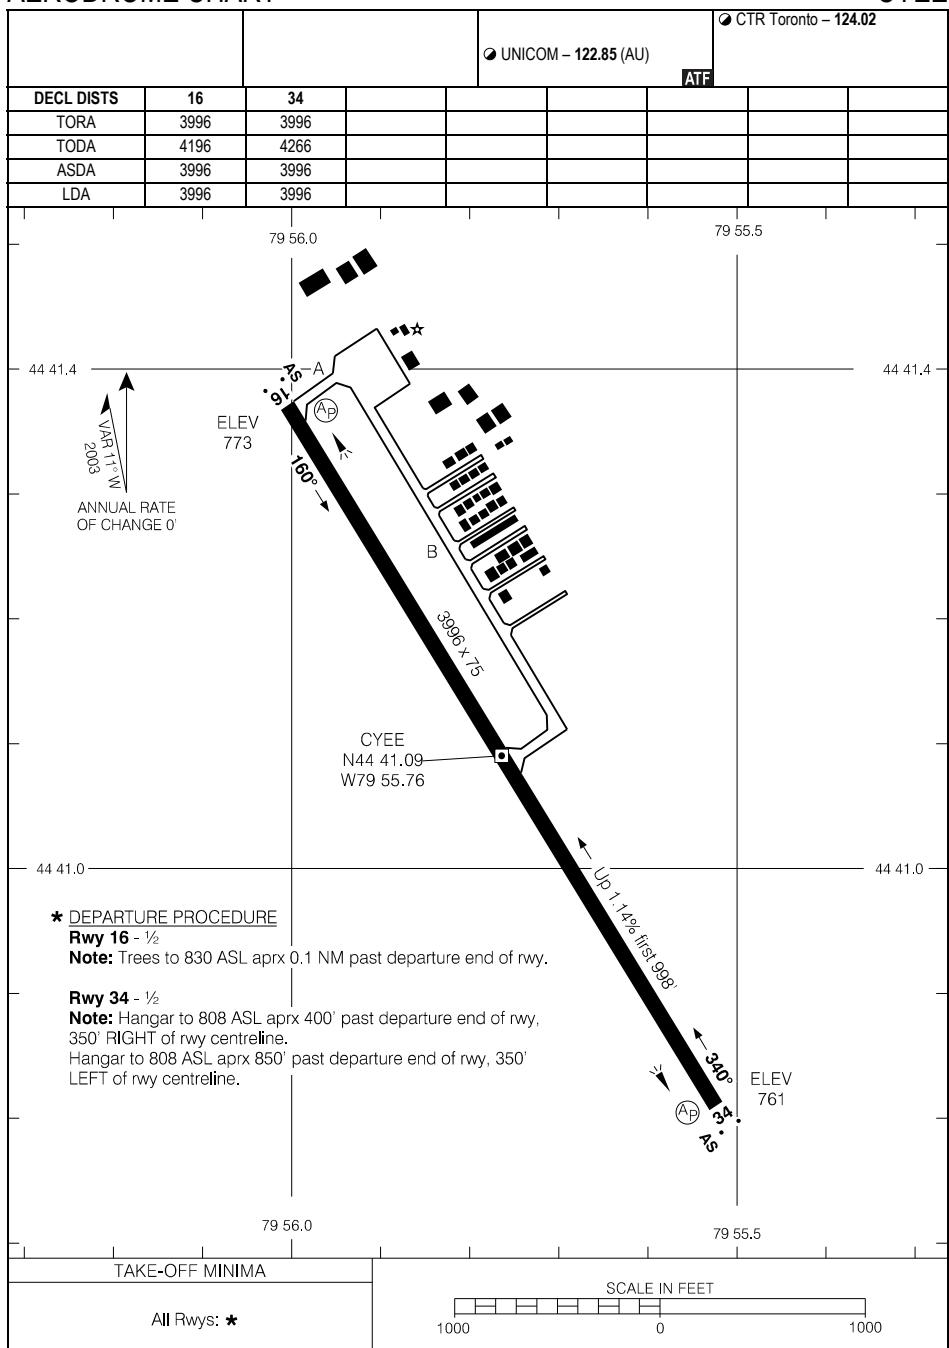

AERODROME CHART

EFF 14 JUL 22


CYEE-AD

CYEE

CYQA-AD

MUSKOKA, ON
CYQA

AERODROME CHART

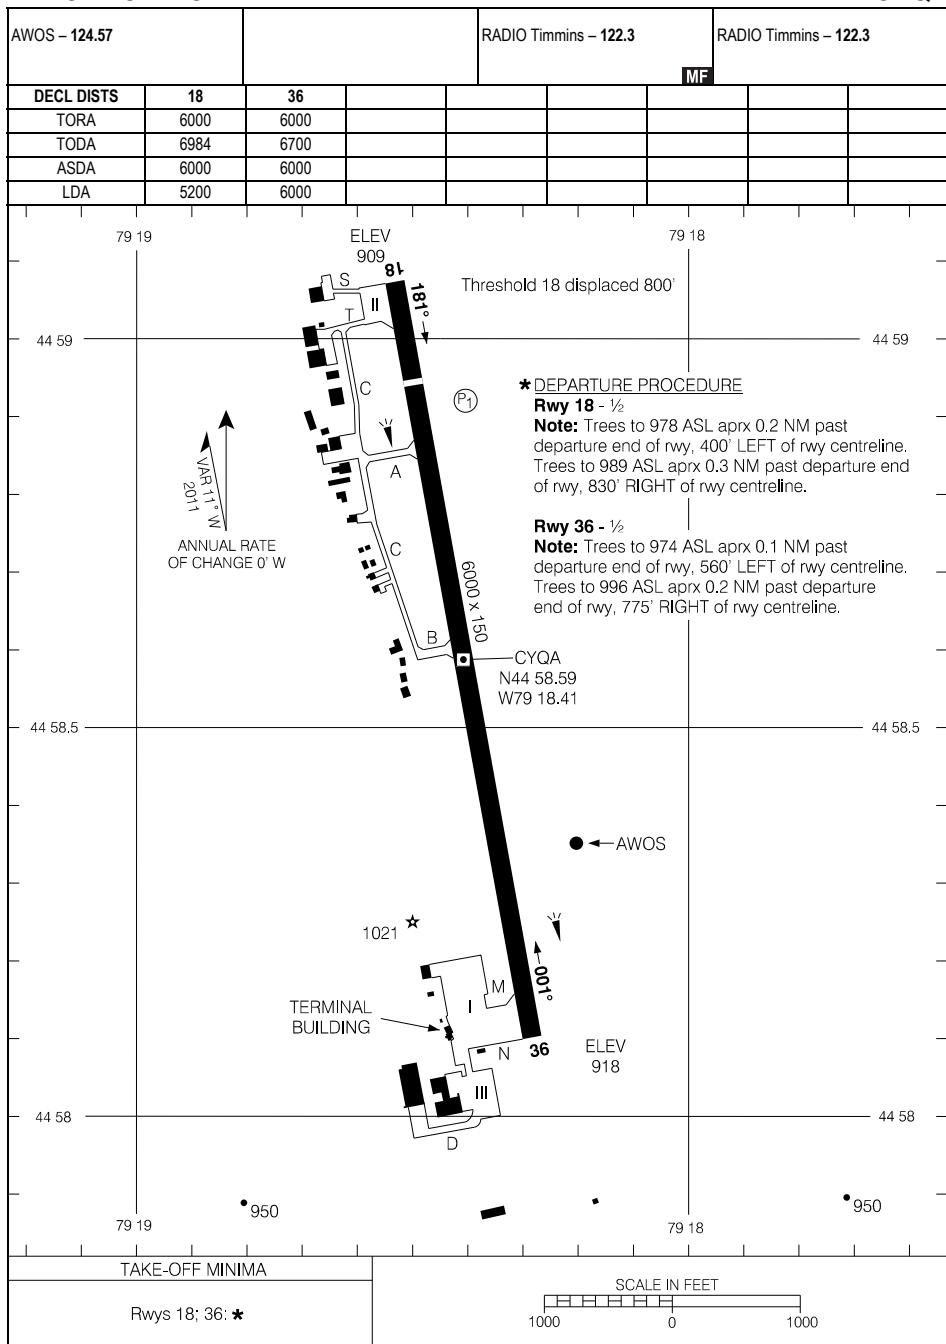

AERODROME CHART

EFF 17 APR 25


CYQA

CYQA-AD

CZMD-AD

MUSKRAT DAM, ON
CZMD

AERODROME CHART

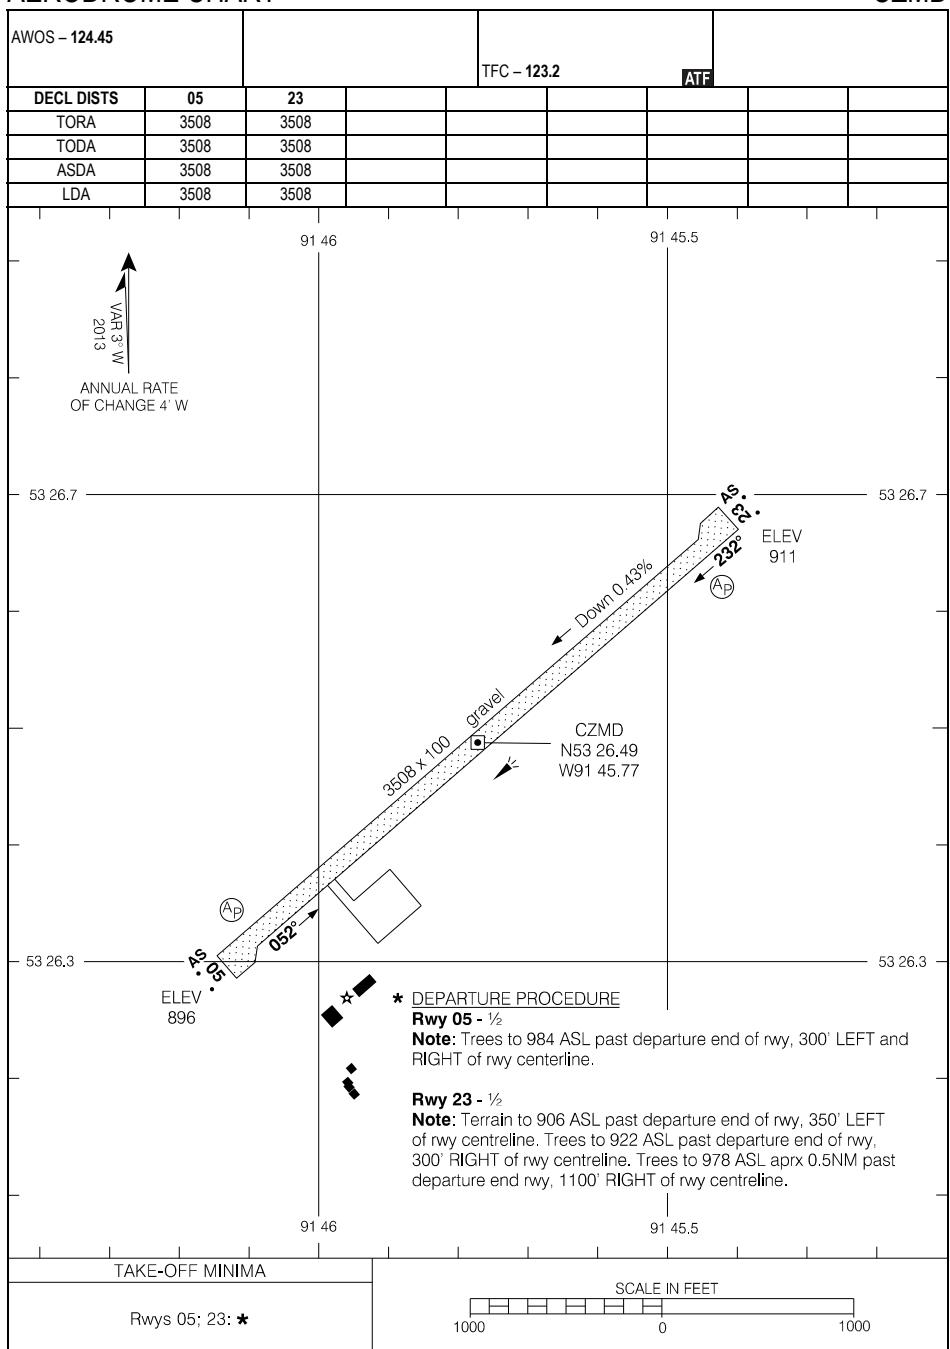

AERODROME CHART

EFF 8 SEP 22


CZMD-AD

CZMD

CYQN-AD

NAKINA, ON
CYQN

AERODROME CHART

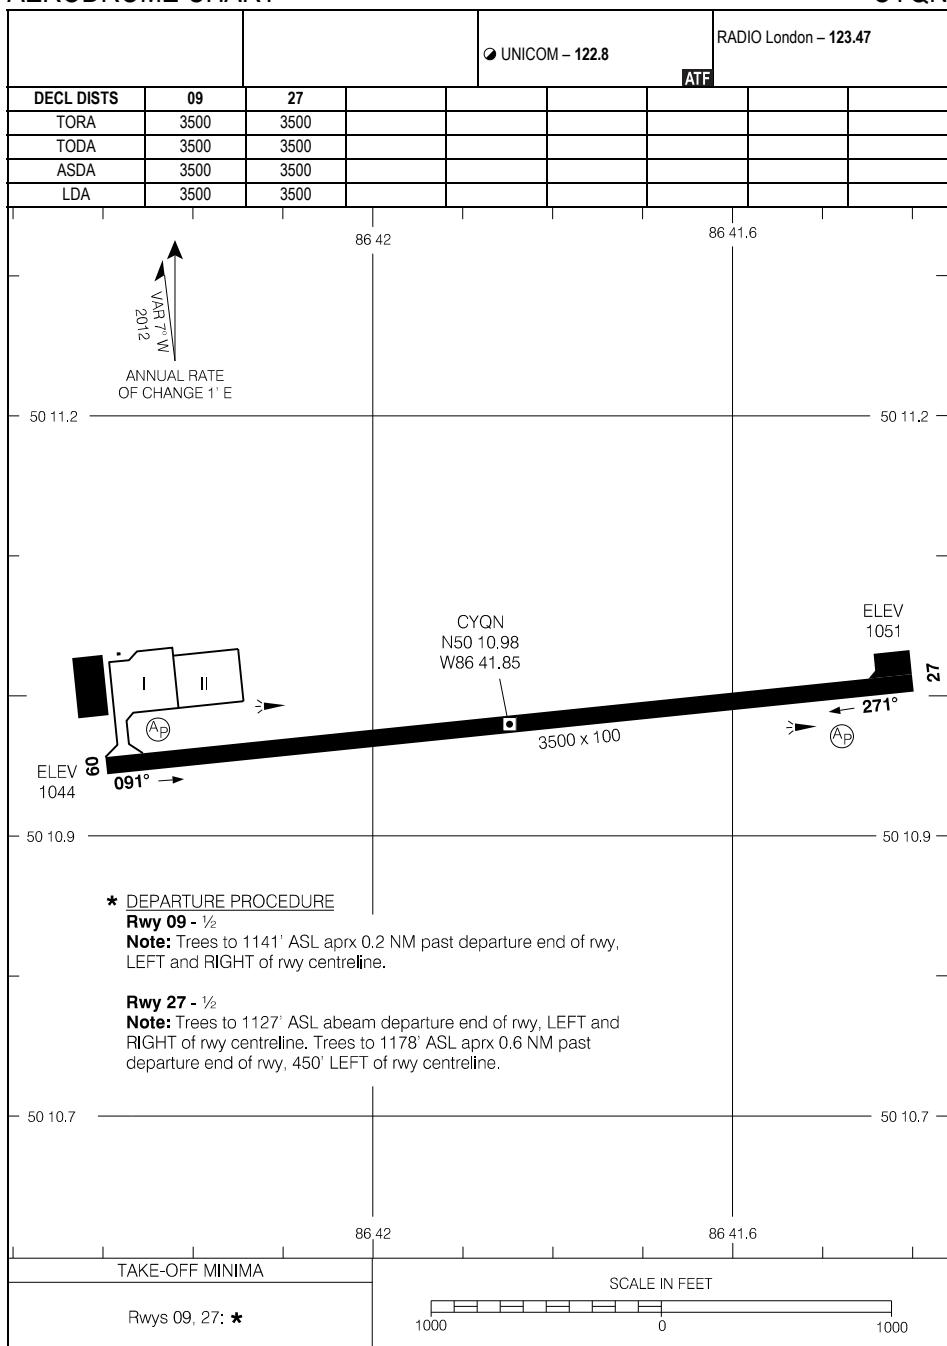

AERODROME CHART

EFF 11 JUL 24

CYQN

CYQN-AD

CYYB-AD


NORTH BAY, ON
CYYB

AERODROME CHART

● ATIS – 124.9 ● AWOS – 124.9				● RADIO – 118.3 ● TFC – 118.3		CTR Toronto – 127.25	
DECL DISTS	08	26	13	31	18	36	MF*
TORA	10004	10004	2000	2000	4492	4492	
TODA	10988	10988	2000	2000	5476	5476	
ASDA	10004	10004	2000	2000	4492	4492	
LDA	10004	10004	2000	2000	4492	4492	

VAR 11° W
2015

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

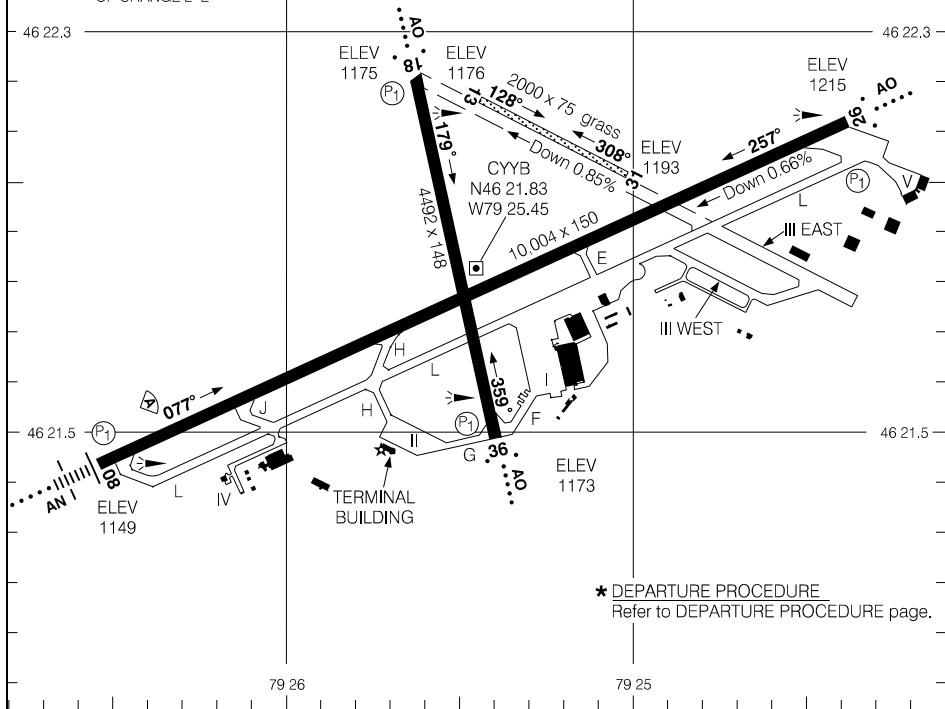

RUNWAY LEVEL OF SERVICE

RVO

NOT AUTHORIZED

TAKE-OFF MINIMA
Rwys 08; 18; 36: *
Rwy 26: ½
Rwys 13; 31: NOT ASSESSED

AFRODROME CHART

FFF 7 AUG 25


GYYB

CYYB-AD

CKQ3-AD

NORTH SPIRIT LAKE, ON
CKQ3

AERODROME CHART

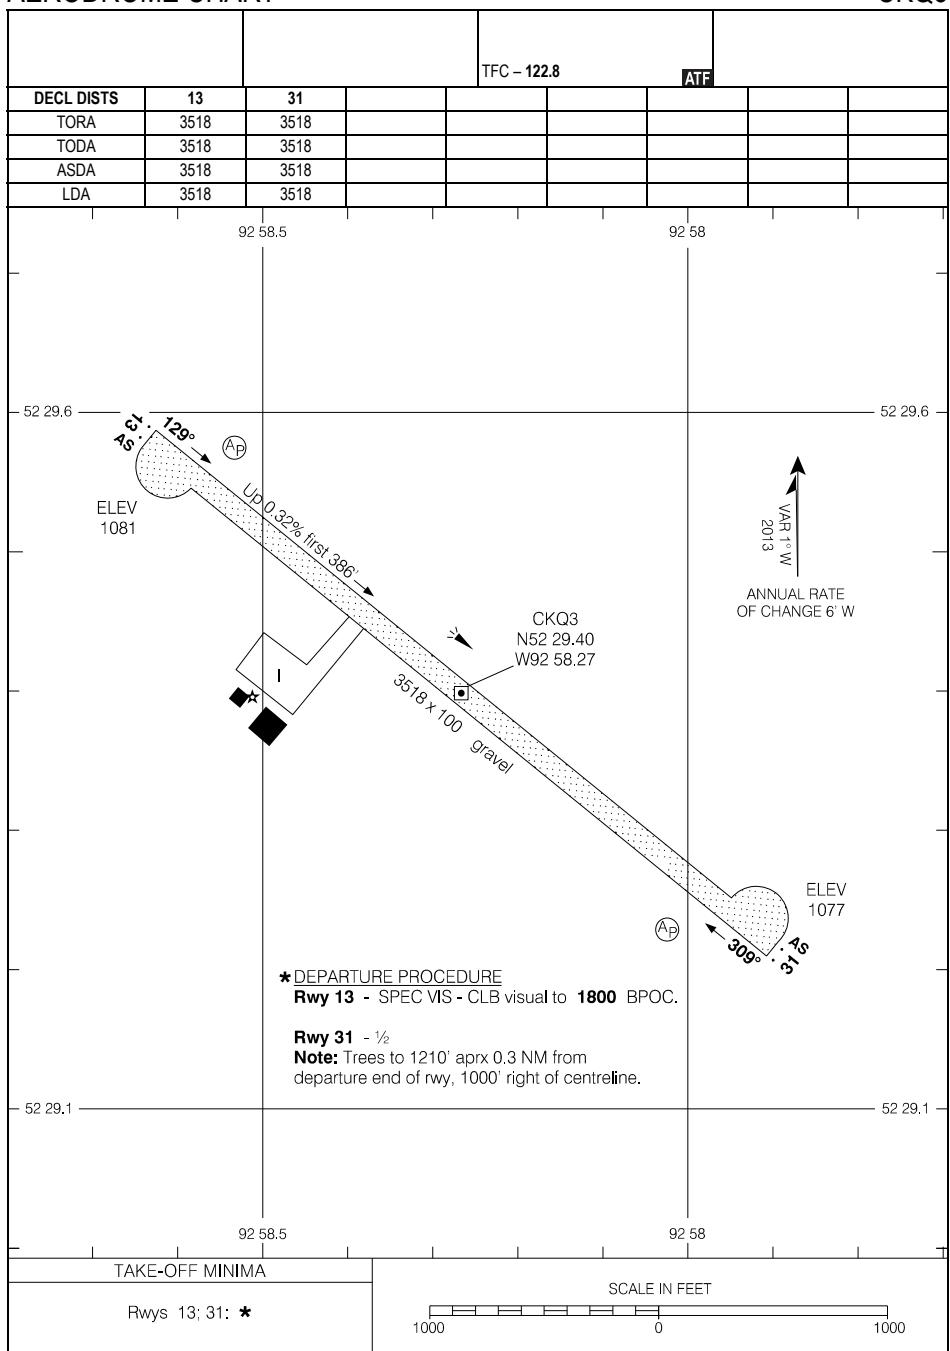

AERODROME CHART

EFF 27 JAN 22


CKQ3-AD

CKQ3

CYKP-AD

OGOKI POST, ON
CYKP

AERODROME CHART

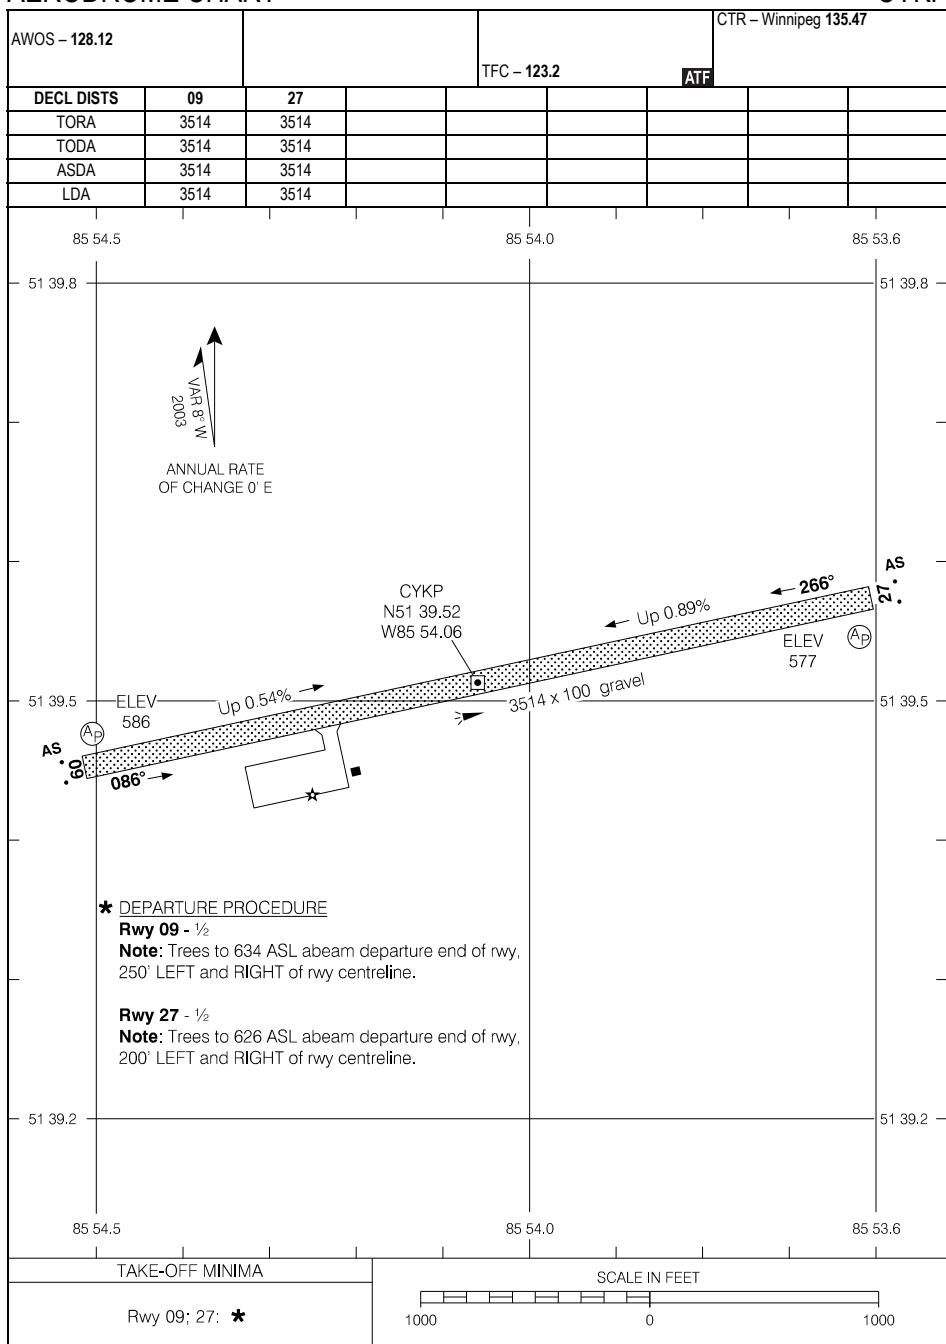

AERODROME CHART

EFF 12 JUN 25

CYKP

CYKP-AD

CYRP-AD

OTTAWA/CARP, ON
CYRP

AERODROME CHART


ATIS Ottawa - 121.15

● UNICOM - 122.8

DEP Ottawa - 128.17

ATF*

DECL DISTS	04	22	10	28			
TORA	2205	2205	3936	3936			
TODA	2205	2205	4920	4743			
ASDA	2205	2205	3936	3936			
LDA	2009	2107	3936	3936			

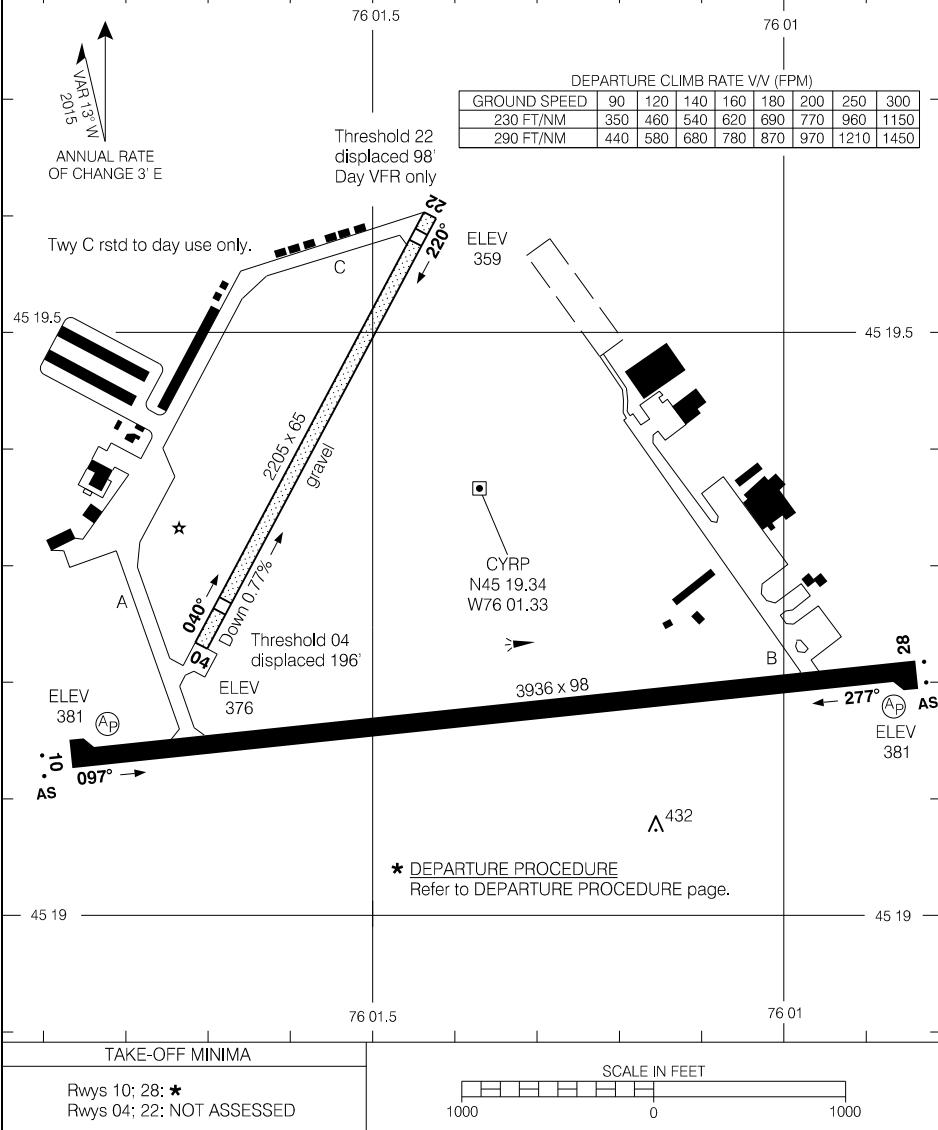

AERODROME CHART

EFF 26 DEC 24


CYRP

CYRP-AD

CYOW-AD

OTTAWA/MACDONALD-CARTIER INTL, ON
CYOW

AERODROME CHART

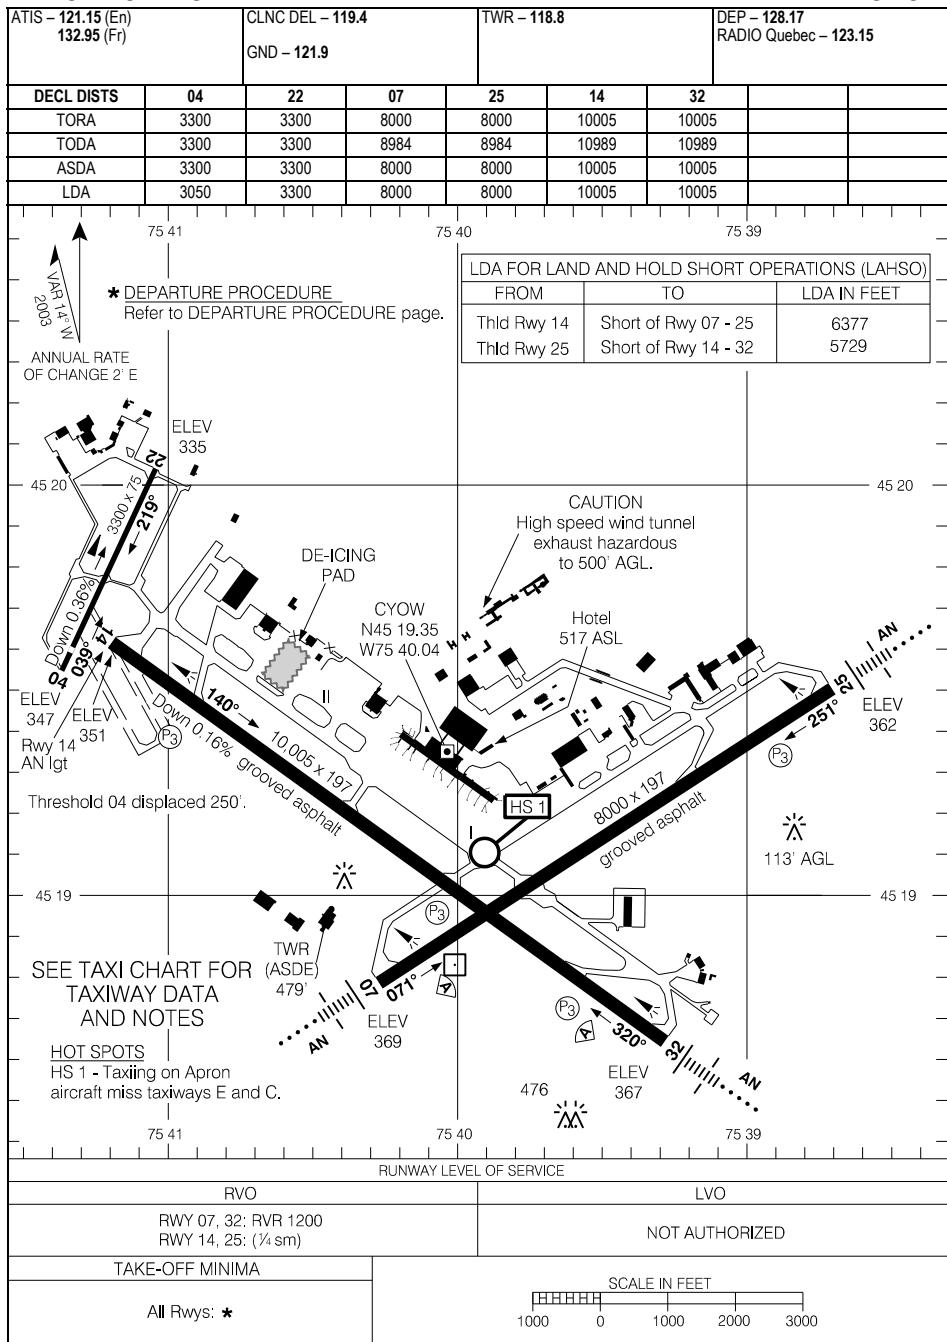

AERODROME CHART

EFF 7 AUG 25

CYOW-AD


CYOW

CYOW-AD

OTTAWA/MACDONALD-CARTIER INTL, ON
CARTE D'AÉRODROME CYOW

ATIS - 132.95 (Fr) 121.15 (Ang)	CLNC DEL - 119.4	TWR - 118.8	DEP - 128.17 RADIO Québec - 123.15
GND - 121.9			

DIST DÉCLARÉES	04	22	07	25	14	32	
TORA	3300	3300	8000	8000	10005	10005	
TODA	3300	3300	8984	8984	10989	10989	
ASDA	3300	3300	8000	8000	10005	10005	
LDA	3050	3300	8000	8000	10005	10005	

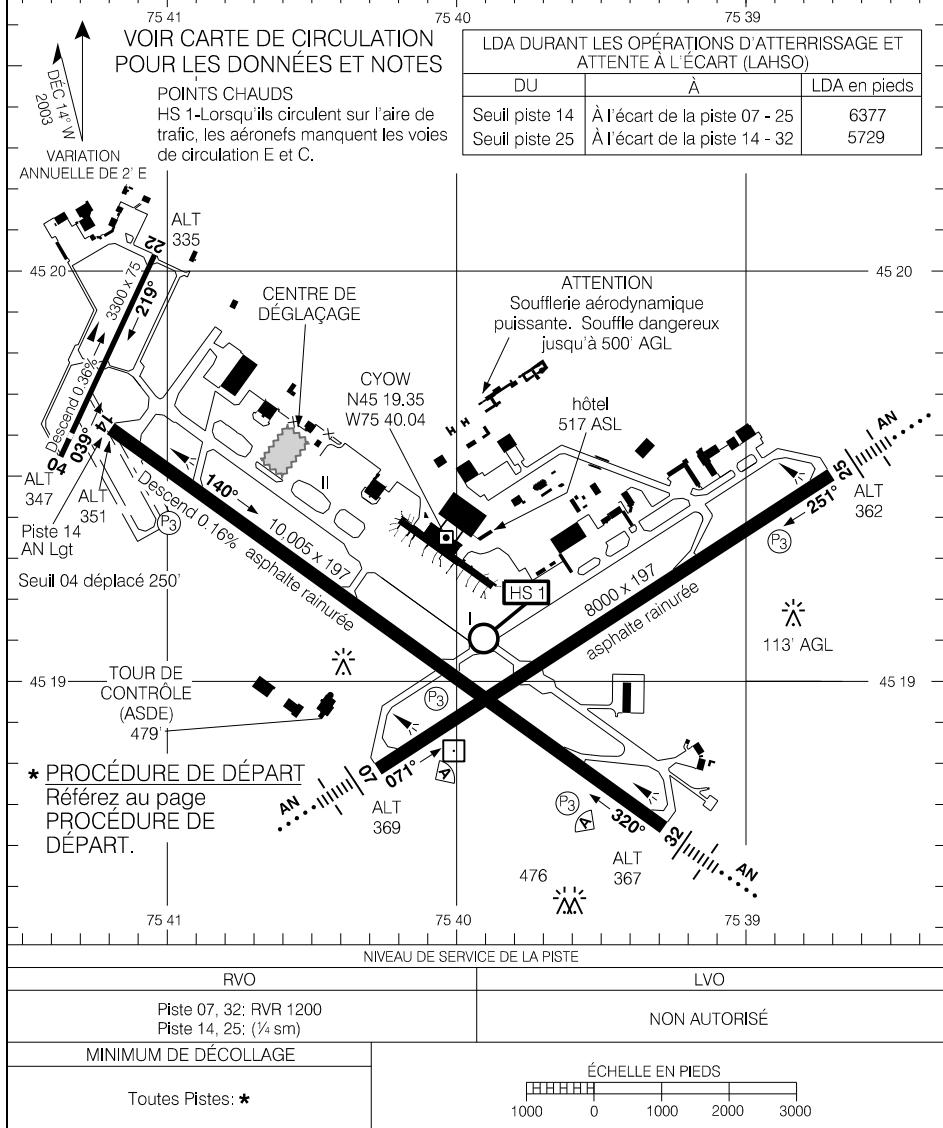

CARTE D'AÉRODROME

EFF 7 AOÛT 25

CYOW

CYOW-AD


CYOW-GM-1

OTTAWA/MACDONALD-CARTIER INTL, ON
CYOW

TAXI CHART

ATTIS - 121.15 (En) 132.95 (Fr)	CLNC DEL - 119.4	TWR - 118.8
GND - 121.9		

Rwy 04-22: 3300 x 75

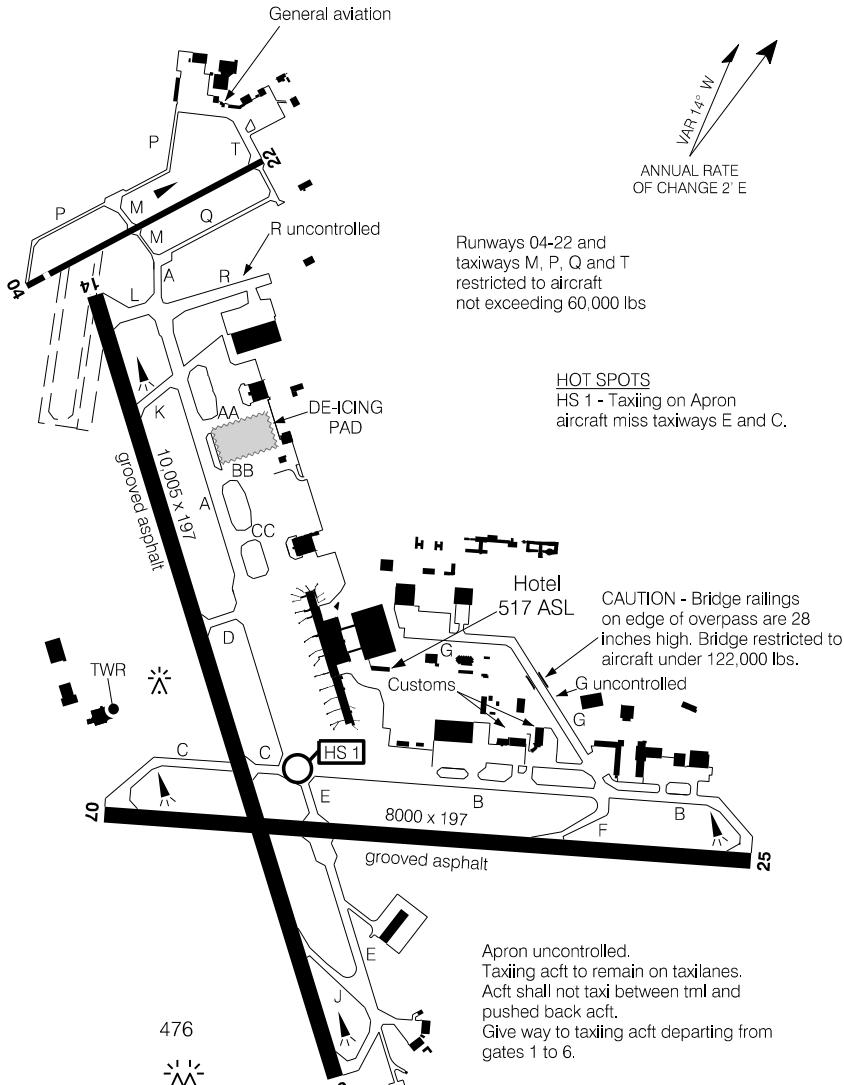

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

TAXI CHART

EFF 7 AUG 25

CYOW


CYOW-GM-1

CARTE DE CIRCULATION

ATIS - 132.95 (Fr) 121.15 (Ang)	CLNC DEL - 119.4	TWR - 118.8
	GND - 121.9	

Piste 04-22: 3300 x 75

Aviation générale

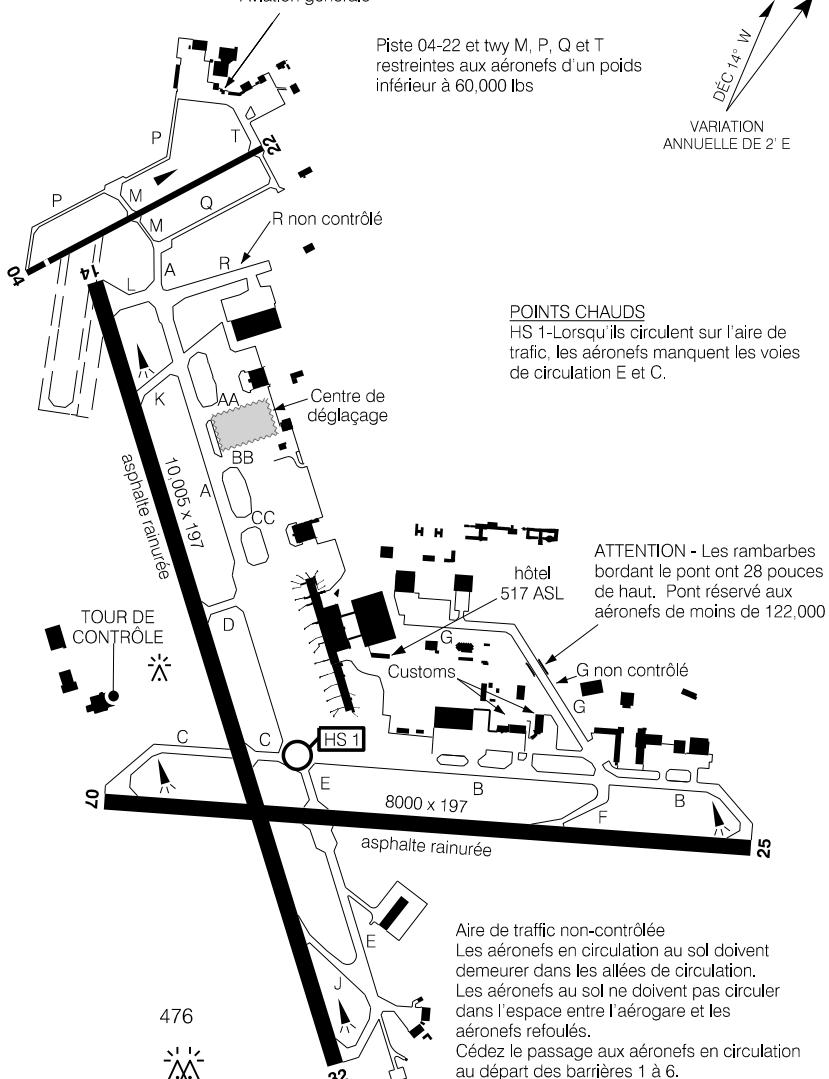

Pour DÉGIVRAGE voir carte
OPÉRATIONS DE DÉGIVRAGE .

CARTE DE CIRCULATION

EFF 7 AOÛT 25

CYOW

DE-ICING OPERATIONS

Gate De-icing – Originating Flights

1. Gate de-icing is approved for environmental frost under the following conditions:
 - Active precipitation is not forecasted for the operational period.
 - Apron conditions are such as to allow the recovery of spent fluid (no snow, ice, sand, gravel, etc.).
 - The required fluid to de-ice is optimal for the presenting frost and up to the minimum 1 litre/square metre.
 - Winds are light to variable (8 knots).
2. De-icing for originating flights will take place 60-90 minutes before scheduled departure time.
3. Staff will conduct initial inspection of acft to determine the requirement for de-icing and will proceed with spray if rqrdr.
4. Airlines must ensure acft are configured and ready for de-icing prior to the above time. De-icing will take place under the assumption that originating flights are configured.
5. De-icing confirmation will be sent electronically or via fax to airline operations following de-icing. Flight crews requiring additional information may contact PAD CONTROL on 122.92.
6. No holdover time is provided for on gate de-icing.
7. The process of “**Pre-Spray**” (Lines 2-3) 60-90 mins before push is being reviewed due to frost regeneration (fall weather patterns with high humidity and close OAT/DP spread).
8. Unless requested of de-ice crews, the PIC is responsible for “**Pre-flight take off inspections**.” Any treatments by de-ice crews for Pre-Sprays will be followed by an “**appropriate post de-ice inspection**.” The “**Pre-Spray**” treatments 60-90 mins before push do not include a “**pre-take off**” inspection.

Gate De-icing – Turn Flights

1. All conditions of gate de-icing exist from above list.
2. De-ice crews will not interact with turn aircraft unless requested – Contact PAD CONTROL on 122.92 to arrange. There will be no pre-emptive contact with the aircraft without request for service. Pre-take off De-ice check remains with the flight crew unless a live spray is completed at pushback.

Centralized De-icing Facility Operations

1. Flow – North to South
 - Entry point is K or AA via Alpha. Acft must hold short of the CDF on the entry point and establish radio contact with PAD CONTROL on 122.92.

Flow – South to North

 - Entry point is CC or BB via Alpha. Acft must hold short of the CDF on the entry point and establish radio contact with PAD CONTROL on 122.92.
2. Follow taxi instructions via East Line to Bays 1, 2, 3 via West Line Bays 4, 5, 6.
3. Aircraft will be staged on the East/West Line short of AA/BB when necessary.
4. When exiting CC/K – Acft must maintain listening watch on the E/W staging lines on 122.92 until reaching Twy A.

NOTE: Aircraft intended on returning to terminal gates after de-icing must drip dry for 25 minutes on CDF.

DE-ICING OPERATIONS

EFF 8 NOV 18

CYOW

DE-ICING OPERATIONS


De-icing Requirements

1. Wings and Stabs refers to the upper surfaces of the wings, upper/lower surface of the Horizontal Stabilizers and both sides (including rudder) of the Vertical Stabilizer.
2. Fuselage includes all components from the front cabin doors aft and Wings and Stabs.
3. Full Body includes the cockpit/radome plus Fuselage, Wings and Stabilizers.
4. Individual treatments like "inspections only", "radome", "winglets" can be done upon request.
5. Hard leading edges tactiles/underwing inspections and treatments may require engine shut down if inlet is in close proximity to surface requiring attention.

DE-ICING OPERATIONS

EFF 8 NOV 18

DE-ICING OPERATIONS

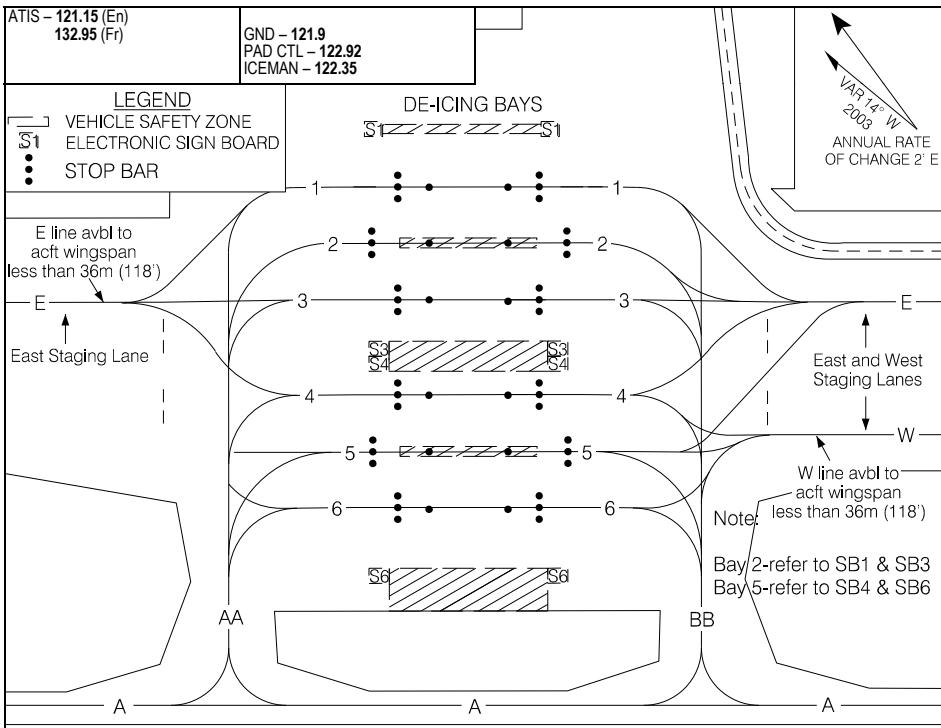

1. Ctc PAD CONTROL on 122.925 30 min prior to dep if de-icing is rqrd.
Notify of any special treatments prior to taxi to CDF.
2. Ctc Ottawa GND after pushback for taxi to CDF.
3. Hold short of the CDF on K, AA, BB or CC and ctc PAD CONTROL for further taxi.
4. Follow instructions and electronic sign boards to de-icing bays.
5. Stop on the 2nd (illuminated) yellow stop bar, immediately set brakes and advise PAD CONTROL.
DO NOT MOVE ACFT. This will allow positioning of trucks while you configure your aircraft.
6. Once instructed switch to ICEMAN on 122.350, confirm brakes are set, confirm treatment and that acft is configured for treatment (engines at idle/props feathered/pacs off). If you can't reduce engines to idle ICEMAN must know, de-icing may not be possible with running engines.
7. After de-icing, configure acft for taxi, however, DO NOT MOVE ACFT.
8. Once instructed, ctc PAD CONTROL for taxi.
9. Follow instructions to designated exit point. Holding short of Twy A, ctc GND 121.9.

TYPE 1 - All Clear Lift-Off E188

TYPE IV - UCAR ADF ENDURANCE EG106 100%

BAY RESTRICTIONS

Bay 1, 3, 4, 6 - May be used by acft with wingspans 36m (118') or less.

Bay 2 - May be used by acft with the wingspan 65m (213') or less. If CC used, the taxi must be on the East taxi line only to/from Bay 2.

Bay 5 - May be used by acft with the wingspan 65m (213') or less. If CC used, taxi must be on the East taxi line only with crossover to/from Bay 5.

AD HOC FLIGHTS

1. Obtain a projected acceptance time for de-icing from PAD CONTROL on 122.925 or via phone 613-248-0228 .
2. Submit Authorization form via fax 613-248-0860 or via e-mail YOW_InlandOps@Inlandgroup.ca.
3. An estimate of litres required will be provided to flight crew.
4. Ad hoc aircraft not abiding by the above may be denied service at the CDF.

DE-ICING OPERATIONS

CYOW

EFF 20 FEB 25

OPÉRATIONS DE DÉGIVRAGE

OTTAWA/MACDONALD-CARTIER INTL, ON
CYOW

Dégivrage à la barrière – vols cédulés

1. Le dégivrage aux portes d'embarquement est approuvé pour le givre dans les conditions suivantes :
 - Les précipitations actives ne sont pas prévues pour la période opérationnelle.
 - Les conditions du tablier sont telles qu'elles permettent de récupérer le fluide usé (pas de neige, de glace, de sable, de gravier, etc.).
 - Le liquide de dégivrage requis est optimal pour le givre présent et ce, jusqu'à un minimum de 1 litre / mètre carré.
 - Les vents sont de légers à variables (8 nœuds).
2. Dégivrage pour les vols cédulés aura lieu 60 – 90 minutes avant l'heure de départ cédulé.
3. Technicien doit faire une inspection initiale de l'appareil pour déterminer les besoins en dégivrage et vont procéder au dégivrage si requis.
4. Les sociétés aériennes doivent s'assurer que l'appareil est configuré et prêt pour le dégivrage. Le dégivrage va avoir lieu en prenant compte que les vols cédulés sont configurés.
5. La confirmation de dégivrage sera envoyée électroniquement ou par fax à la société aérienne après le dégivrage. L'équipage requérant de l'information additionnelle peut contacter CTL DÉGIVRAGE sur 122.92.
6. Aucun temps d'efficacité n'est fourni pour le dégivrage à la barrière.
7. Le processus de « **Pré-application** » (lignes 2-3), 60-90 minutes avant le refoulement est en cours de révision en raison de la régénération du givre (conditions météorologiques automnal, incluant une forte humidité et une relation étroite entre la TAE / PR).
8. À moins que les équipes de dégivrage ne le demandent, le commandant de bord est responsable des « **inspections avant le décollage** ». Tout traitement effectué par les équipes de dégivrage pour les pré-applications sera suivi d'une « **inspection post-dégivrage appropriée** ». Les traitements de « **pré-application** » de 60 à 90 minutes avant le refoulement n'incluent pas une inspection de « **pré-décollage** ».

Dégivrage à la barrière – vols en transit

1. Toutes les conditions de dégivrage aux portes d'embarquement existent depuis la liste ci-dessus.
2. Les équipes de dégivrage n'interagiront pas avec le virage des avions à moins que cela ne soit demandé – Contactez PAD CONTROL sur 122.92 pour organiser la manœuvre. Il n'y aura pas de contact préventif avec l'aéronef sans demande de service. La vérification de dégivrage avant le décollage demeure à l'équipage de l'aéronef à moins qu'une application directe soit complétée au refoulement.

OPÉRATIONS DE DÉGIVRAGE

EFF 15 AOÛT 19

CYOW

OPÉRATIONS DE DÉGIVRAGE

Opération au centre de dégivrage

1. Circulation – Nord vers Sud

- Point d'entrée est K ou AA via Apha. L'appareil doit se tenir à l'écart du CDF au point d'entrée et établir le contact radio avec CTL DÉGIVRAGE sur 122.92.

Circulation – Sud vers Nord

- Points d'entrée est CC ou BB via Alpha. L'appareil doit se tenir à l'écart du CDF au point d'entrée et établir le contact radio avec CTL DÉGIVRAGE sur 122.92.

2. Suivre les instructions pour le taxi via la ligne Est pour les baies 1,2,3 ou via la ligne Ouest pour les baie 4,5,6.

3. L'appareil sera mis en attente sur la ligne Est/Ouest à l'écart de AA/BB lorsque nécessaire.
4. À la sortie de CC / K – L'aéronef doit rester attentif aux lignes d'arrêt E / W et au 122.92 jusqu'à ce qu'il atteigne le Twy A.


Note : L'appareil qui doit retourner à la barrière doit rester au CDF pendant 25 minutes afin d'assécher l'appareil

Besoins en dégivrage

1. Ailes et Stabilisateurs se réfère aux surfaces supérieures des ailes, aux surfaces supérieures / inférieures des Stabilisateurs Horizontaux et des deux côtés (y compris le gouvernail) du Stabilisateur Vertical.
2. Le Fuselage comprend toutes les composantes, des portes de cabine avant vers l'arrière ainsi que les Ailes et Stabilisateurs.
3. L'appareil complet comprend la cabine de pilotage, le radôme ainsi que le Fuselage et les Ailes et Stabilisateurs.
4. Des traitements individuels tels que « inspections seulement », « radôme », « ailettes » peuvent être effectués sur demande.
5. Les inspections tactiles et les traitements sous les ailes peuvent nécessiter la fermeture d'un moteur si l'entrée est à proximité de la surface nécessitant une attention.

OPÉRATIONS DE DÉGIVRAGE

OPÉRATIONS DE DÉGIVRAGE

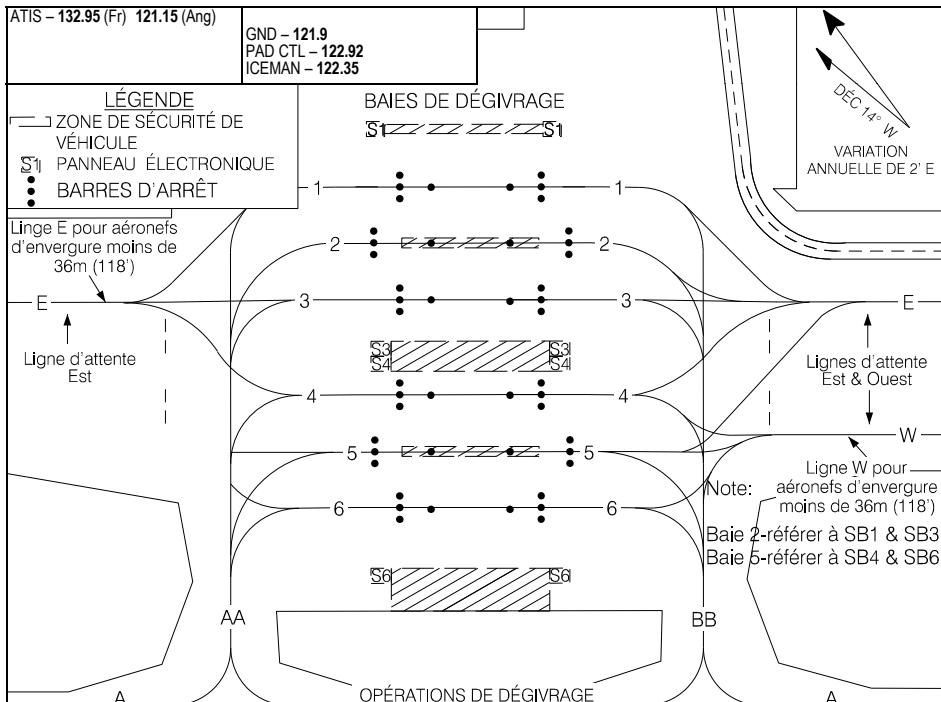

1. Ctc CTL DÉGIVRAGE 122.925 30 min avant le dép si dégivrage est requis. SVP aviser de tout traitement spécial avant de rouler à l'installation centrale de dégivrage.
2. Ctc Ottawa SOL, après refoulement pour circuler au CDF.
3. Rester à l'écart du CDF sur K, AA, BB ou CC et ctc CTL DÉGIVRAGE pour circuler.
4. Suivez les instructions et les panneaux électroniques pour procéder à la baie de dégivrage.
5. Arrêtez-vous sur la deuxième barre d'arrêt jaune (éclairée), actionnez immédiatement les freins et confirmez avec PAD CONTROL, NE PAS BOUGER L'AÉRONEF. Cela permettra de positionner les camions pendant que vous configurez votre avion.
6. Une fois qu'on vous le demande, passez à ICEMAN au 122.350. Confirmez que les freins sont serrés, le traitement désiré et que votre avion est configuré pour le traitement (Moteurs au ralenti / hélices mises en drapeau). Si vous ne pouvez pas réduire les moteurs au ralenti, avisez ICEMAN, il se peut que le dégivrage ne soit possible avec les moteurs en marche.
7. Après dégivrage, configurer l'appareil pour circuler, toutefois, NE PAS BOUGER L'APPAREIL.
8. Une fois avisé, ctc CTL DÉGIVRAGE pour circuler.
9. Suivre les instructions pour le point de sortie désigné. À l'écart de la voie de circulation A ctc SOL 121.9.

TYPE 1 - All Clear Lift-Off E188

TYPE IV - UCAR ADF ENDURANCE EG106 100%

RESTRICTIONS DES BAIES DE DÉGIVRAGE

Baies 1, 3, 4, 6 - Peuvent être utilisées par les aéronefs d'envergure de 36m (118') ou moins

Baie 2 - Peut être utilisé par un aéronef ayant une envergure de 65m (213pi) ou moins. Si CC est utilisé, le taxi doit être sur la ligne de taxi Est uniquement vers/de la baie 2.

Baie 5 - Peut être utilisé par un aéronef ayant une envergure de 65m (213pi) ou moins. Si CC est utilisée, le taxi doit être sur la ligne de taxi Est uniquement vers/de la baie 5.

VOLS AD HOC

1. Obtenir une heure projetée pour le dégivrage en contactant CTL DÉGIVRAGE sur 122.925 ou par téléphone au 613-248-0228.
2. Soumettre le formulaire d'autorisation par fax au 613-248-0860 ou par courriel à YOW_InlandOps@Inlandgroup.ca.
3. Un estimé des litres de glycol requis sera transmis à l'équipage.
4. Un vol AD HOC ne se conformant pas à la procédure ci-haut mentionnée, peut se voir refuser l'accès au centre de dégivrage.

OPÉRATIONS DE DÉGIVRAGE


CYOW

EFF 20 FÉV 25

CYOW-APD-1

OTTAWA/MACDONALD-CARTIER INTL, ON
CYOW

PARKING AREAS (APRON I)

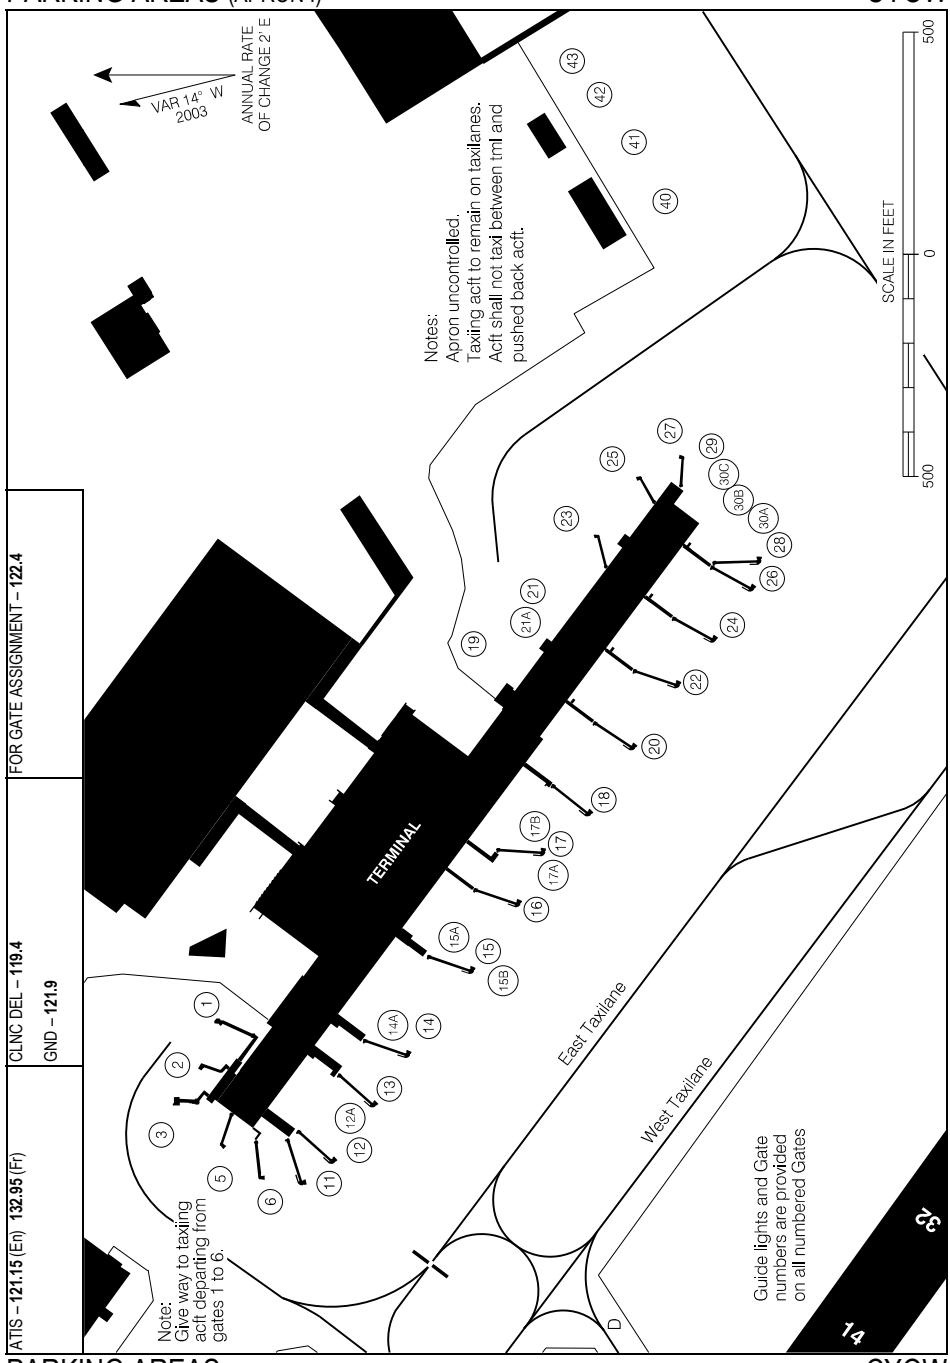

CYOW-APD-1


CYOW-APD-2

OTTAWA/MACDONALD-CARTIER INTL, ON
CYOW

PARKING AREAS (APRON II)



ATIS - 121.15 [En] 132.95 [Fr]	CLNC DEL - 119.4	FOR GATE ASSIGNMENT - 122.4
GND - 121.9		



DE-ICING
FACILITY

ANNUAL RATE
OF CHANGE 2° E

CYOW-APD-2



Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

32


14

AA

BB

II

CC



PARKING AREAS (APRON II)


EFF 20 FEB 25

CYOW

CYOW-APD-1

OTTAWA/MACDONALD-CARTIER INTL, ON
CYOW

AIRES DE STATIONNEMENT (AIRE DE TRAFIC I)

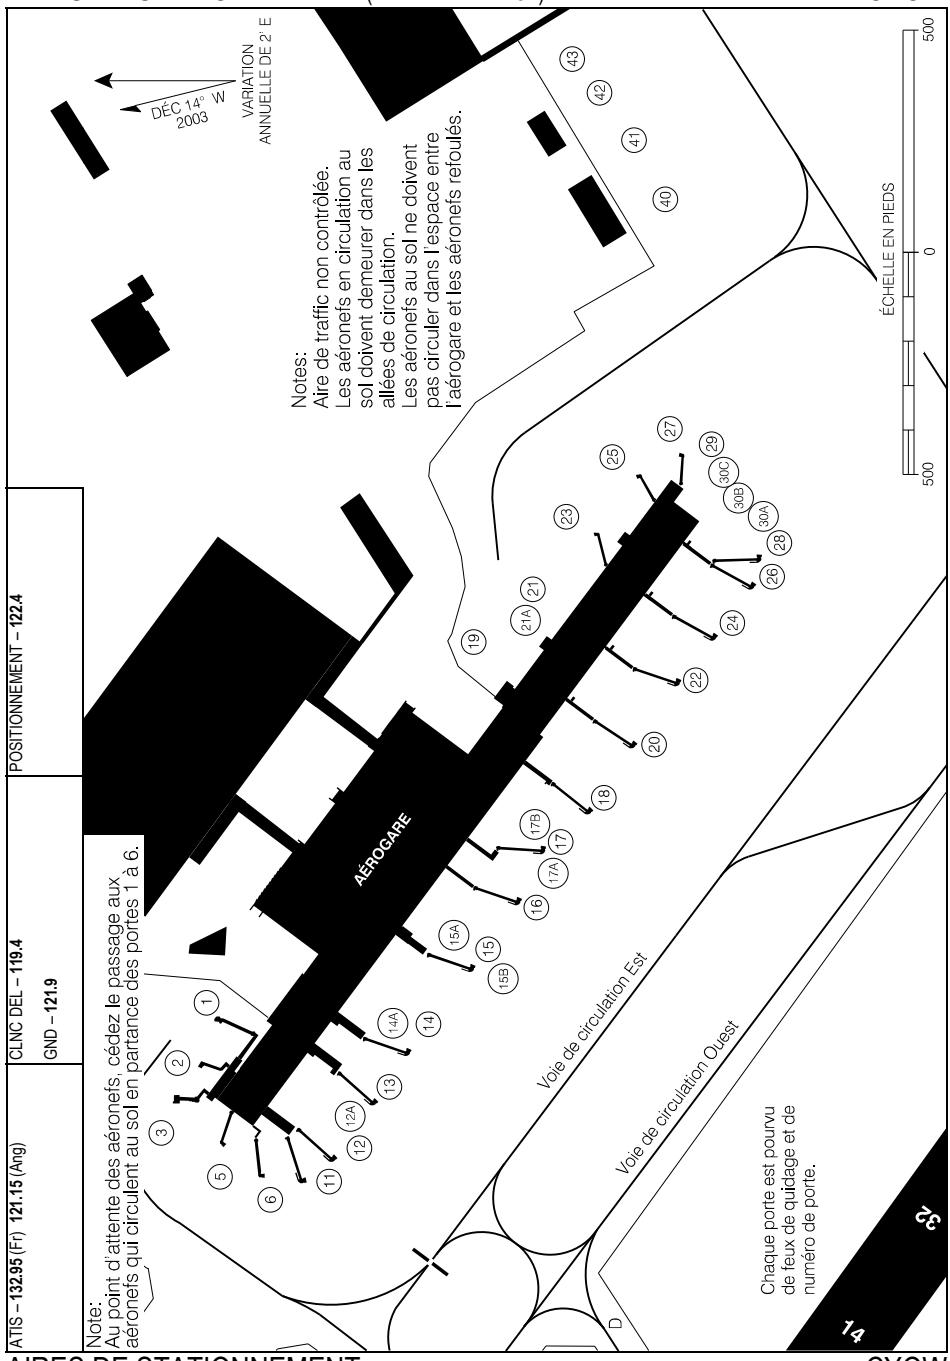

AIRES DE STATIONNEMENT (AIRE DE TRAFIC I)


EFF 7 AOÛT 25

CYOW-APD-1

CYOW-APD-2

OTTAWA/MACDONALD-CARTIER INTL, ON
CYOW

AIRES DE STATIONNEMENT (AIRE DE TRAFIC II)

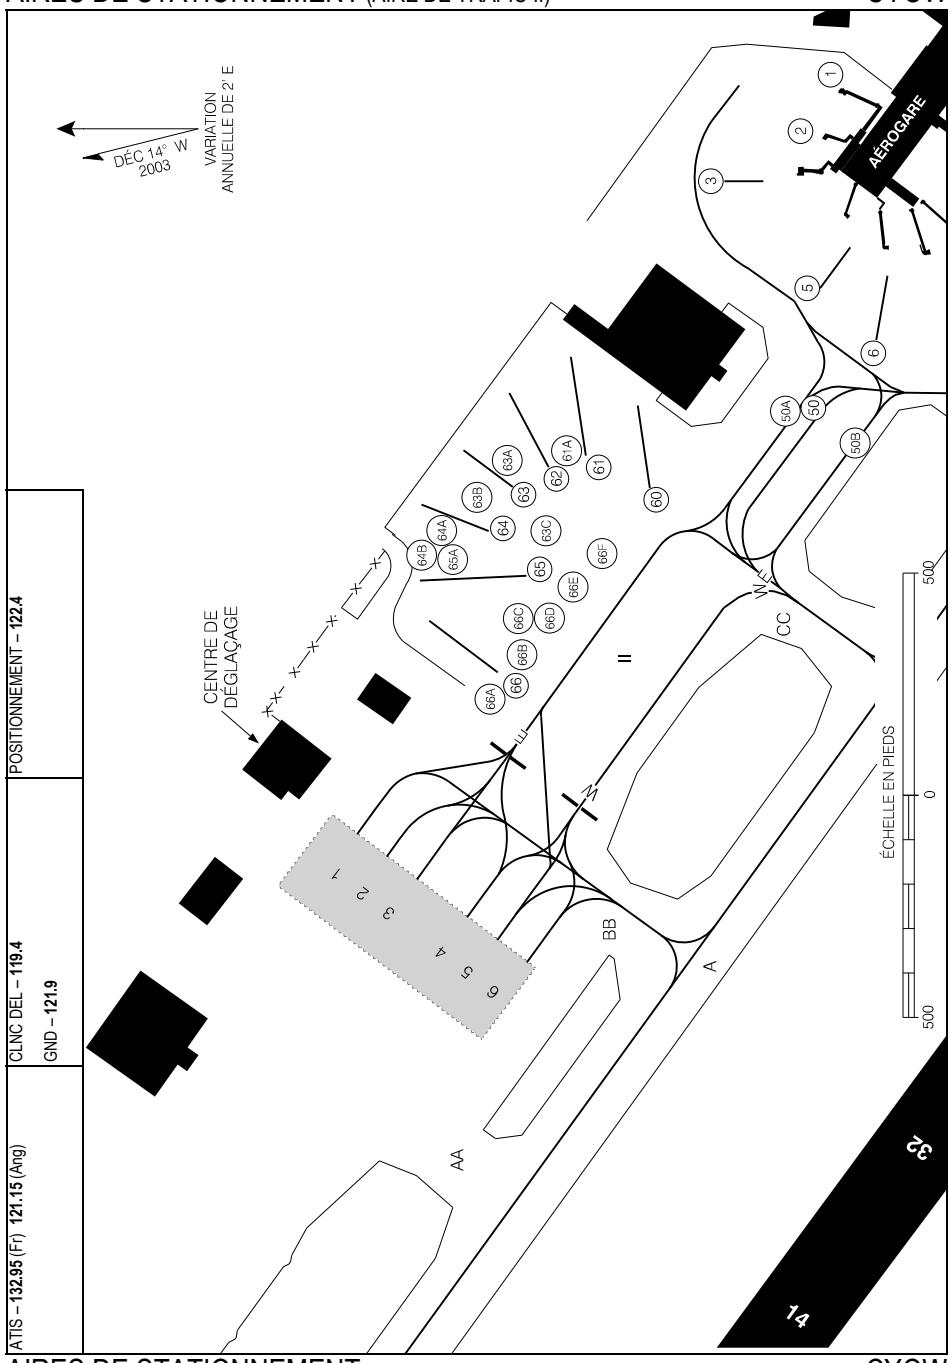

AIRES DE STATIONNEMENT (AIRE DE TRAFIC II)


EFF 20 FÉV 25

CYOW-APD-2

CNK4-AD

PARRY SOUND AREA MUNI, ON
CNK4

AERODROME CHART

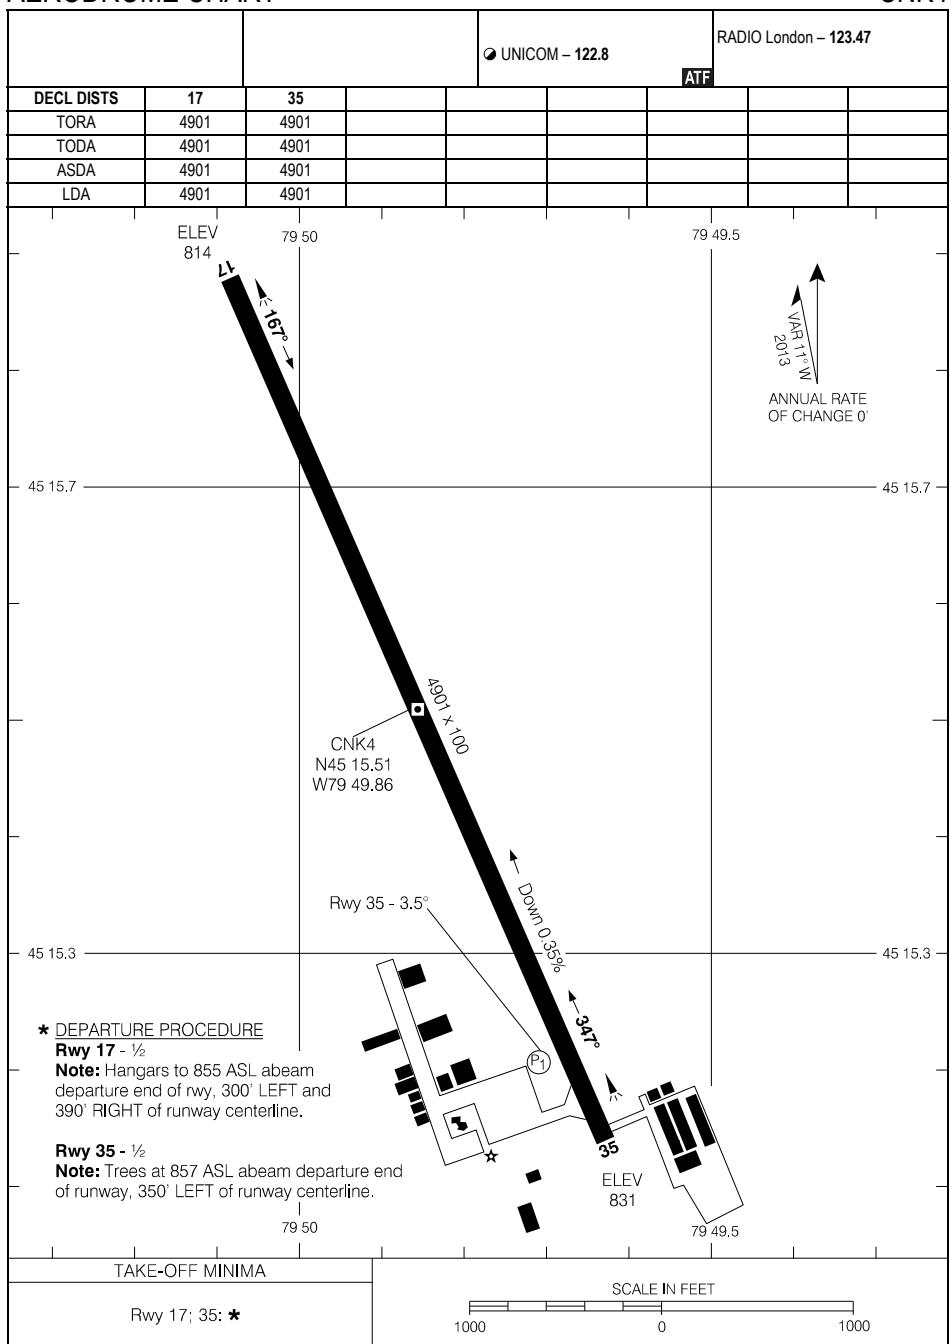

AERODROME CHART

EFF 25 JAN 24

CNK4

CNK4-AD

CYPO-AD

PEAWANUCK, ON
CYPO

AERODROME CHART

AWOS - 128.52

RADIO London = 123.27

TFC - 122.8

ATE

DECL DISTS	11	29							ATP
TORA	3520	3520							
TODA	3520	3520							
ASDA	3520	3520							
LDA	3520	3520							

↑
VAR 10°
2013
↓
ANNUAL RATE
OF CHANGE 1 E

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

ELEV
169

286

x 100
g
CYPO
N54 59.28
W85 26.61

29 AS

*DEPARTURE PROCEDURE

Rwy 11 - 1/2

Note: Trees to 210 ASL abeam departure end of rwy, 250' LEFT and RIGHT of rwy centreline.

Rwy 29 - 1/2

Note: Trees to 217 ASL abeam departure end of rwy, 250' LEFT and RIGHT of rwy centreline.

TAKE-OFF MINIMA

All Rows: *

SCALE IN FEET

A horizontal number line starting at -1000 and ending at 1000. The line is marked with major tick marks at intervals of 200, specifically at -1000, -800, -600, -400, -200, 0, 200, 400, 600, 800, and 1000. The labels are positioned below the line.

AERODROME CHART

EFF 5 OCT 23


CYPO

CYPO-AD

CYPT-AD

PELEE ISLAND, ON
CYPT

AERODROME CHART

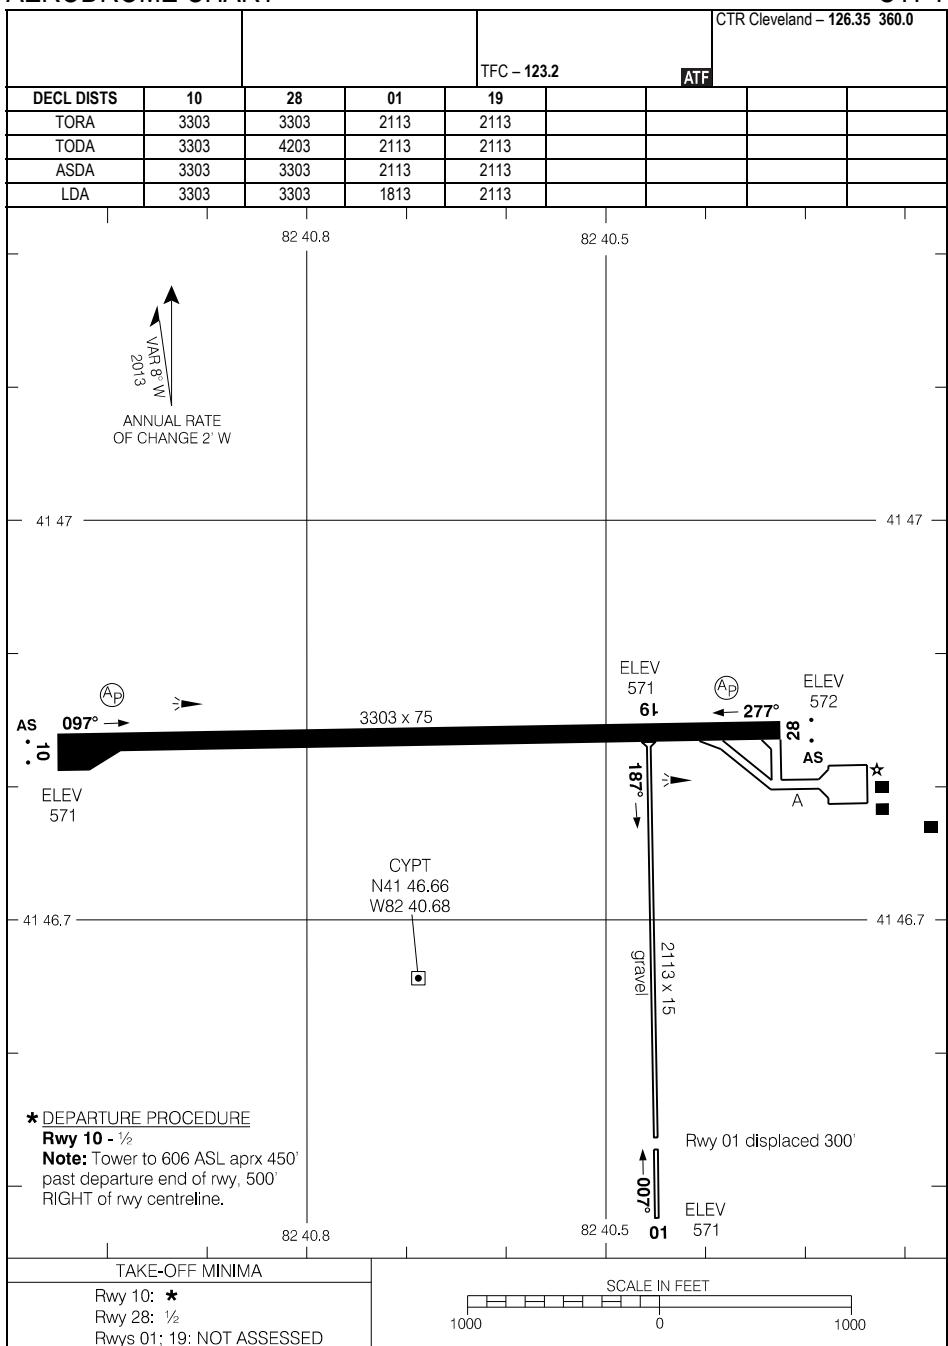

AERODROME CHART

EFF 26 DEC 24


CYPT-AD

CYPT

CYTA-AD

PEMBROKE, ON
CYTA

AERODROME CHART

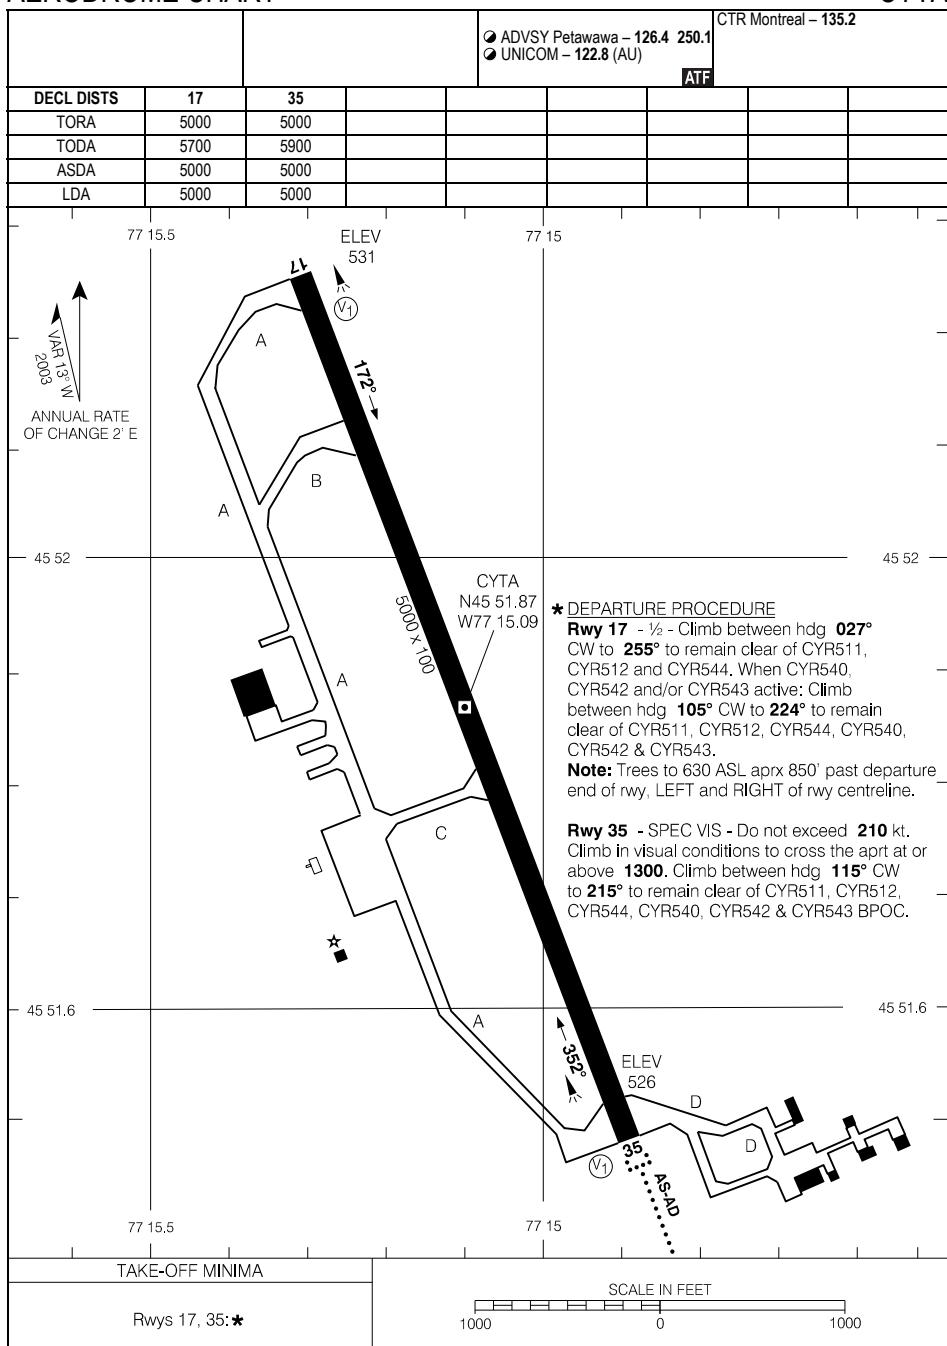

AERODROME CHART

EFF 25 JAN 24


CYTA-AD

CYTA

CYPQ-AD

PETERBOROUGH, ON
CYPQ

AERODROME CHART

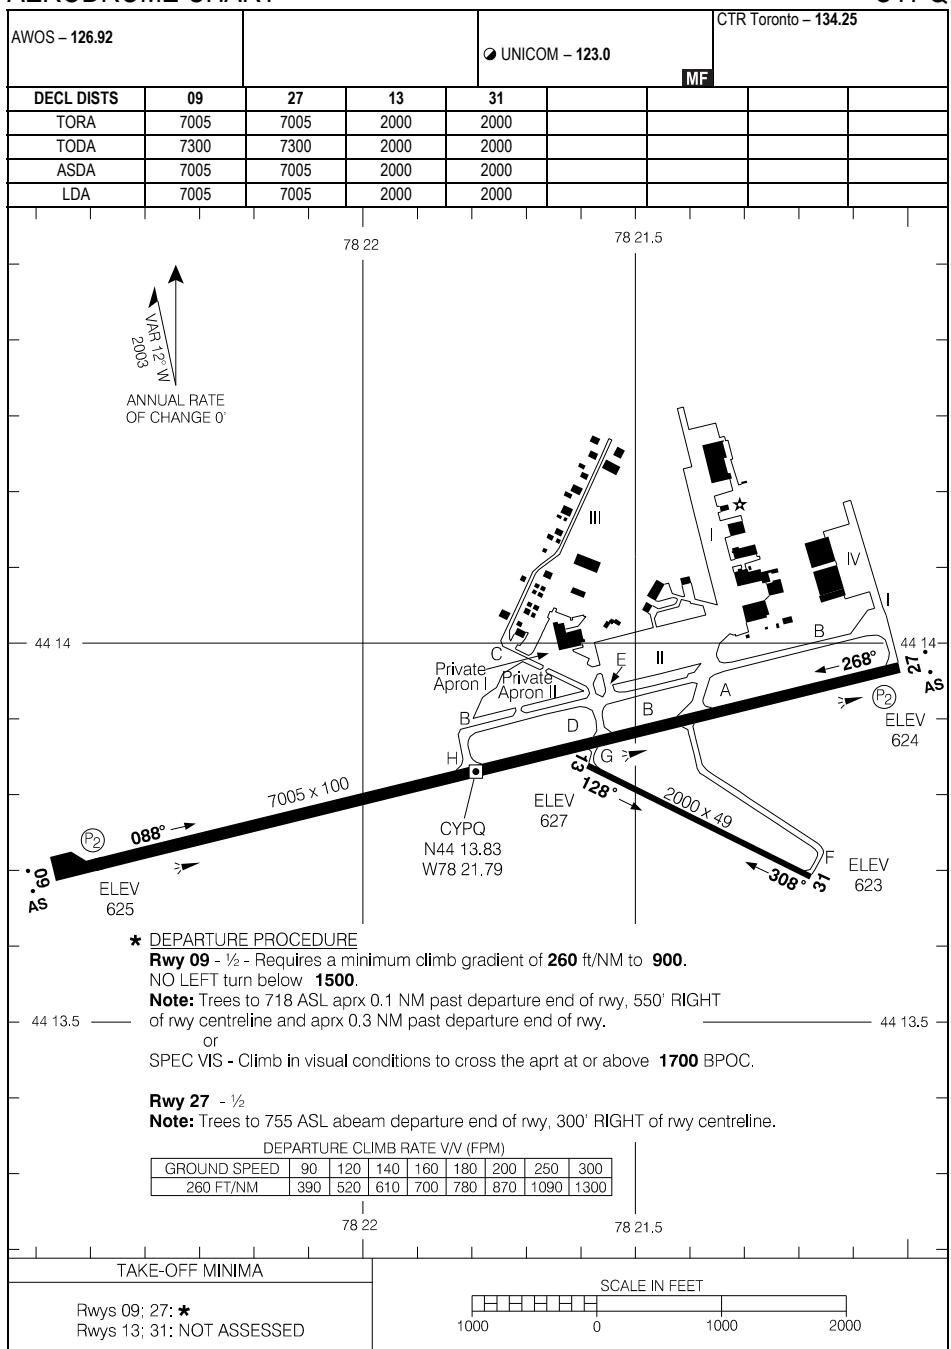

AERODROME CHART

EFF 21 MAR 24

CYPQ

CYPQ-AD


CYPL-AD

PICKLE LAKE, ON
CYPL

AERODROME CHART

AWOS – 127.67				<input checked="" type="radio"/> RADIO Thunder Bay – 122.2	RADIO London – 123.47
		<input checked="" type="radio"/> TFC – 122.2		MF	
DECL DISTS	09	27			
TORA	5217	5217			
TODA	6201	6201			
ASDA	5217	5217			
LDA	5217	5217			

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

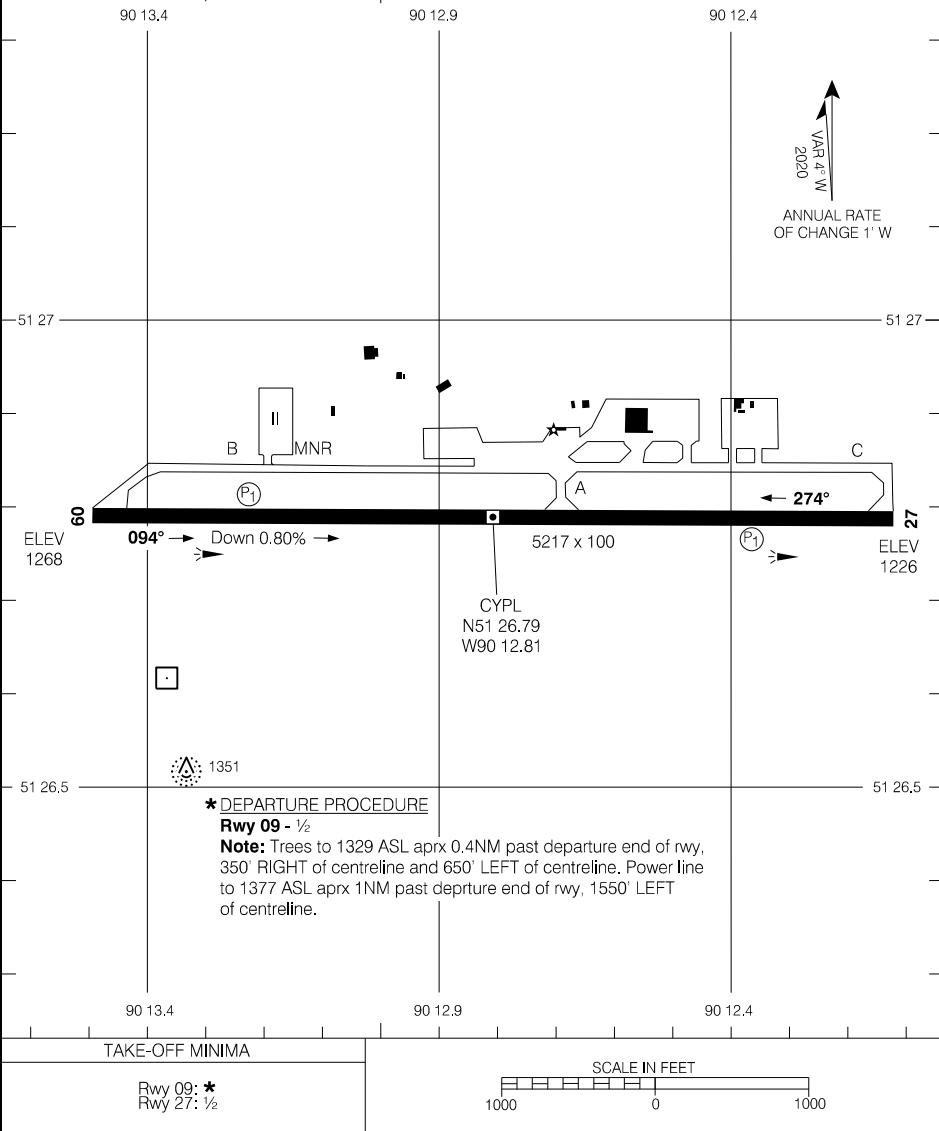

AERODROME CHART

EFF 25 JAN 24

CYPL-AD

CYPM-AD


PIKANGIKUM, ON
CYPM

AERODROME CHART

CTR Winnipeg - 135.32

ATF

DECL DISTS	09	27					
TORA	3508	3508					
TODA	4492	4492					
ASDA	3508	3508					
LDA	3508	3508					

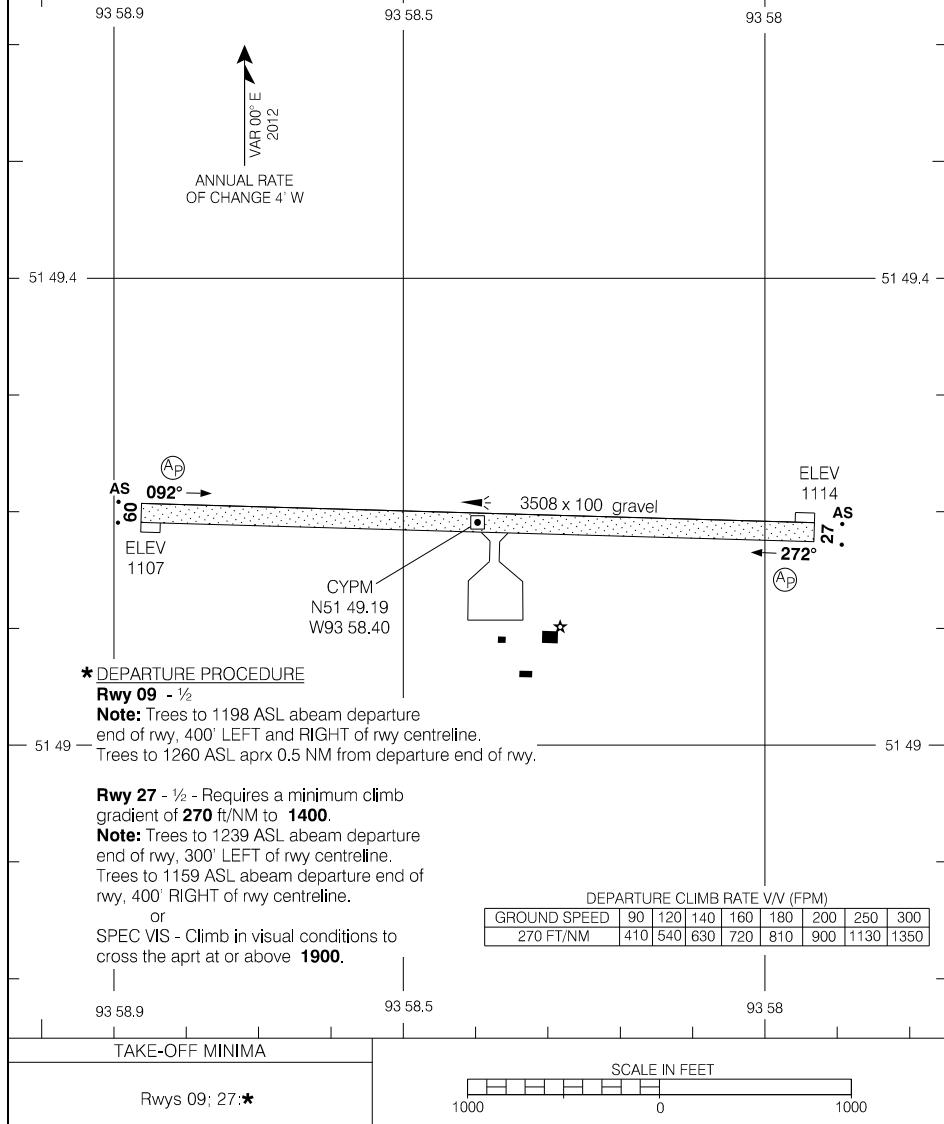


AERODROME CHART

EFF 24 MAR 22

CYPM

CYPM-AD

AERODROME CHART

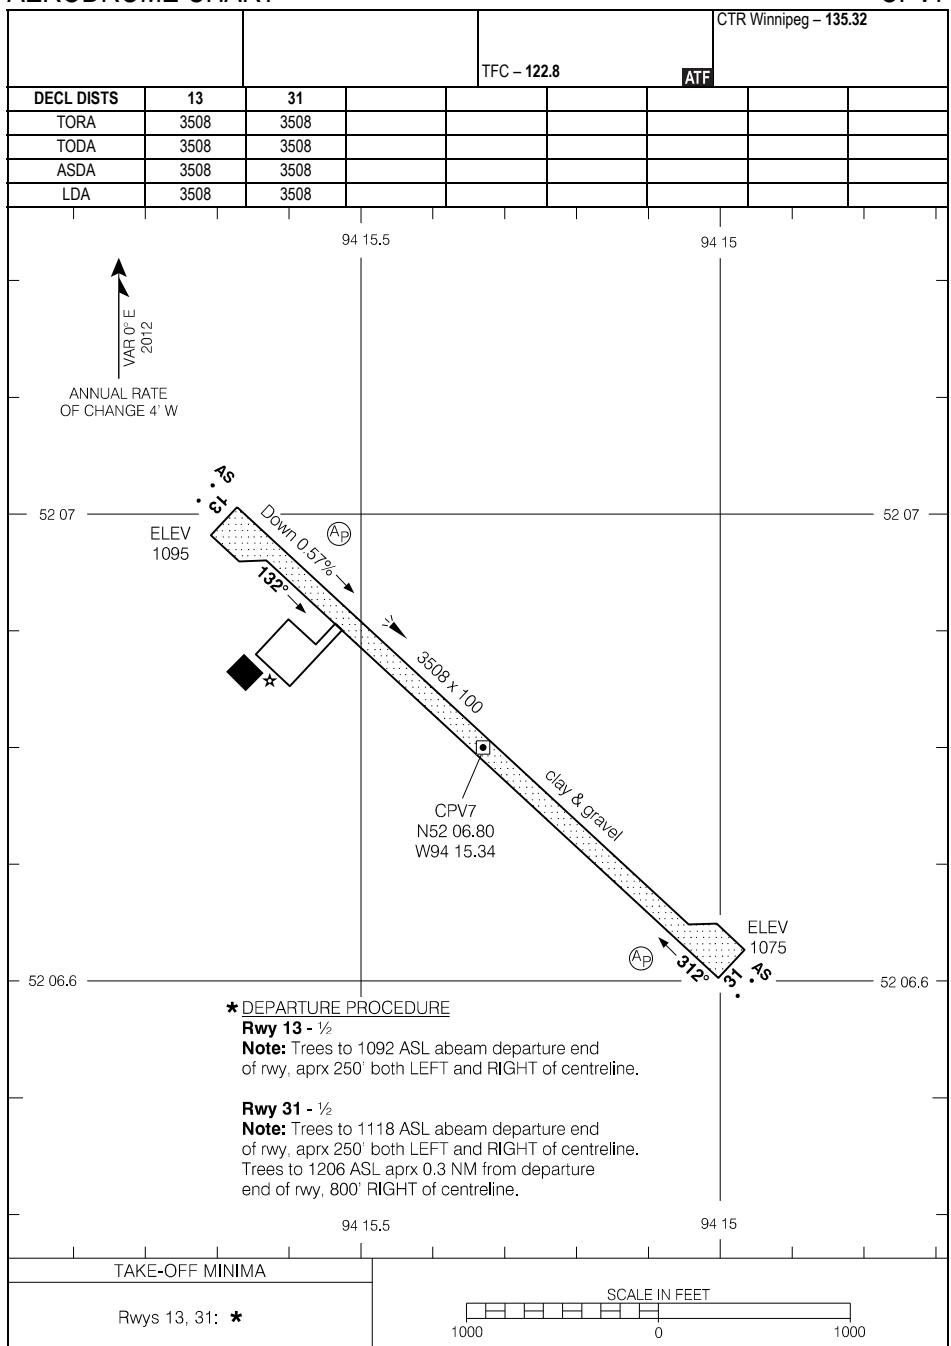

AERODROME CHART


EFF 27 JAN 22

CPV7

CFA2-HP

PORT CARLING/FIG AIR, ON
CFA2

HELIPORT CHART

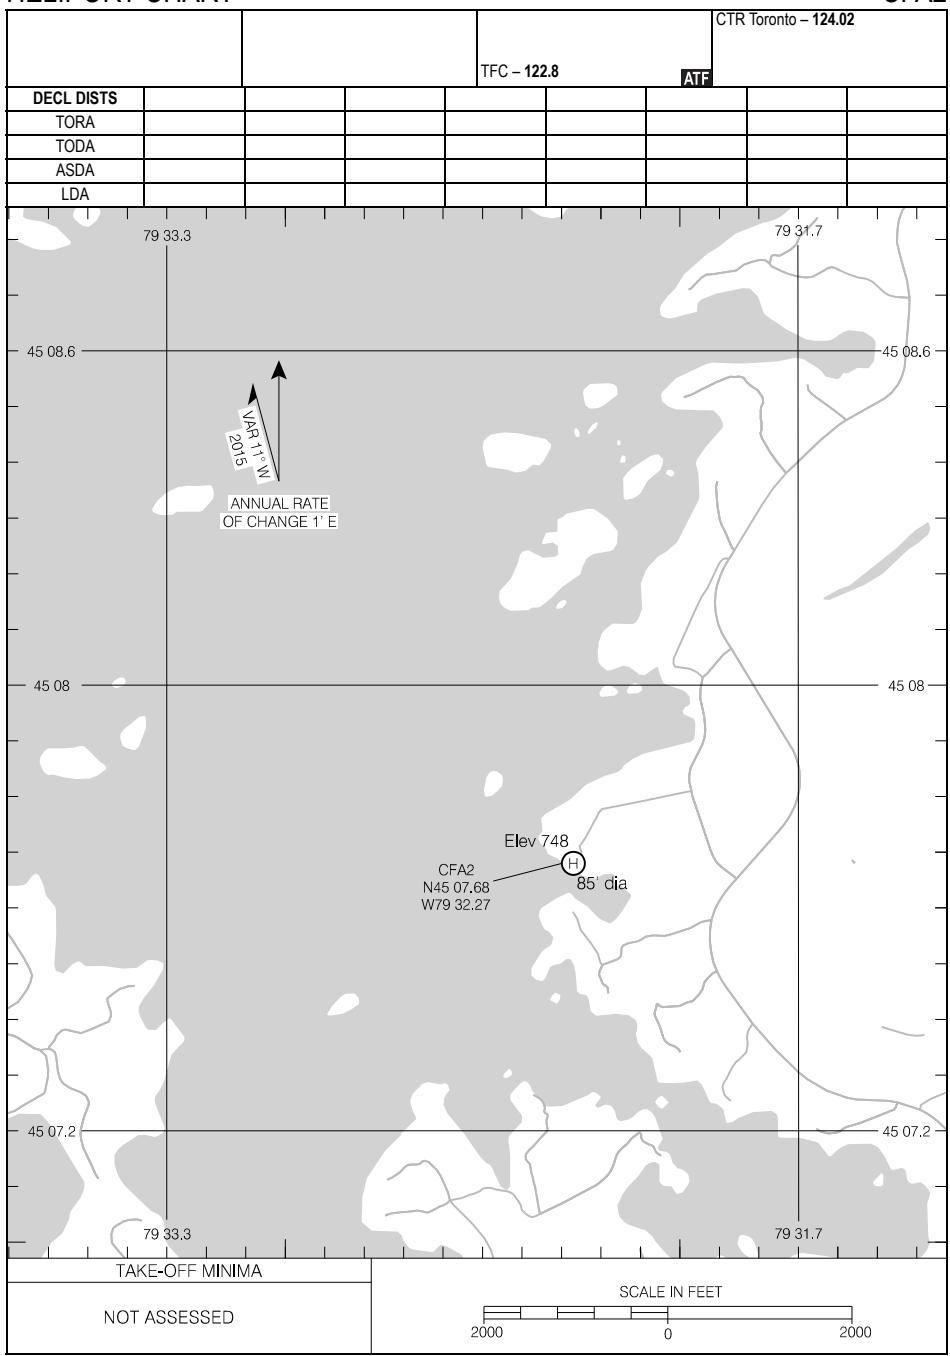

HELIPORT CHART

EFF 16 JUL 20


CFA2

CFA2-HP

CYRL-AD

RED LAKE, ON
CYRL

AERODROME CHART

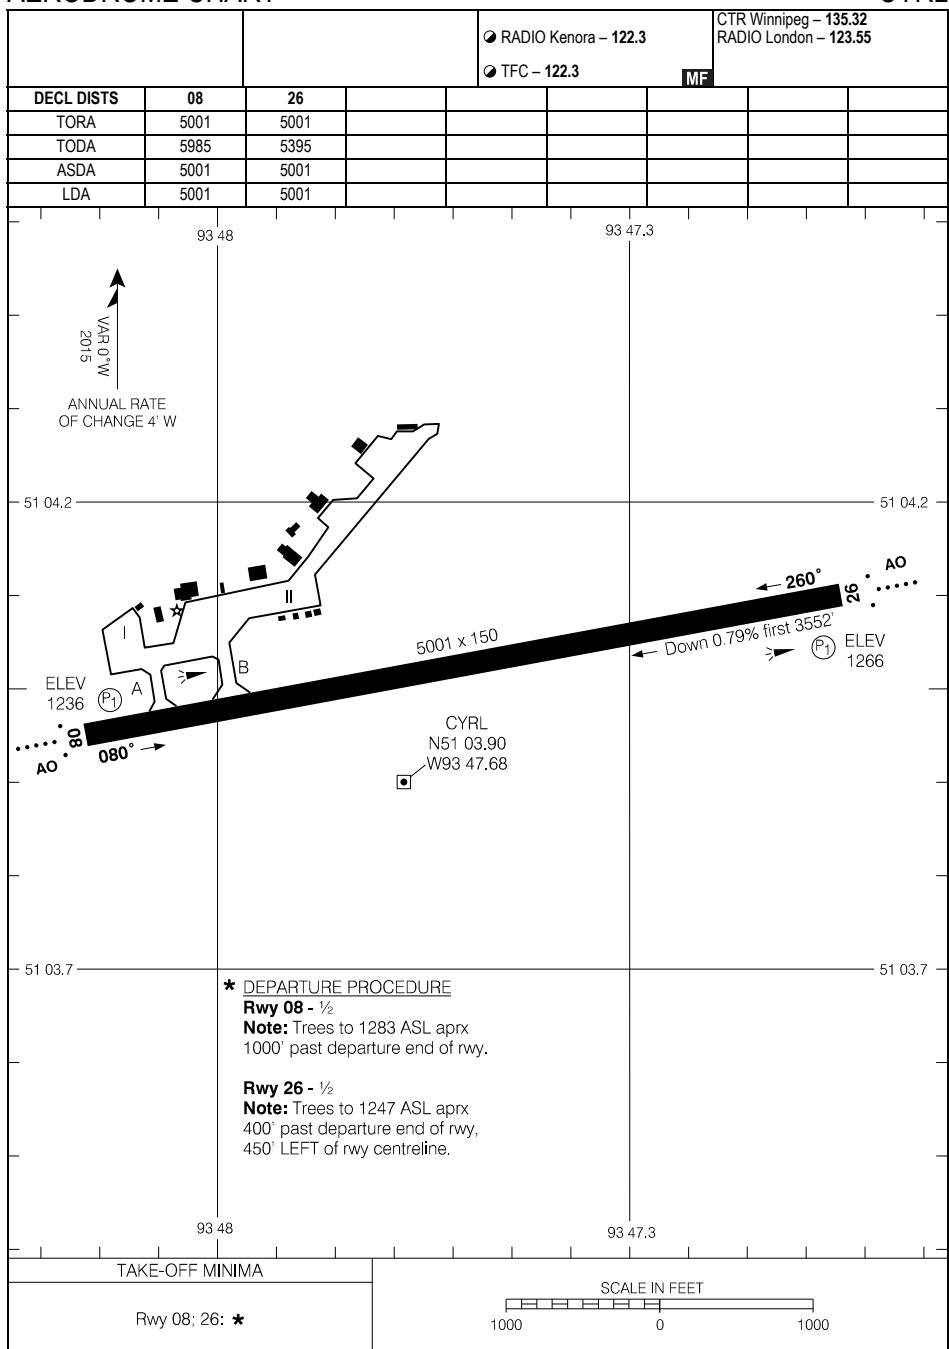

AERODROME CHART

EFF 21 MAR 24


CYRL-AD

CYRL

CZRJ-AD

ROUND LAKE (WEAGAMOW LAKE), ON
CZRJ

AERODROME CHART

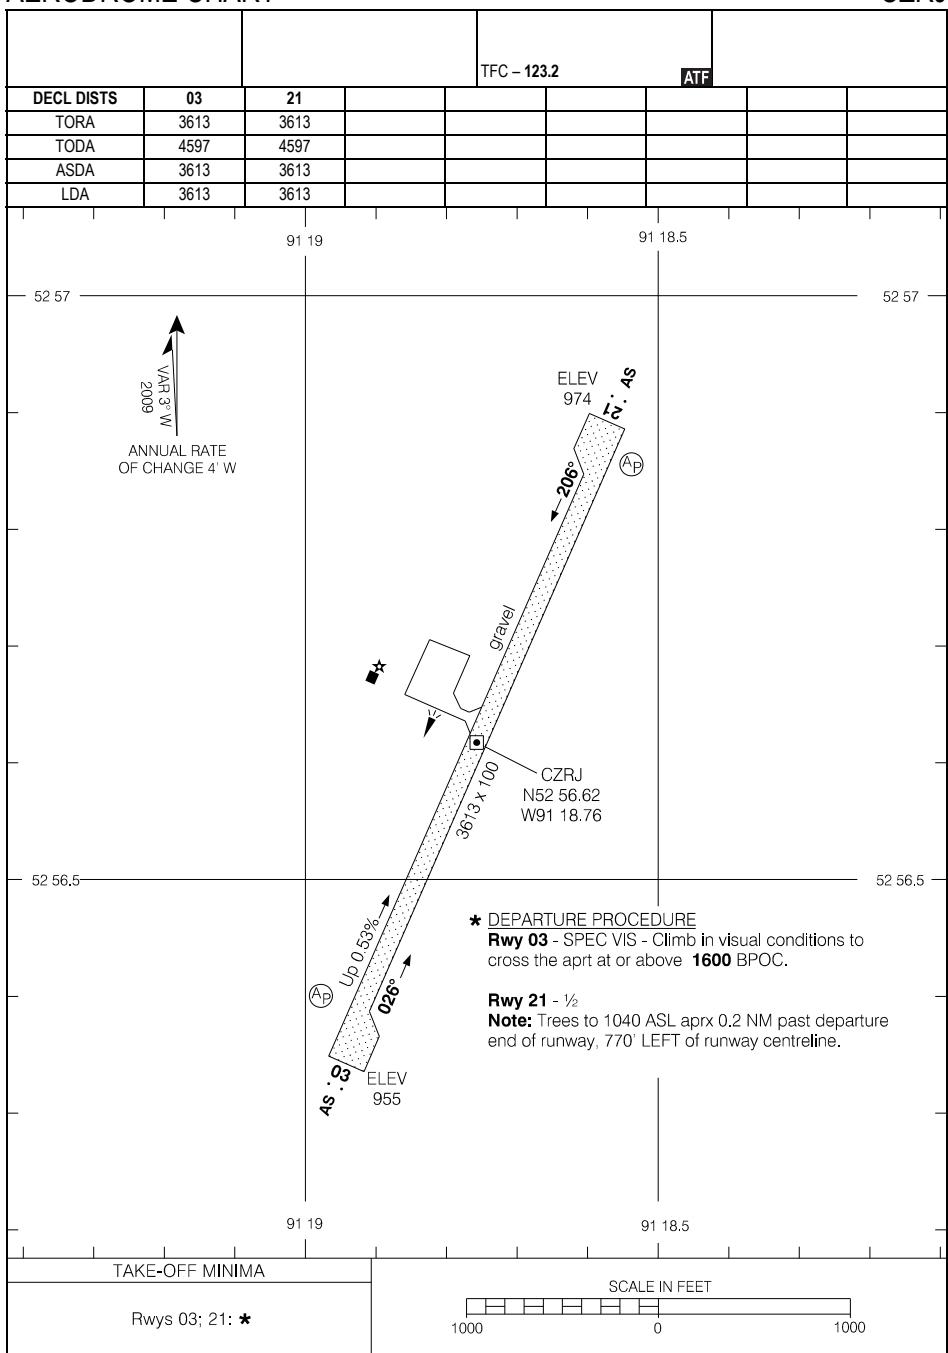

AERODROME CHART

EFF 20 APR 23


CZRJ-AD

CZRJ

CZSJ-AD

SANDY LAKE, ON
CZSJ

AERODROME CHART

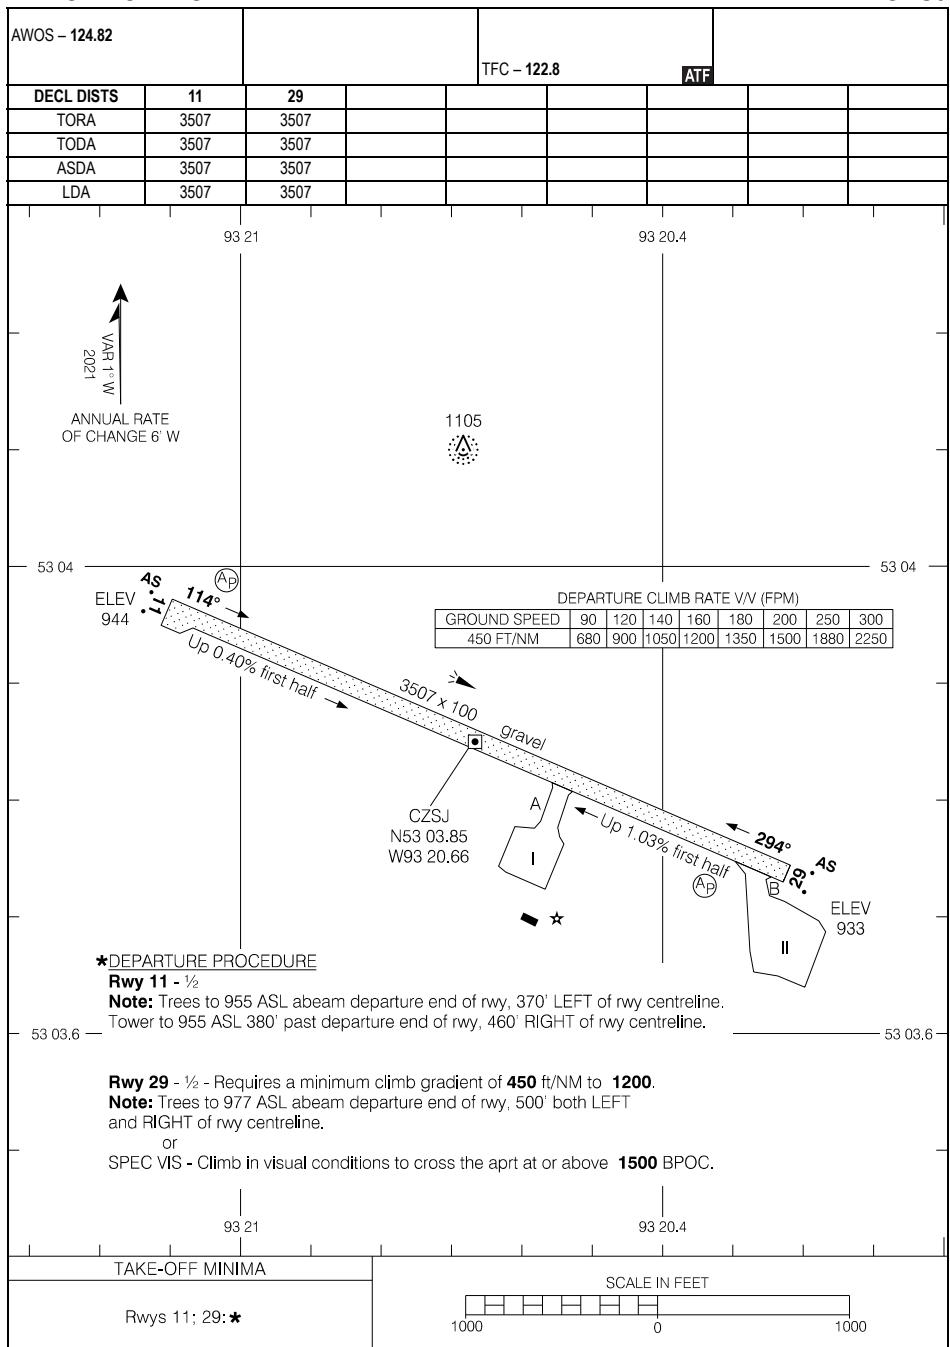

AERODROME CHART

EFF 24 MAR 22

CZSJ

CZSJ-AD

CYRZ-AD

SARNIA (CHRIS HADFIELD), ON
CYZR

AERODROME CHART


AWOS - 119.12

TEC - 123 0

CTR TORONTO = 134.37

DECL DISTS	06	24	15	33	ATF		
TORA	2990	2990	5106	5106			
TODA	3482	3289	6090	5811			
ASDA	2990	2990	5106	5106			
LDA	2990	2990	5106	5106			

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

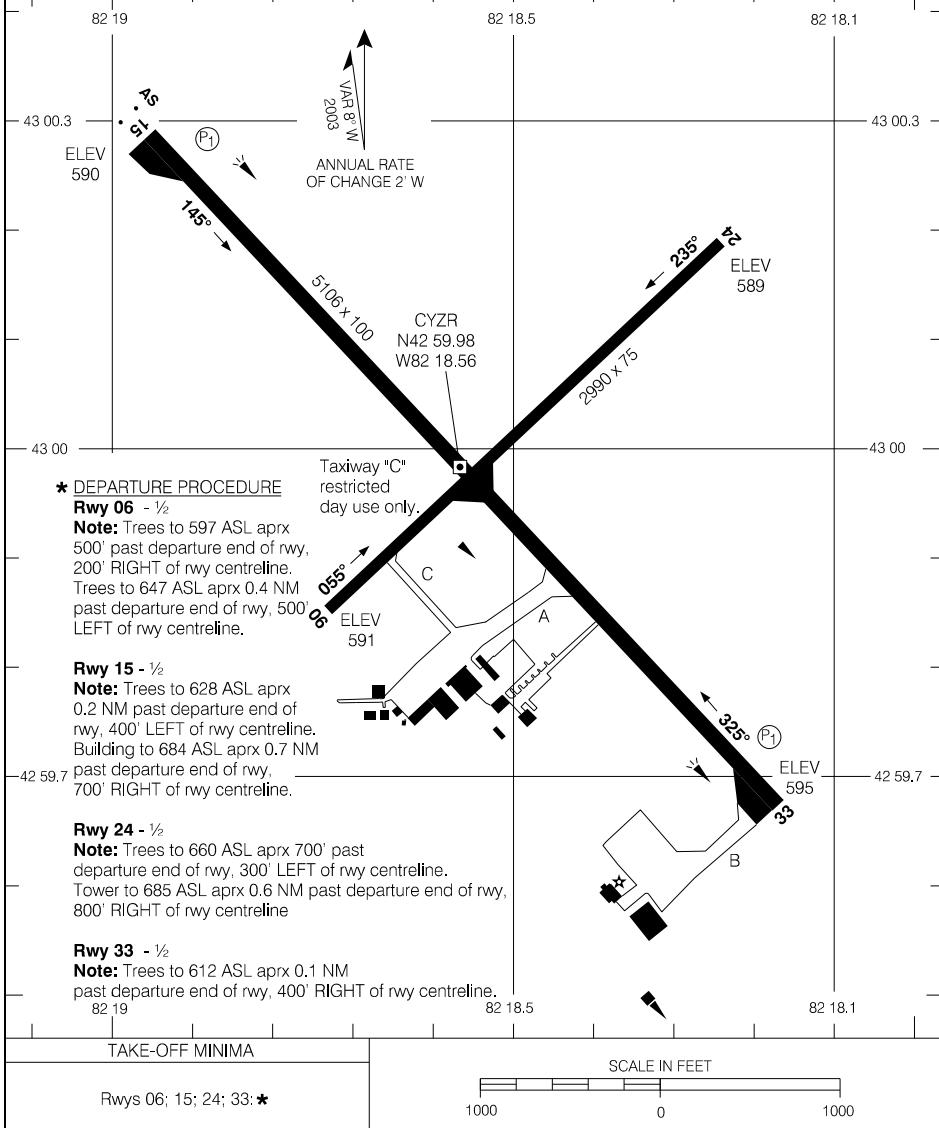

AERODROME CHART

EFF 17 APR 25


CYZR-AD

CYZR

CYAM-AD

SAULT STE. MARIE, ON
CYAM

AERODROME CHART

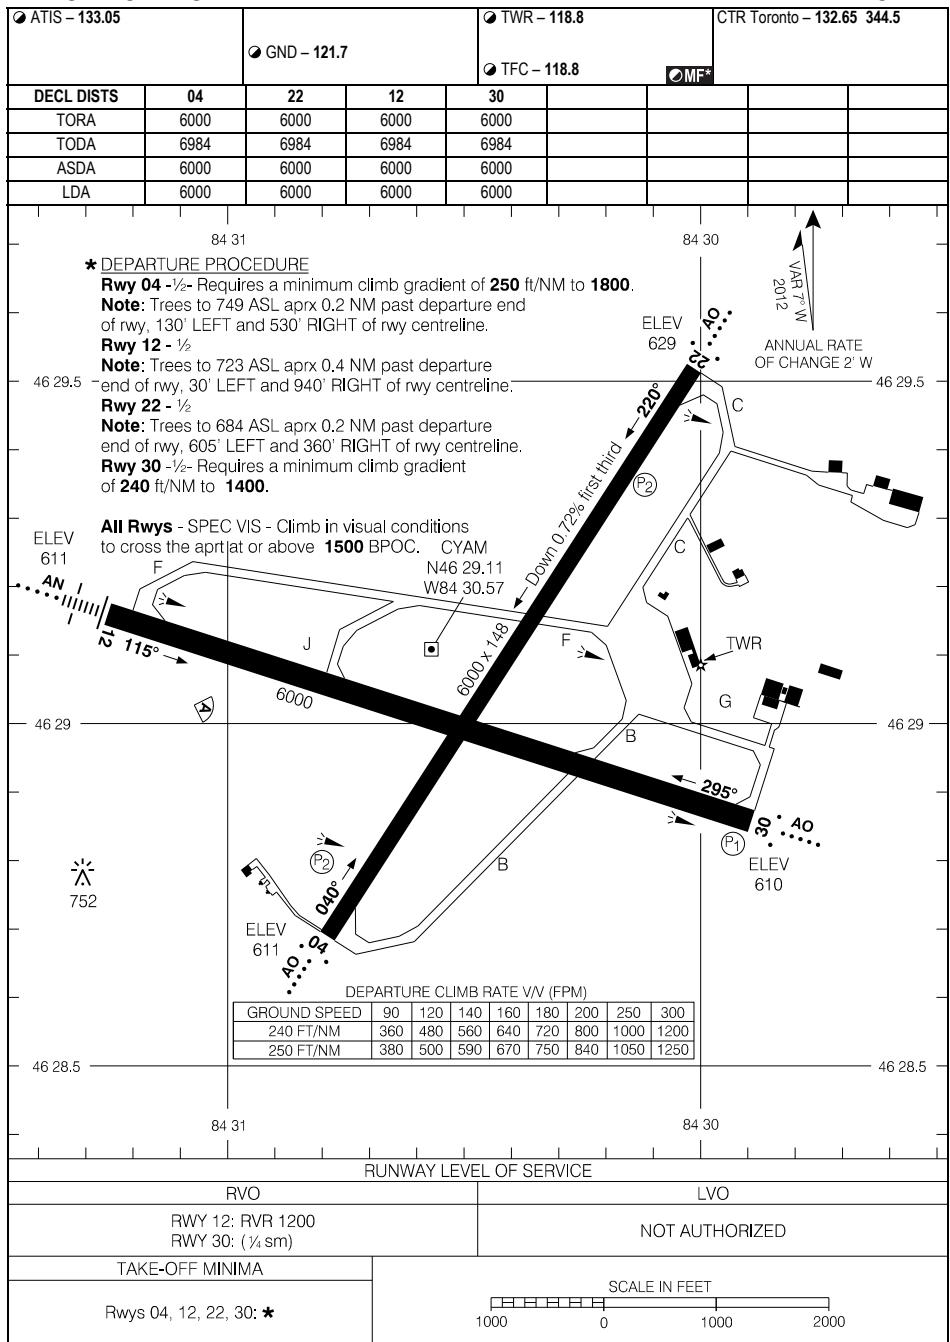

AERODROME CHART

EFF 31 OCT 24

CYAM

CYAM-AD

CYXL-AD

SIOUX LOOKOUT, ON
CYXL

AERODROME CHART


ATIS - 124.75

RADIO - 122.0

1

**CTR Winnipeg – 132.2
RADIO London – 126.0**

DECL DISTS	16	34					WTF
TORA	5300	5300					
TODA	6284	6000					
ASDA	5300	5300					
LDA	5002	5300					

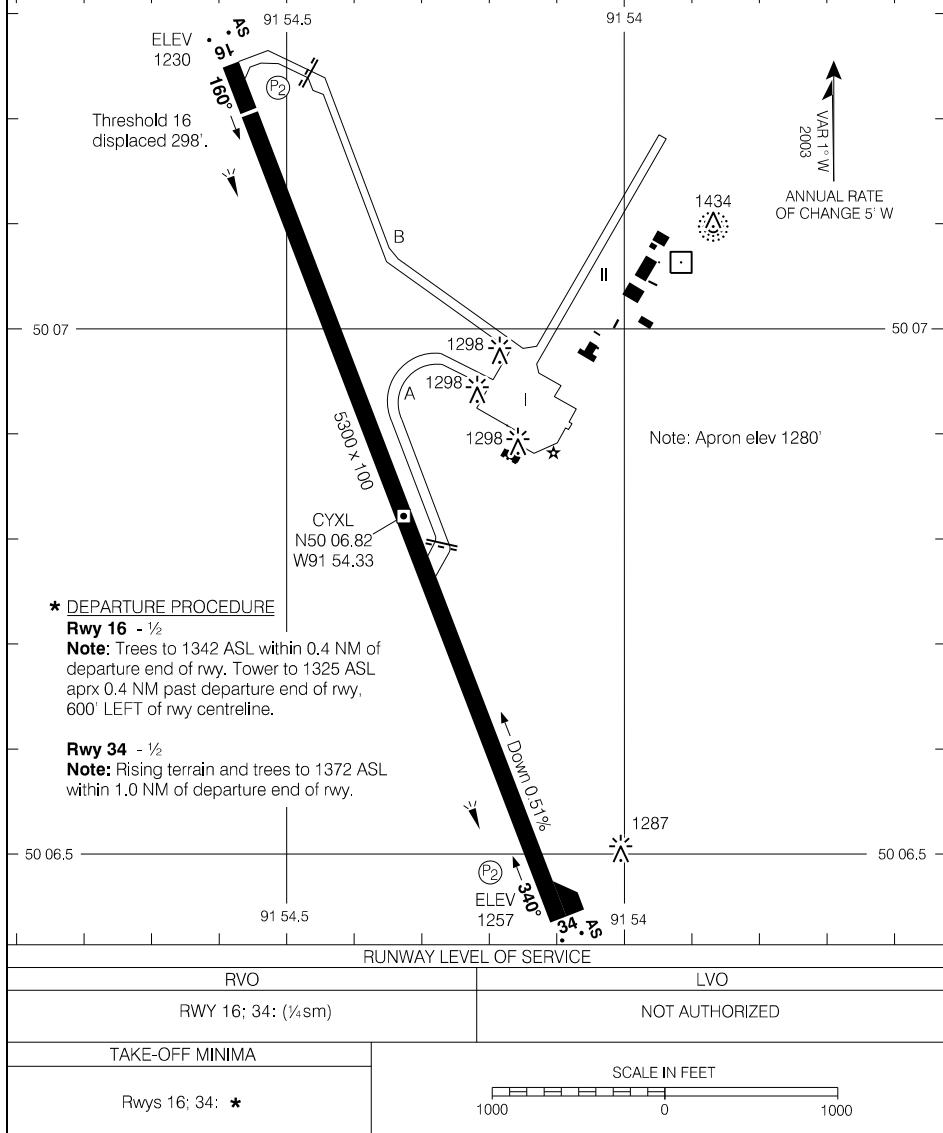

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved


AERODROME CHART

EFF 3 NOV 22

CYXL

CYXL-AD

AERODROME CHART

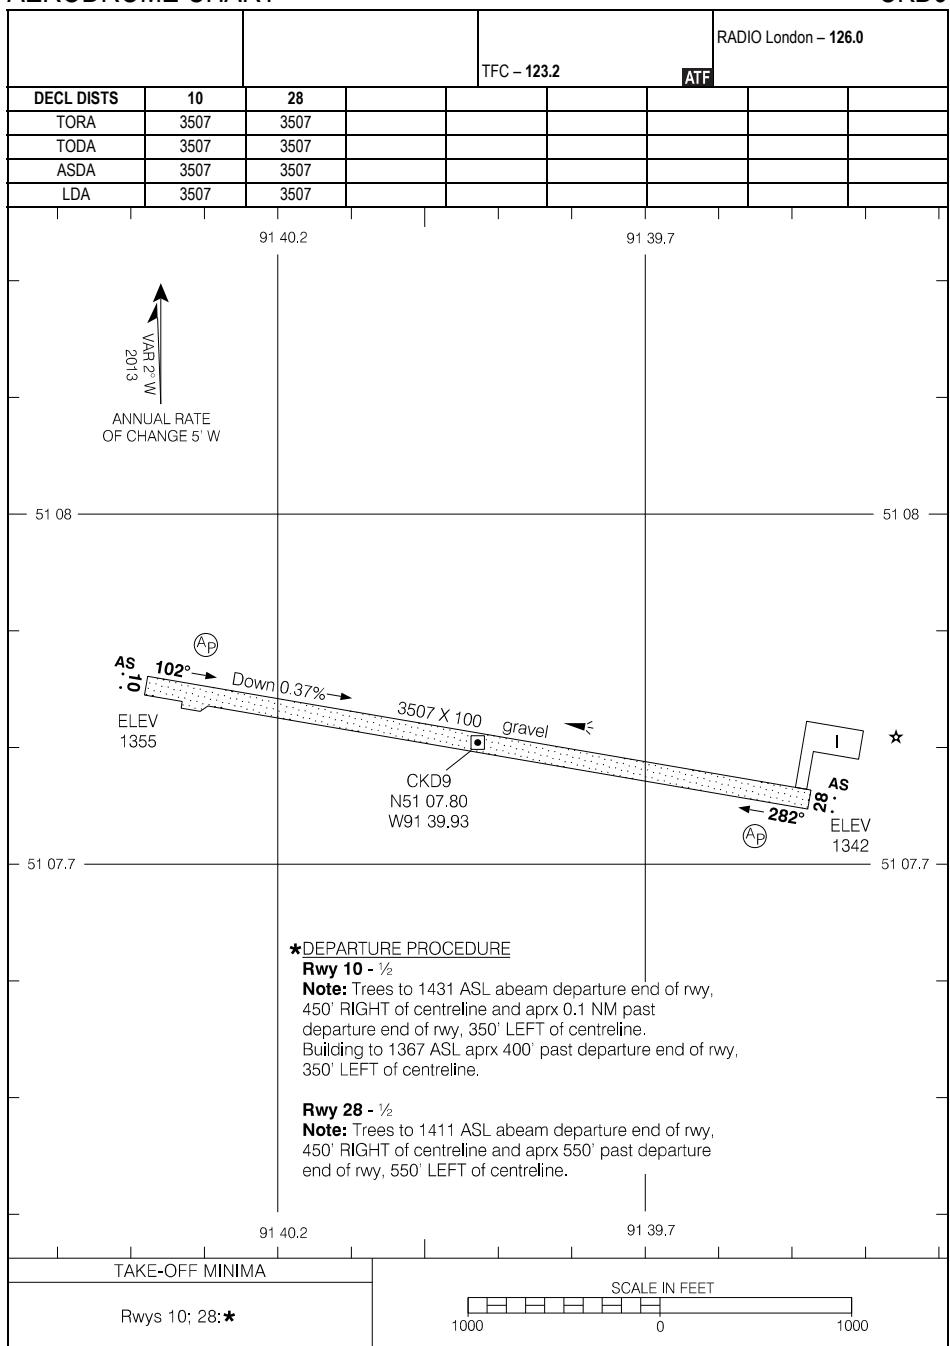

AERODROME CHART

EFF 21 MAR 24


CKD9

CYSN-AD

ST. CATHARINES/NIAGARA DISTRICT, ON
CYSN

AERODROME CHART

● ATIS – 128.52				● RADIO – 123.25		● TFC – 123.25		● MF	CTR Toronto – 133.4 RADIO London – 123.47
DECL DISTS	01	19	06	24	11	29			
TORA	2498	2498	5000	5000	1988	1988			
TODA	2695	3348	5984	5197	2972	2185			
ASDA	2498	2498	5000	5000	1988	1988			
LDA	2498	2498	5000	5000	1988	1988			

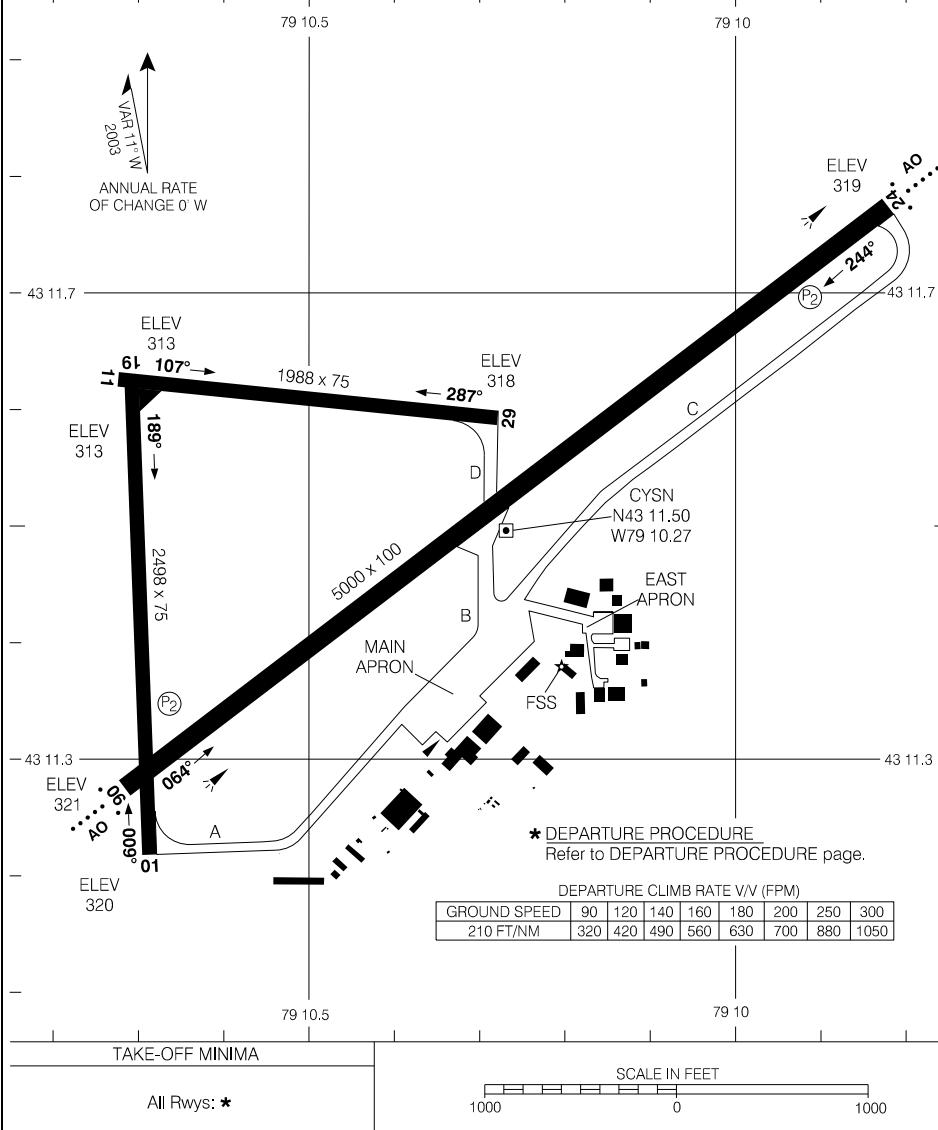

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 12 JUN 25


CYSN

CYSN-AD

CYQS-AD

ST. THOMAS MUNI, ON
CYQS

AERODROME CHART

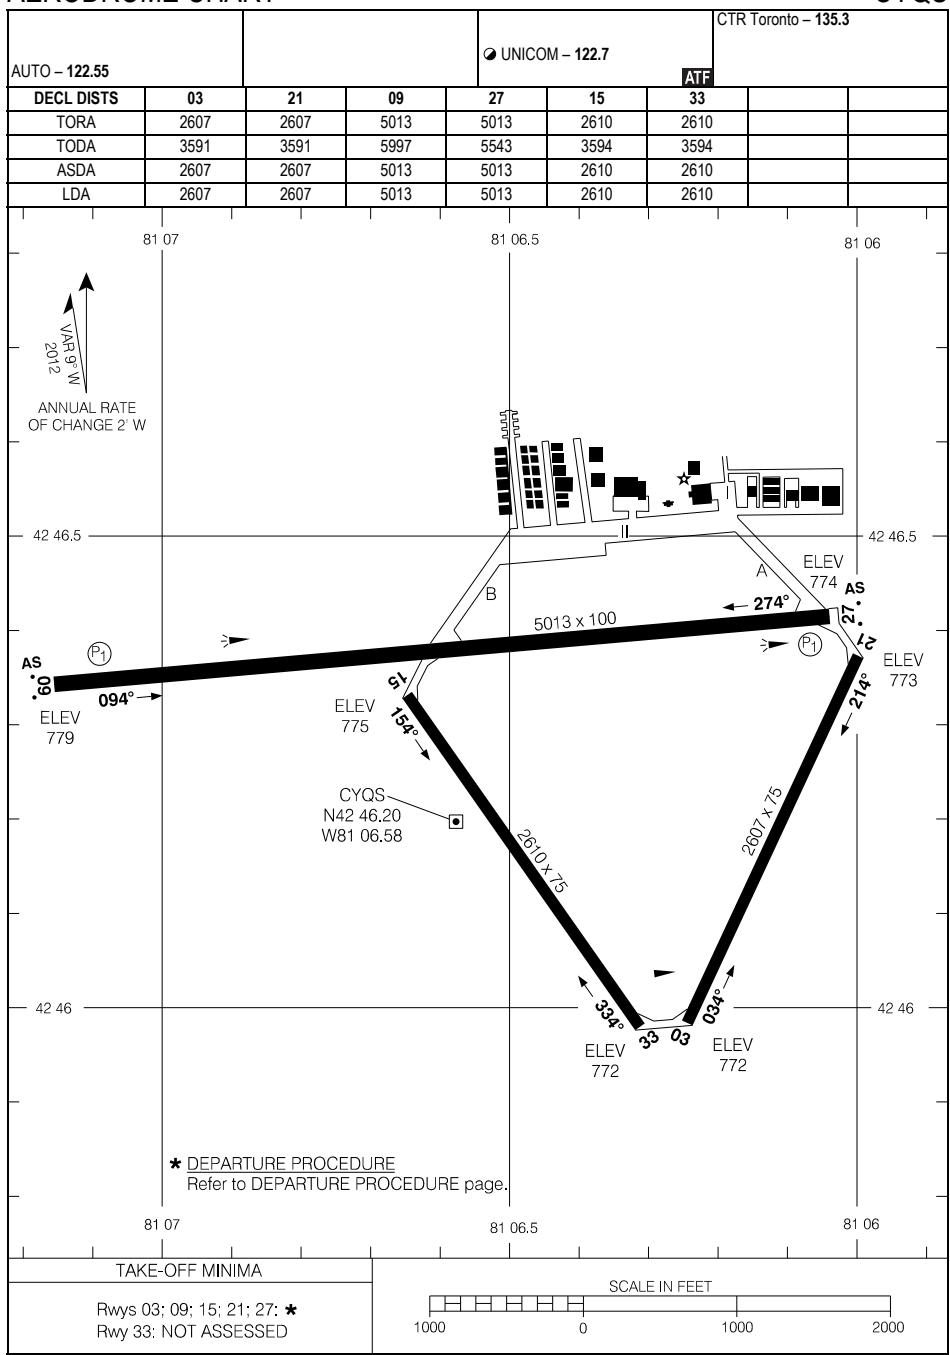

AERODROME CHART

EFF 21 MAR 24


CYQS-AD

CYQS

CYSA-AD

STRATFORD MUNI, ON
CYSA

AERODROME CHART

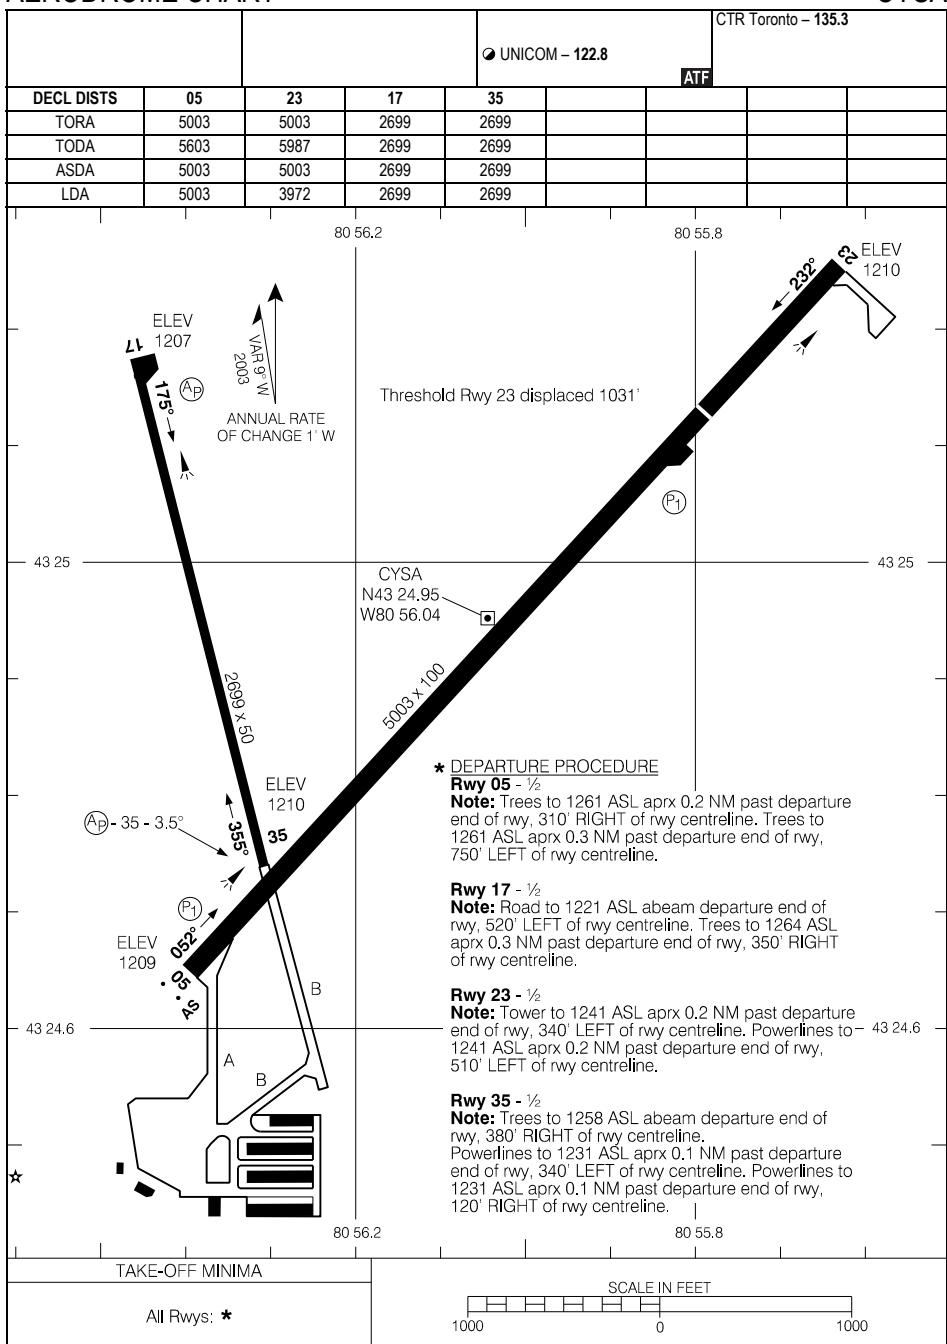

AERODROME CHART


EFF 25 JAN 24

CYSA-AD

CYSA

HELIPORT CHART

CNM3-HP
STURGEON FALLS (WEST NIPISSING GEN HOSPITAL), ON
CNM3

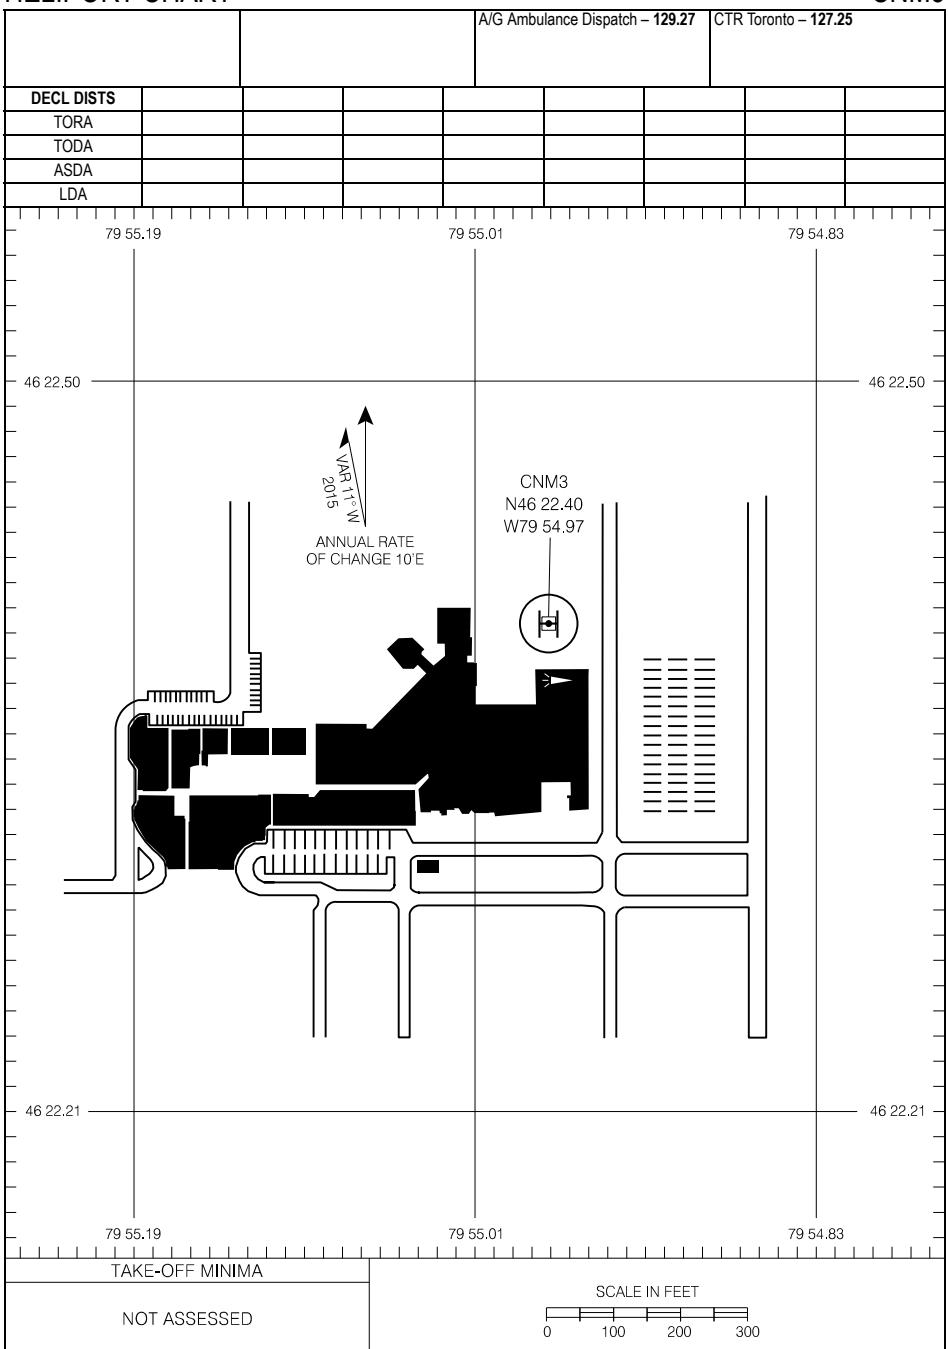

HELIPORT CHART

EFF 5 JAN 17


CNM3-HP

CNM3

CYSB-AD

SUDBURY, ON
CYSB

AERODROME CHART

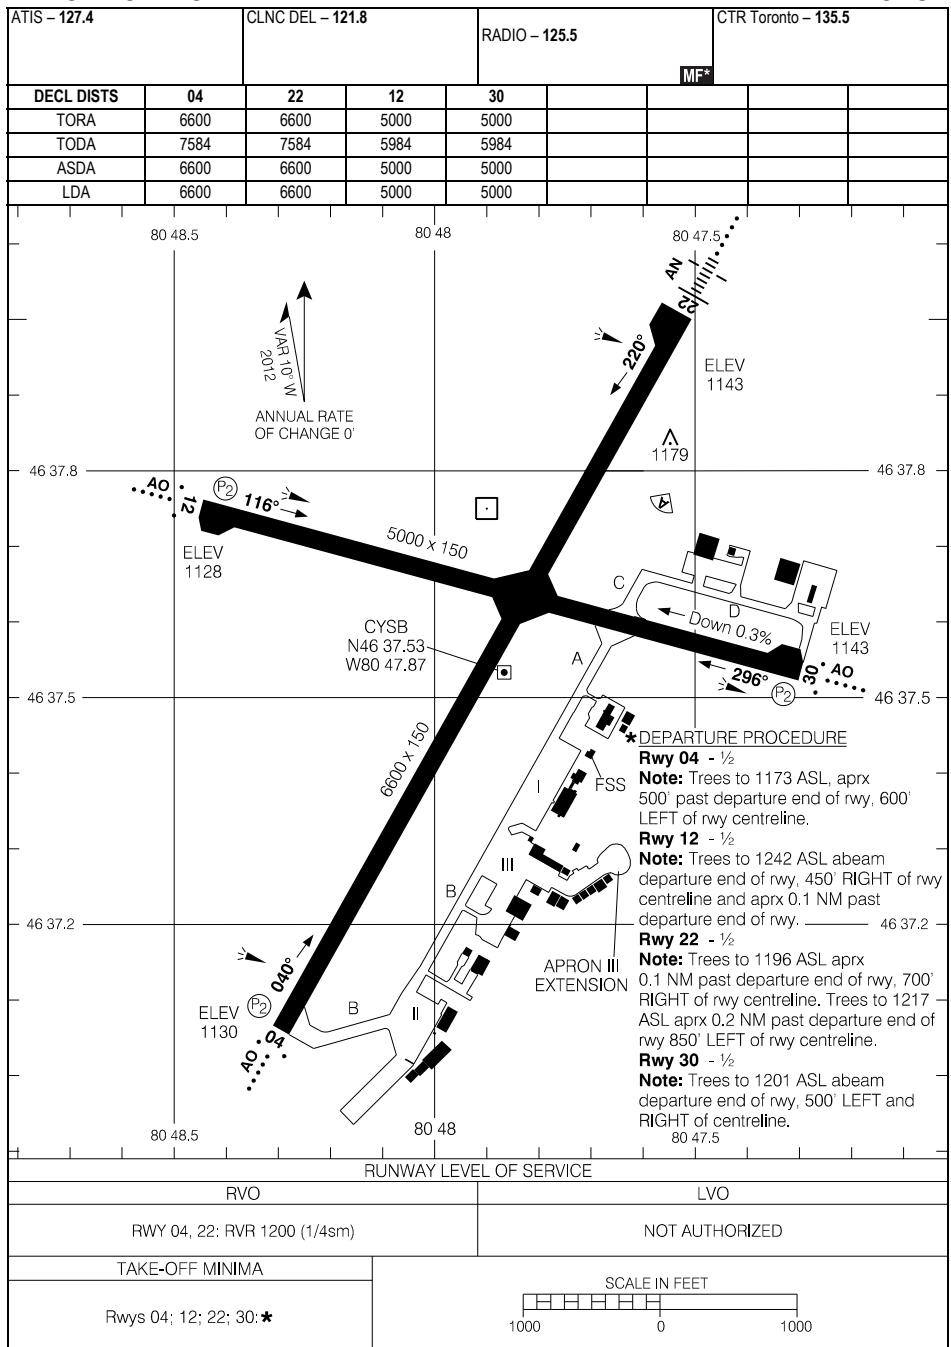


AERODROME CHART

EFF 10 AUG 23

CYSB

CYSB-AD

AERODROME CHART

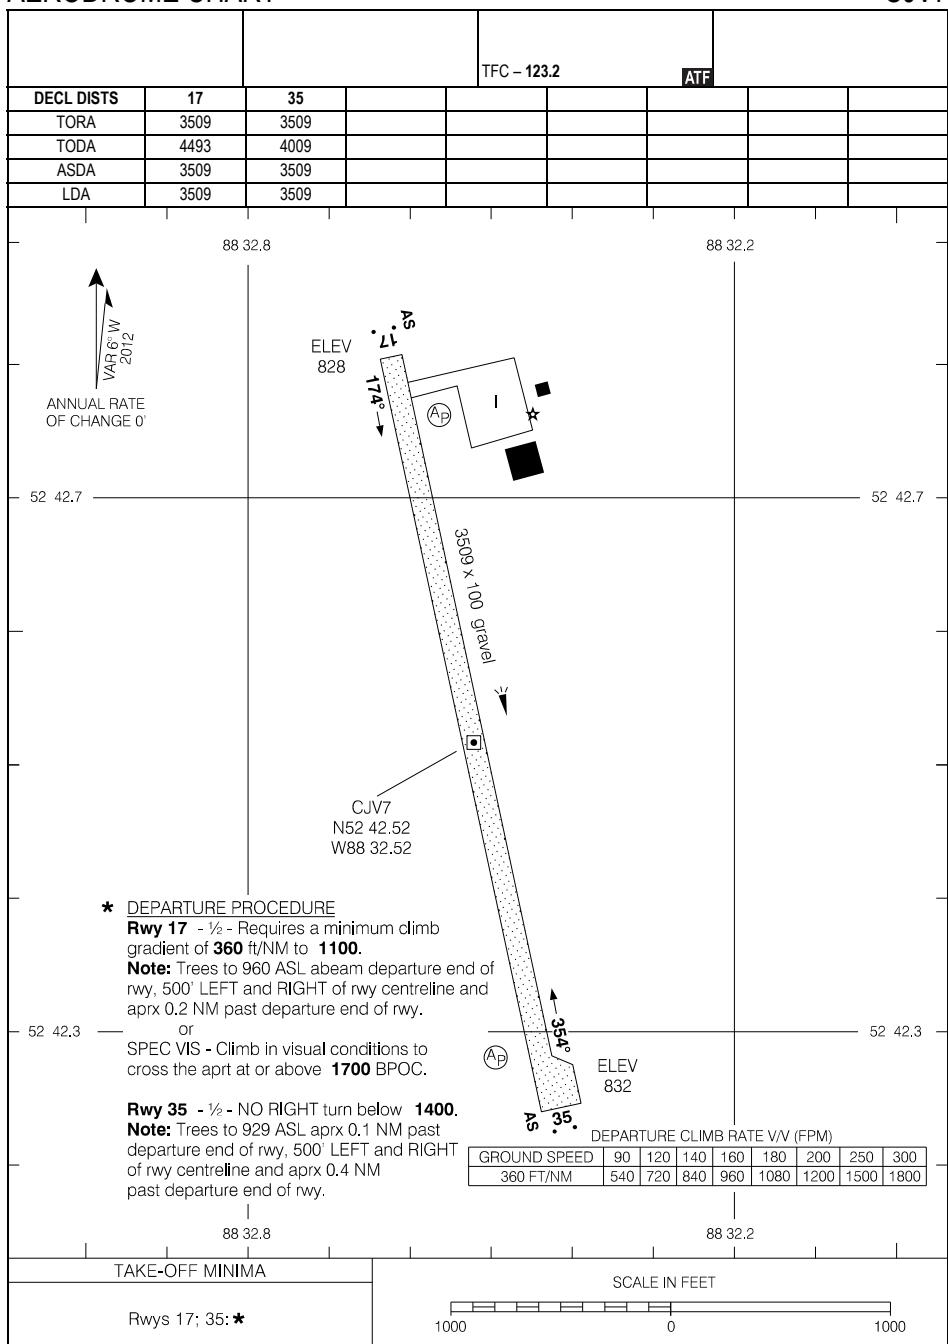


AERODROME CHART

EFF 19 MAY 22

CJV7

PARKING AREAS

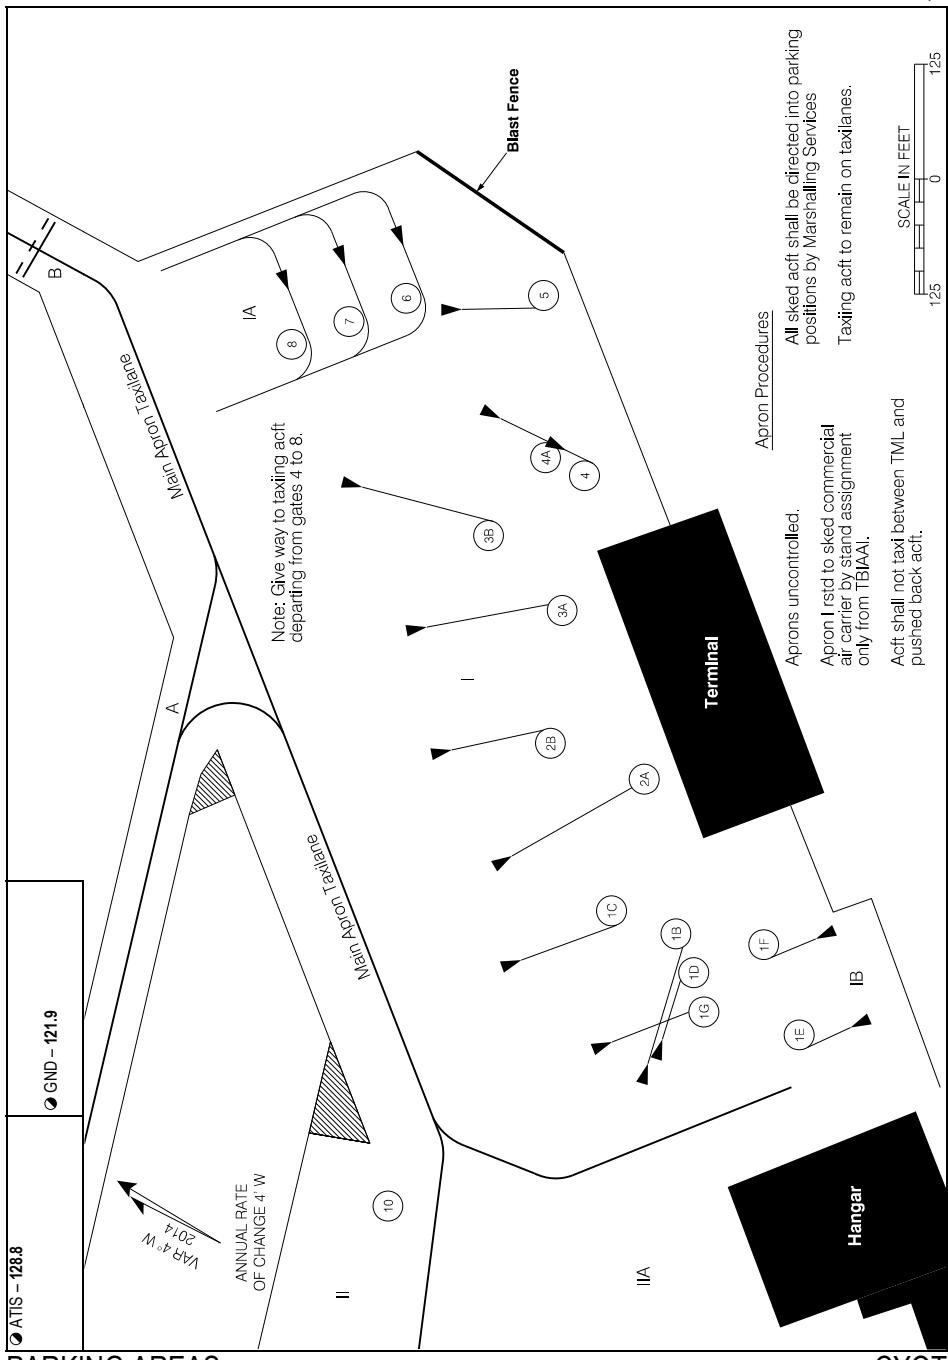

PARKING AREAS

EFF 7 AUG 25

CYQT

PARKING AREAS

Aircraft Parking Position

Position	Coordinates	Position	Coordinates
1B	482217.78N 0891847.56W	3B	482222.20N 0891843.42W
1C	482218.44N 0891847.55W	4	482221.51N 0891841.70W
1D	482217.61N 0891848.07W	4A	482221.84N 0891841.74W
1E	482216.32N 0891848.11W	5	482222.93N 0891840.12W
1F	482217.16N 0891847.16W	6	482224.27N 0891840.57W
1G	482217.34N 0891848.57W	7	482224.68N 0891841.37W
2A	482219.47N 0891846.12W	8	482225.10N 0891842.18W
2B	482220.48N 0891845.78W	10	482219.40N 0891853.46W
3A	482221.25N 0891844.20W		

PARKING AREAS


TILLSONBURG, ON
CYTB

AERODROME CHART

				● UNICOM – 123.0			CTR Toronto – 135.3	
DECL DISTS	02	20	08	26	14	32	ATF	
TORA	2348	2348	5504	5504	2258	2258		
TODA	2348	2348	5504	5504	2258	2258		
ASDA	2348	2348	5504	5504	2258	2258		
LDA	2248	2248	5504	4505	1958	2158		

VAR 9° W
2003

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

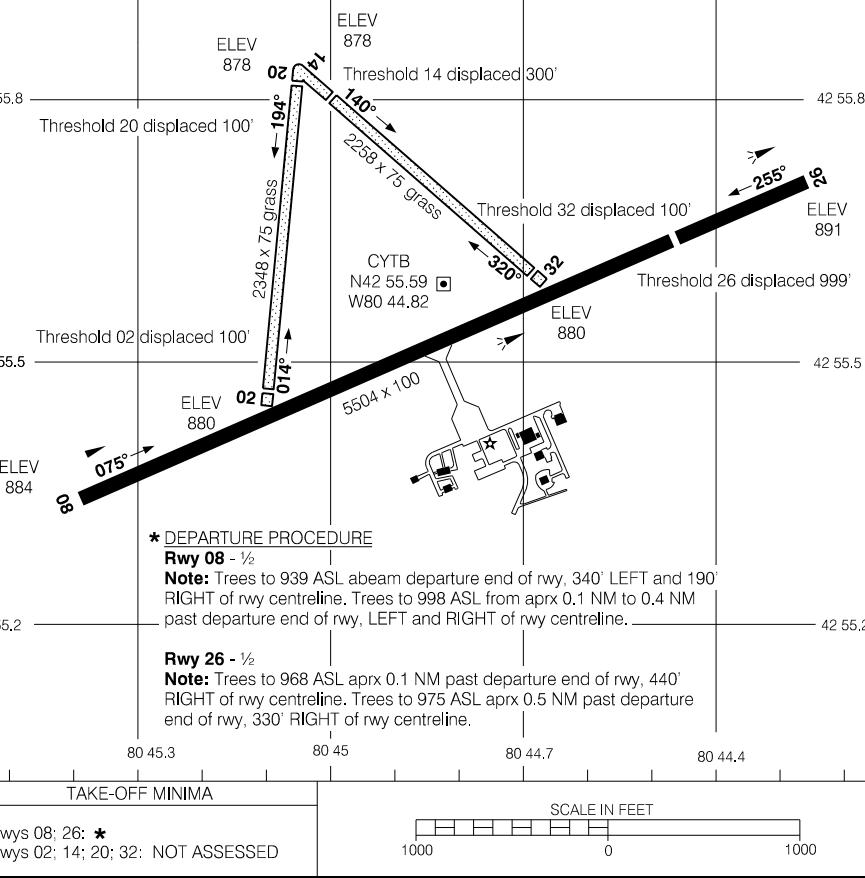

AERODROME CHART

EFF 7 AUG 25

CYTB-AD

CYTB

AERODROME CHART

CYTZ-AD


TORONTO/BILLY BISHOP TORONTO CITY AIRPORT, ON

CYTZ

(● ATIS - 133.6 ● GND - 121.7 ● TWR City - 119.2 118.2 TML Toronto - 133.4)

(● AWOS - 133.6 ● TFC - 118.2 ● ATF*)

DECL DISTS	06	24	08	26			
TORA	2460	2460	3988	3988			
TODA	2460	2910	4338	4338			
ASDA	2460	2460	3988	3988			
LDA	2460	2460	3988	3988			

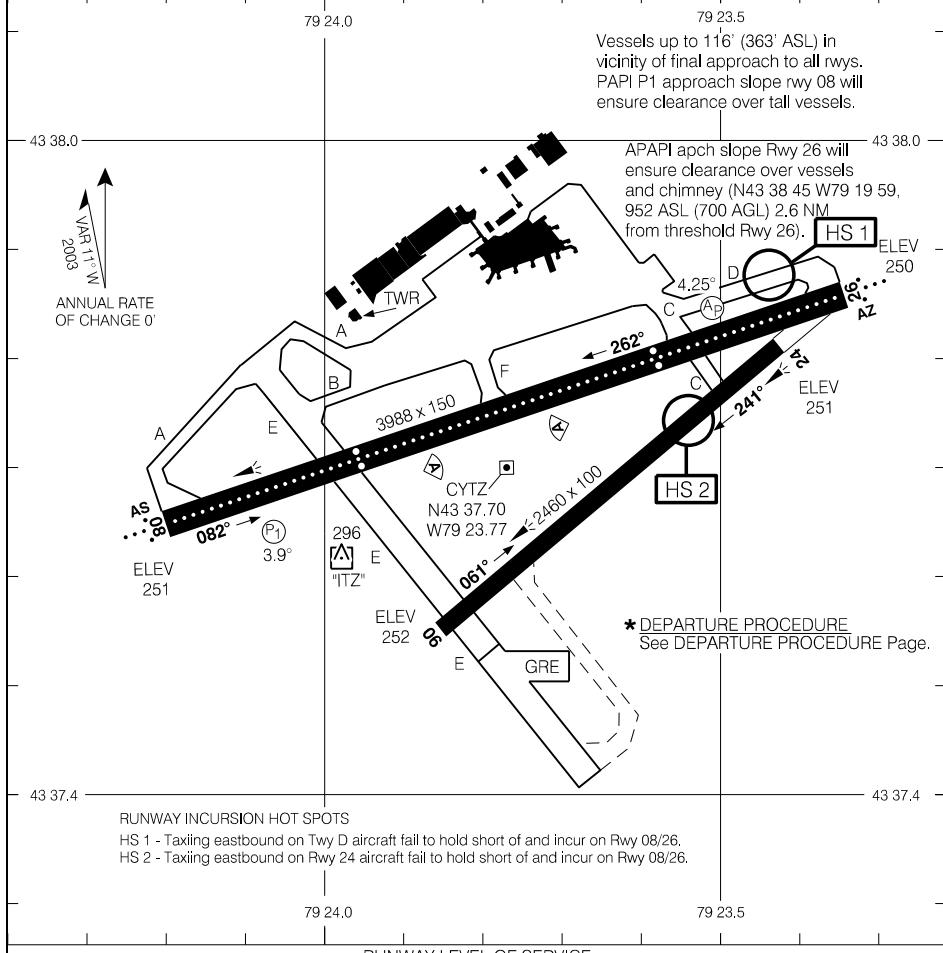

RUNWAY LEVEL OF SERVICE	
RVO	LVO
RWY 08, 26: RVR 1200	NOT AUTHORIZED
TAKE-OFF MINIMA	
Rwys 08, 24, 26: *	SCALE IN FEET
Rwys 06: NOT ASSESSED	1000 0 1000


AERODROME CHART

EFF 17 APR 25

CYTZ-AD

CYTZ

AERODROME CHART

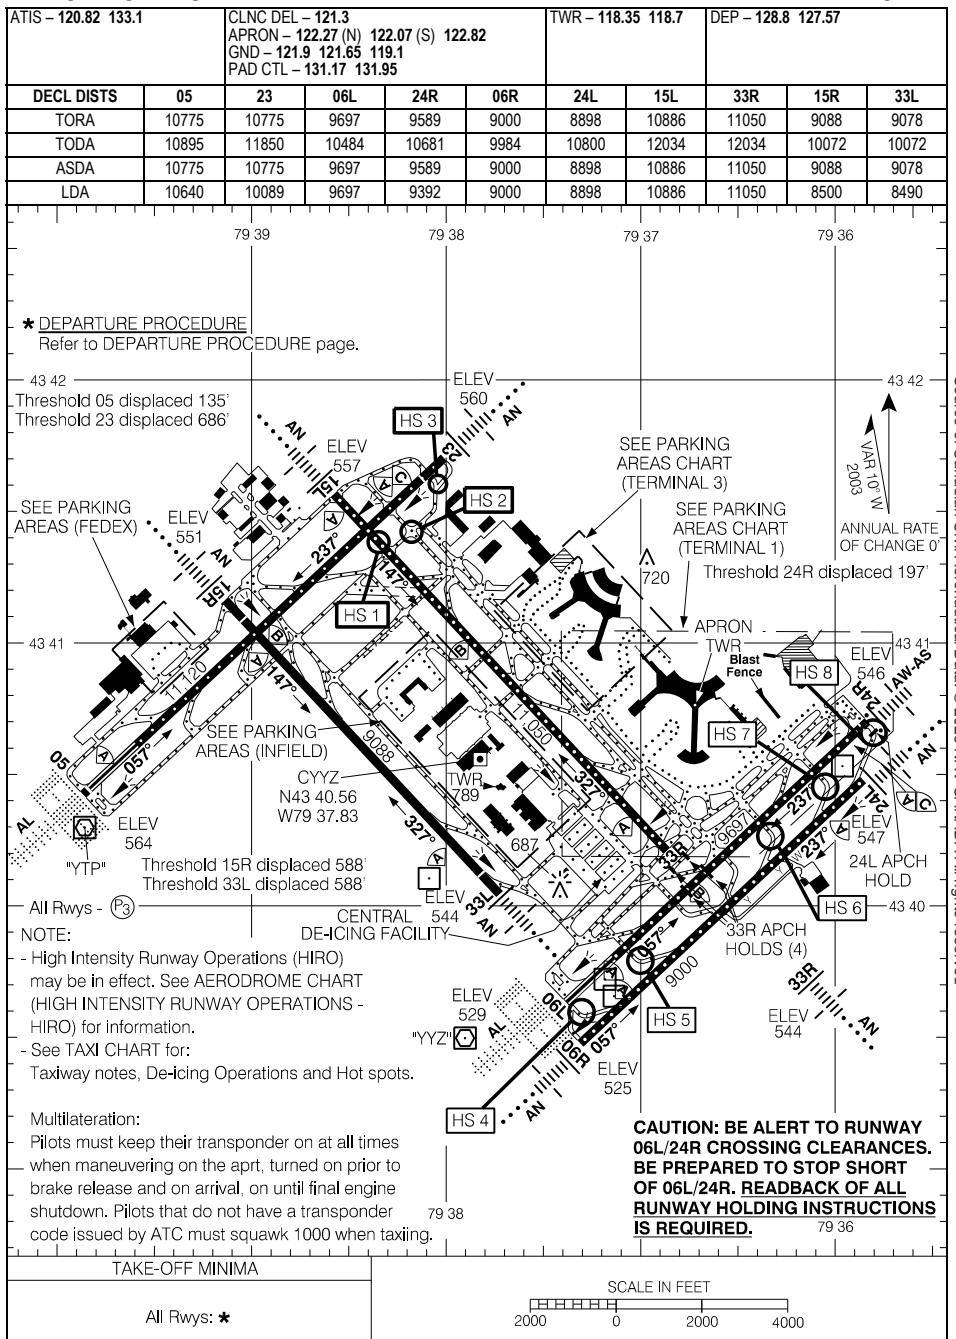

AERODROME CHART

EFF 16 MAY 24

LDA for High Intensity Runway Operations				
From threshold rwy:	To exit point	LDA in ft	Preferred exit for med/heavy jet transport	Preferred exit for prop/turboprop transport
05	15R F P H3 15L B	5030 5630 6570 6670 8536 9278	H3	H3
06L	C1 C3	4790 6797	C3	C1
06R	D1 D3 D5	4424 5682 7483	D3 D5	D1
15L	B4 R S B1 B3	4050 5118 6154 6500 8250	B1 B3	B1
15R	F1	6276	F1	F1
23	H3 P F 15R H2 H4 J2	3427 3516 4449 5064 5176 6593 7577	H2 H4	H2
24L	D2 D4 D8	4061 5682 7883	D4 D8	D2
24R	C2 C4	5090 6984	C2 C4	C2
33L	F2 F4 H 05	4860 6060 6680 7424	F2 F4	F2
33R	B3 B1 S/B2 R B4 H 23	2805 4550 4895 5920 6994 9160 9900	B2 B4	B2

AERODROME CHART (REDUCED TAKE-OFF RUNS)

When authorized by ATC, intersection departures are available as follows:

RUNWAY	INTERSECTION	RUNWAY REMAINING
05	J2 H4 H6	8120 7129 10512
06L	D4 C4	7763 7182
06R	D8 D4 Y	7883 5682 4401
15L	H N B4	8996 7766 6841
15R	H F4	7270 6633
23	H/J B	10246 9058
24L	D5 Y W	7381 4753 6567
24R	D5 C3	7973 6693
33L	F1	6854
33R	V T B3	10669 9219 8251

Departures from holding bay inner centerlines rwy 06L/D6, 24R/C5 and 05/H6
 subtract 263' from declared distances.

AERODROME CHART (REDUCED TAKE-OFF RUNS)

EFF 3 NOV 22

ADVISORY CHART

ATIS - 120.82 133.1

CLNC DEL - 121.3
APRON - 122.27 (N) 122.07 (S) 122.82
GND - 121.9 121.65 119.1
PAD CTL - 131.17 131.95

TWR - 118.35 118.7

CYYZ

A diagram consisting of two vectors originating from the same point. The first vector points upwards and to the left, labeled "VAR 10° W" above it and "2003" below it. The second vector points upwards and to the right, labeled "ANNUAL RATE" below it.

ANNUAL RATE
OF CHANGE (%)


**CAUTION: BE ALERT TO RUNWAY
06L/24R CROSSING CLEARANCES.
BE PREPARED TO STOP SHORT
OF 06L/24R. READBACK OF ALL
RUNWAY HOLDING INSTRUCTIONS
IS REQUIRED.**

- * See TAXI CHART for:
Taxiway notes, De-icing
operations and Hot Spots

NOTE

Multilateration

Pilots must keep their transponder on at all times when maneuvering on the aprt, turned on prior to brake release and on arrival, on until final engine shutdown. Pilots that do not have a transponder code issued by ATC must squawk 1000 when taxiing.

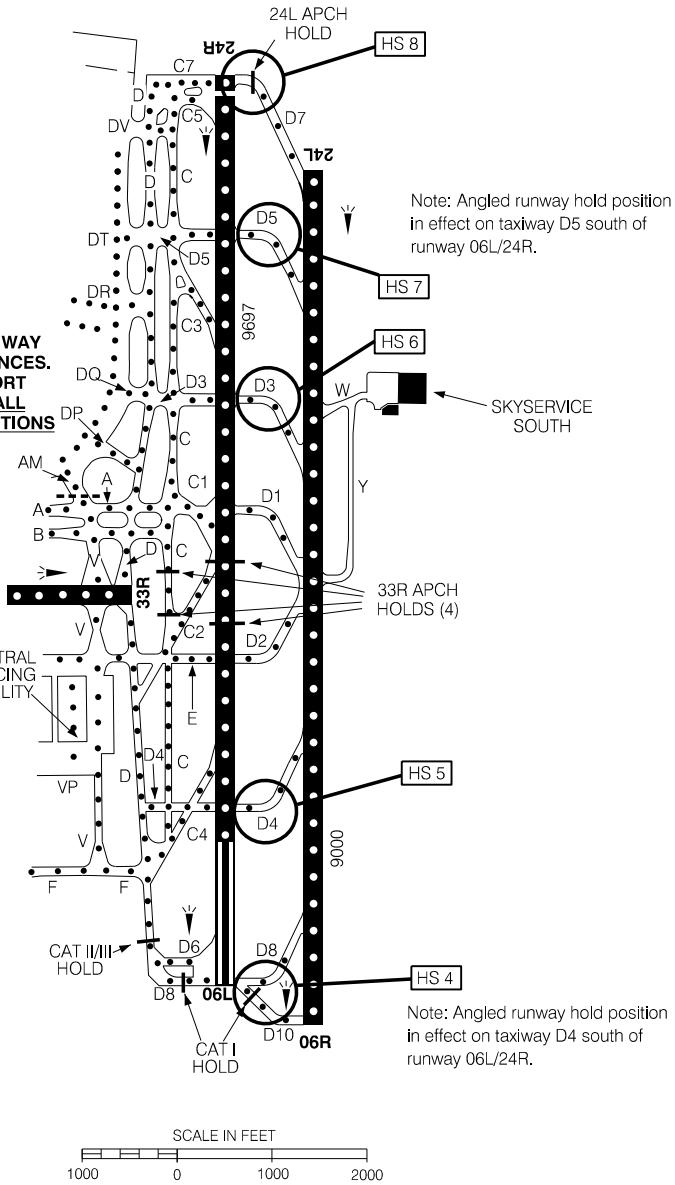

ADVISORY CHART

TAXI CHART**Notes**

Twy "K" is uncontrolled and is restricted to aircraft with wingspans of 41.15m/135ft (B757W) or less and an Aircraft Load Rating of 9.0 or less. Other aircraft may be authorized with prior approval from operator (416) 776-3056.

Discretionary oversteering required for aircraft with wingspans 38m/124ft (B757) or greater:

- Rwy 06L onto "E", "D3" and "D5".
- Rwy 24R onto "D3", "E", "D4" and "D10/D8 southbound".

A340-500/600, A350-900/1000, B777-300, and A380 discretionary oversteering required at all intersections.

Specific aircraft operations plan in effect for aircraft with wingspans 65m/214ft up to 79.9m/262ft. Restrictions in place include;

- No holding short of Runway 06L/24R after exit from Runway 06R/24L.
- Aircraft (as defined above) operations on any parallel taxiway system, such as Alpha-Bravo, Charlie-Delta, or Delta-Victor (Alpha to Echo), restrict operations on adjacent taxiway to aircraft with wingspans less than 36m.
- Strict adherence to taxiway centre line is required all times.
- Discretionary oversteering is required at all intersections.
- No taxiing on apron taxi lane between AJ and AK (between gates C31-C34).
- No taxiing on apron taxi lane between AJ and AT (between gates B15-B18).
- No turns from twy E onto CDF Pads 1 through 6.
- When aircraft on taxilane 5S, strict adherence to centreline. Taxilane 5 between 5A and 5D closed. Taxilane 6 between 6A and 6C closed, remainder of taxilane 6 restricted to aircraft with wingspan less than 36m/118'. Simultaneous use of taxilane 7 & 8, max span 64.9m/213'.
- No taxiing on twy D between twy D4 and twy E.
- No taxiing on twy B between rwy 05/23 and twy J.
- When aircraft taxiing within Holding Bays rwys 06L/24R/05, adjacent parallel taxilane restricted to aircraft with wingspans less than 36m.
- Tow only authorized onto parking stands H1 and H10.

While taxiing on twy V (Pad 1) and twy T (Pad 5) through the CDF strict adherence to the centreline is required. When in contact with ATC use Centre Lane. When in contact with Pad Control or Iceman, use assigned Lane. Pad 1 (twy V) and Pad 5 (twy T) Centre Lane will accommodate aircraft with wingspans 79.9m/261ft and smaller. Aircraft with wingspans less than 36m may use North/South Lanes.

TAXI CHART

EFF 30 NOV 23

CYYZ

TAXI CHART

Hot Spots

Note: HS 4 to 8 - Short distance between parallel runways. Manage your taxi speed. Expect to hold short of parallel runway.

HS 1 – Taxiing northbound on rwy 33R aircraft fail to hold short of and incur on rwy 05/23.

HS 2 – Taxiing northbound on twy B aircraft miss turn onto twy H and incur on rwy 05/23.

HS 3 – Taxiing eastbound on twy H aircraft continue onto twy Q and incur on rwy 23.

HS 4 – Exiting rwy 24L onto twy D8 aircraft fail to hold short of and incur on rwy 06L/24R.

HS 5 – Exiting rwy 24L onto twy D4 aircraft fail to hold short of and incur on rwy 06L/24R.

Note: Angled rwy hold position in effect on twy D4 south of rwy 06L/24R.

HS 6 – Exiting rwy 06R onto twy D3 aircraft fail to hold short of and incur on rwy 06L/24R.

HS 7 – Exiting rwy 06R onto twy D5 aircraft fail to hold short of and incur on rwy 06L/24R.

Note: Angled rwy hold position in effect on twy D5 south of rwy 06L/24R.

HS 8 – Taxiing southbound on twy D7 aircraft fail to hold short of the 24L approach hold line and incur on rwy 06R/24L.

TAXI CHART

EFF 8 SEP 22


CYYZ

TAXI CHART

ATIS - 120.82 133.1

CLNC DEL - 121.3
 APRON - 122.27 (N) 122.07 (S) 122.82
 GND - 121.9 121.65 119.1
 PAD CTL - 131.17 131.95

TWR - 118.35 118.7

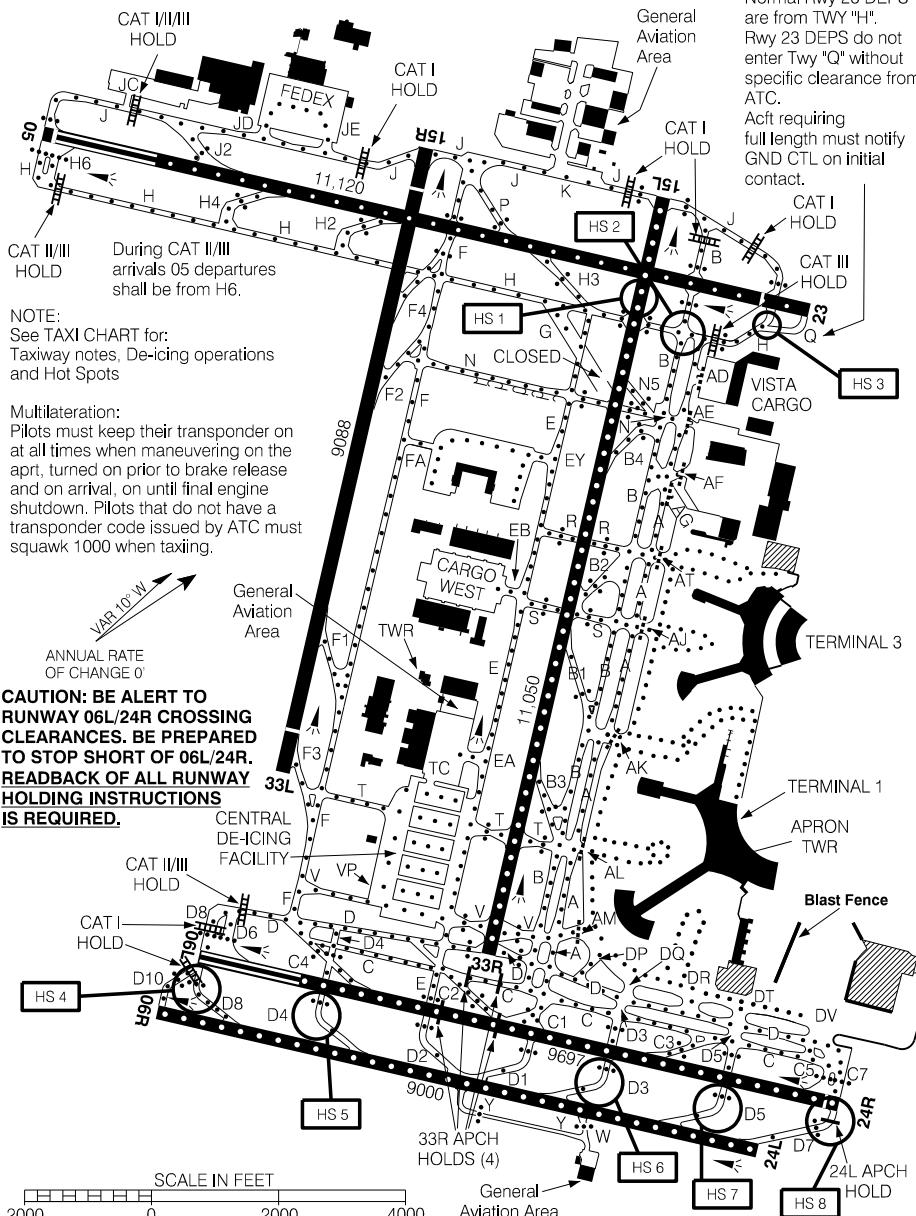

TAXI CHART

EFF 16 MAY 24

LOW VISIBILITY PROCEDURES

Low Visibility Procedures (RVR less than 1200 to 600 ft)

Application

These procedures apply to ground movements of aircraft arriving and departing under low visibility conditions. Arrivals and departures below RVR 600 are not authorized. When weather conditions indicate visibility below RVR 1200 is imminent, procedures will be implemented restricting aircraft and vehicle operations on the movement area. The following message will be added to the ATIS broadcast:

"LOW VISIBILITY PROCEDURES IN EFFECT"

General

Low Visibility Taxi Routes

Typical taxi routes are shown on the Low Visibility Taxi Charts. Taxiway surfaces are painted with enhanced yellow and black centerline markings. In addition, taxiways A, C, F, H, J, N, T, P, R, S, V, E, D, B, T1, and T3 aprons are equipped with green centreline lights. Yellow in-set taxiway intersection lights that consist of three lights spaced 1.5 meters apart at 90 degrees to the direction of travel are located at taxiway/taxiway intersections and apron entry/exit points coincident with lighted locations signs. Aircraft may be directed to hold or report by any of these positions.

Airport Surface Detection Equipment (ASDE)

Ground radar is used to monitor the position of aircraft operating on the manoeuvring area. In the event of an ASDE failure, ATC may suspend, restrict or terminate low visibility operations.

Departures

When low visibility procedures are in effect the Departure runways are 05, 06L and 33R. Intersection take-offs from 06L are not authorized. Intersection take-offs on 33R from Victor Taxiway and on 05 from H6 may be assigned by ATC.

Sequencing of Aircraft Ground Movements for Take-off

Do not request start, push back or call for taxi clearance until the reported RVR is greater than:

Aircraft/Pilot Take-off Minima	Minimum RVR for Start
1200 RVR	1000 RVR
600 RVR	600 RVR

Stop Bar/Guard Light system

Each taxiway entrance onto runways 05, 06L and 33R is equipped with a stop bar consisting of red in-set lights and red elevated lights located at the taxi holding position. Yellow flashing runway guard lights (wig-wags) are installed at each end of the stop bar. When the red stop bar lights are illuminated, green lead on lights beyond the stop bar are extinguished. When ATC issues a clearance to proceed onto the runway, the red stop bar lights will be extinguished and the green lead on lights beyond the stop bar will be illuminated. The stop bar is reset automatically as the aircraft moves onto the runway.

AT NO TIME SHALL A PILOT CROSS AN ILLUMINATED RED STOP BAR

Arrivals

When low visibility procedures are in effect the Arrival runways are 05 and 06L. For 05, approved exits are Taxiways F (northbound), H3, B, H/J and Q. For 06L, approved exits are Taxiways C1, C3 and C7. Aircraft exiting either runway must proceed beyond the alternating green and yellow centreline lights to ensure the aircraft is clear of the runway and the ILS sensitive area.


LOW VISIBILITY PROCEDURES

CYYZ

EFF 3 NOV 22

LOW VISIBILITY TAXI CHART

LAND RWY 05, DEPART RWY 05 (RVR LESS THAN 1200 TO 600 FT)

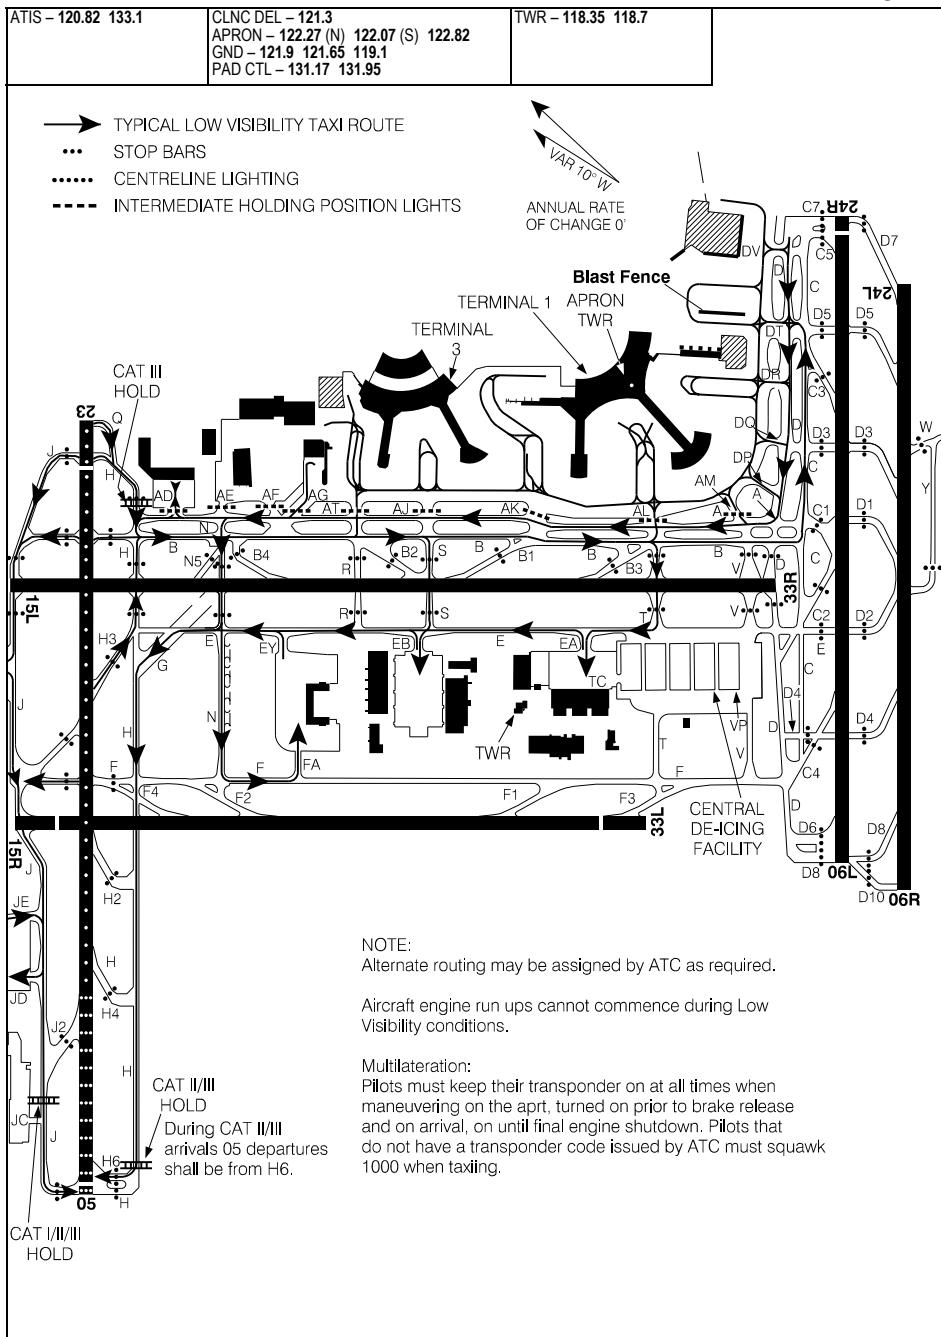TORONTO/LESTER B. PEARSON INTL, ON
CYYZLAND RWY 05, DEPART RWY 05 (RVR LESS THAN 1200 TO 600 FT)
LOW VISIBILITY TAXI CHART


CYYZ-GM-3C

LOW VISIBILITY TAXI CHART

LAND RWY 06L, DEPART RWY 06L (RVR LESS THAN 1200 TO 600 FT)

TORONTO/LESTER B. PEARSON INT'L, ON

CYYZ

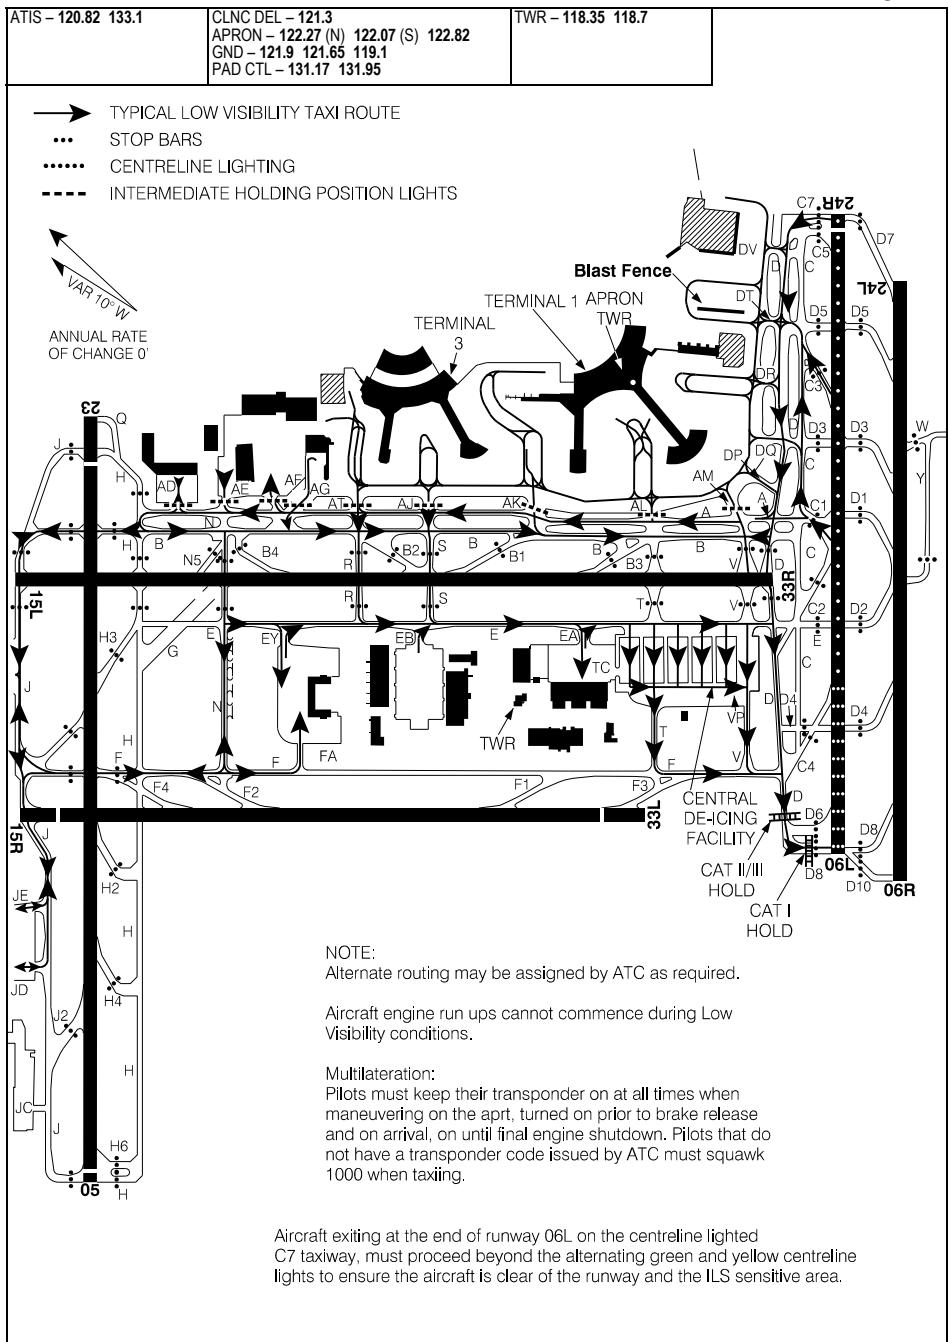

LAND RWY 06L, DEPART RWY 06L (RVR LESS THAN 1200 TO 600 FT)
LOW VISIBILITY TAXI CHART

CYYZ
EFF 16 MAY 24

CYYZ-GM-3C

LOW VISIBILITY TAXI CHART

LAND RWY 06L, DEPART RWY 33R (RVR LESS THAN 1200 TO 600 FT)

TORONTO/LESTER B. PEARSON INT'L, ON


CYYZ

ATIS - 120.82 133.1

CLNC DEL - 121.3
 APRON - 122.27 (N) 122.07 (S) 122.82
 GND - 121.9 121.65 119.1
 PAD CTL - 131.17 131.95

TWR - 118.35 118.7

- TYPICAL LOW VISIBILITY TAXI ROUTE
- ... STOP BARS
- CENTRELINE LIGHTING
- - - INTERMEDIATE HOLDING POSITION LIGHTS

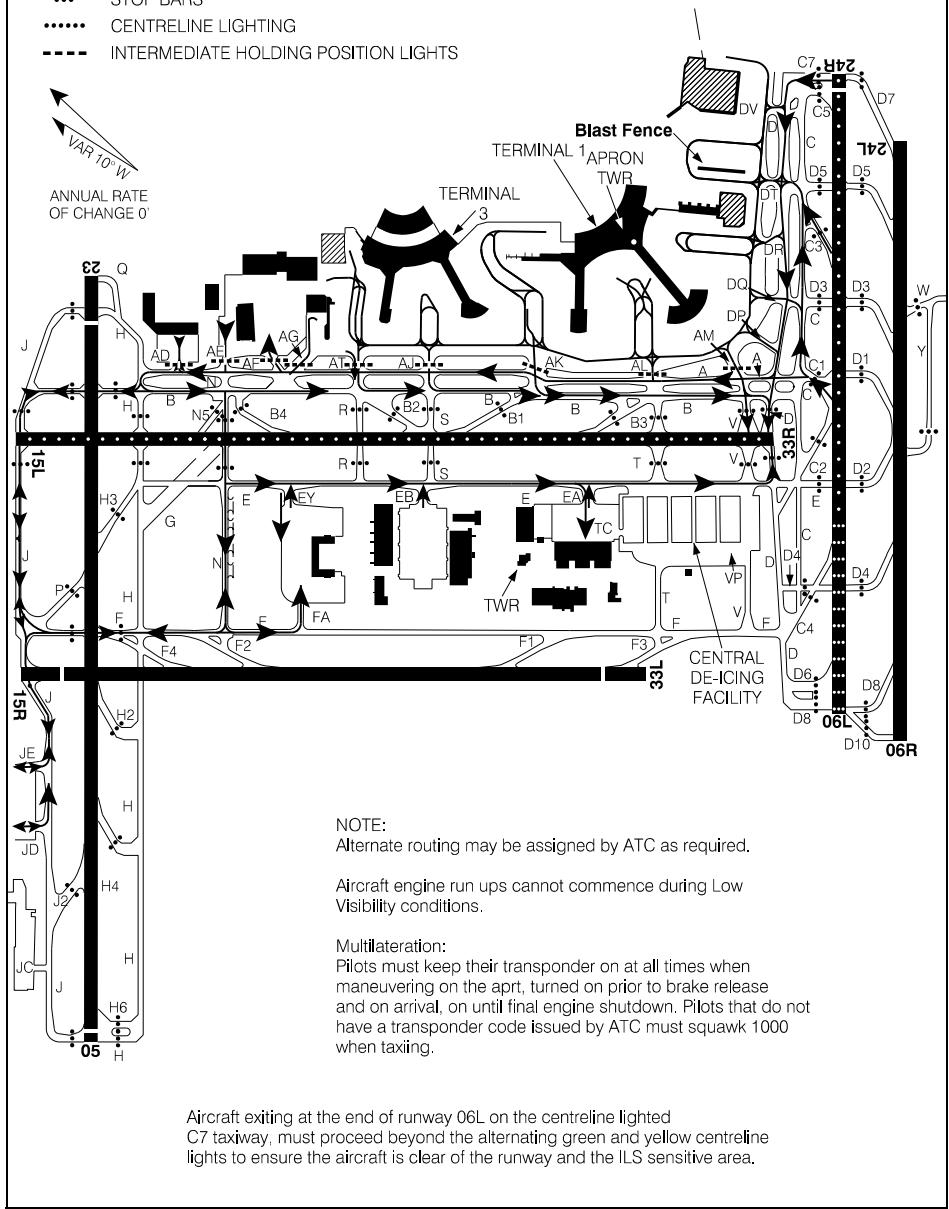

LAND RWY 06L, DEPART RWY 33R (RVR LESS THAN 1200 TO 600 FT)
 LOW VISIBILITY TAXI CHART

CYYZ
 EFF 16 MAY 24

DE-ICING OPERATIONS

CENTRAL DE-ICING FACILITY (CDF)

Overview

All de-icing ops are performed with acft engines opng, unless otherwise advised by Pad Control or ICEMAN.

Pad 1 & 5

- Centre lane will accommodate all acft.
- Acft with wingspans less than 36m may use North/South lanes.

Pad 2, 3, 4 & 6

- Centre lanes will accommodate acft with wingspans 64.9m/213ft and smaller.
 - Acft with wingspans less than 36m may use North/South lanes.
1. Prior to departing Parking Position, ctc CLNC DEL/APRON/GND (as applicable) and advise, "ACFT DE-ICING REQUIRED".
 2. On twys T, V and E, hold short of ICE# and when directed by Ground Control monitor Pad Control on 131.17. Follow Pad Control taxi instructions to the entrance of the de-icing pad.
 3. When directed by Pad Control, ctc ICEMAN on the assigned freq. (129.62 or 131.37).
 4. Follow verbal instructions, guidance displays and lights (as applicable) into staging and/or de-icing bays.
 5. Once aircraft is in final stop position, brakes are set and aircraft configured for de-icing, ctc ICEMAN and advise, "BRAKES SET, ACFT CONFIGURED, READY TO DE-ICE". At this time, pass along any specific fluid and/or treatment requirements.
 6. After de-icing, do not move aircraft. Ctc Pad Control on 131.17 when instructed by ICEMAN to obtain taxi instruction.
 7. Follow Pad Control instruction designated exit points. When instructed by Pad Control ctc Ground Control on assigned freq.
 8. Specific aircraft operations plan in effect for aircraft with wingspans 65m/214ft up to 79.9m/262ft. Restrictions in place include:
 - For Central De-icing Facility (CDF) operations, no turns from twy E into any of the de-icing pads are permitted. The only taxi routes permitted for de-icing are via twy T into Pad 5 and via twy V into Pad 1.

DE-ICING OPERATIONS


EFF 24 MAR 22

CYYZ

CENTRAL DE-ICING FACILITY

ATTIS - 120.82 133.1

GND - 121.9	121.65	119.1
PAD CTL - 131.17	131.95	
ICEMAN - 129.62	131.37	

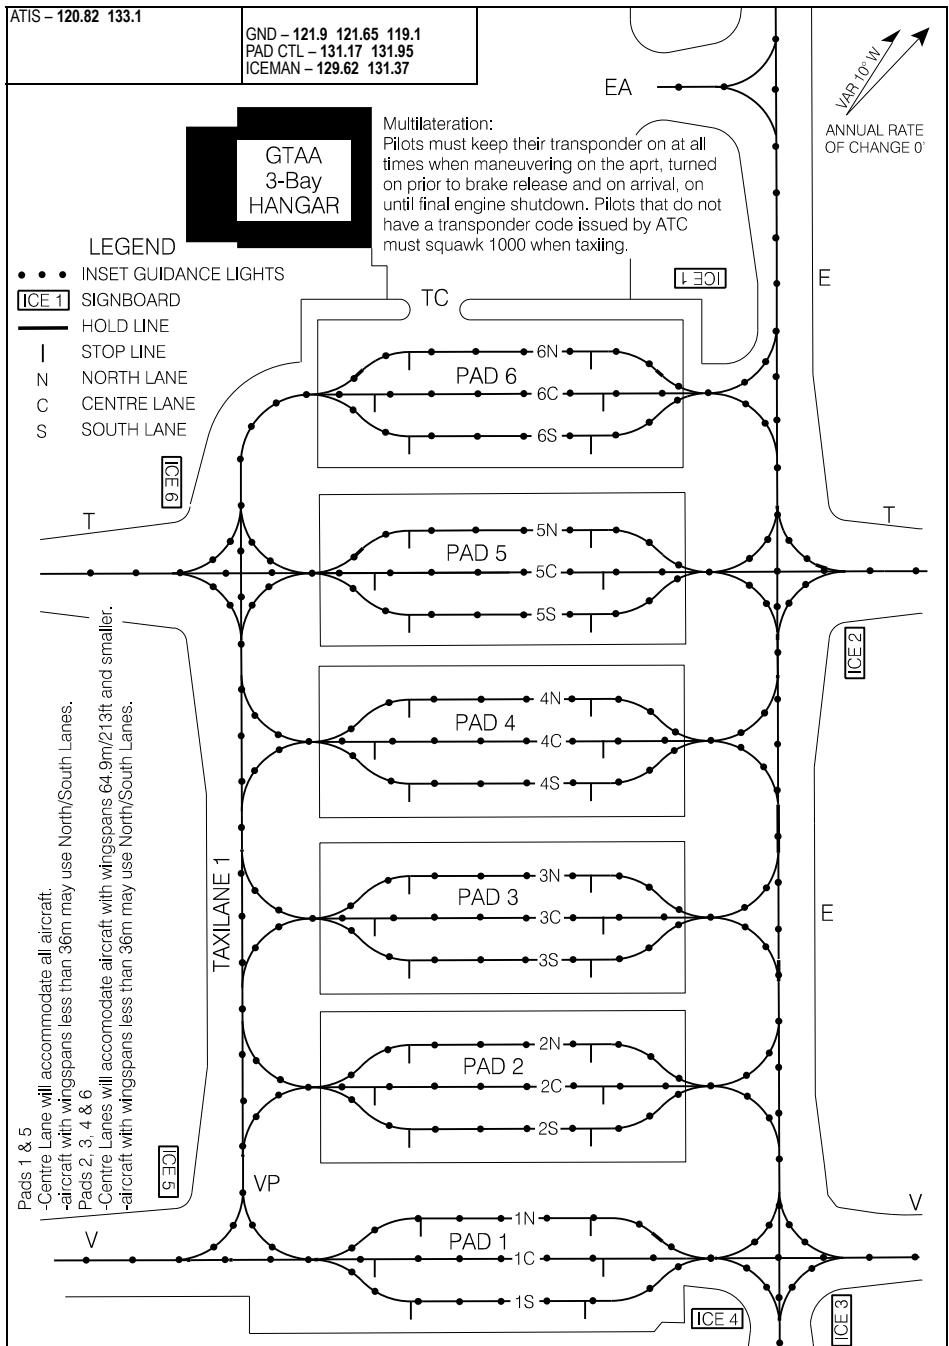

CENTRAL DE-ICING FACILITY

EFF 24 MAR 22

ENGINE FAN BLADE ICE SHEDDING PROCEDURES

Single engine taxi operations should not be used during contaminated airfield conditions or when operations require the crossing of active runways. This will enhance safety and reduce the likelihood of engine inlet contamination during active precipitation, while eliminating any requirement to conduct engine-start activities on the airfield.

The completion of aircraft engine run-up for engine fan blade ice shedding must be conducted on taxiway areas as outlined in the Engine Fan Blade Ice Shedding Chart. Strict adherence to the centerline is mandatory during engine fan blade ice shedding. Proper coordination with air traffic control (ATC) (clearance delivery, ground, or tower) is required.

On initial contact with Clearance Delivery (121.3 MHz), flight crews shall advise:

- De-icing requirements
- Run-up requirement prior to take-off
- Duration of run-up (if required)

Subsequently, if engine run-up requirements change, flight crews shall notify ATC as soon as practicable. The Airport Authority will ensure engine fan blade ice shedding areas in use are inspected and treated as required. Should taxiway surface conditions make engine run-up unsafe, flight crews shall coordinate with ATC to have the run-up conducted at the takeoff position.

Departing Rwy 06L or 06R Ice Shed Area (IS) see chart.

- IS1 Taxiway F between Taxiway T and Taxiway V.
- IS2 Taxiway D at the Runway 06L CAT II/III hold line.
- IS6 Taxiway B between Taxiway T and Taxiway V.
- IS11 Taxiway D between Runway 33R approach hold line and Taxiway A.

Departing Rwy 24R or 24L Ice Shed Area (IS) see chart.

- IS3 Taxiway D between Taxiway D3 and Taxiway D5.
- IS6 Taxiway B between Taxiway T and Taxiway V.
- IS11 Taxiway D between Runway 33R approach hold line and Taxiway A.
- IS12 Taxiway C between Taxiway D3 and Taxiway C3.

Departing Rwy 23 Ice Shed Area (IS) see chart.

- IS4 Taxiway A between Taxiway AE and Taxiway H.
- IS8 Taxiway F between Taxiway N and Taxiway FA.
- IS9 Taxiway N between Taxiway F and Taxiway E.

Departing Rwy 05 Ice Shed Area (IS) see chart.

- IS1 Taxiway F between Taxiway T and Taxiway V.
- IS5 Taxiway H between Taxiway H4 and Runway 05 CAT III hold line.
- IS8 Taxiway F between Taxiway N and Taxiway FA.
- IS9 Taxiway N between Taxiway F and Taxiway E.
- IS10 Taxiway H between Taxiway H2 and Taxiway H4.

ENGINE FAN BLADE ICE SHEDDING PROCEDURES

CYYZ

ENGINE FAN BLADE ICE SHEDDING PROCEDURES

Departing Rwy 33R Ice Shed Area (IS) see chart.

- IS1 Taxiway F between Taxiway T and Taxiway V.
- IS6 Taxiway B between Taxiway T and Taxiway V.
- IS11 Taxiway D between Runway 33R approach hold line and Taxiway A.
- IS13 Taxiway V holding short of Taxiway E (west side).

Departing Rwy 33L Ice Shed Area (IS) see chart.

- IS1 Taxiway F between Taxiway T and Taxiway V.

Departing Rwy 15L Ice Shed Area (IS) see chart.

- IS4 Taxiway A between Taxiway AE and Taxiway H.
- IS7 Taxiway F between Runway 05/23 and Taxiway J.
- IS9 Taxiway N between Taxiway F and Taxiway E.

Departing Rwy 15R Ice Shed Area (IS) see chart.

- IS7 Taxiway F between Runway 05/23 and Taxiway J.
- IS8 Taxiway F between Taxiway N and Taxiway FA.
- IS9 Taxiway N between Taxiway F and Taxiway E.

ENGINE FAN BLADE ICE SHEDDING PROCEDURES

CYYZ-GM-4E


TORONTO/LESTER B. PEARSON INTL, ON
CYYZ

ENGINE FAN BLADE ICE SHEDDING PROCEDURES

ATIS - 120.82 133.1

CLNC DEL - 121.3
APRON - 122.27 (N) 122.07 (S) 122.82
GND - 121.9 121.65 119.1
PAD CTL - 131.17 131.95

TWR - 118.35 118.7

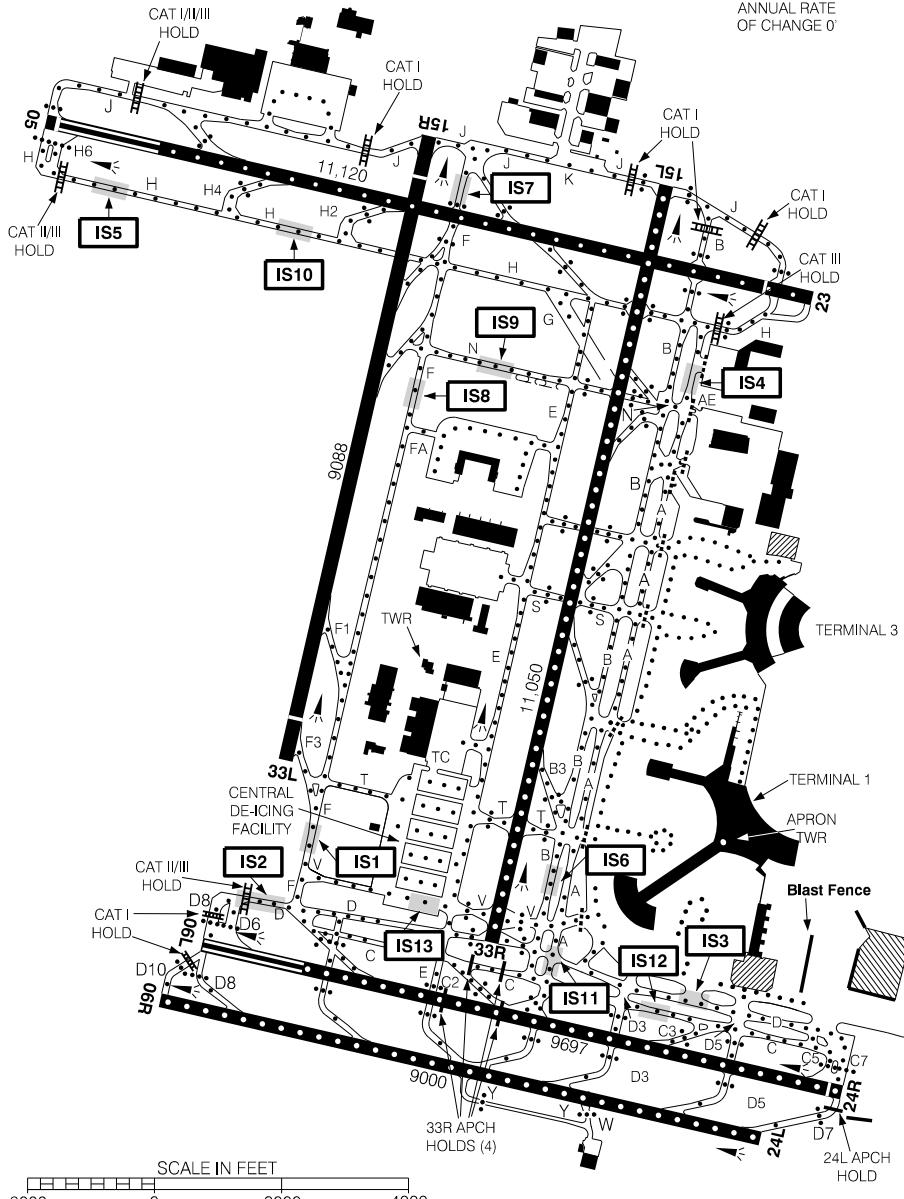VAR 10° W
ANNUAL RATE OF CHANGE 0'

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved


ENGINE FAN BLADE ICE SHEDDING PROCEDURES

CYYZ

EFF 16 MAY 24

CYYZ-GM-4E


PARKING AREAS (TERMINAL 1)

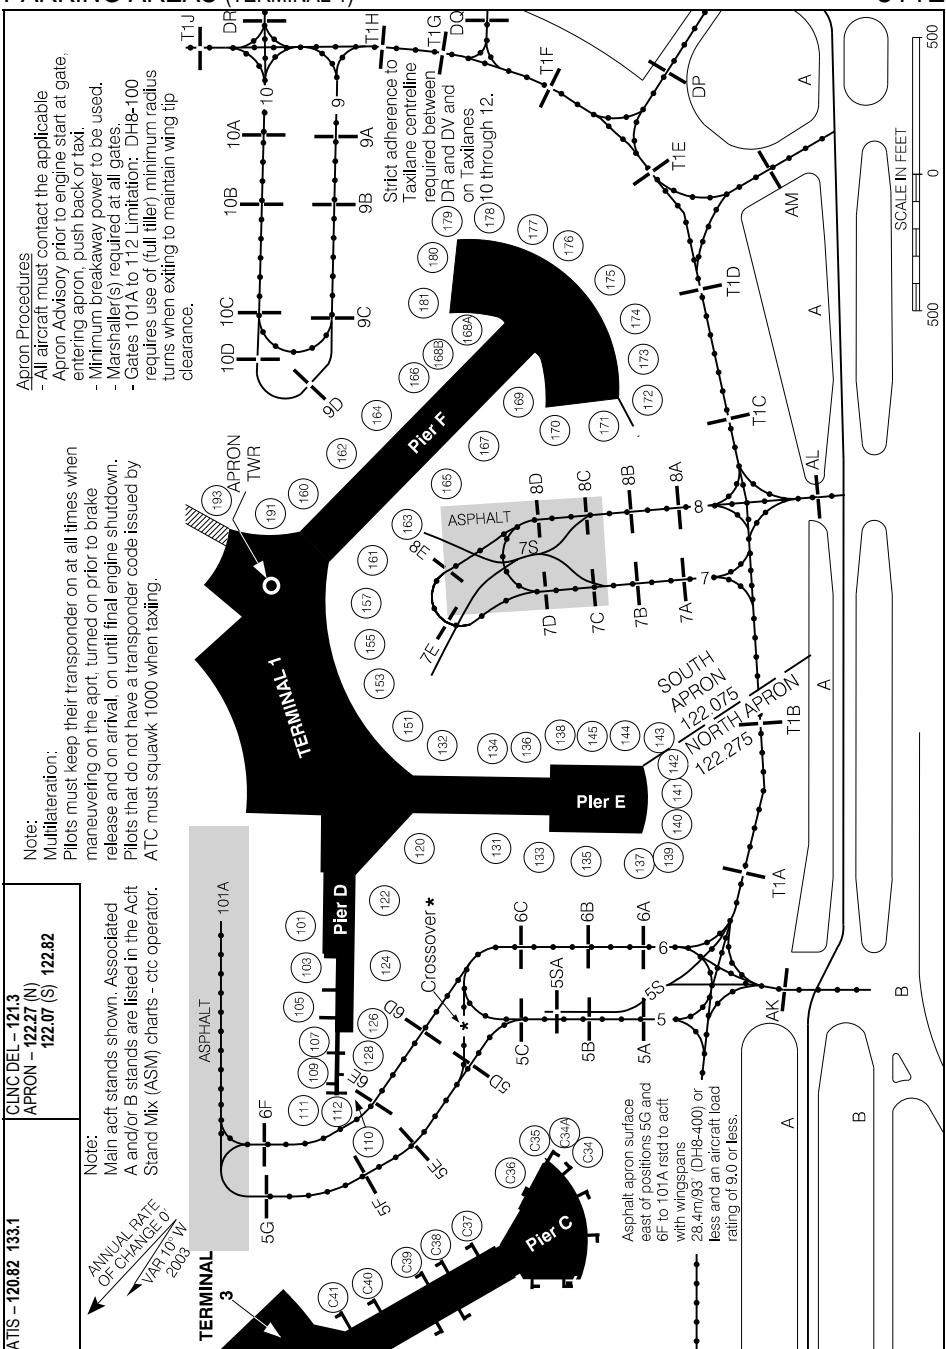

PARKING AREAS (TERMINAL 1)

EFF 20 APR 23

PARKING AREAS (TERMINAL 3)

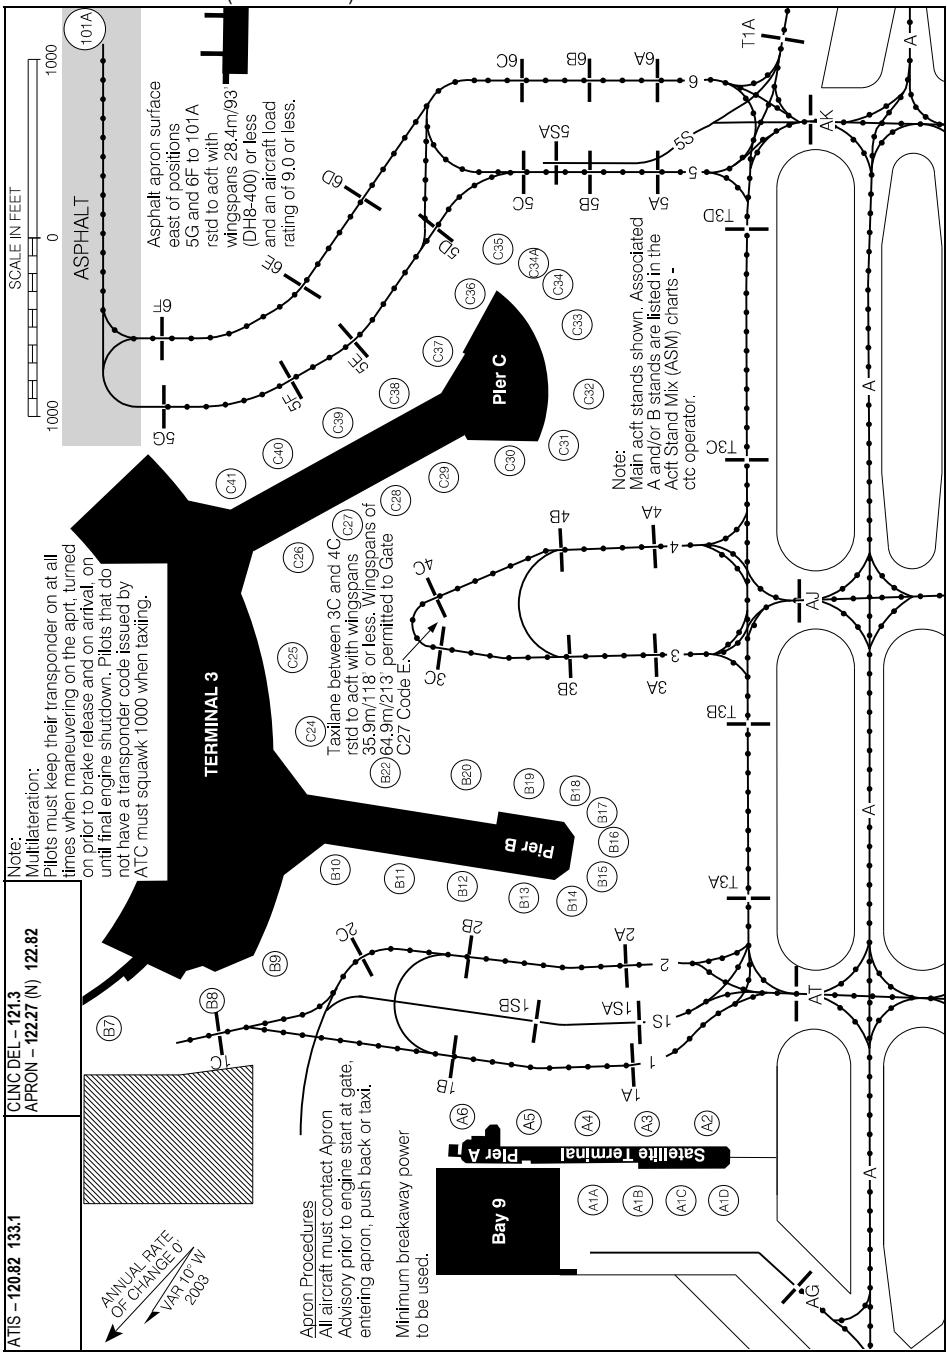

TAXILANE LIMITATIONS

Taxilane	Taxilane Segment	Acft Code/ Limitation	Max Wingspan	Comments
Pier A North	Between AG and Gate A1A	DH8-400	28.4m/93'	
1	Between AT & Stand B8	C	36m/118'	
	Between Stand B8 & Stand B7D	DH8-400	28.4m/93'	
1S	Between AT and Hangar	E	65m/213'	
2	Between AT and Hangar	D	51.9m/170'	
2	Between 2C & Stand B8	C	36m/118'	
1 / 2	1B/2B Radius	C	36m/118'	
3	Between AJ & 3B	E	65m/213'	
	Between 3B & 3C	C	36m/118'	Code E to Stand C29 & C27
4	Between AJ & 4B	E	65m/213'	
	Between 4B & 4C	C	36m/118'	Code E to Stand C29 & C27
3 / 4	3B/4B Radius	D	51.9m/170'	
	3C/4C Radius	C	36m/118'	
N/S	Between AT & AK	E	65m/213'	
5	Between AK & 5E	E	65m/213'	AK to 5D closed when Lane 5S in use.
	Between 5E & 5G	D	51.9m/170'	
5S	Between AK & Stand C35	F	79.9m/262'	A380 only. Strict Adherence to C/L. Closes Lane 5A-5D. Lane 6 between 6A and 6C closed, remainder of Lane 6 restricted to Code C or smaller.
5-6	Crossover	E	65m/213'	Closed when Lane 5S in use
6	Between AK & 6C	E	65m/213'	Code E allowed to Stand 124. AK to 6C closed when Lane 5S in use.
	Between 6C & 6D	C	36m/118'	Code E allowed to Stand 124. No code E push tail East onto Lane 6 from Stand 124.
	Between 6D & 6F	C	36m/118'	
	Between 6F & Stand 101	DH8-400	28.4m/93'	
5 / 6	5C/6C Radius	E	65m/213'	No B777 due to Jet Blast
	5G/6F Radius	C	36m/118'	
7	Between AL & 7D	F	79.9m/262'	Simultaneous use of lane 7 & 8, Max span 64.9m/213', Code E
	Between 7D & 7E	C	36m/118'	Code D allowed to stand 151
8	Between AL & 8D	F	79.9m/262'	Simultaneous use of lane 7 & 8, Max span 64.9m/213', Code E
	Between 8D & 8E	C	36m/118'	
7 / 8	7D/8D Radius	F	79.9m/262'	
	7E/8E Radius	C	36m/118'	
7S	Between 7C & 7S	E	65m/213'	
	Between 8C & 7S	E	65m/213'	
	Between 7S & 151	E	65m/213'	No 77W/773, Closes Taxilane 7 & 8 beyond 7C/8C.
	Between 7S & 161A	E	65m/213'	Closes Taxilane 7 & 8 beyond 7C/8C.
N/S	Between AK & AM	F	79.9m/262'	
9	Between DR & 9C	E	65m/213'	
	Between 9C & 9D	C	36m/118'	

TAXILANE LIMITATIONS

EFF 7 AUG 25

CYYZ

TAXILANE LIMITATIONS

Taxilane	Taxilane Segment	Acft Code/ Limitation	Max Wingspan	Comments
10	Between DR & 10D	C	36m/118'	
9 / 10	9C/10C Radius	C	36m/118'	
	9D/10D Radius	C	36m/118'	
E/W	Between AM & DV	F	79.9m/262'	Strict adherence to C/L
11	Between DT & H4	E	65m/213'	Strict adherence to C/L
12	Between H1/H10 & H4	E	65m/213'	Strict adherence to C/L
E/W	Between DV & H12B	E	65m/213'	
E/W/N/S	Between H12B & H18	E	65m/213'	Tow Operations Only

TAXILANE LIMITATIONS

CYYZ

EFF 7 AUG 25

PARKING AREAS (INFIELD)

ATIS - 120.82 133.1

CLNC DEL - 121.3
APRON - 122.27 (N)
122.07 (S) 122.82VAR 10° W
2003
ANNUAL RATE
OF CHANGE 6°

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

Taxilane abeam gates 528, 527, 526, 525, 524 and 523 restricted to aircraft maximum wingspans 68.58m/225ft or smaller.

Taxilane abeam gates 529, 530 and 531 restricted to Code D aircraft (maximum wingspans 51.9m/170ft) or smaller.

Infield Concourse

Cargo 3

Cargo 2

CARGO WEST

EB

S

Air Canada Cargo Building

Air Canada Equipment Mtce Building

NORTH APRON 122.275
SOUTH APRON 122.075

Control Tower

SkyService Midfield Hangar

ESSO Avitat

General Aviation Area

Gate Gourmet Canada

GTA 3-Bay Hangar

Area Control Centre

TC

CENTRAL DE-ICING

FACILITY

Infield Apron Procedures

All aircraft must contact the applicable Apron Advisory prior to engine start at gate, entering apron push back or taxi.

Minimum breakaway power to be used.

Marshaller(s) required at all gates.

"On the Infield Concourse apron, all tri-engine aircraft must be established at the start position as assigned by Apron Advisory prior to the starting of number two engine. Number two engine must not be advanced above idle power while on apron."

Note:

Multilateration:

Pilots must keep their transponder on at all times when maneuvering on the apron, turned on prior to brake release and on arrival, on until final engine shutdown. Pilots that do not have a transponder code issued by ATC must squawk 1000 when taxiing.

SCALE IN FEET
500 0 500

CYYZ

PARKING AREAS (INFIELD)

EFF 20 FEB 25


PARKING AREAS (FEDEX)

ATIS - 120.82 133.1

CLNC DEL - 121.3
APRON - 122.27 (N) 122.82

VAR 10° W
2003
ANNUAL RATE
OF CHANGE 0

Fedex apron restricted to Code D aircraft
(maximum wingspans 51.9m/170ft) or
smaller.

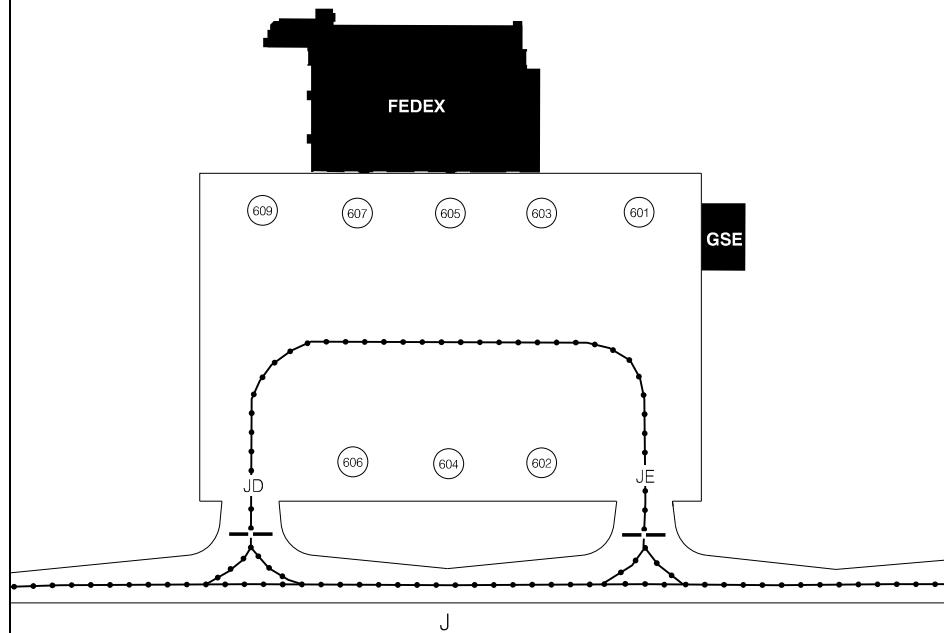Fedex Apron Procedures


All aircraft must contact North Apron (122.275)
prior to engine start at gate, entering apron,
push back or taxi.
Minimum breakaway power to be used.
Marshaller(s) required at all gates.

Note:

Multilateration:

Pilots must keep their transponder on at all times
when maneuvering on the apron, turned on prior to
brake release and on arrival, on until final engine
shutdown. Pilots that do not have a transponder
code issued by ATC must squawk 1000 when
taxiing.

SCALE IN FEET



PARKING AREAS (FEDEX)

EFF 21 MAY 20

CYYZ

COMMUTER PARKING AREAS

SATELLITE TERMINAL
TERMINAL 3


SCALE IN FEET

200

0

200

AG

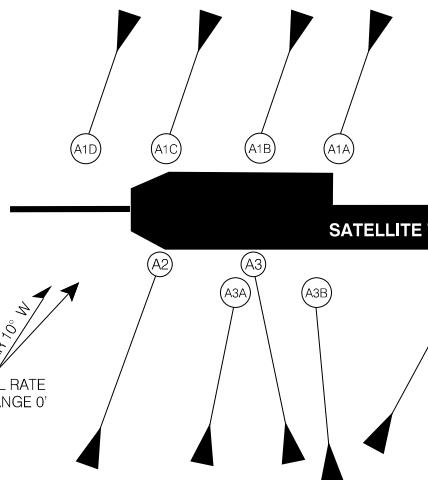

BAY 9

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

GATE B7

NOTE

Multilateration:

Pilots must keep their transponder on at all times when maneuvering on the aprt, turned on prior to brake release and on arrival, on until final engine shutdown. Pilots that do not have a transponder code issued by ATC must squawk 1000 when taxiing.

SCALE IN FEET

200

0

200

TERMINAL 3
BUILDING


COMMUTER PARKING AREAS

EFF 5 SEP 24

CYOO-AD

TORONTO/OSHAWA EXECUTIVE AIRPORT, ON
CYOO

AERODROME CHART

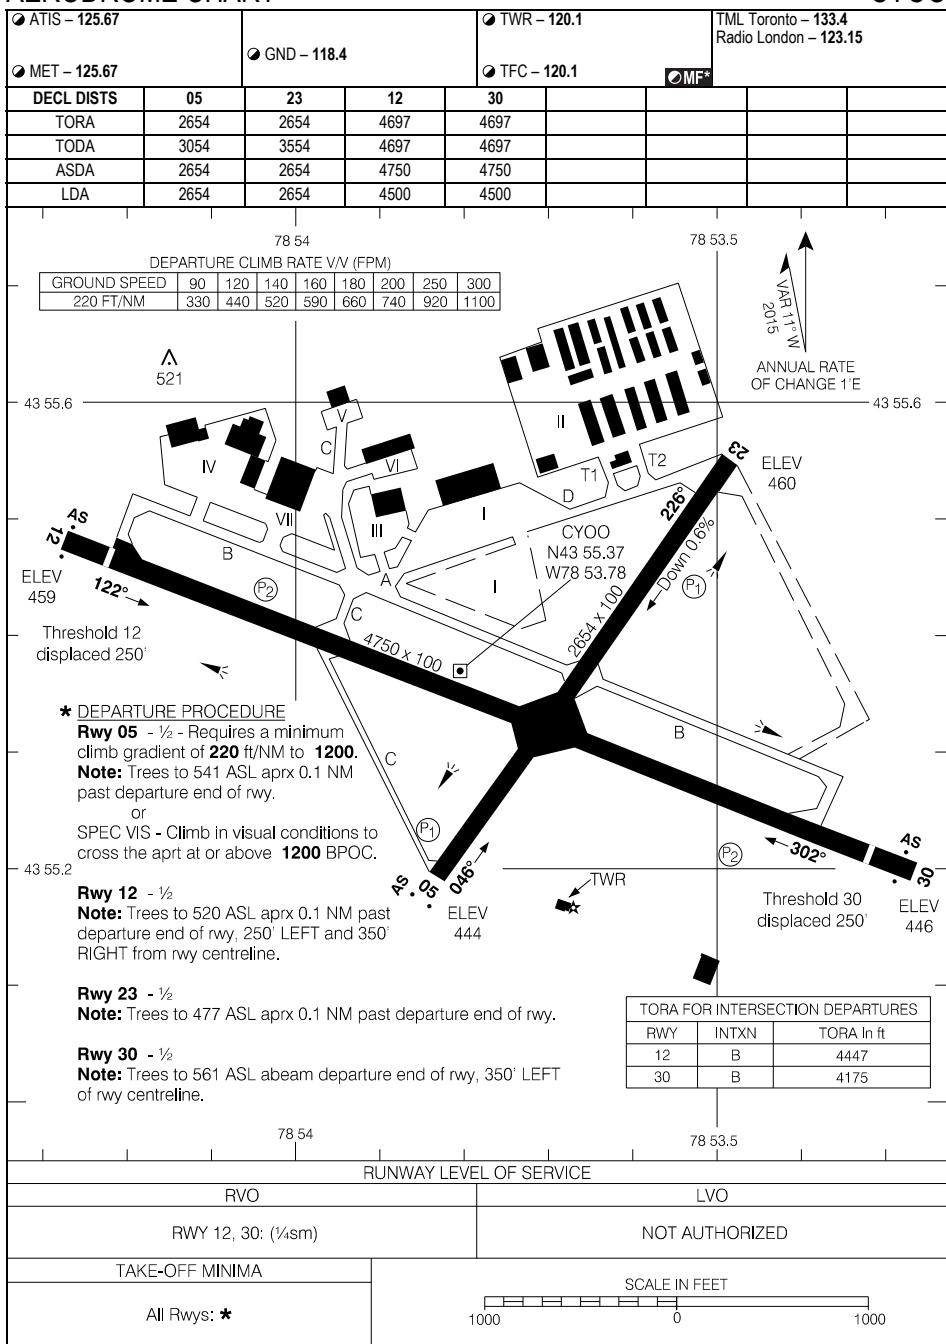

AERODROME CHART

EFF 12 JUN 25


CYOO-AD

CYOO

CYTR-AD

TRENTON, ON
CYTR

AERODROME CHART (DND)

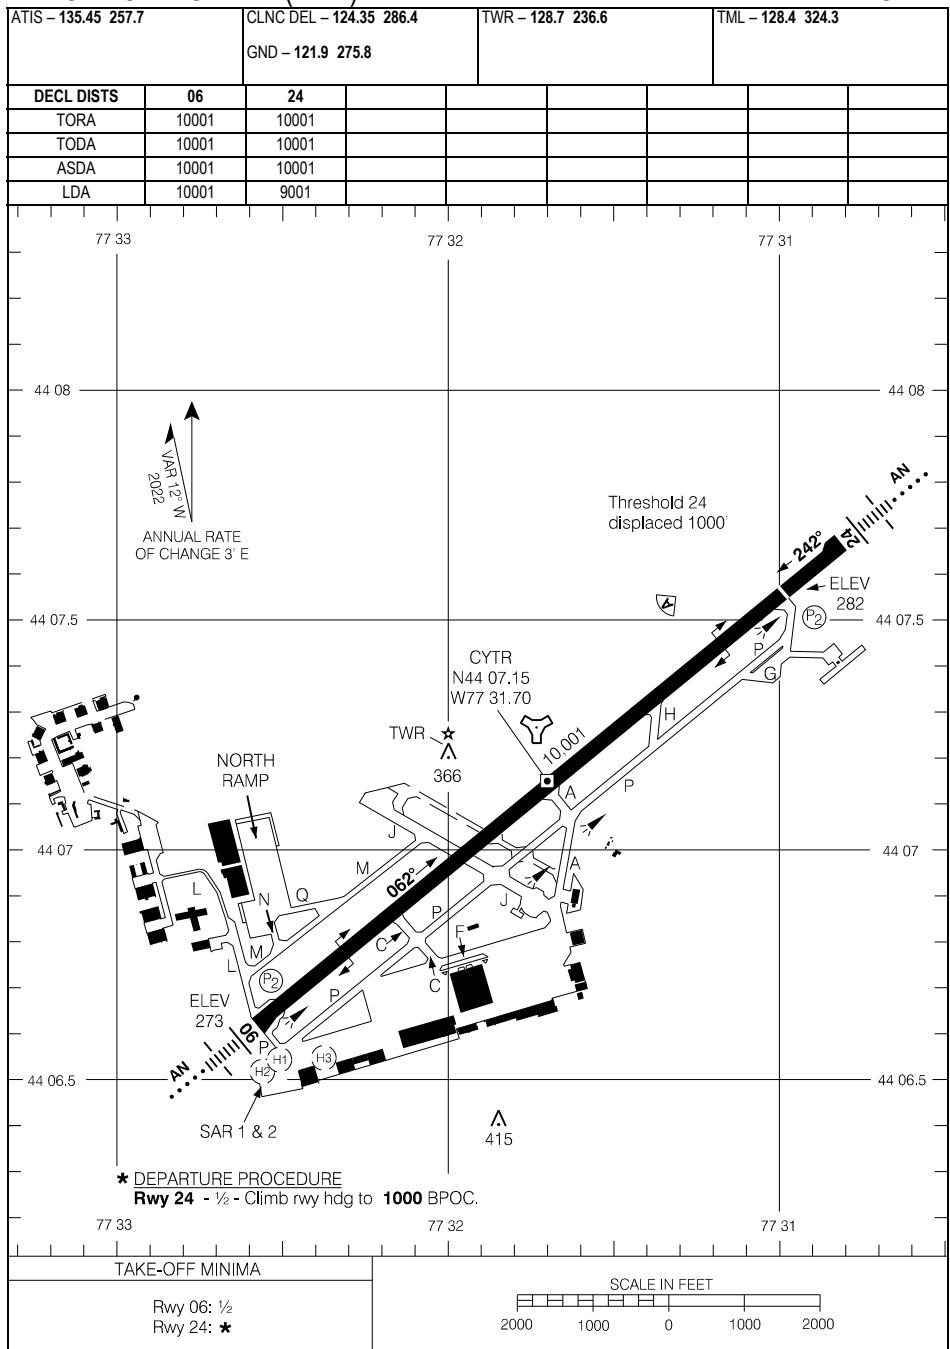

AERODROME CHART (DND)

EFF 5 OCT 23


CYTR

CYTR-AD

CYXZ-AD

WAWA, ON
CYXZ

AERODROME CHART

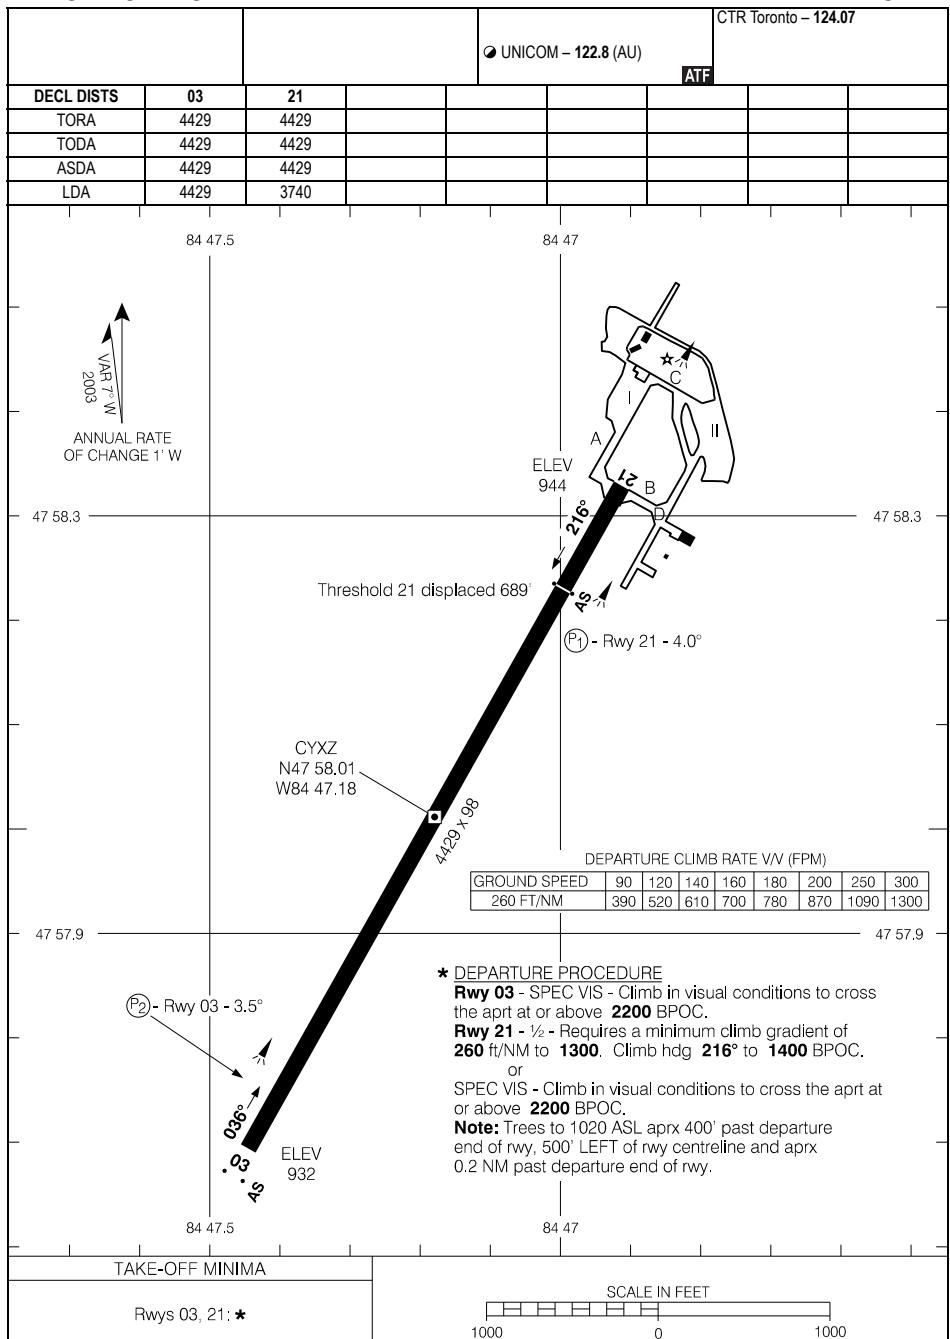

AERODROME CHART

EFF 8 NOV 18


CYXZ

CYXZ-AD

CYWP-AD

WEBEQUIE, ON
CYWP

AERODROME CHART

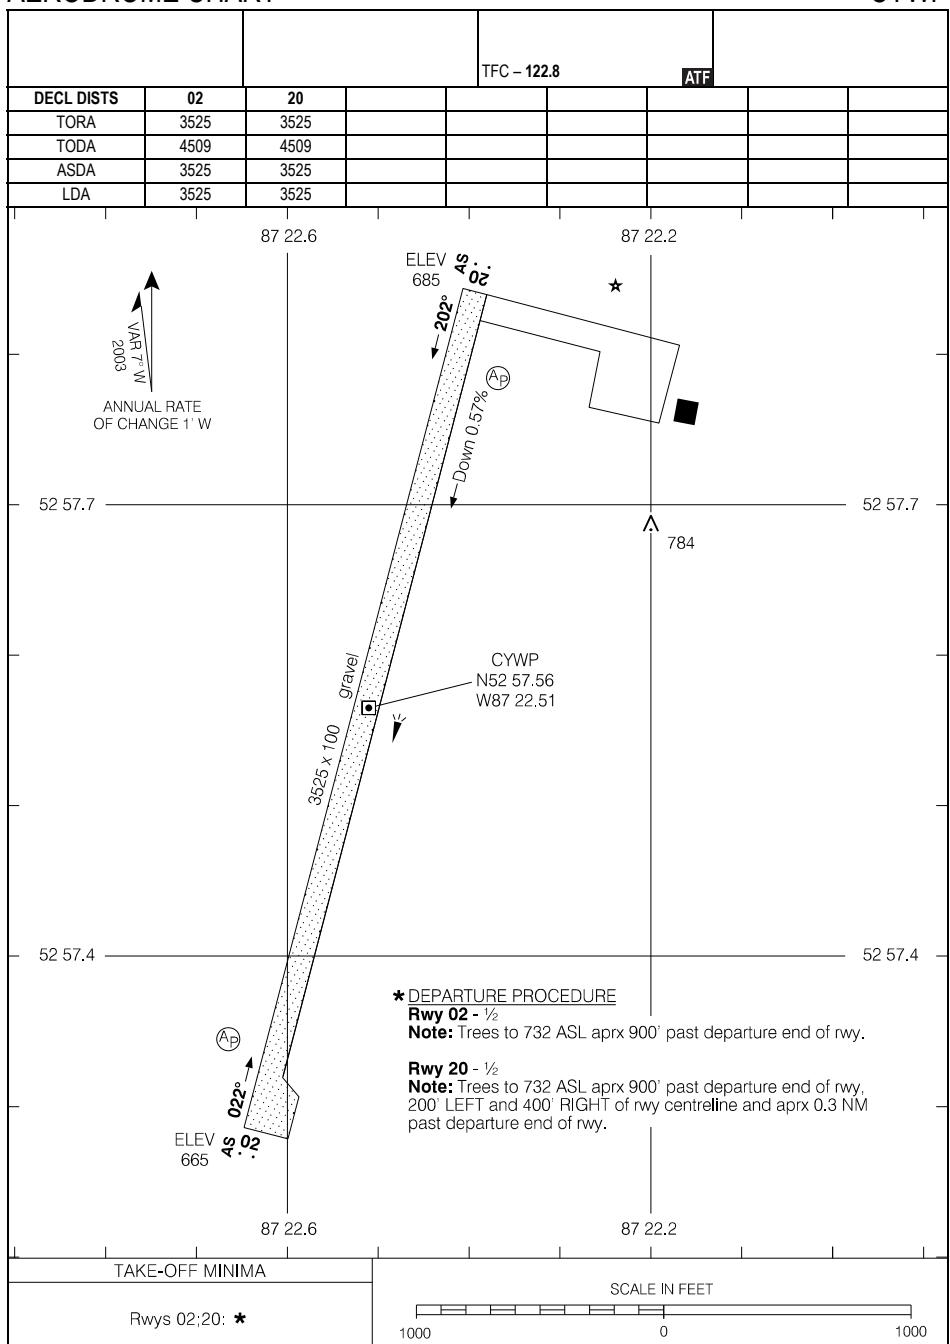

AERODROME CHART


EFF 17 APR 25

CYWP

CYWP-AD

AERODROME CHART

CNQ3-AD
WELLAND/NIAGARA CENTRAL DOROTHY RUNGELING, ON
CNQ3

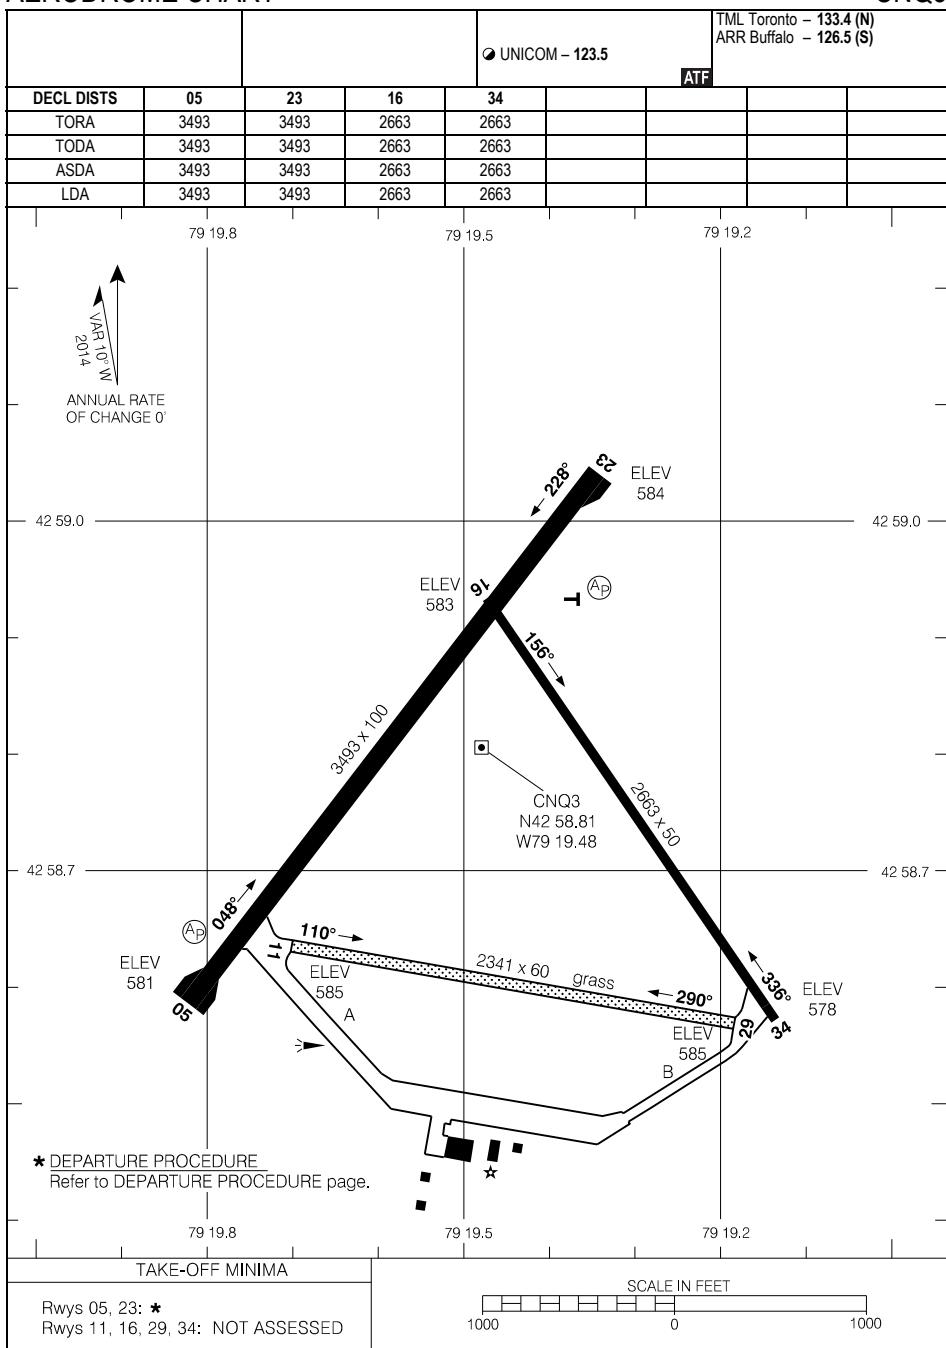

AERODROME CHART

EFF 23 FEB 23


CNQ3-AD

CNQ3

CYWV-AD

WIARTON, ON
CYWV

AERODROME CHART

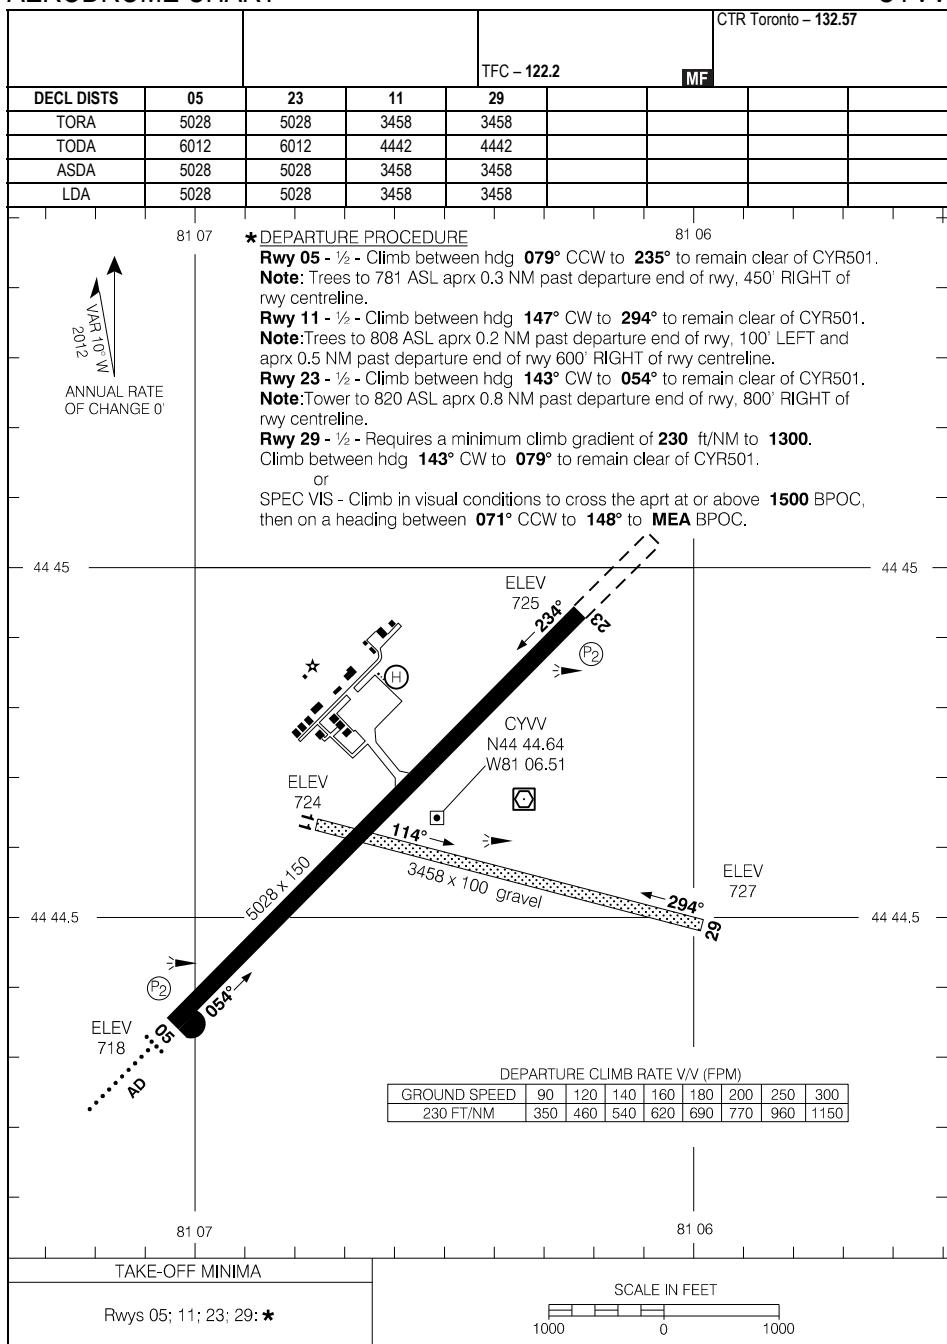

AERODROME CHART

EFF 11 JUL 24


CYWV-AD

CYWV

CKL3-AD

WUNNUMIN LAKE, ON
CKL3

AERODROME CHART

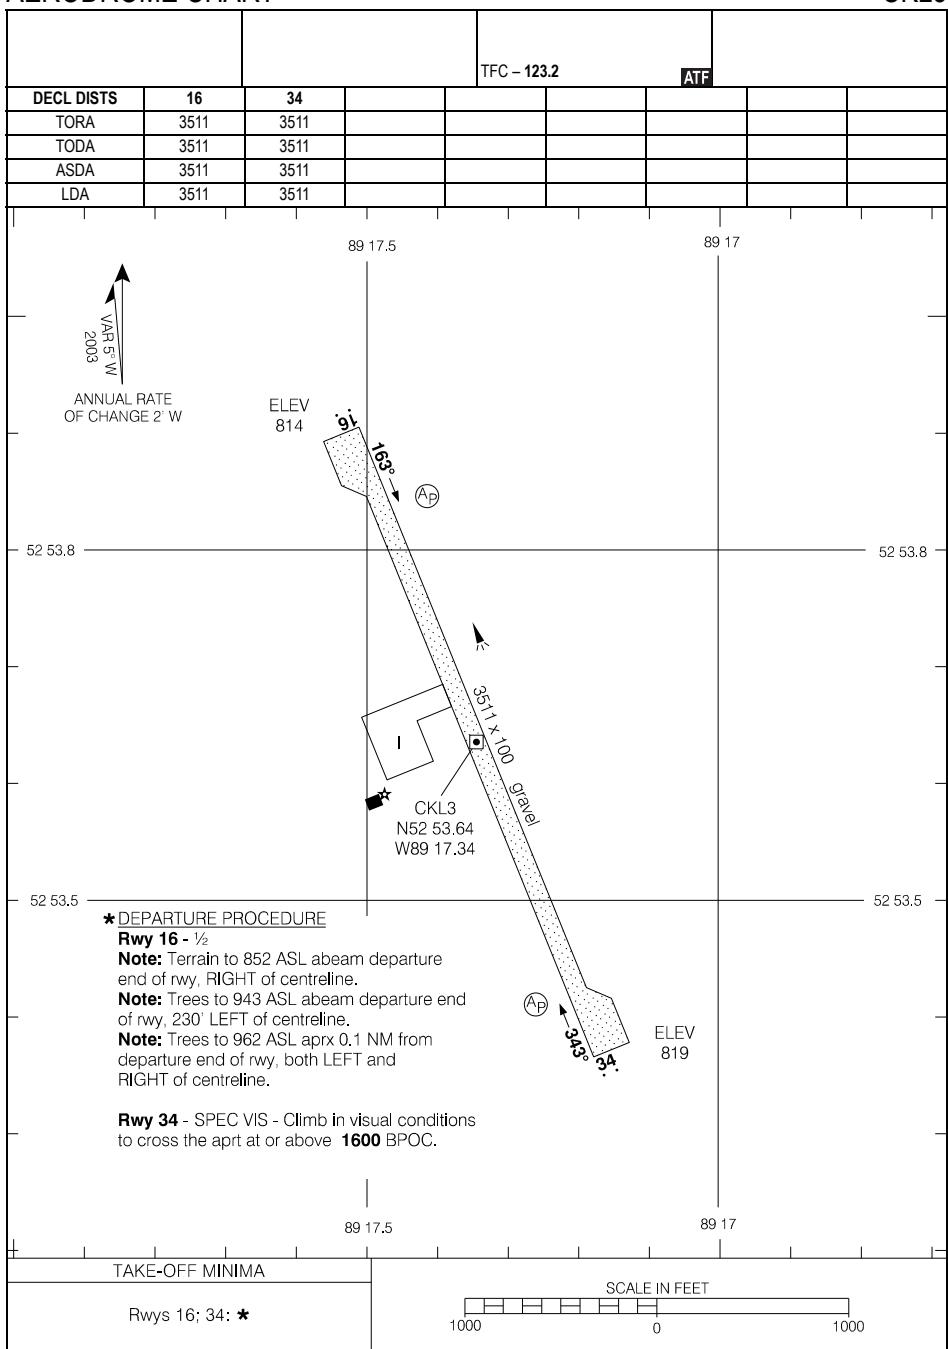

AERODROME CHART

EFF 27 JAN 22


CKL3-AD

CKL3

CYKO-AD

AKULIVIK, QC
CYKO

AERODROME CHART

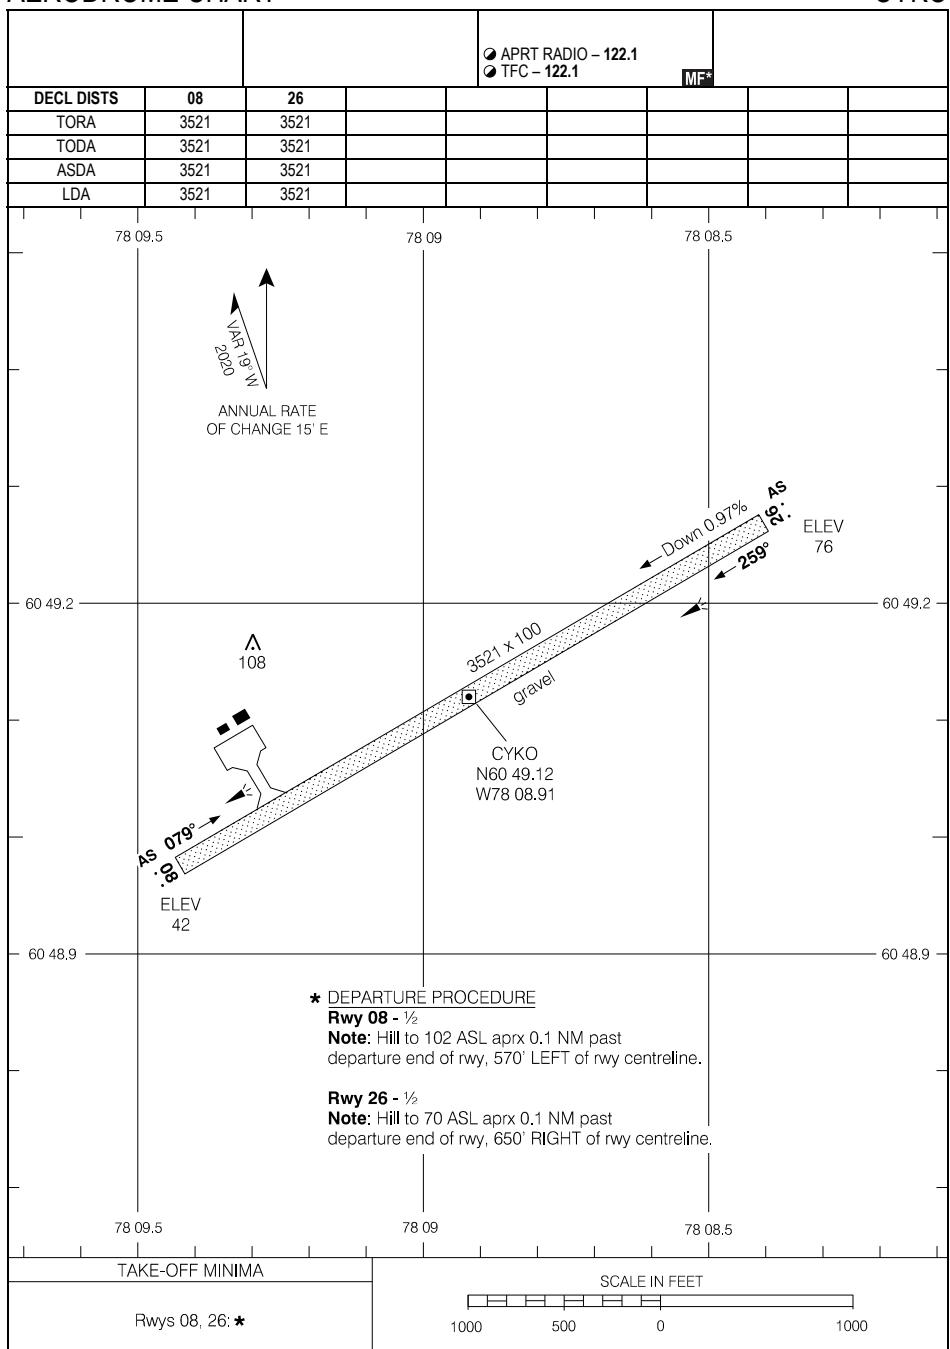

AERODROME CHART

EFF 20 APR 23


CYKO

CYKO-AD

CYKO-AD

AKULIVIK, QC
CYKO

CARTE D'AÉRODROME

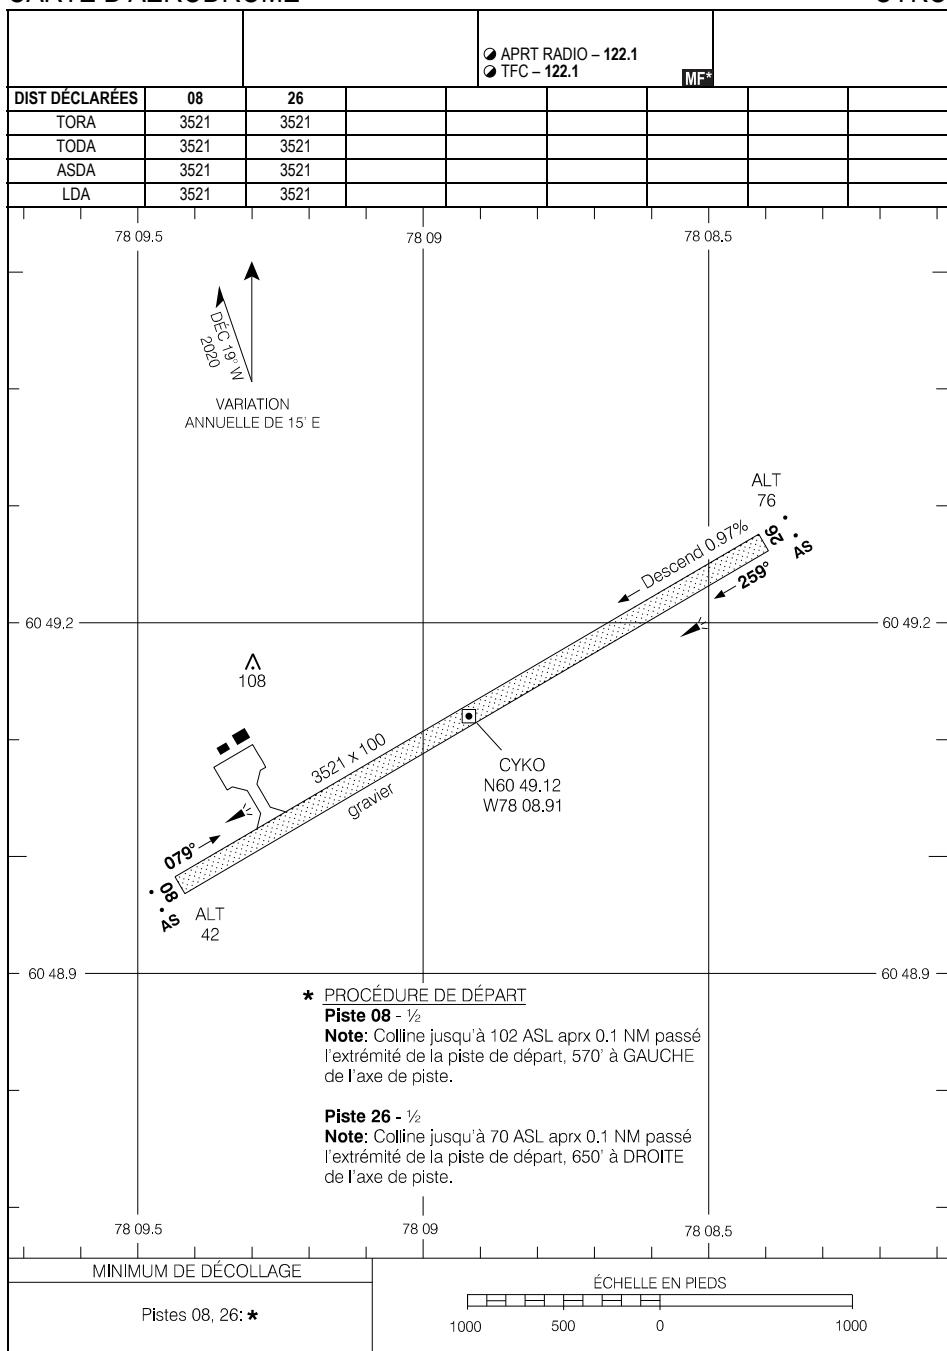CARTE D'AÉRODROME
EFF 20 AVR 23

CYKO

CYKO-AD

ALMA, QC
CYTF

AERODROME CHART

AUTO - 123.17				<input checked="" type="radio"/> UNICOM - 122.35 <input checked="" type="radio"/> TFC - 122.35	TML Bagotville - 127.2
DECL DISTS	13	31		<input checked="" type="checkbox"/> MF*	
TORA	5000	5000			
TODA	5000	5000			
ASDA	5000	5000			
LDA	5000	5000			

An upward-pointing arrow with a diagonal line through it, labeled "ANNUAL RATE OF CHANGE 7' E".

ANNUAL RATE
OF CHANGE 7' E

71 38,9

71 38.1

4

48 30.8

CYTF
N48 30.51
W71 38.48

* DEPARTURE PROCEDURE

Rwy 13 - $\frac{1}{2}$ - Requires a minimum climb gradient of **230** ft/NM to **700**.

Note: Trees to 529 ASL within 0.4 NM of departure end of rwy.

or

48 30.3 —— SPEC VIS - Climb in visual conditions to cross the apt at or above

1500 BPOC. [View Details](#)

SPEC VIS - Procedure mandatory when blasting area 3.6 NM SW or 3.1 NM SW of Chicoutimi/St-Honoré (CYRC) active.

Rwy 31 - ½

Note: Trees to 525 ASL within 0.5 NM of departure end of rwy.

All Rwy: Departure procedure not authorized when CYR651, CYR652, CYR653, CYR654, CYR655, CYR656 active.

DEPARTURE CLIMB RATE V/V (FPM)							
GROUND SPEED	90	120	140	160	180	200	250
230 FT/NM	350	460	540	620	690	770	960

71 389

71.38.1

TAKE-OFF MINIMA

SCALE IN FEET

1000 0 1000

AERODROME CHART

EEE 14 III 22

CYTE

ALMA, QC
CYTF

CARTE D'AÉRODROME


AUTO - 123.17

TMI Baotville - 1272

UNICOM – 122.35
TFC – 122.35

OME*

DIST DÉCLARÉES	13	31						
TORA	5000	5000						
TODA	5000	5000						
ASDA	5000	5000						
LDA	5000	5000						

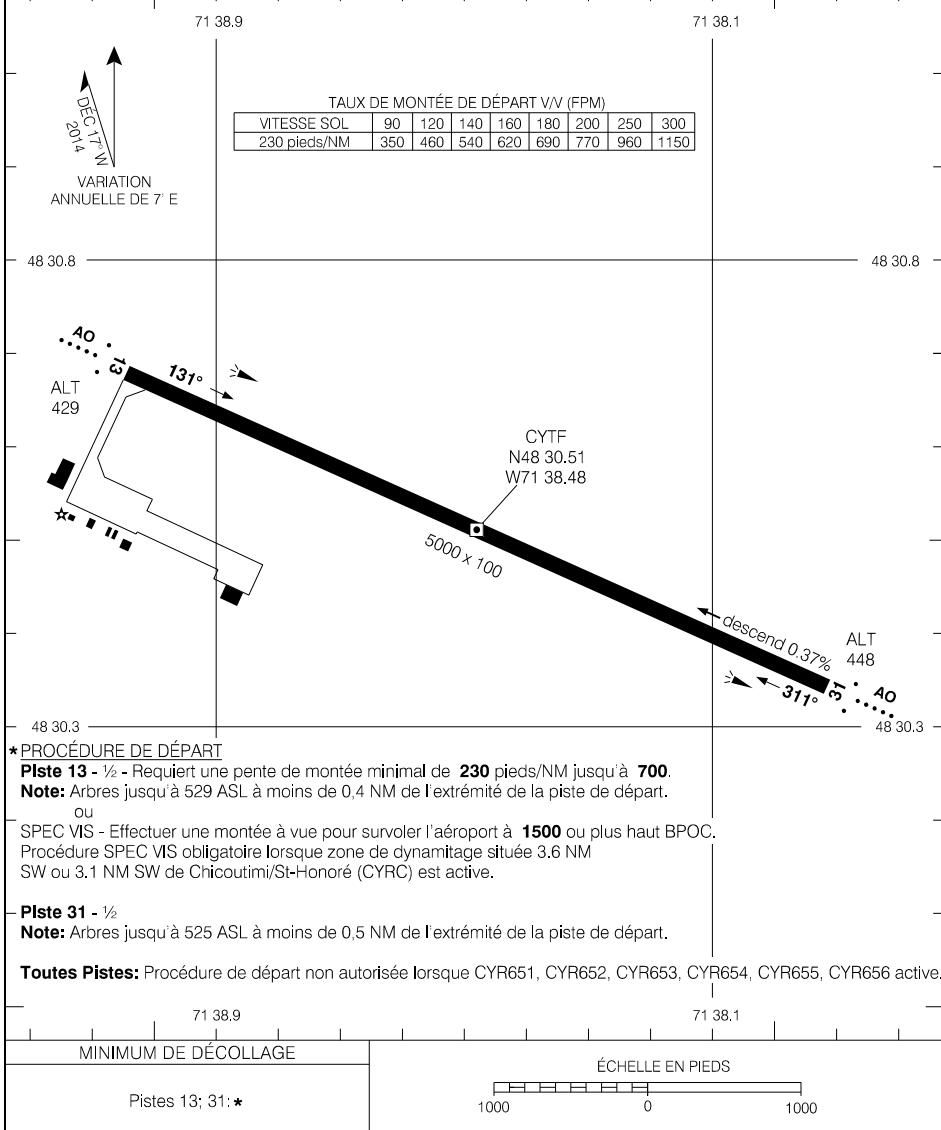

Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

*PROCÉDURE DE DÉPART

Piste 13 - ½ - Requiert une pente de montée minimal de **230** pieds/NM jusqu'à **700**.

Note: Arbres jusqu'à 529 ASL à moins de 0,4 NM de l'extrémité de la piste de départ.

Q

SPEC VIS - Effectuer une montée à vue pour survoler l'aéroport à **1500** ou plus haut BPOC.
Procédure SPEC VIS obligatoire lorsque zone de dynamitage située 3.6 NM SW ou 3.1 NM SW des Chicoutimi/St-Honoré (CYCR) est active.

- Plste 31 - ½

Note: Arbres jusqu'à 525 ASL à moins de 0,5 NM de l'extrémité de la piste de départ.

Toutes Pistes: Procédure de départ non autorisée lorsque CYR651, CYR652, CYR653, CYR654, CYR655, CYR656 active.


CARTE D'AÉRODROME

CYTF

CYEY-AD

AMOS/MAGNY, QC
CYEY

AERODROME CHART

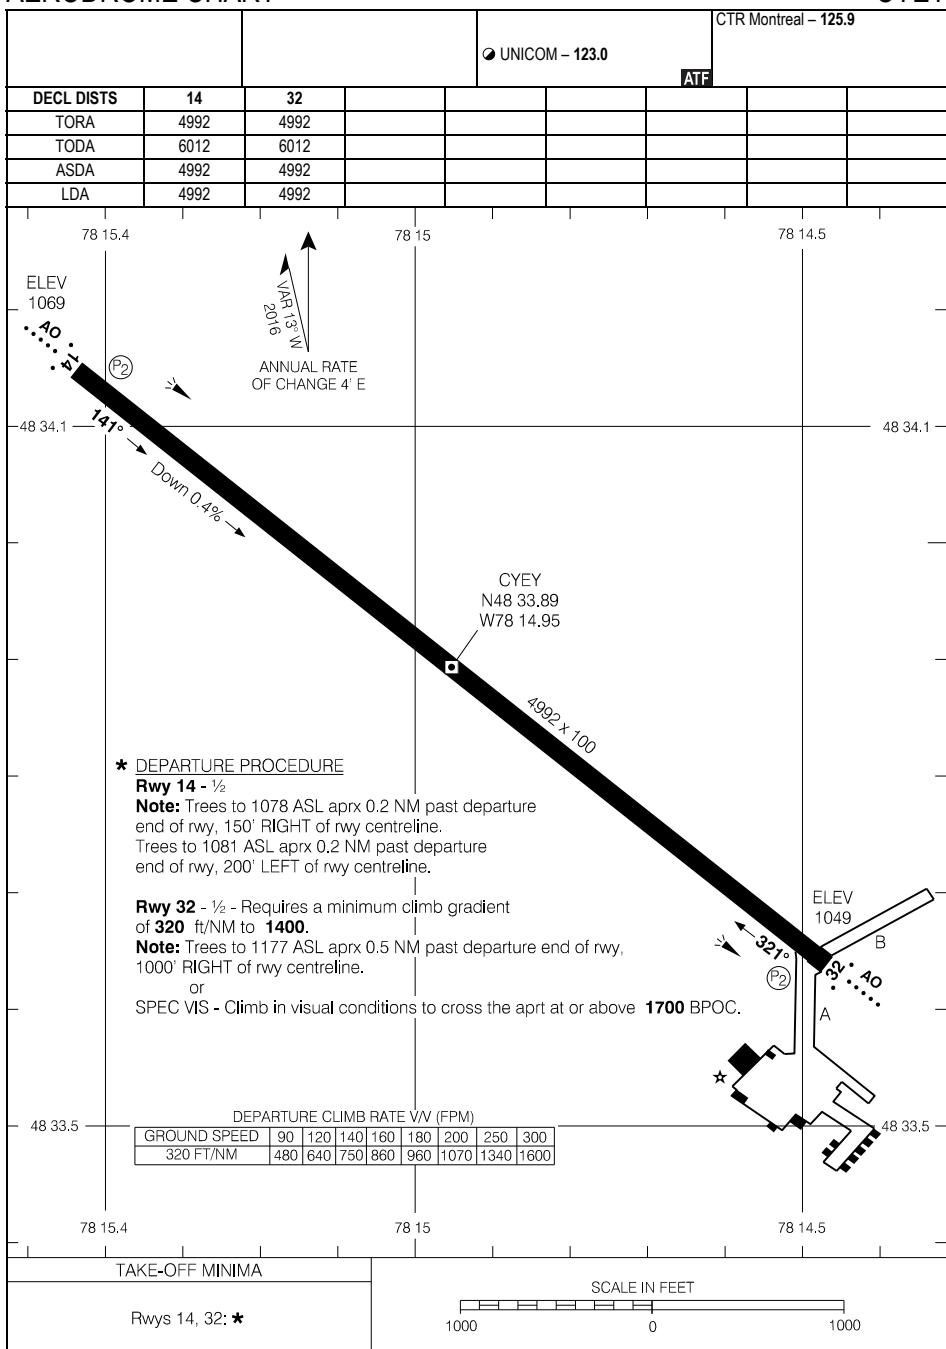

AERODROME CHART

EFF 20 FEB 25


CYEY-AD

CYEY

CYEY-AD

AMOS/MAGNY, QC
CYEY

CARTE D'AÉRODROME

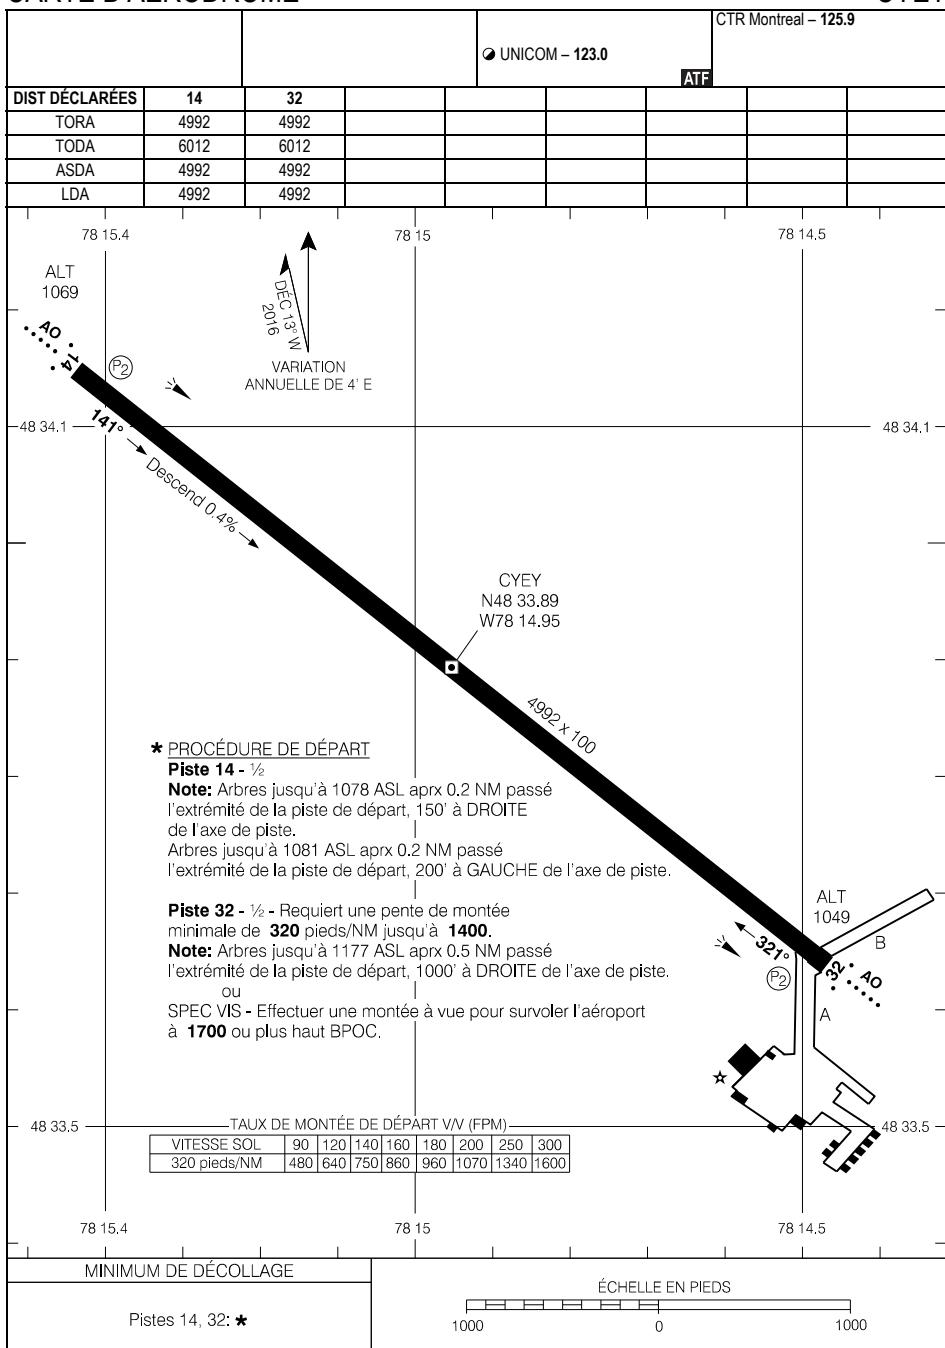

CARTE D'AÉRODROME

EFF 20 FÉV 25


CYEY

CYEY-AD

CYLA-AD

AUPALUK, QC
CYLA

AERODROME CHART

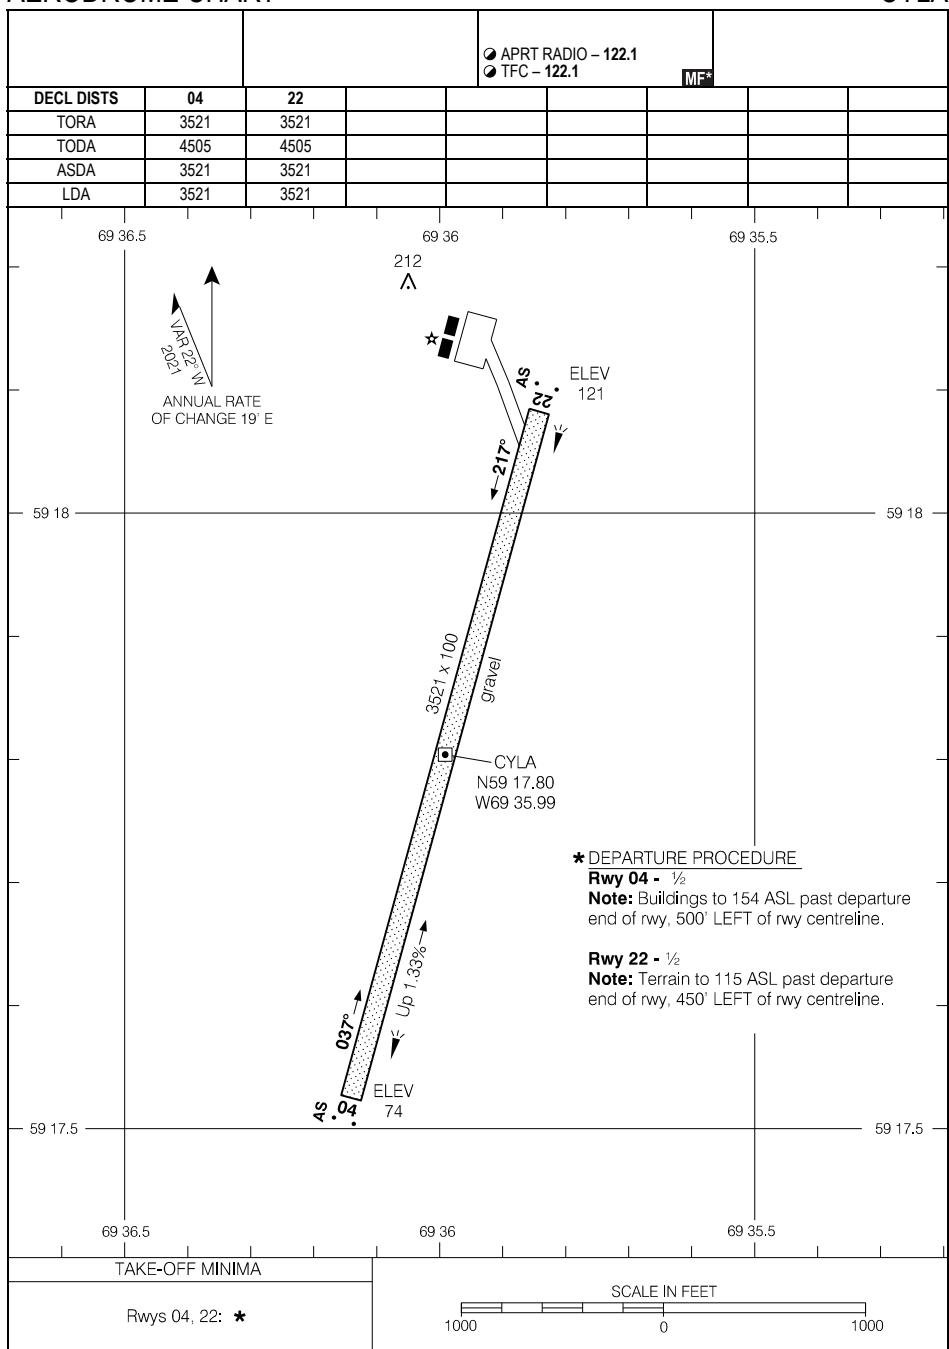

AERODROME CHART

EFF 7 OCT 21


CYLA-AD

CYLA

CYLA-AD

AUPALUK, QC
CYLA

CARTE D'AÉRODROME

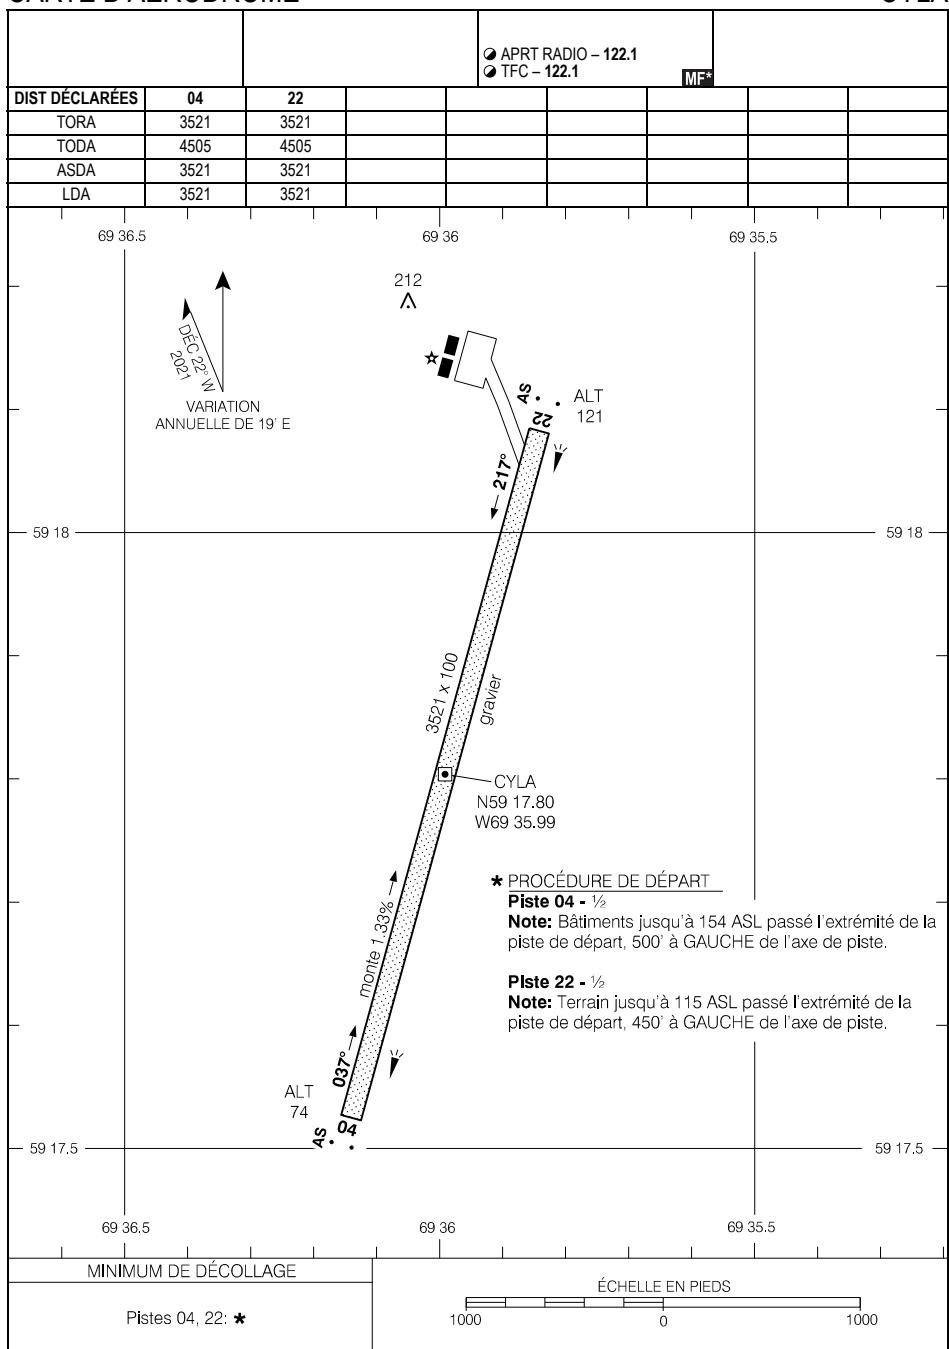

CARTE D'AÉRODROME

EFF 7 OCT 21

CYLA

CYLA-AD


CYBG-AD

BAGOTVILLE, QC
CYBG

AERODROME CHART (DND)

ATIS -124.2 (En) 125.8 (Fr) 302.5		CLNC DEL - 119.0 384.5 GND - 121.7 275.8	TWR - 126.2 337.7	TML - 127.2 227.6
DECL DISTS	11	29	18	36
TORA	10000	10000	6029	6029
TODA	10000	10000	6029	6029
ASDA	10200	10200	6029	6029
LDA	10000	10000	6029	6029

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

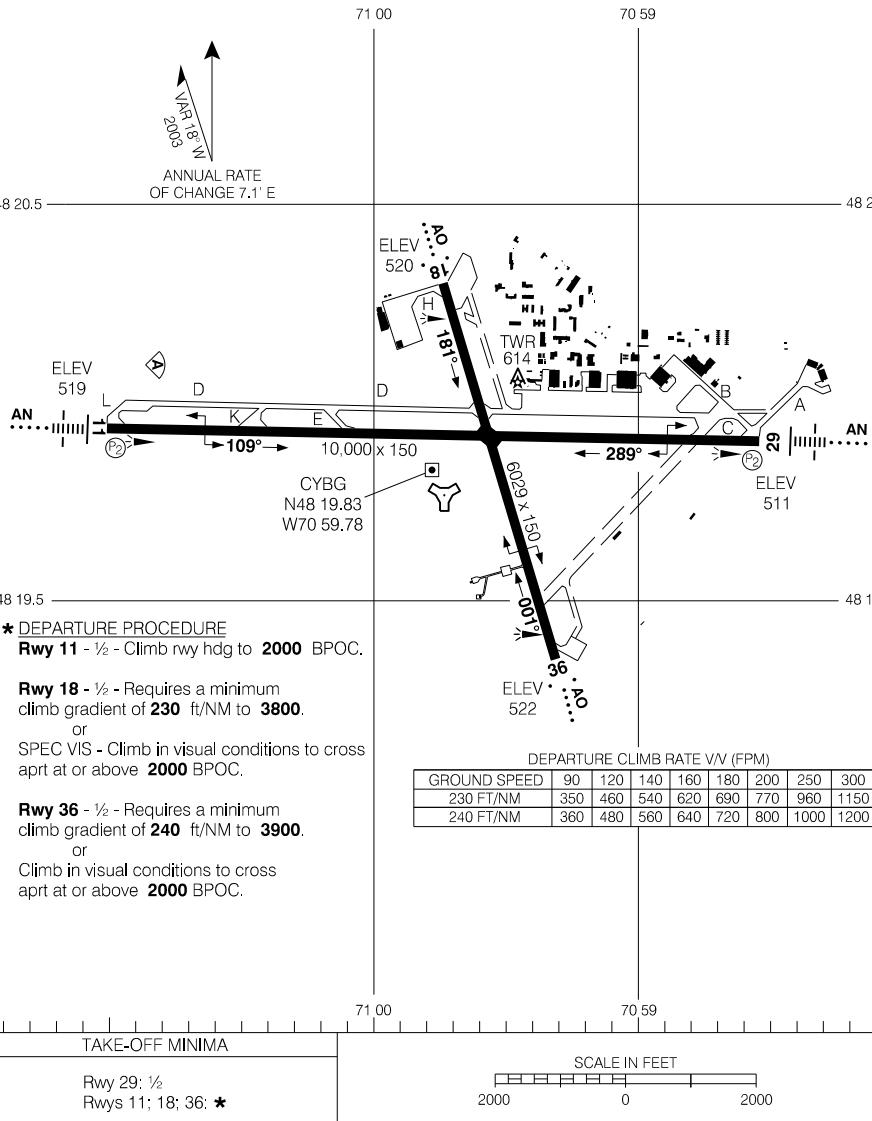

AERODROME CHART (DND)

EFF 16 MAY 24


CYBG

CYBG-AD

CYBG-AD

BAGOTVILLE, QC
CYBG

CARTE D'AÉRODROME

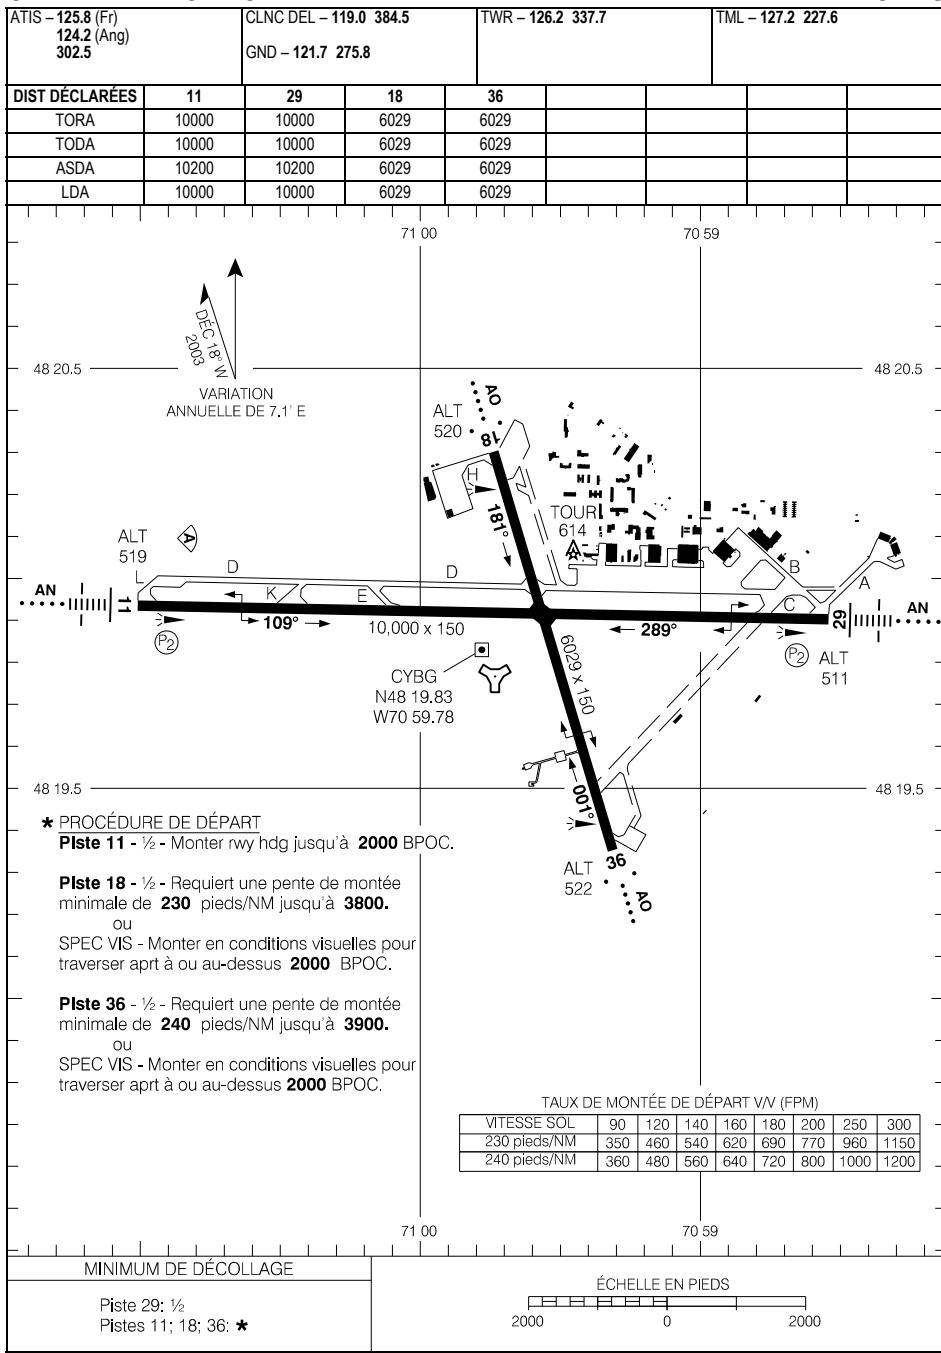


CARTE D'AÉRODROME

EFF 16 MAI 24

CYBG

CYBG-AD

AERODROME CHART

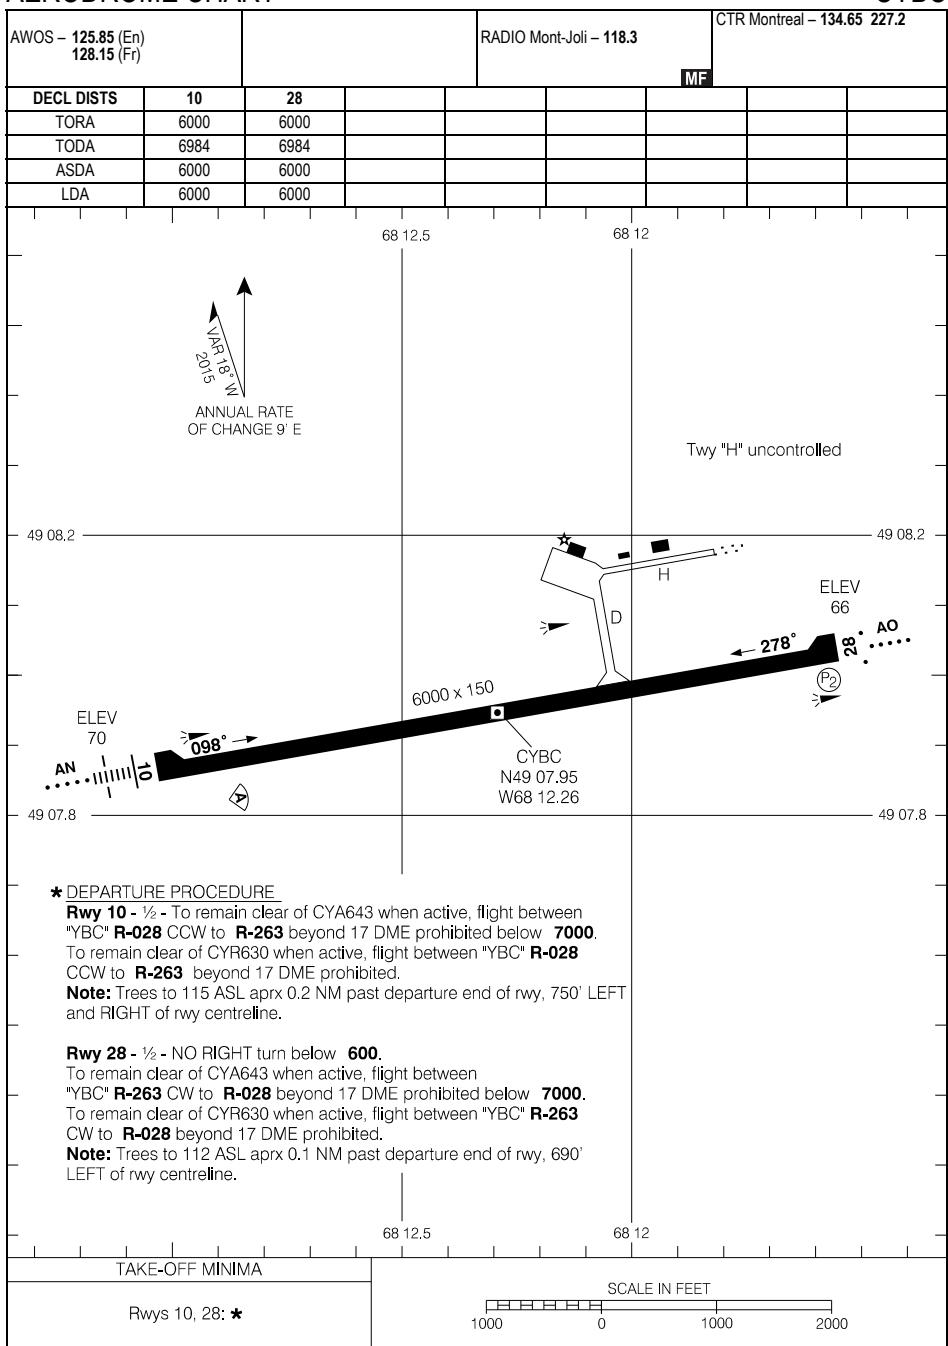


AERODROME CHART

EFF 15 JUN 23

CYBC

CARTE D'AÉRODROME

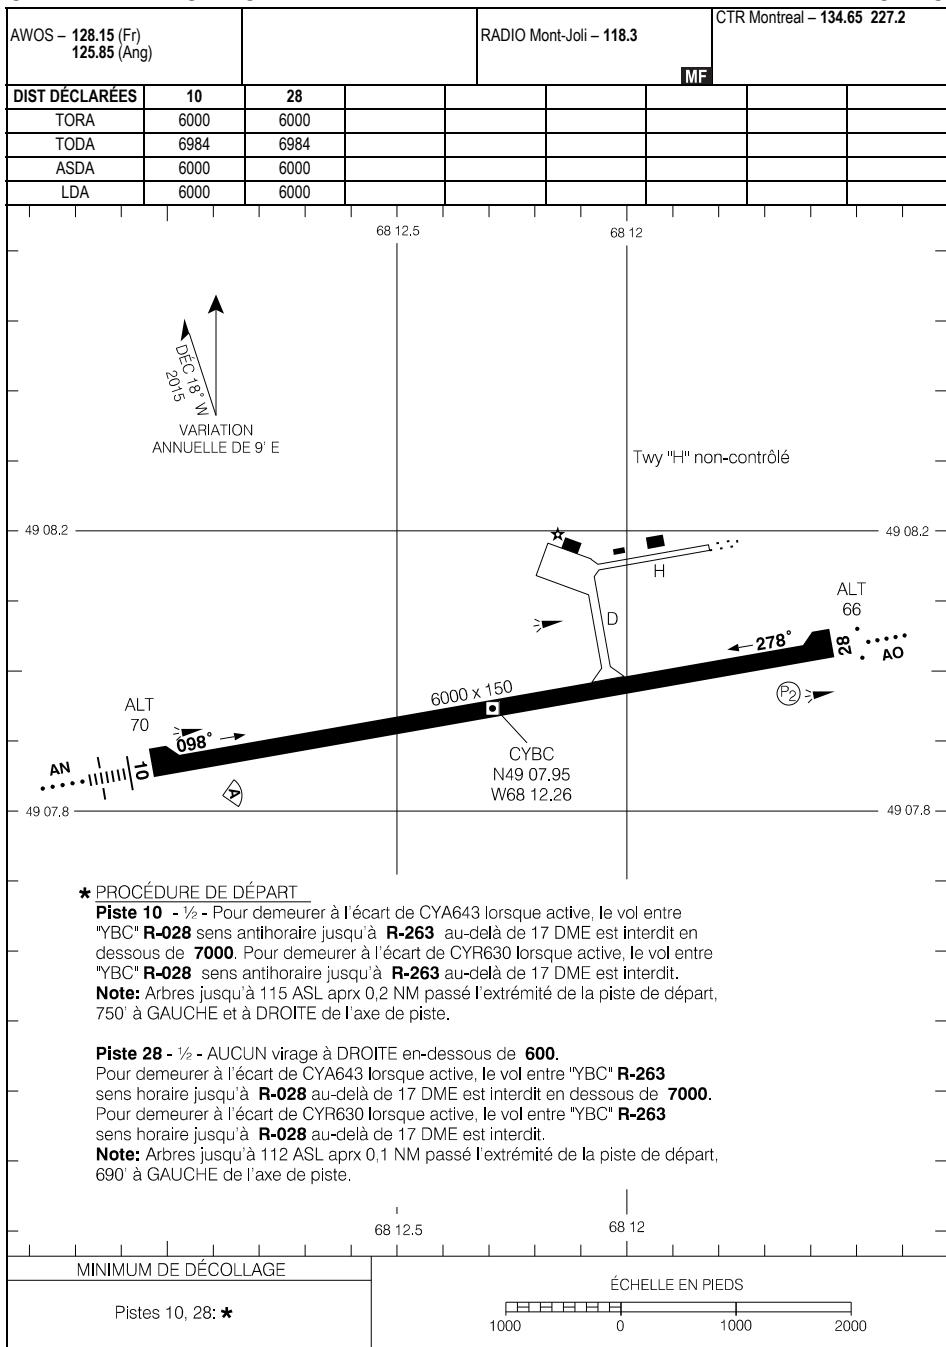

CARTE D'AÉRODROME

EFF 15 JUIN 23

CYBC

CYVB-AD

BONAVENTURE, QC
CYVB

AERODROME CHART

AUTO – 122.05				● UNICOM – 123.0 (AU)		RADIO Quebec – 123.55 DRCO	
				MF			
DECL DISTS	13	31					
TORA	5983	5983					
TODA	5983	5983					
ASDA	5983	5983					
LDA	5983	5983					

DEPARTURE CLIMB RATE V/V (FPM)

GROUND SPEED	90	120	140	160	180	200	250	300
270 FT/NM	410	540	630	720	810	900	1130	1350

*** DEPARTURE PROCEDURE**

Rwy 13 - 1/2

Note: Trees to 140 ASL aprx 100' past
departure end of rwy, 220' LEFT of centreline.
Trees to 154 ASL abeam departure end of rwy, 300' LEFT of rwy centreline.

Trees to 211 ASL aprx 300' past departure end of rwy, 500' LEFT of rwy centreline.

Power line to 154 ASL aprx 500' past departure end of rwy.

Rwy 31 - 1/2 - Requires a minimum climb gradient of **270 ft/NM** to **500**.
Note: Fence to 150 ASL running parallel to departure path of rwy, 500' LEFT and RIGHT of rwy centreline.

SPEC VIS - Climb in visual conditions to cross the aprt at or above **1000 BPOC**.

SCALE IN FEET

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved


AERODROME CHART

EFF 7 AUG 25

CYVB

CYVB-AD


CARTE D'AÉRODROME

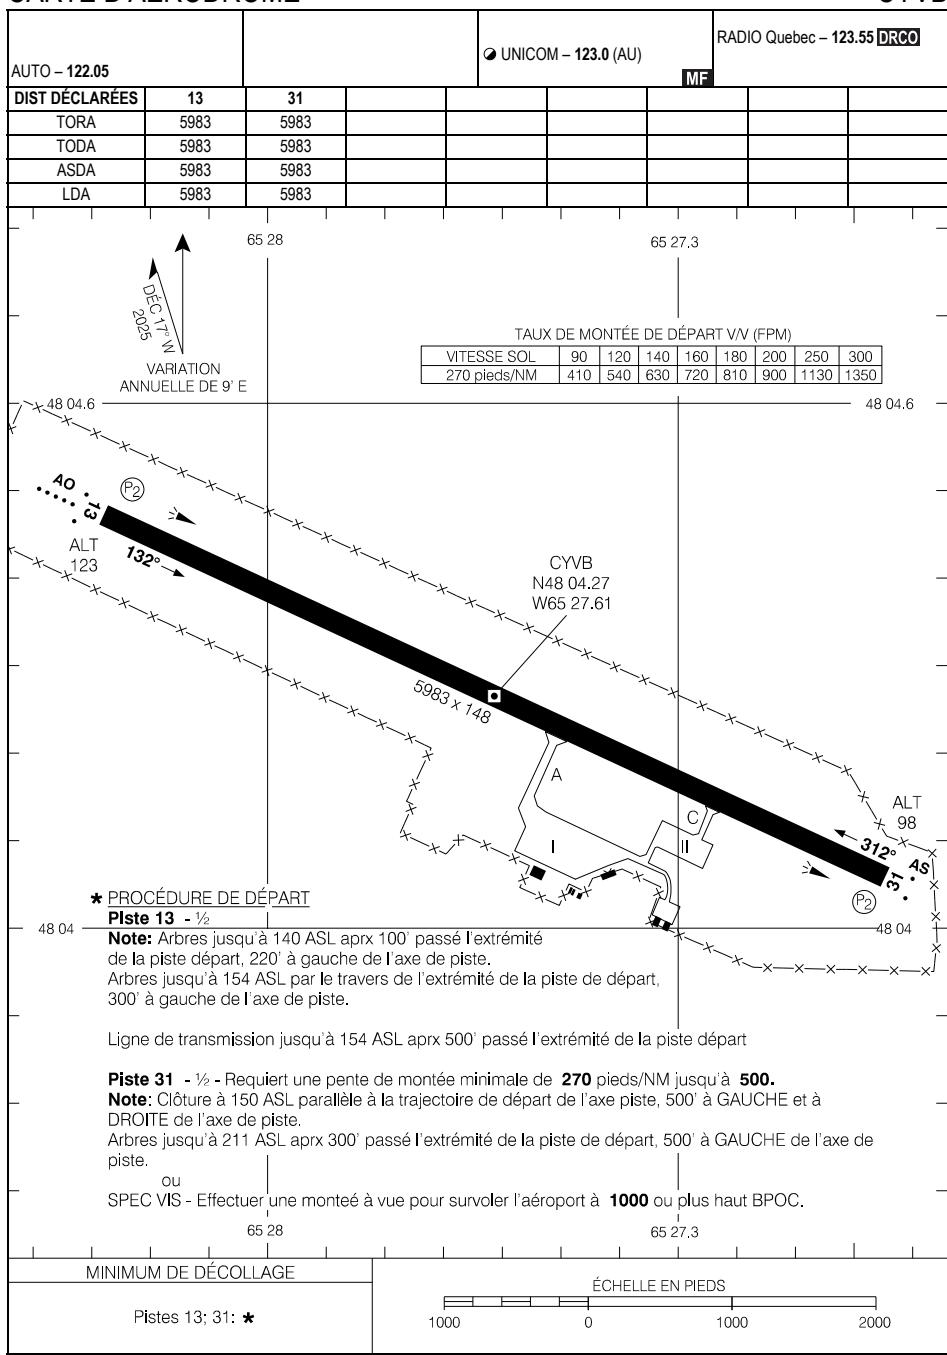

CZBM-AD

BROMONT (ROLAND DÉSOURDY), QC
CZBM

AERODROME CHART

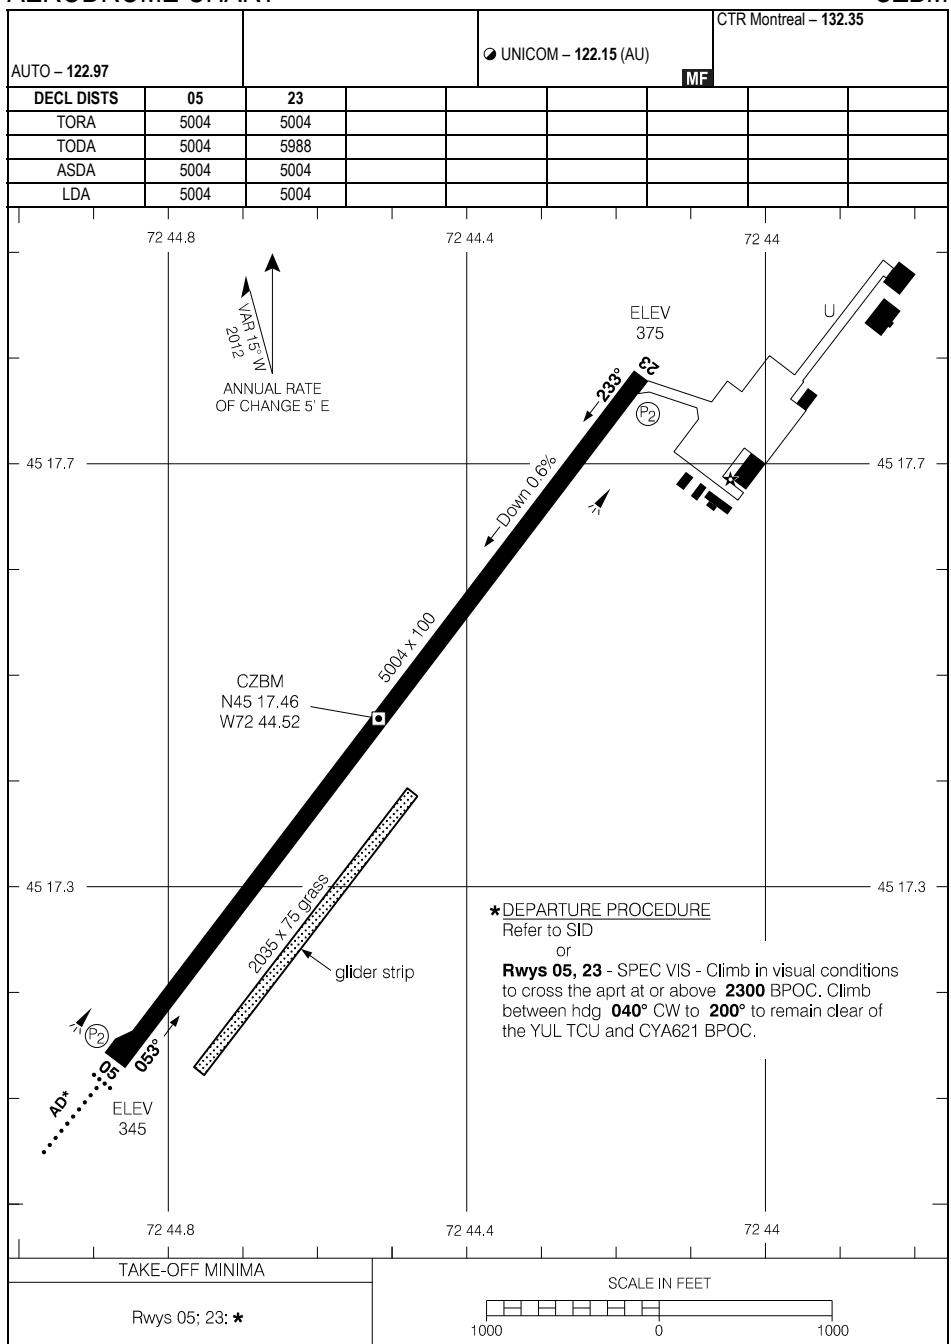

AERODROME CHART

EFF 12 AUG 21

CZBM-AD


CZBM

CZBM-AD

BROMONT (ROLAND DÉSOURDY), QC

CZBM

CARTE D'AÉRODROME

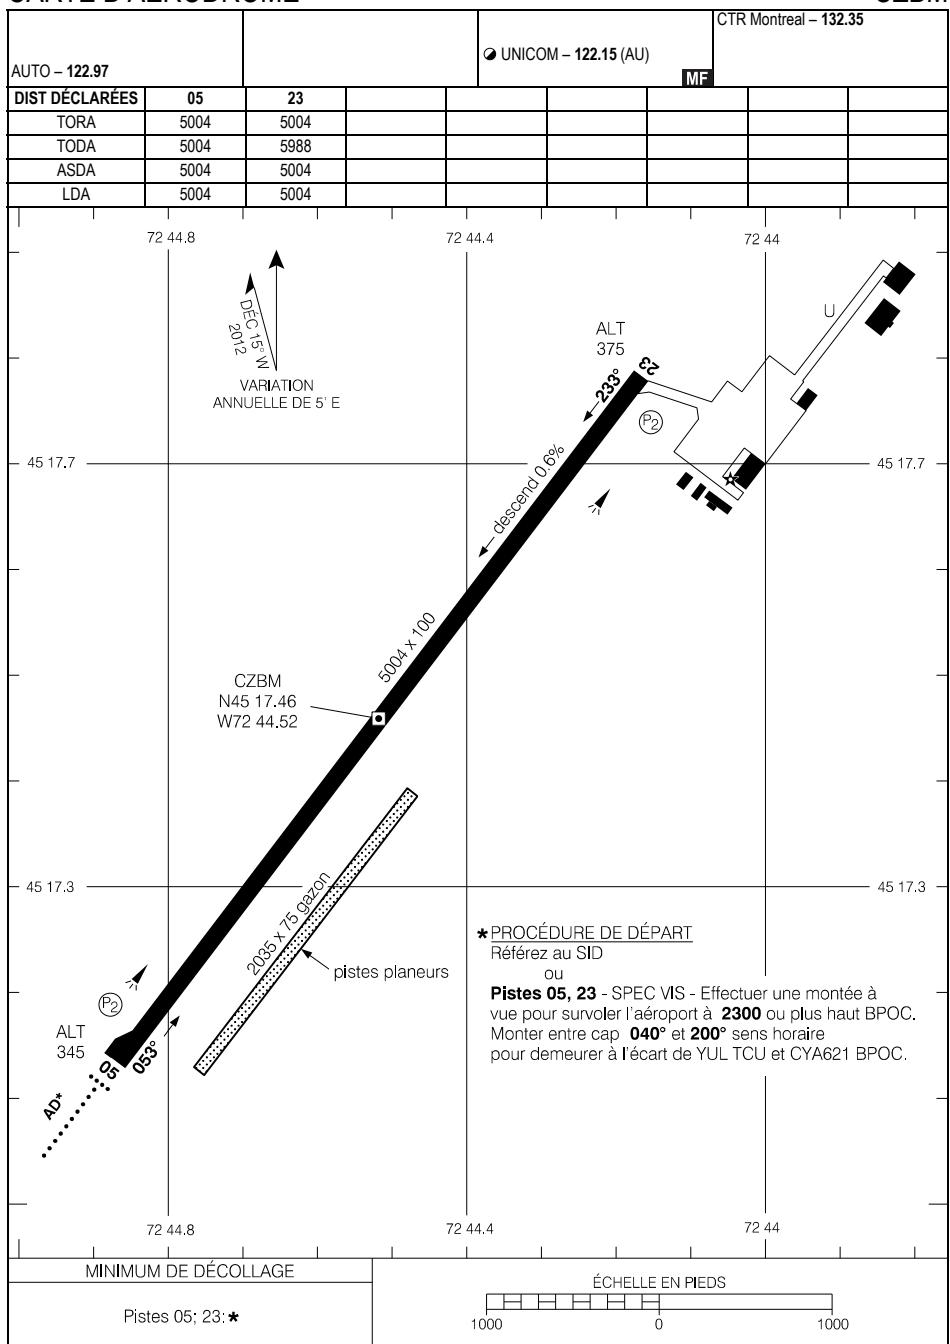

CARTE D'AÉRODROME

EFF 12 AOÛT 21


CZBM

CZBM-AD

CYML-AD

CHARLEVOIX, QC
CYML

AERODROME CHART

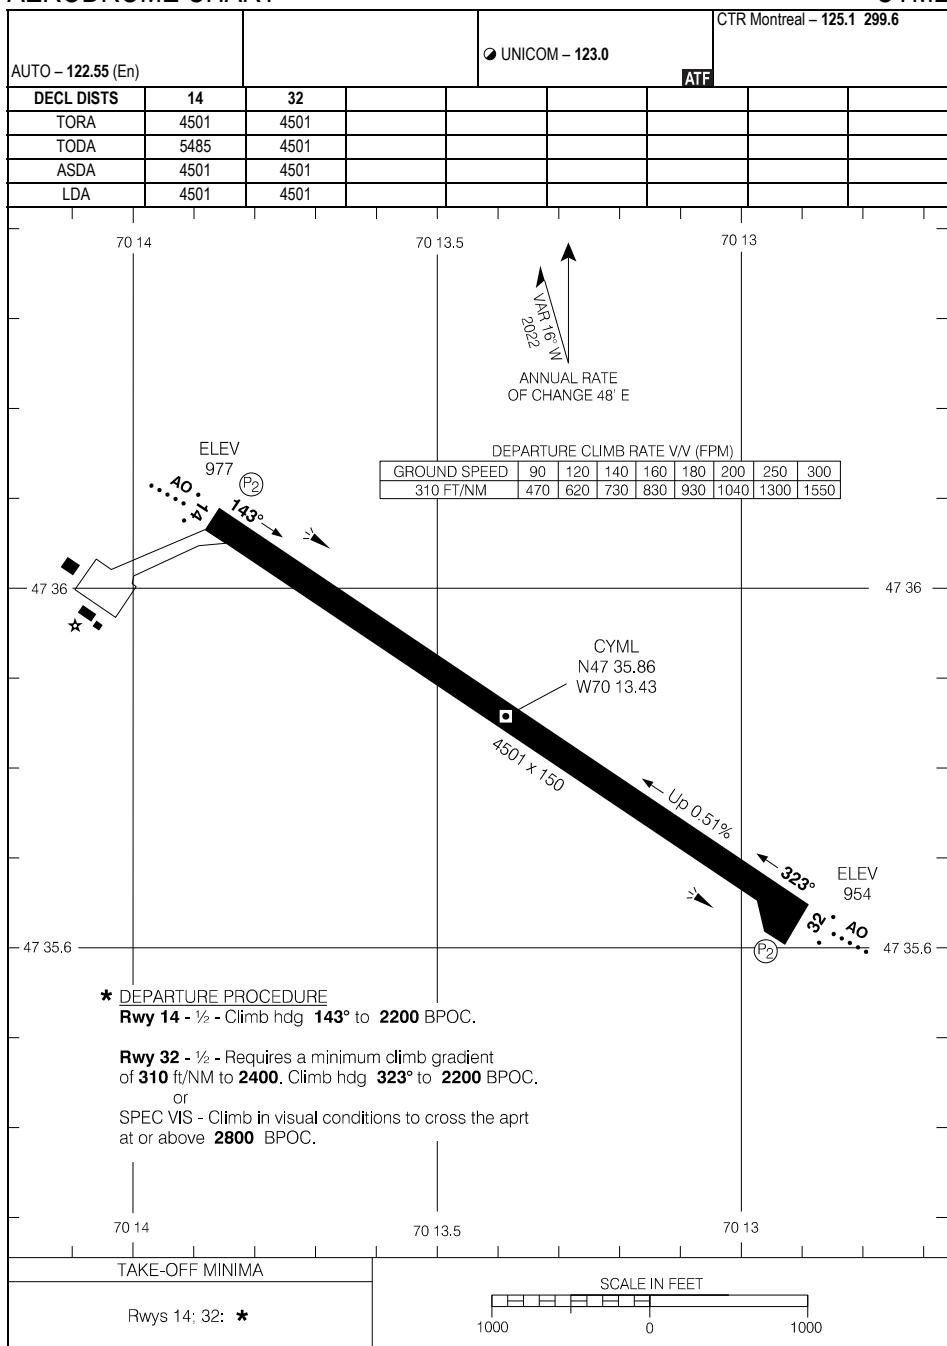

AERODROME CHART

EFF 29 DEC 22


CYML

CYML-AD

CYML-AD

CHARLEVOIX, QC
CYML

CARTE D'AÉRODROME

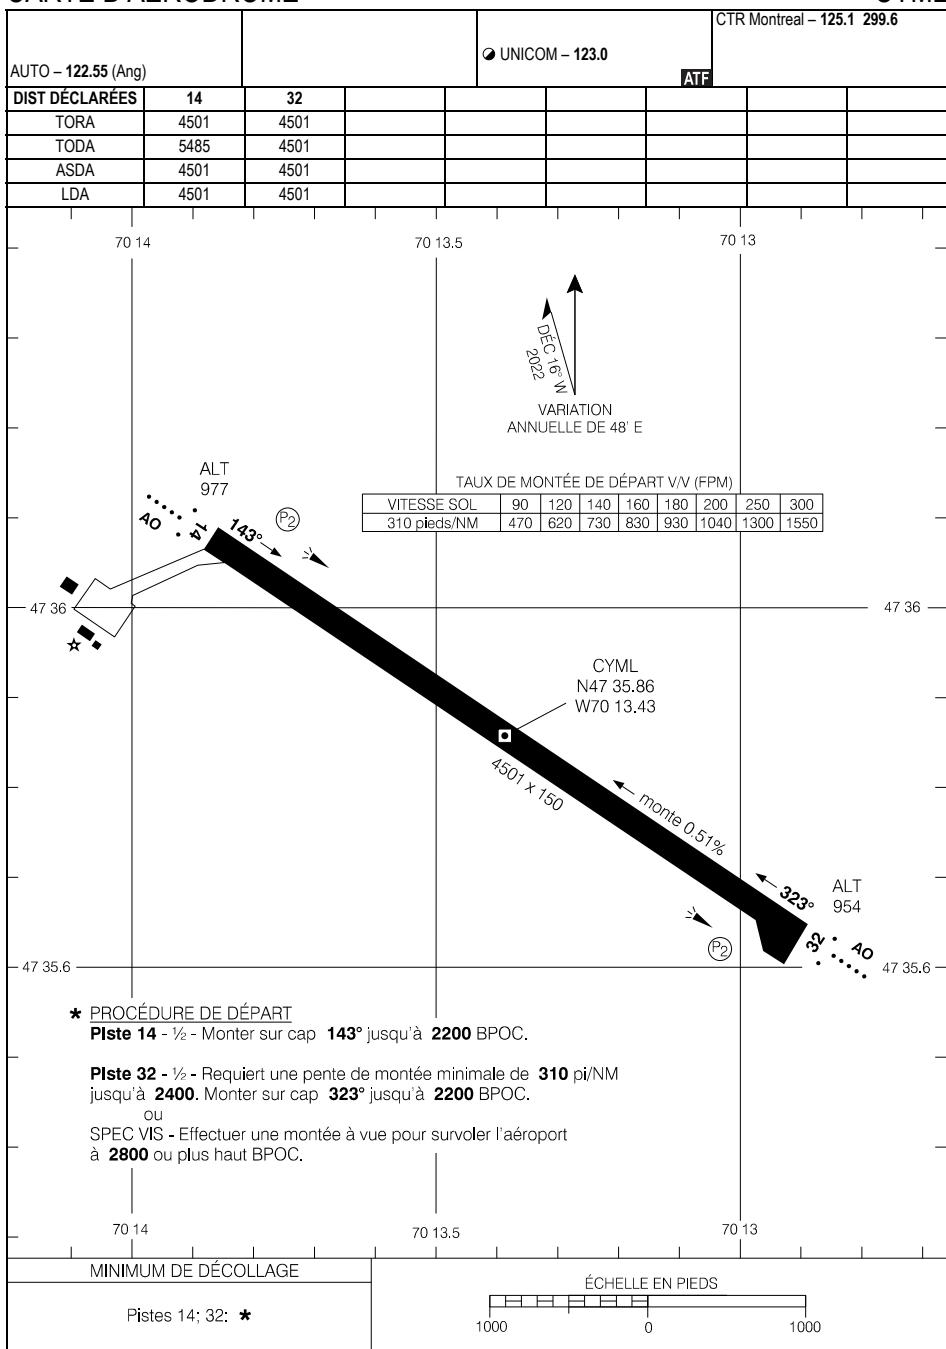CARTE D'AÉRODROME
EFF 29 DÉC 22


CYML

CYML-AD

CYHR-AD

CHEVERY, QC
CYHR

AERODROME CHART

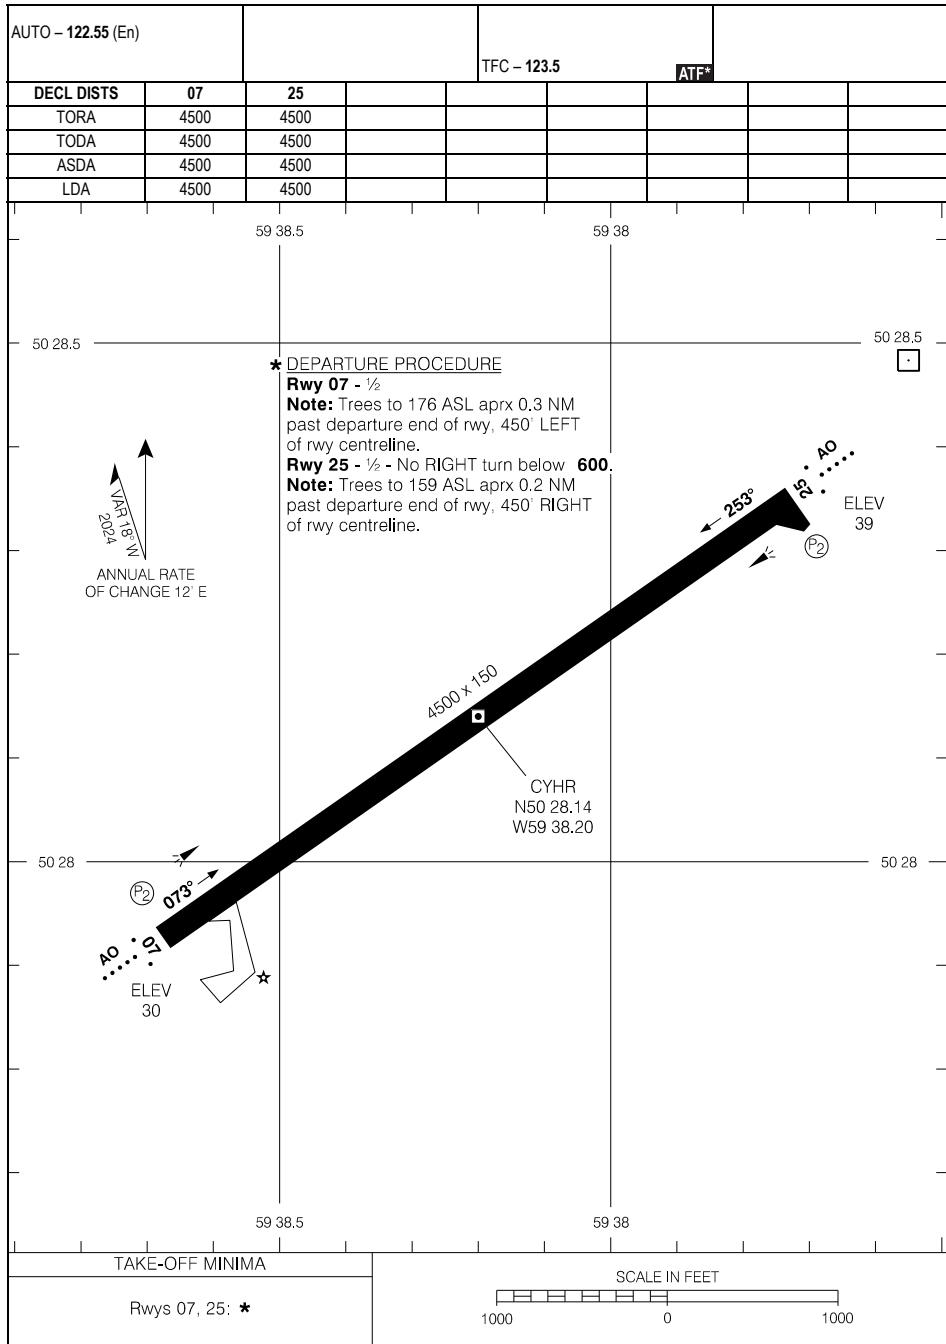

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 16 MAY 24


CYHR-AD

CYHR

CYHR-AD

CHEVERY, QC
CYHR

CARTE D'AÉRODROME

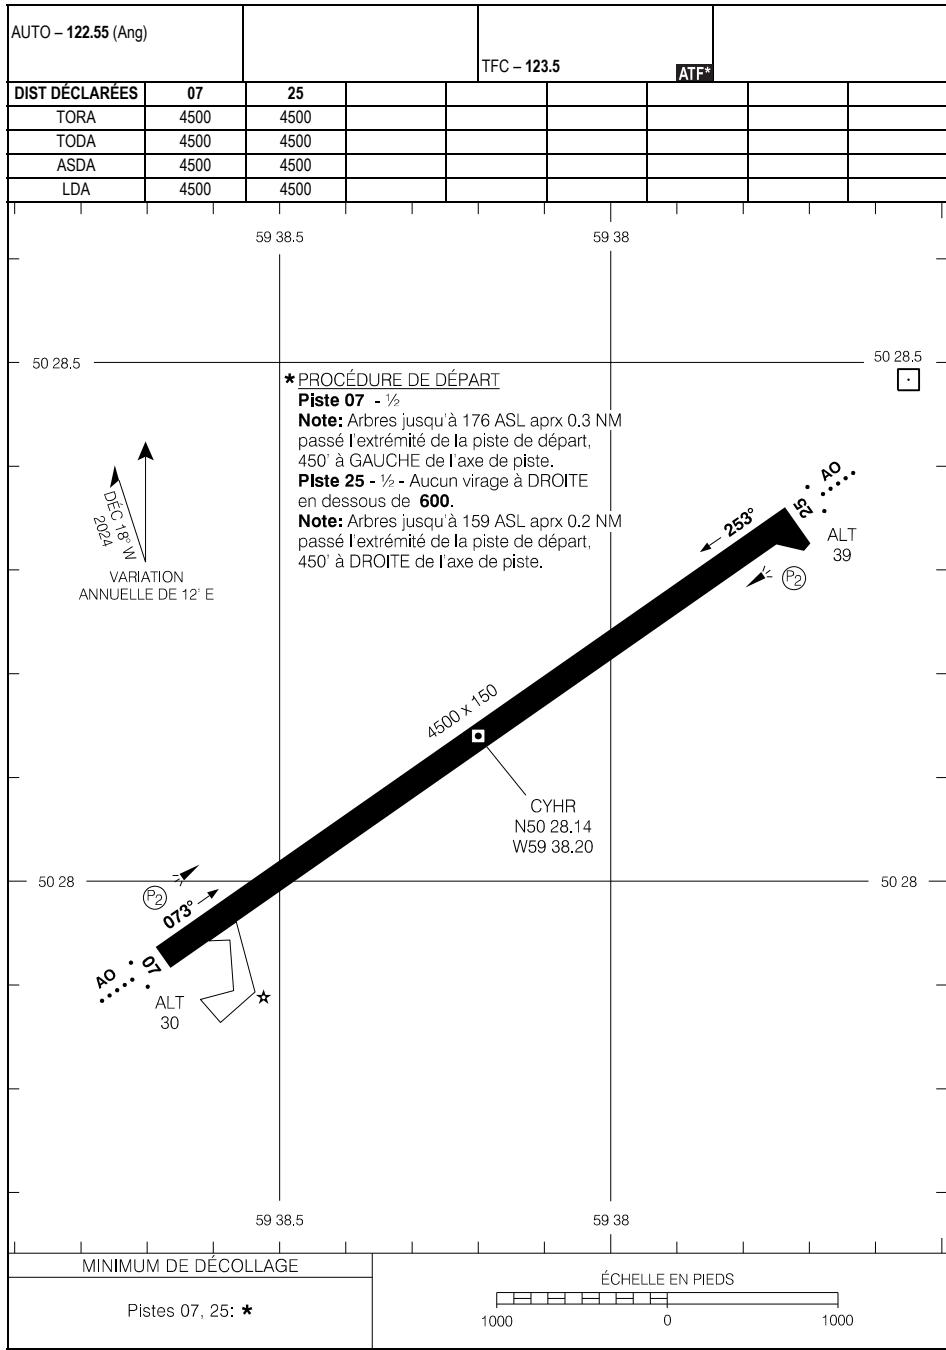CARTE D'AÉRODROME
EFF 16 MAI 24


CYHR

CYHR-AD

CYMT-AD

CHIBOUGAMAU/CHAPAIS, QC
CYMT

AERODROME CHART

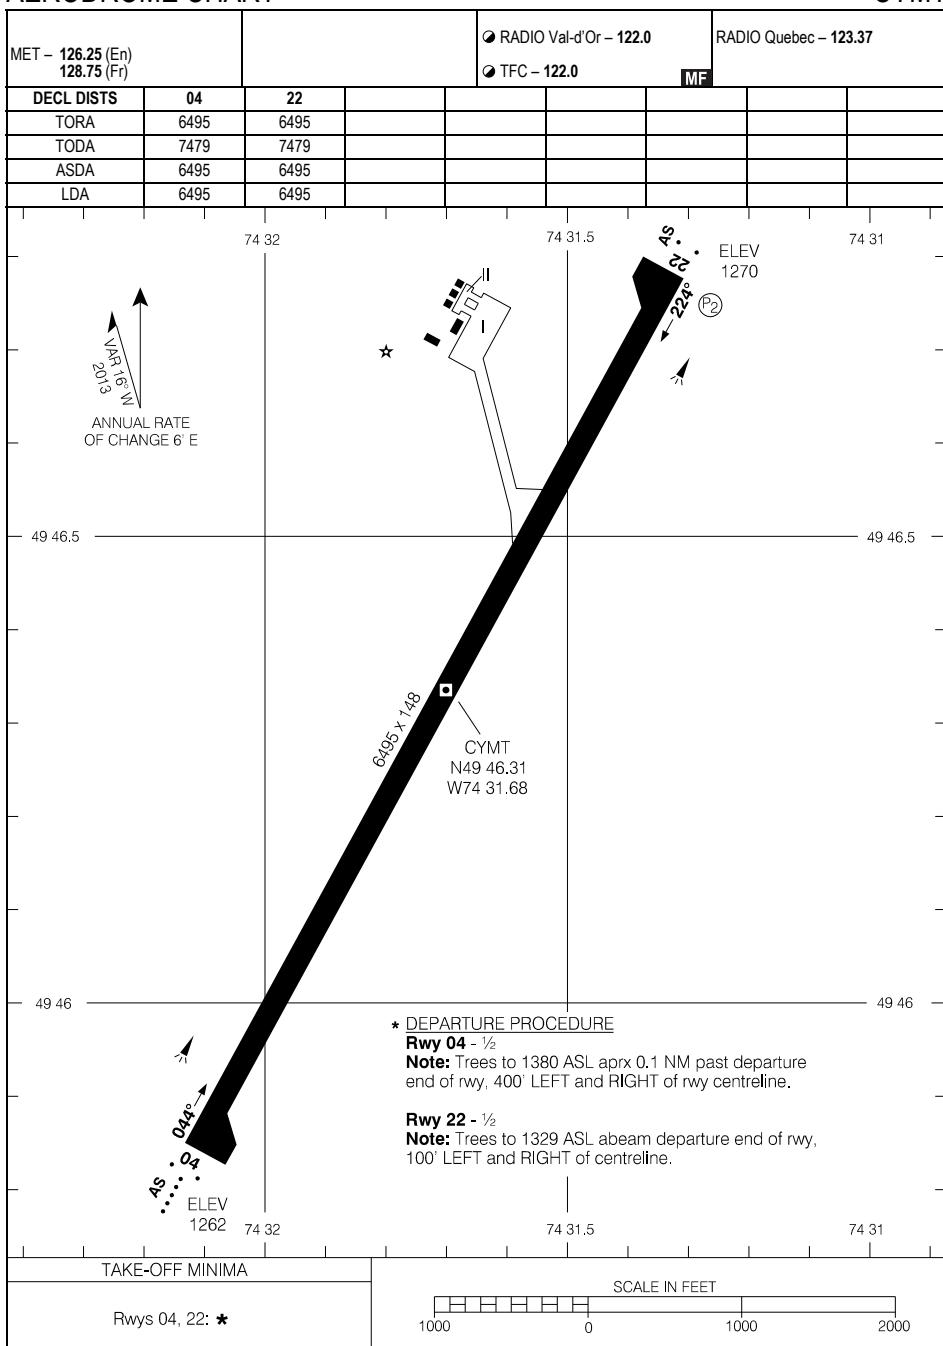

AERODROME CHART

EFF 14 JUL 22


CYMT-AD

CYMT

CYMT-AD

CHIBOUGAMAU/CHAPAI, QC
CYMT

CARTE D'AÉRODROME

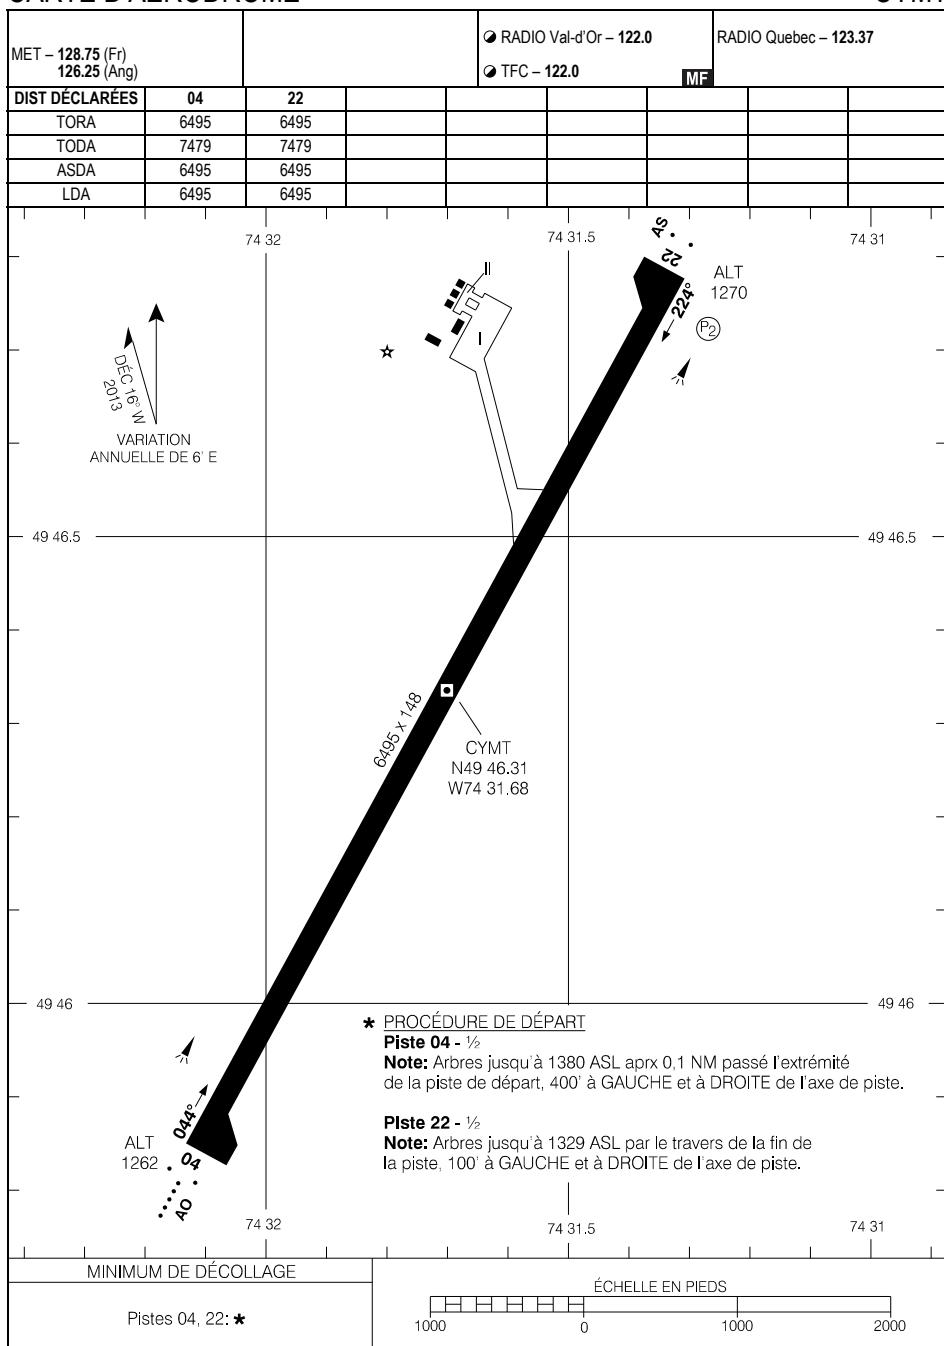

CARTE D'AÉRODROME

EFF 14 JUIL 22


CYMT

CYMT-AD

CYRC-AD

CHICOUTIMI/ST-HONORÉ, QC
CYRC

AERODROME CHART

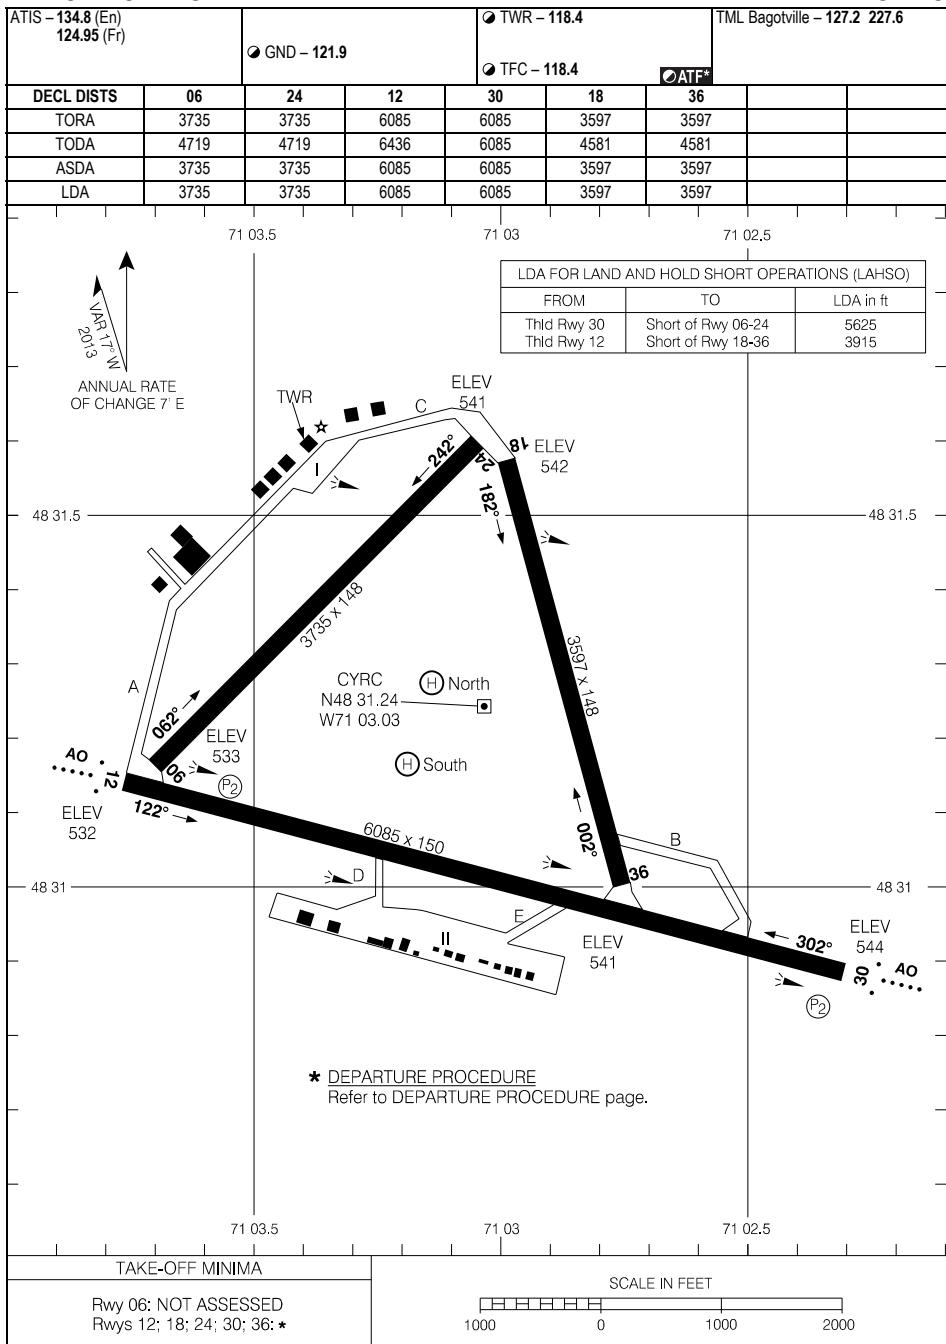

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved


AERODROME CHART

EFF 25 JAN 24

CYRC-AD

CYRC

CARTE D'AÉRODROME

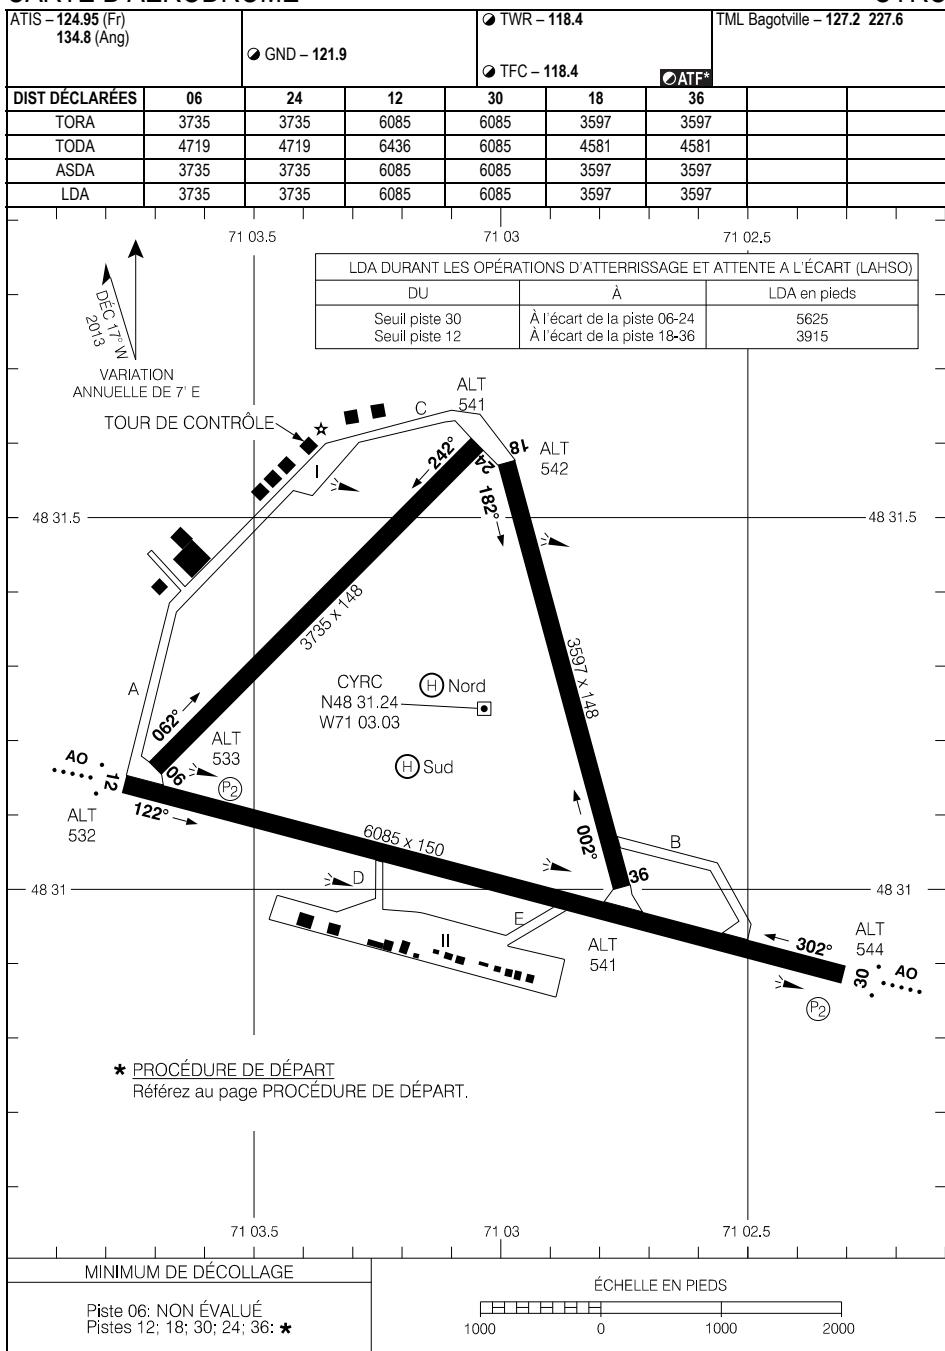


CARTE D'AÉRODROME

EFF 25 JAN 24

CYRC

AERODROME CHART

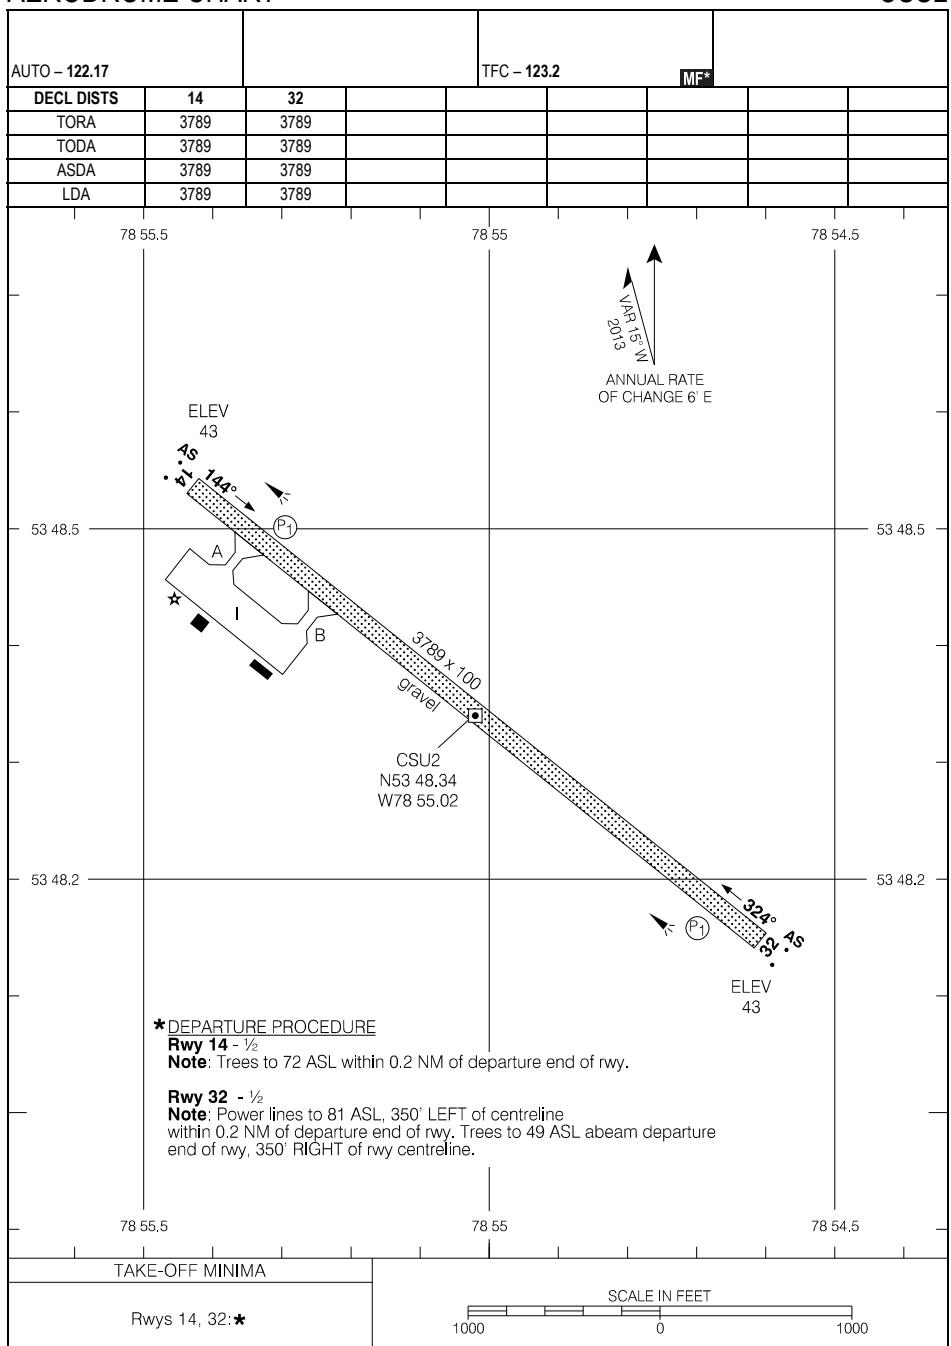


AERODROME CHART

EFF 17 JUN 21

CSU2

CARTE D'AÉRODROME

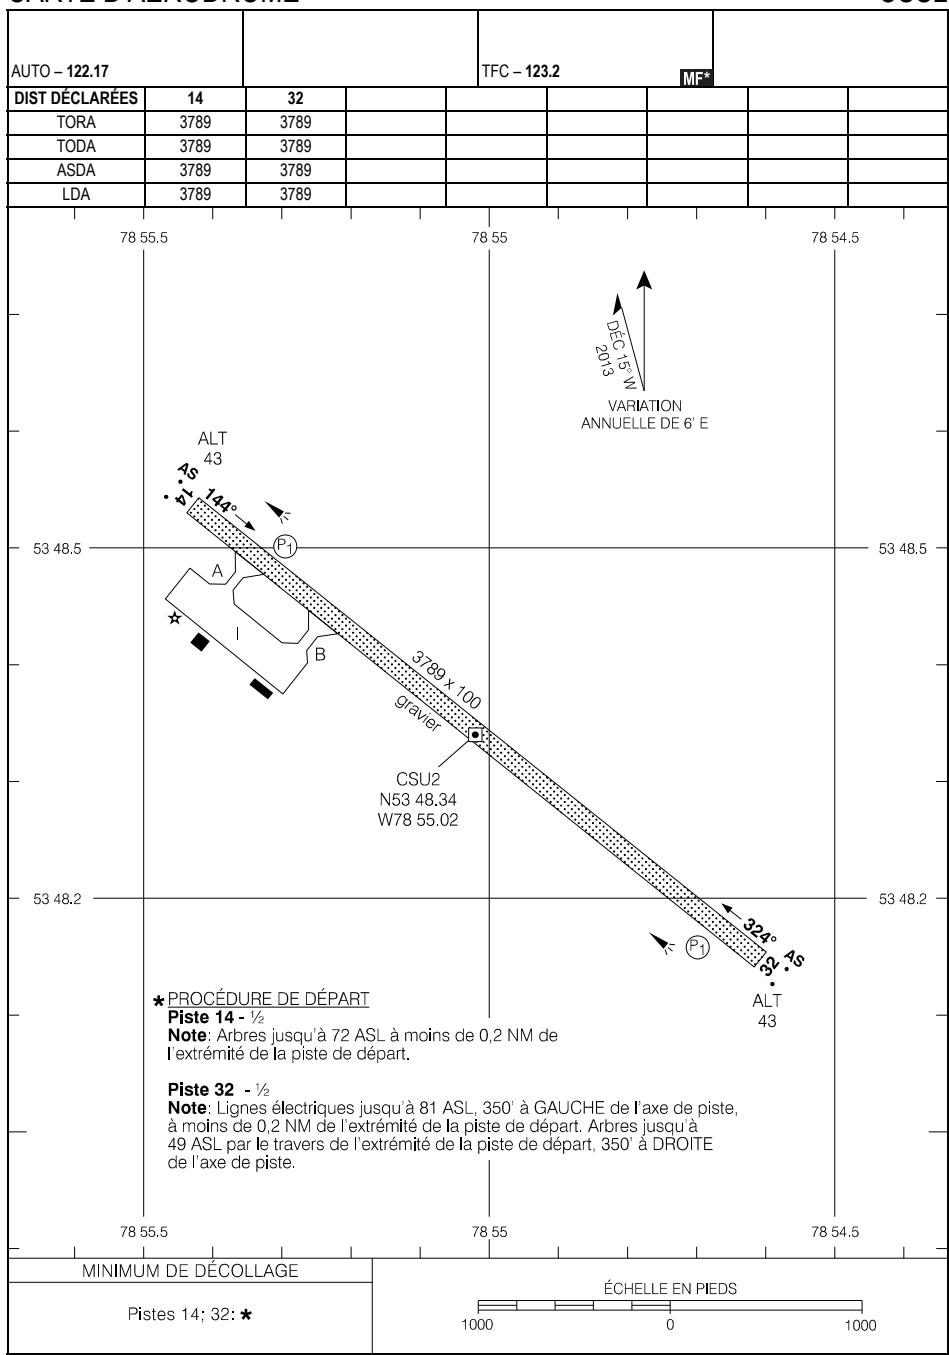

CARTE D'AÉRODROME

EFF 17 JUIN 21

CSU2

AERODROME CHART


AUTO - 122.55

● UNICOM – 122.8

MR


CTR Montreal – 132.35

DECL DISTS	06	24					
TORA	6003	6003					
TODA	6003	6003					
ASDA	6003	6003					
LDA	6003	6003					

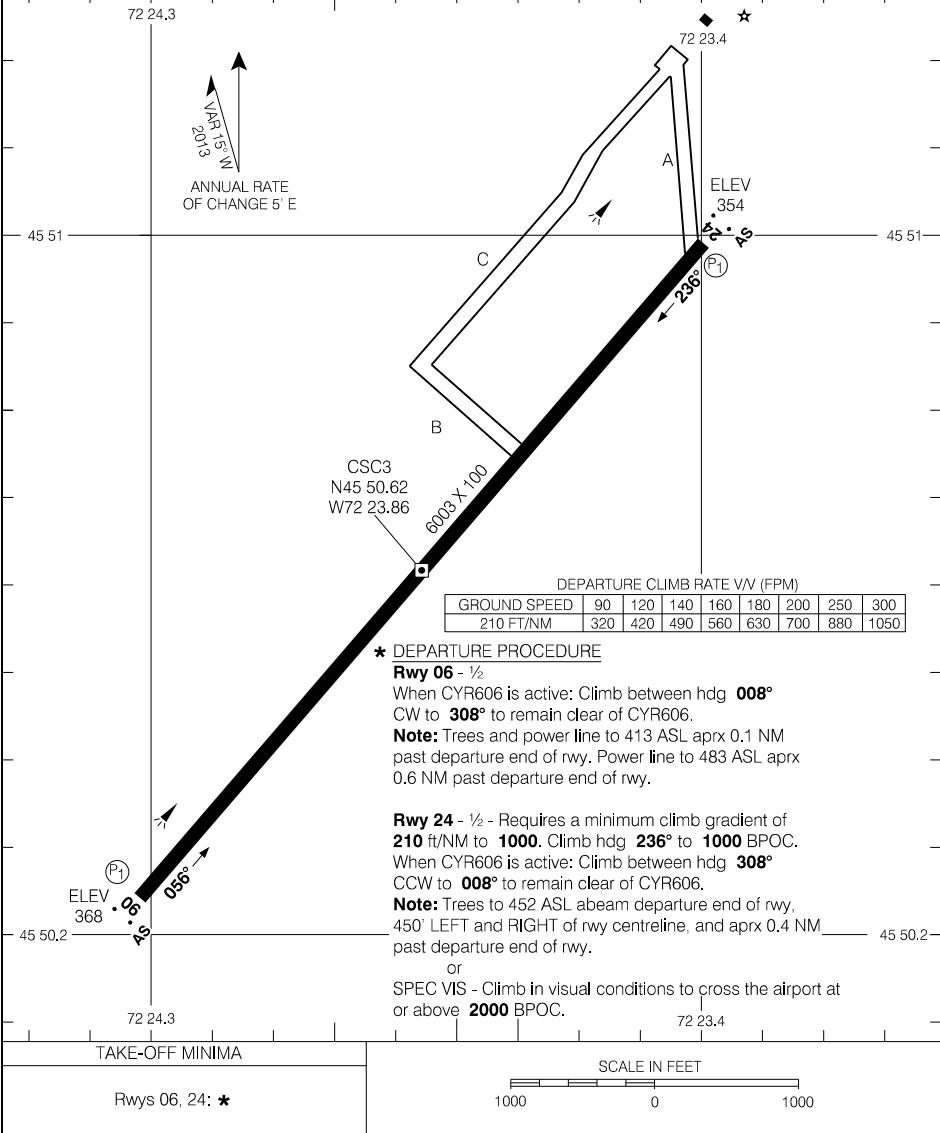

AERODROME CHART

CARTE D'AÉRODROME

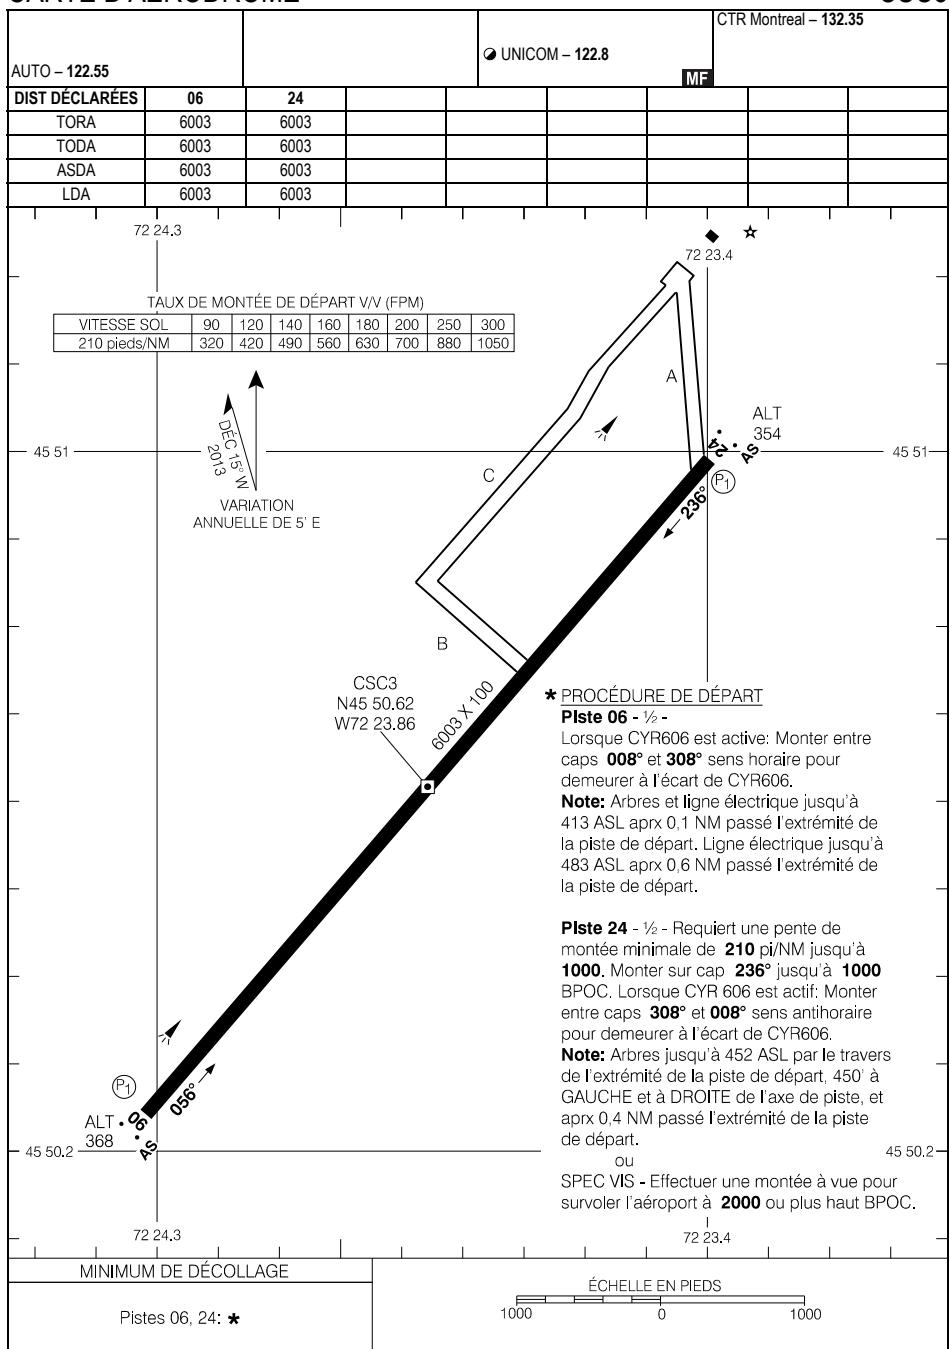


CARTE D'AÉRODROME

EFF 25 JAN 24

CTG3-AD

DU ROCHER-PERCÉ (PABOK), QC
CTG3

AERODROME CHART

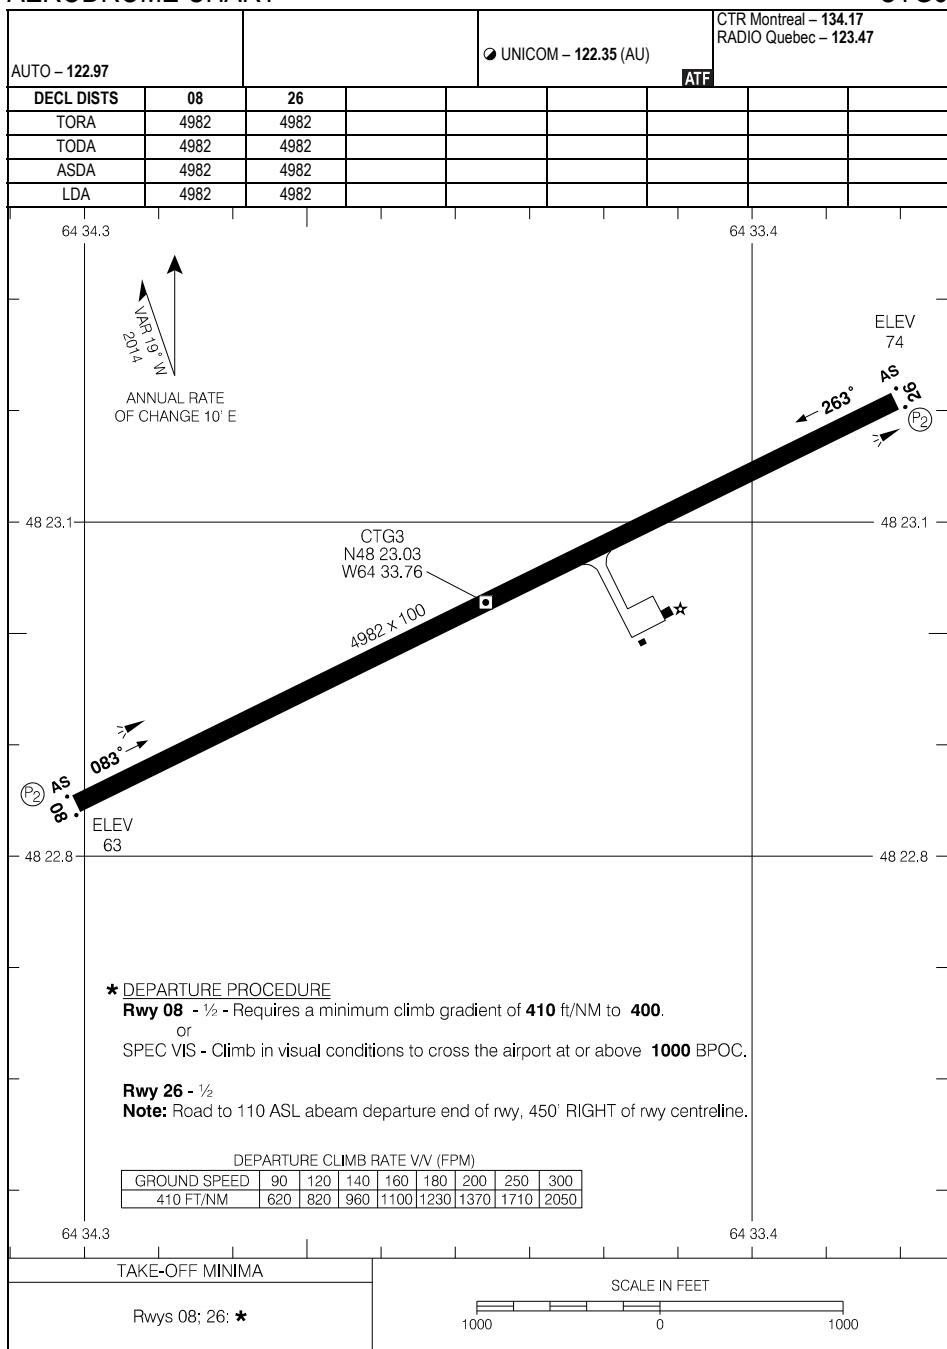

AERODROME CHART

EFF 17 APR 25

CTG3


CTG3-AD

AUTO - 122.97

● UNICOM - 122.35 (AU)

CTR Montreal - 134.17
RADIO Québec - 123.47


ATF

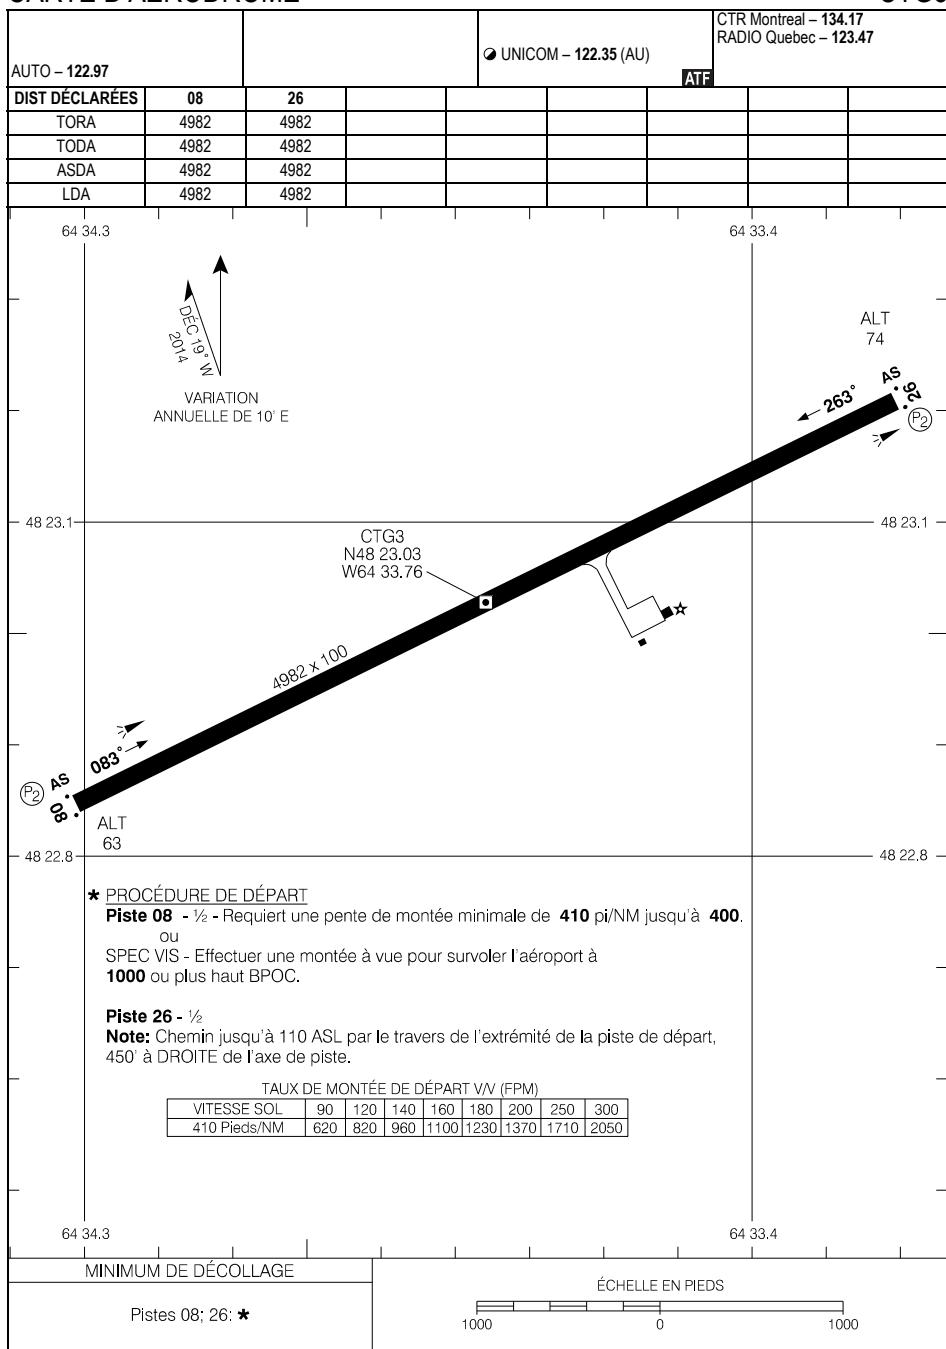

CZEM-AD

EASTMAIN RIVER, QC
CZEM

AERODROME CHART

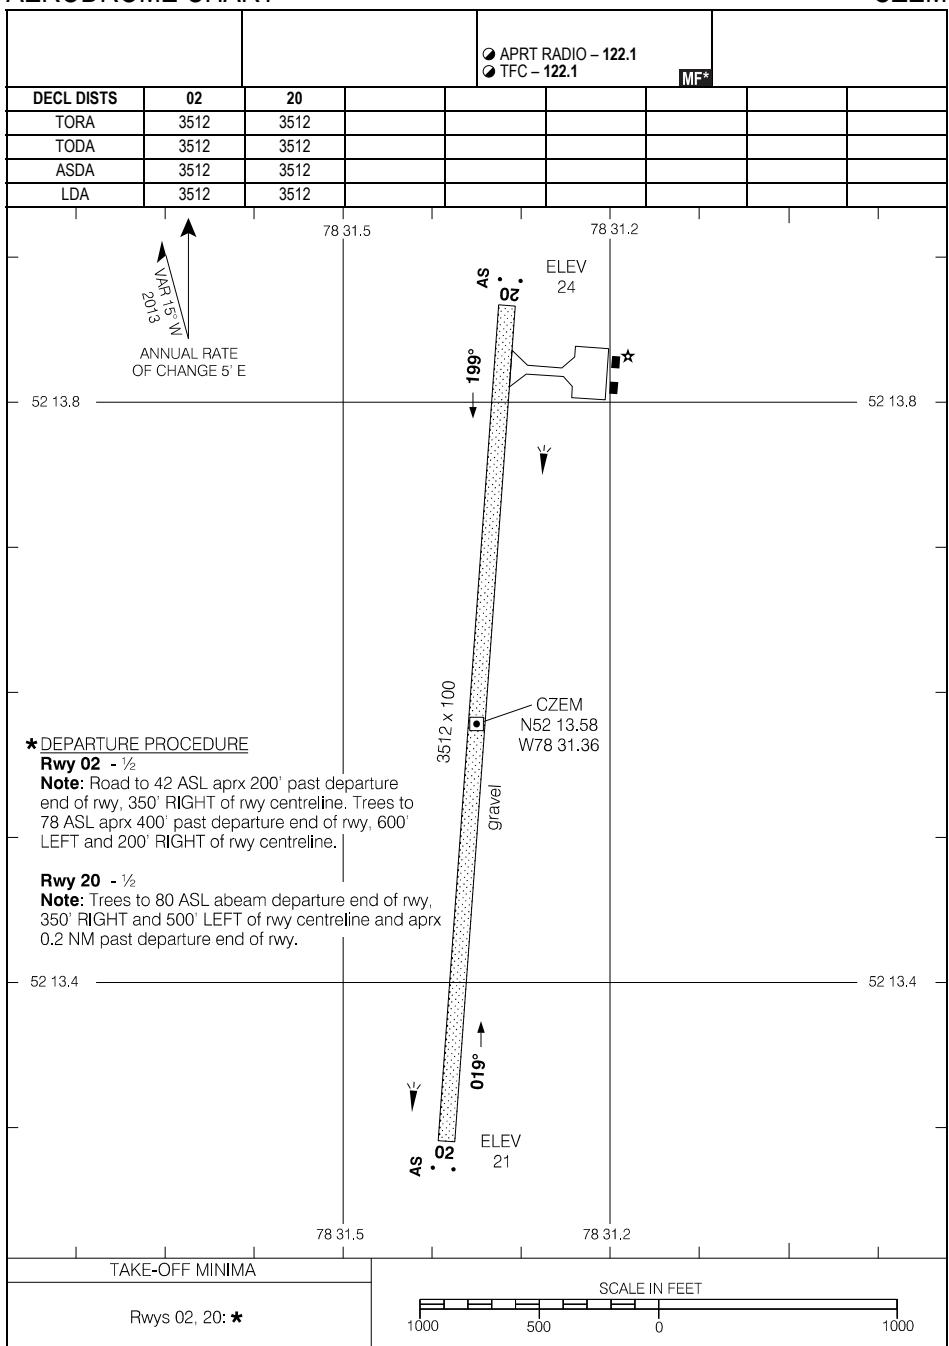

AERODROME CHART

EFF 5 SEP 24


CZEM-AD

CZEM

CZEM-AD

EASTMAIN RIVER, QC
CZEM

CARTE D'AÉRODROME

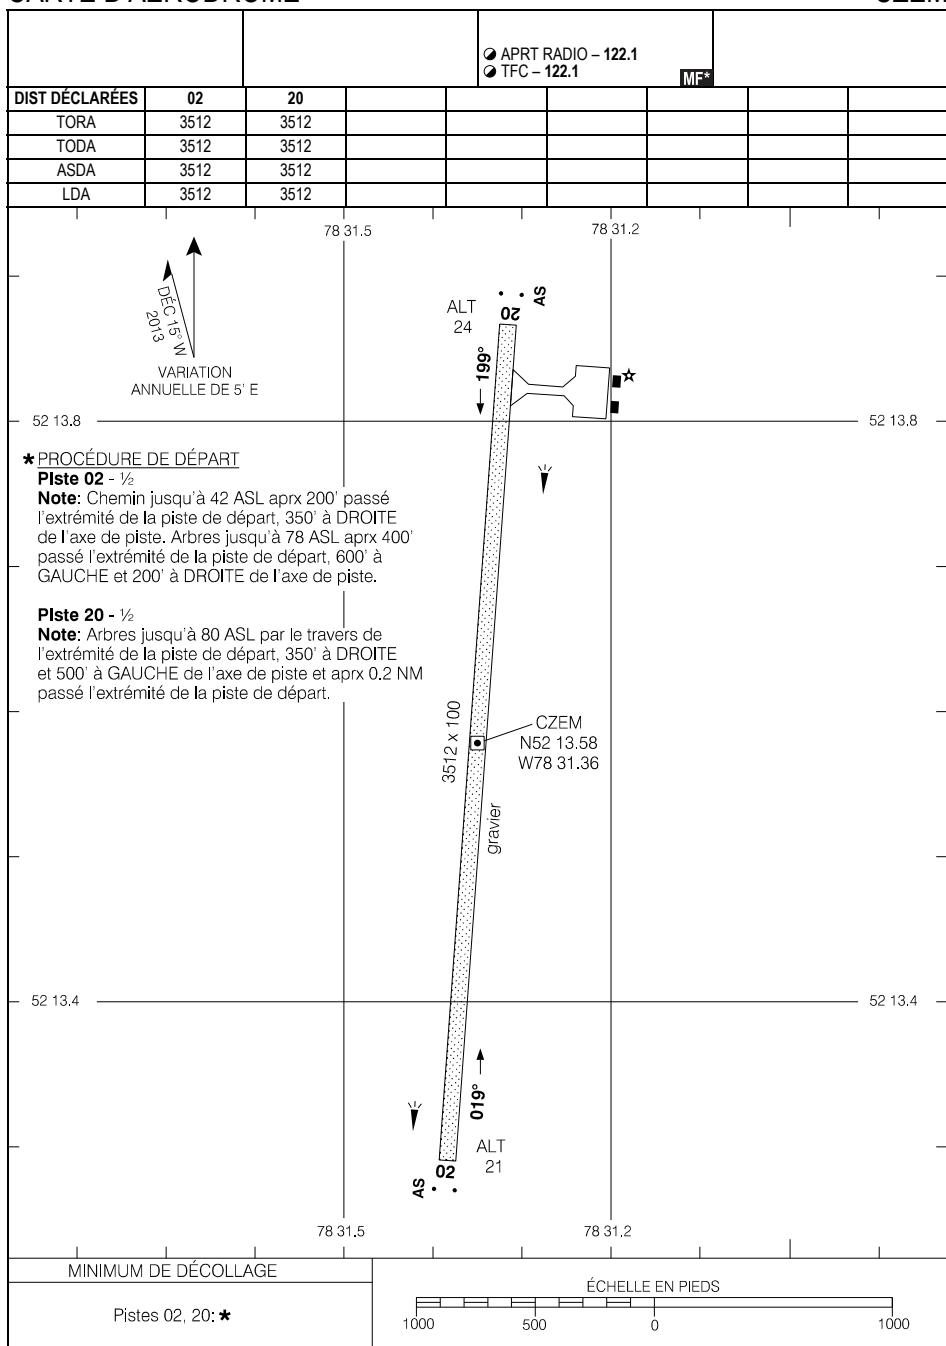

CARTE D'AÉRODROME

EFF 5 SEP 24

CZEM


CZEM-AD

CEL8-AD

ÉLÉONORE, QC
CEL8

AERODROME CHART

AUTO - 122.55				TFC - 123.2		MF*	
DECL DISTS	09	27					
TORA	3930	3930					
TODA	3930	3930					
ASDA	3930	3930					
LDA	3737	3736					

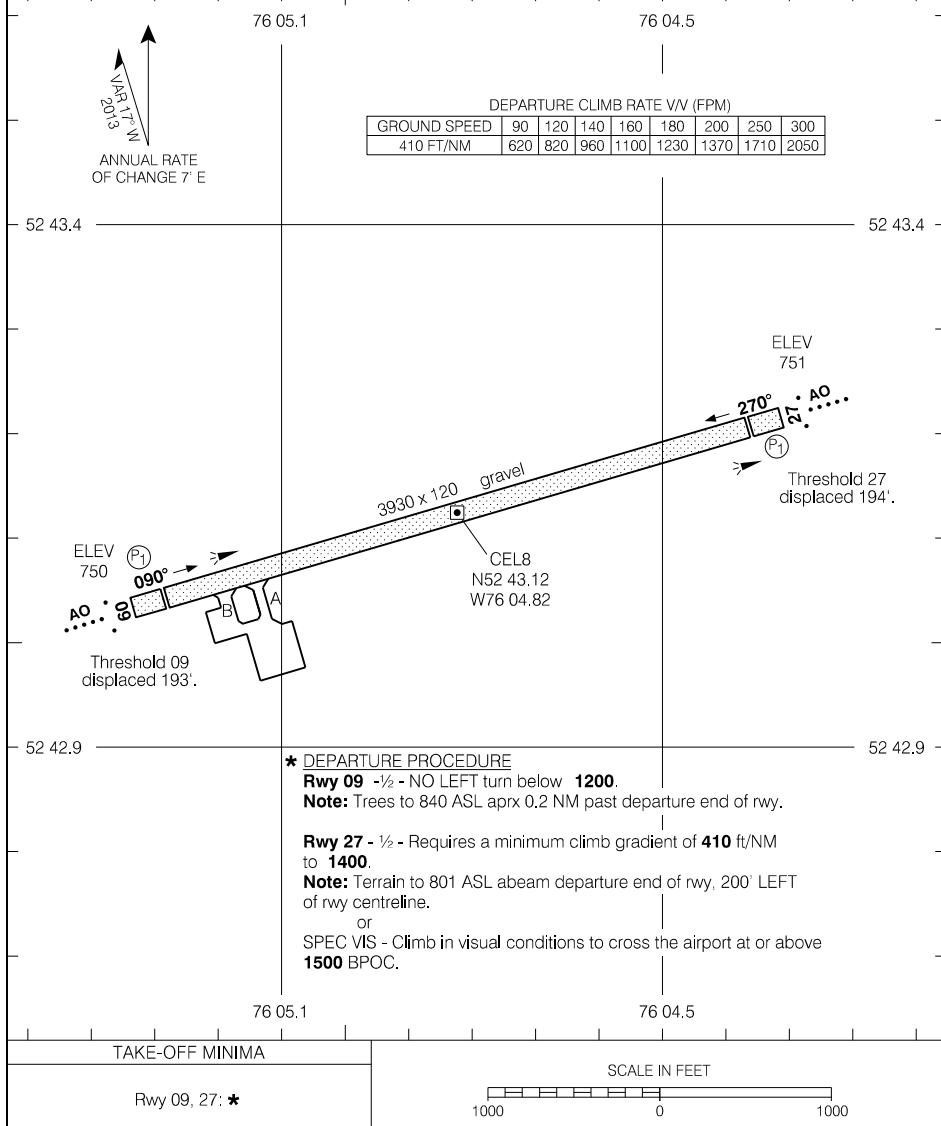

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 30 NOV 23

CEL8

CEL8-AD


CARTE D'AÉRODROME

AUTO – 122.55				TFC – 123.2	MF*	
DIST DÉCLARÉES	09	27				
TORA	3930	3930				
TODA	3930	3930				
ASDA	3930	3930				
LDA	3737	3736				

**VARIATION
ANNUELLE DE 7° E**

TAUX DE MONTÉE DE DÉPART V/V (FPM)								
VITESSE SOL	90	120	140	160	180	200	250	300
410 pieds/NM	620	820	960	1100	1230	1370	1710	2050

Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

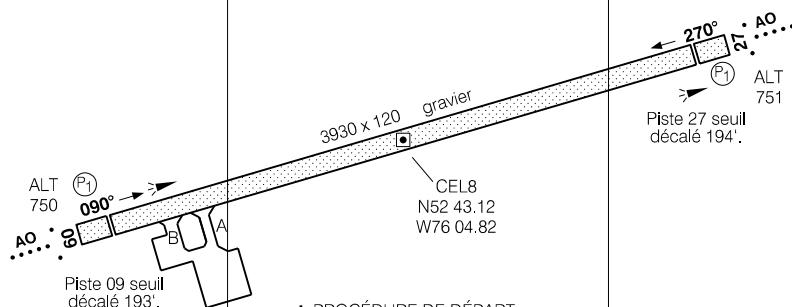

* PROCÉDURE DE DÉPART

Piste 09 - ½ - AUCUN virage à GAUCHE en dessous de 1200.
Note: Arbres jusqu'à 840 ASL aprx 0.2 NM passé l'extrémité

Notre ville jusqu'à 10 h 30 puis passons lentement de la piste de départ. —

Piste 27 - ½ - Requiert une pente de montée minimale de 410 pi/NM jusqu'à 1400

Note: Terrain jusqu'à 801 ASL par le travers de l'extrémité de la piste de départ, 200' à GAUCHE de l'axe de piste.

SPEC VIS - Effectuer une montée à vue pour survoler l'aéroport à 1500 ou plus haut RPOC

1500 ou plus haut BPOC.

MINIMUM DE DÉCOLLAGE


ÉCHELLE EN PIEDS

CARTE D'AÉRODROME
EEE 30 NOV 23

CTU2-AD

FONTANGES, QC
CTU2

AERODROME CHART

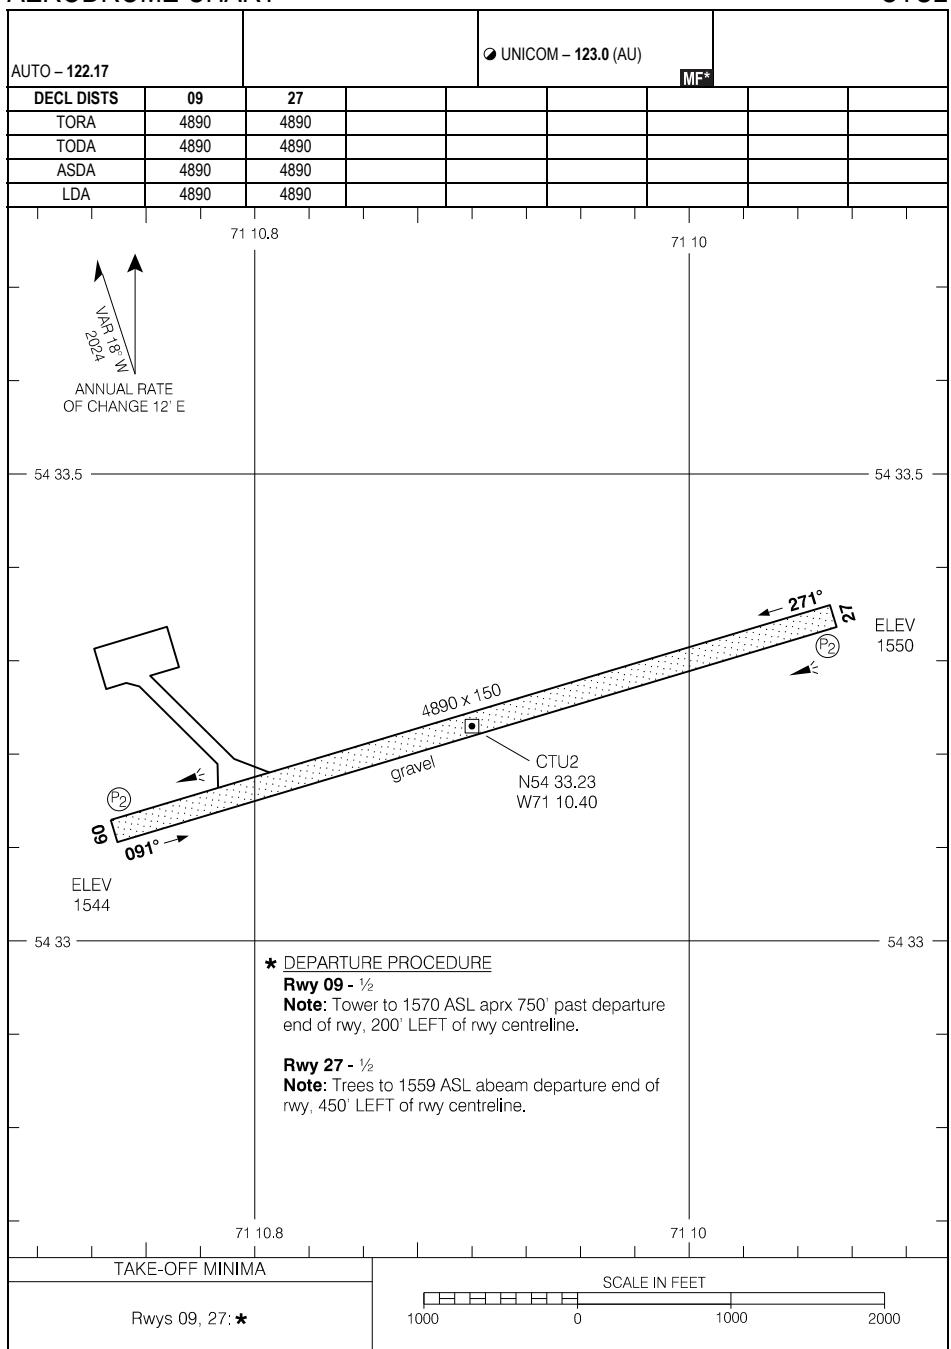

AERODROME CHART

EFF 20 FEB 25


CTU2-AD

CTU2

CTU2-AD

FONTANGES, QC
CTU2

CARTE D'AÉRODROME

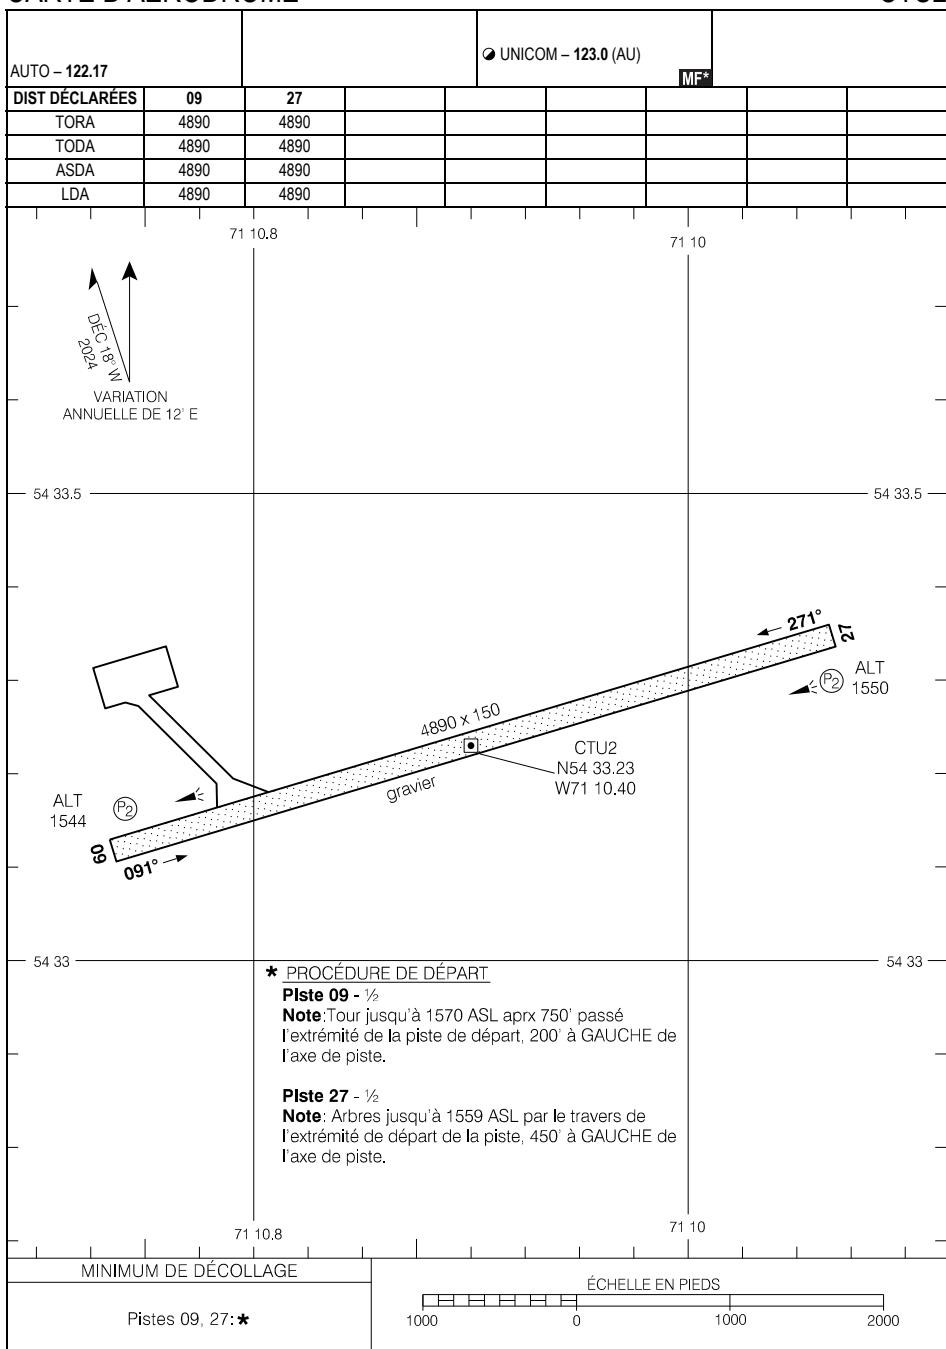

Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

CARTE D'AÉRODROME

EFF 20 FÉV 25


CTU2

CTU2-AD

CYGP-AD

GASPÉ (MICHEL-POULIOT), QC
CYGP

AERODROME CHART

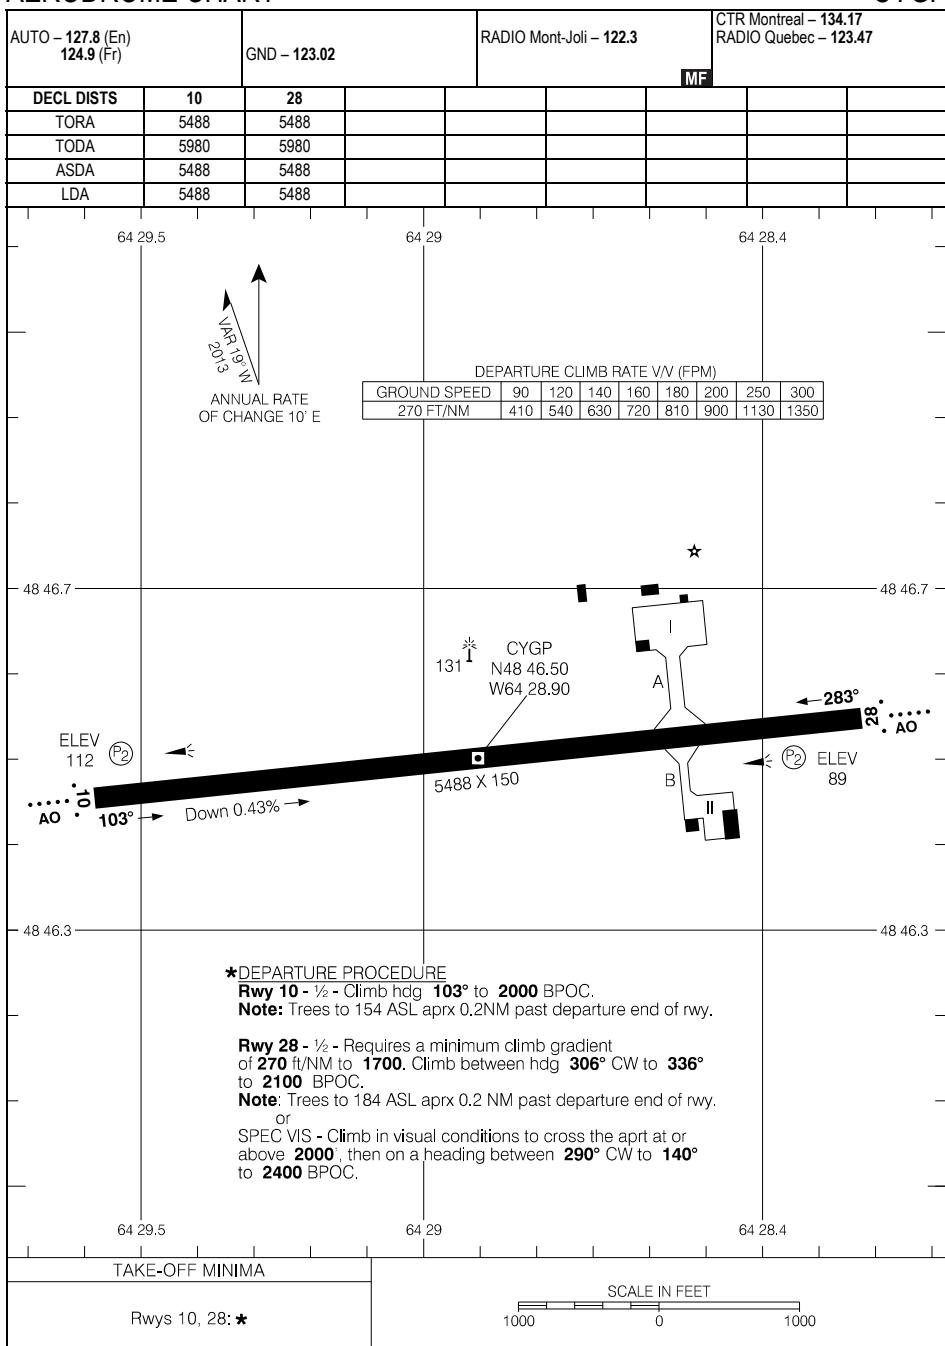


AERODROME CHART

EFF 11 JUL 24

CYGP-AD

CYGP

CARTE D'AÉRODROME

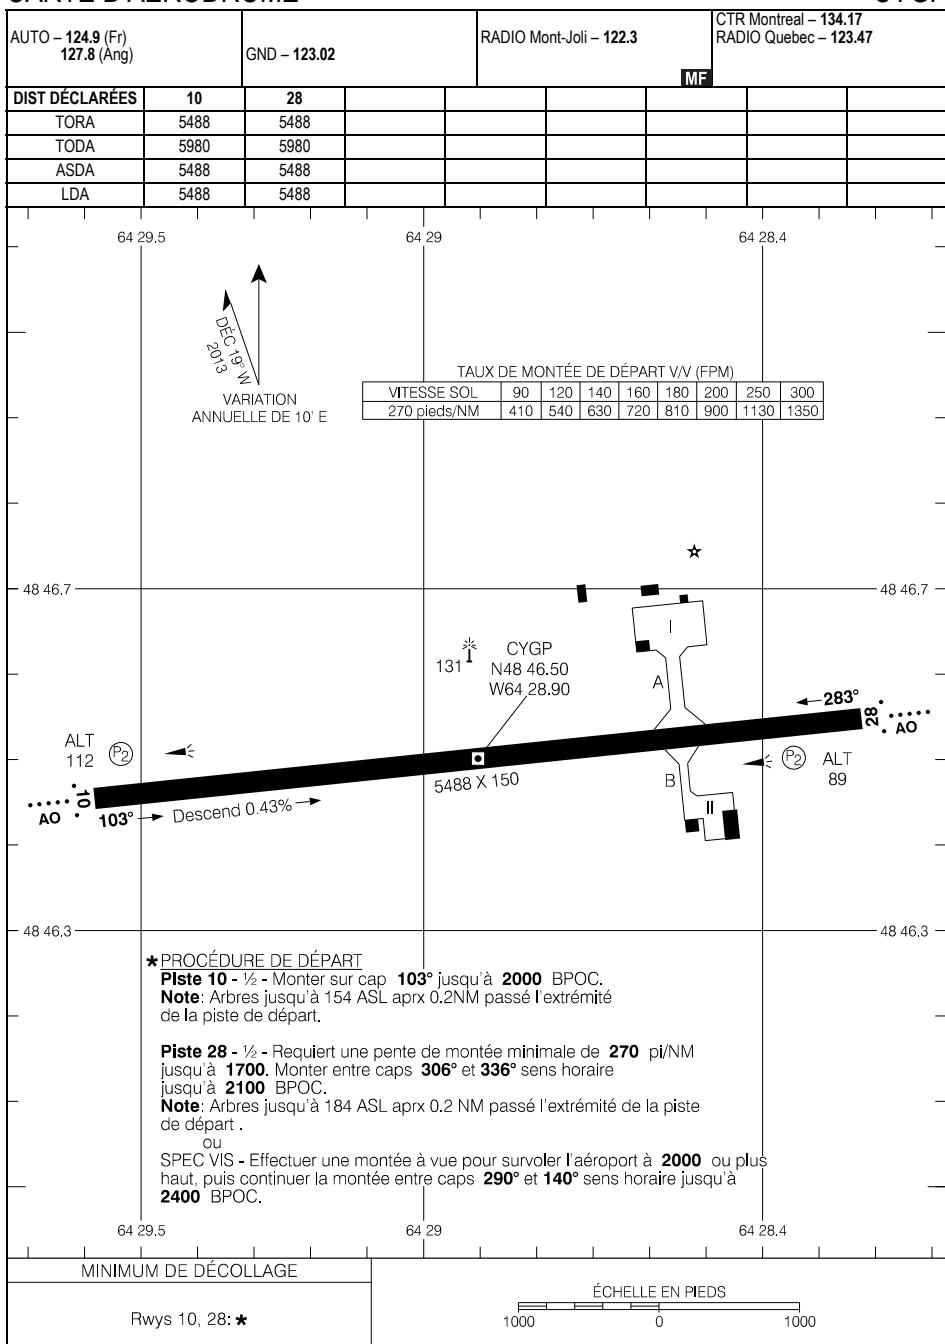

CARTE D'AÉRODROME


EFF 11 JUIL 24

CYGP

CYGV-AD

HAVRE ST-PIERRE, QC
CYGV

AERODROME CHART

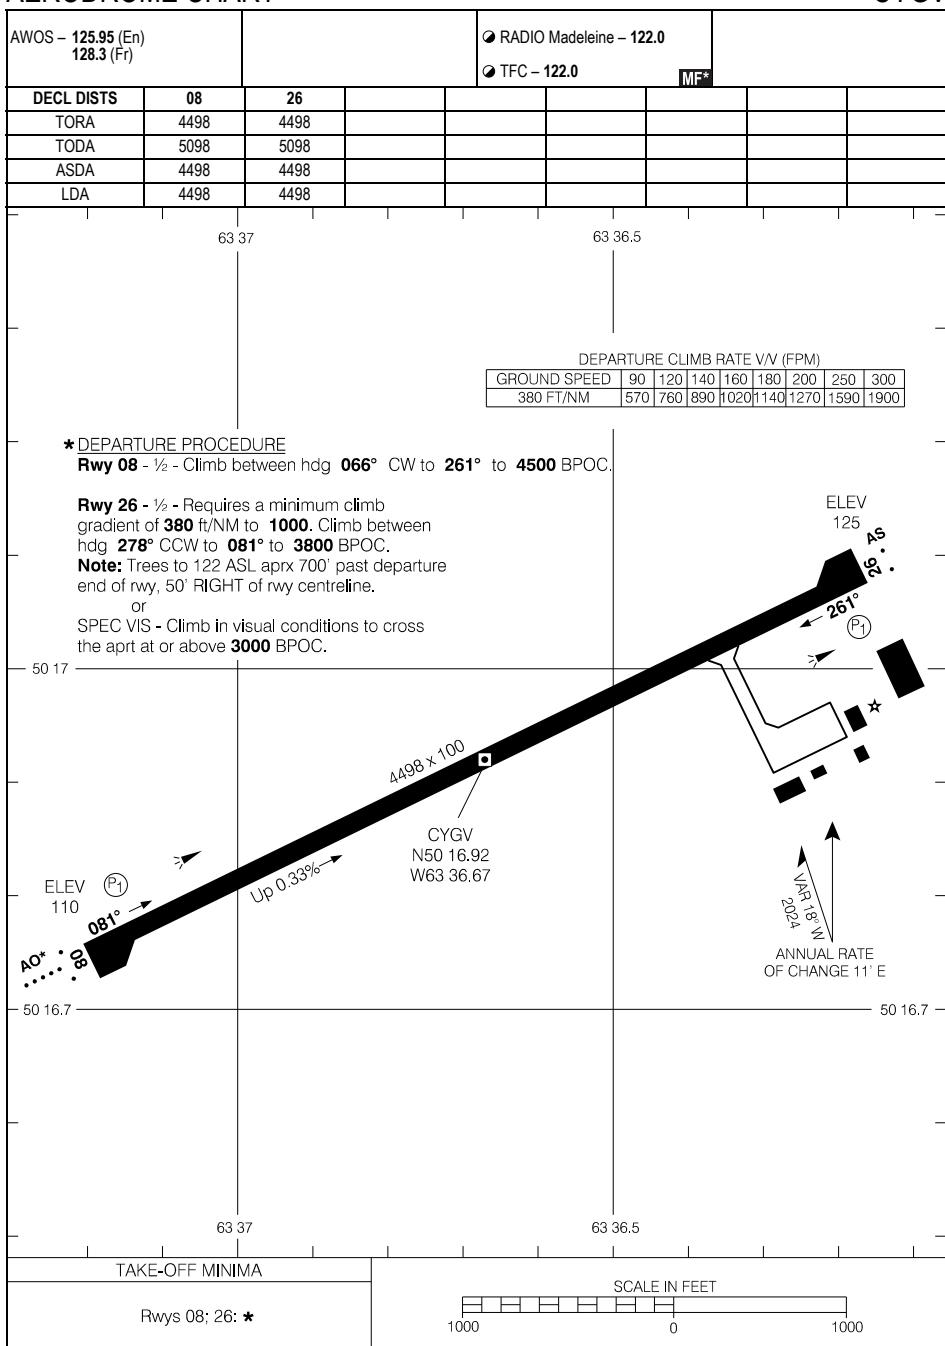

AERODROME CHART

EFF 21 MAR 24


CYGV-AD

CYGV

C102-HP

ÎLES AUX OIES, QC
C102

HELIPORT CHART

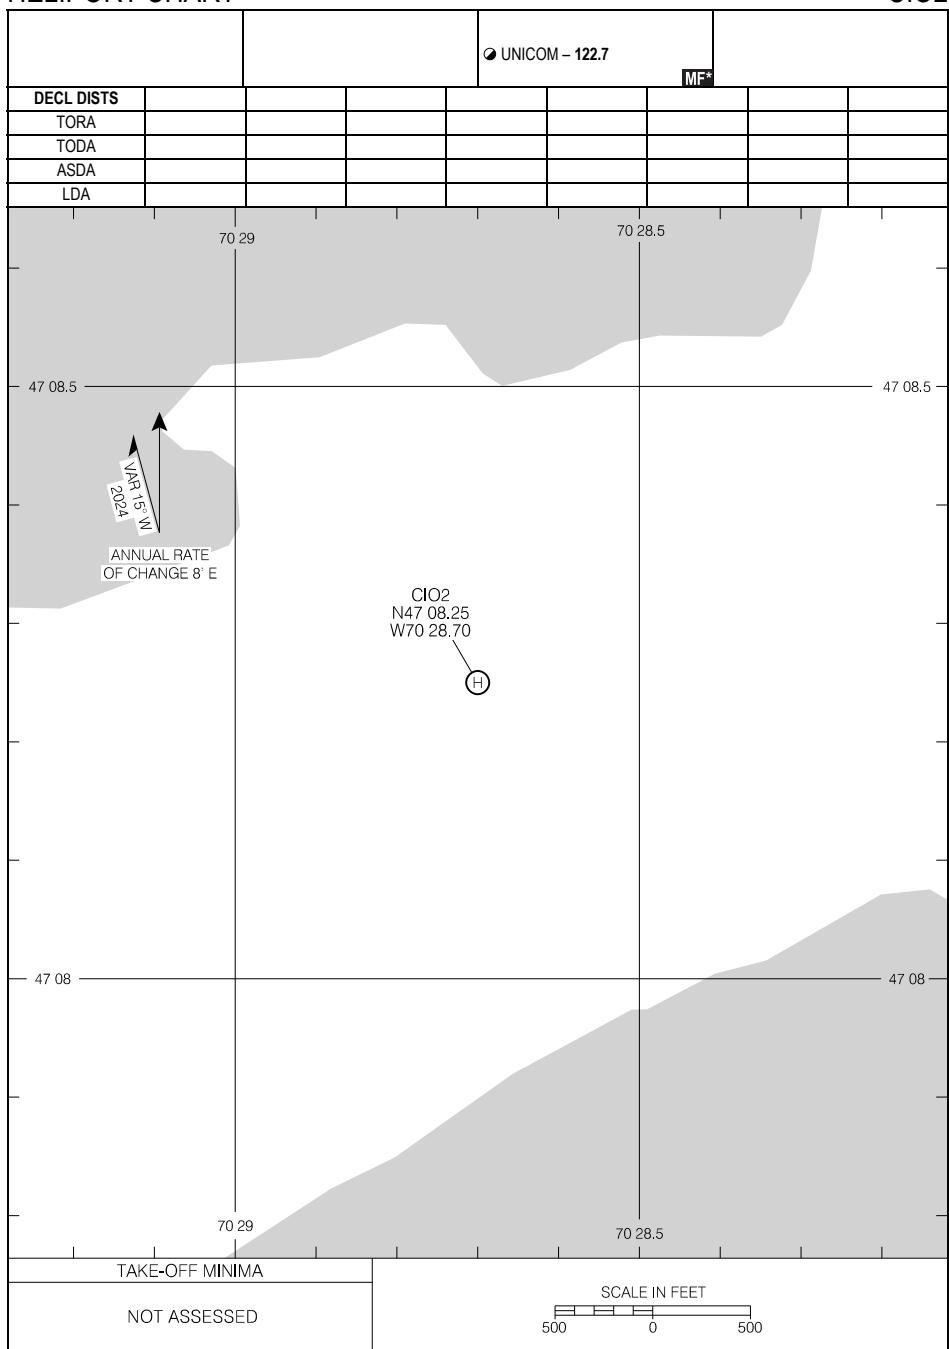

HELIPORT CHART

EFF 12 JUN 25


C102

C102-HP

CI02-HP

ÎLES AUX OIES, QC
CI02

CARTE D'HÉLIPORT

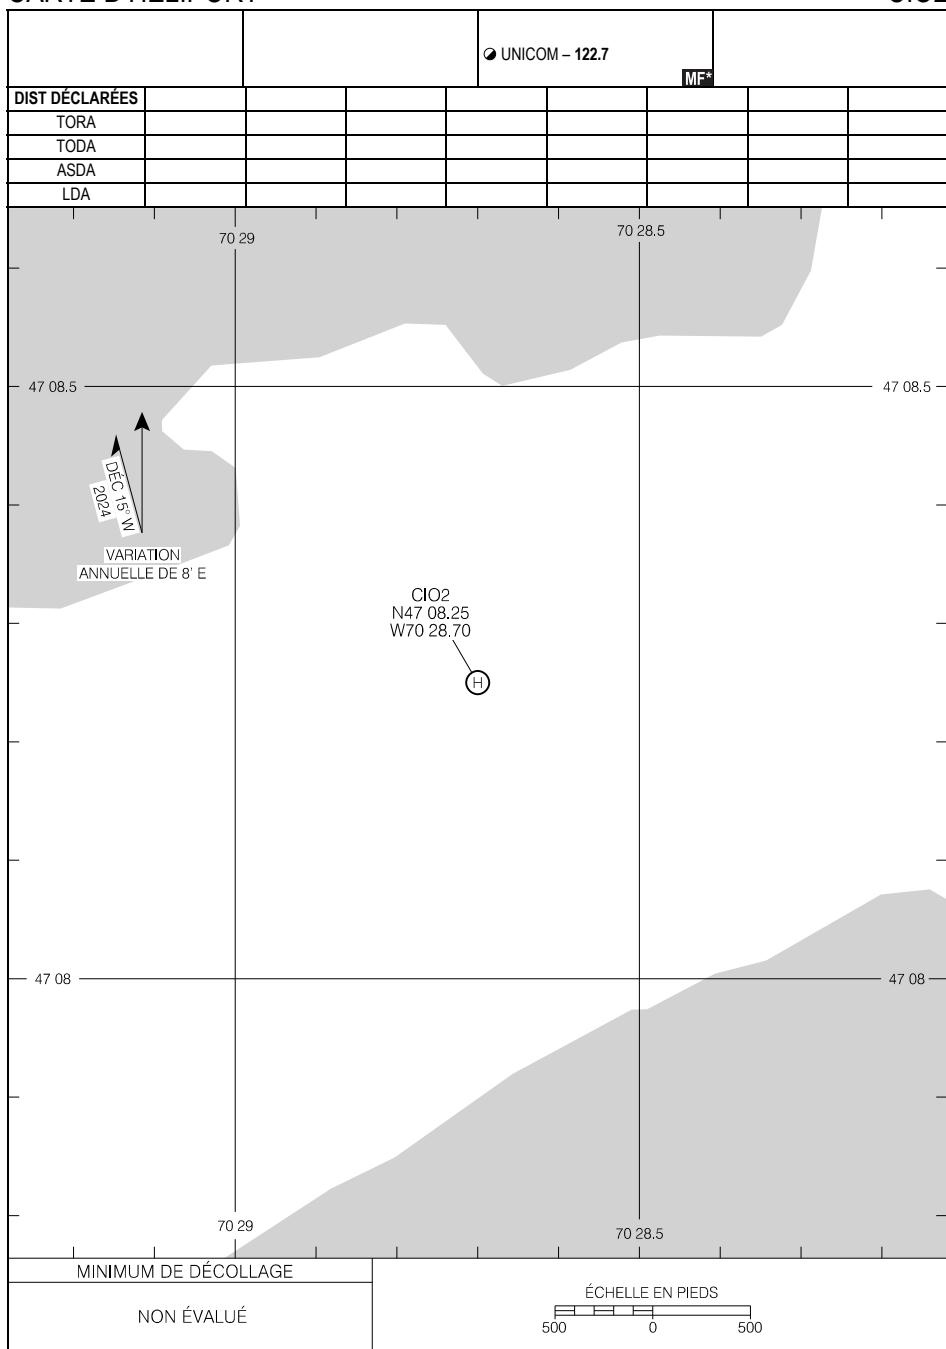

CARTE D'HÉLIPORT

EFF 12 JUIN 25


CI02

CI02-HP

CYGV-AD

HAVRE ST-PIERRE, QC
CYGV

CARTE D'AÉRODROME

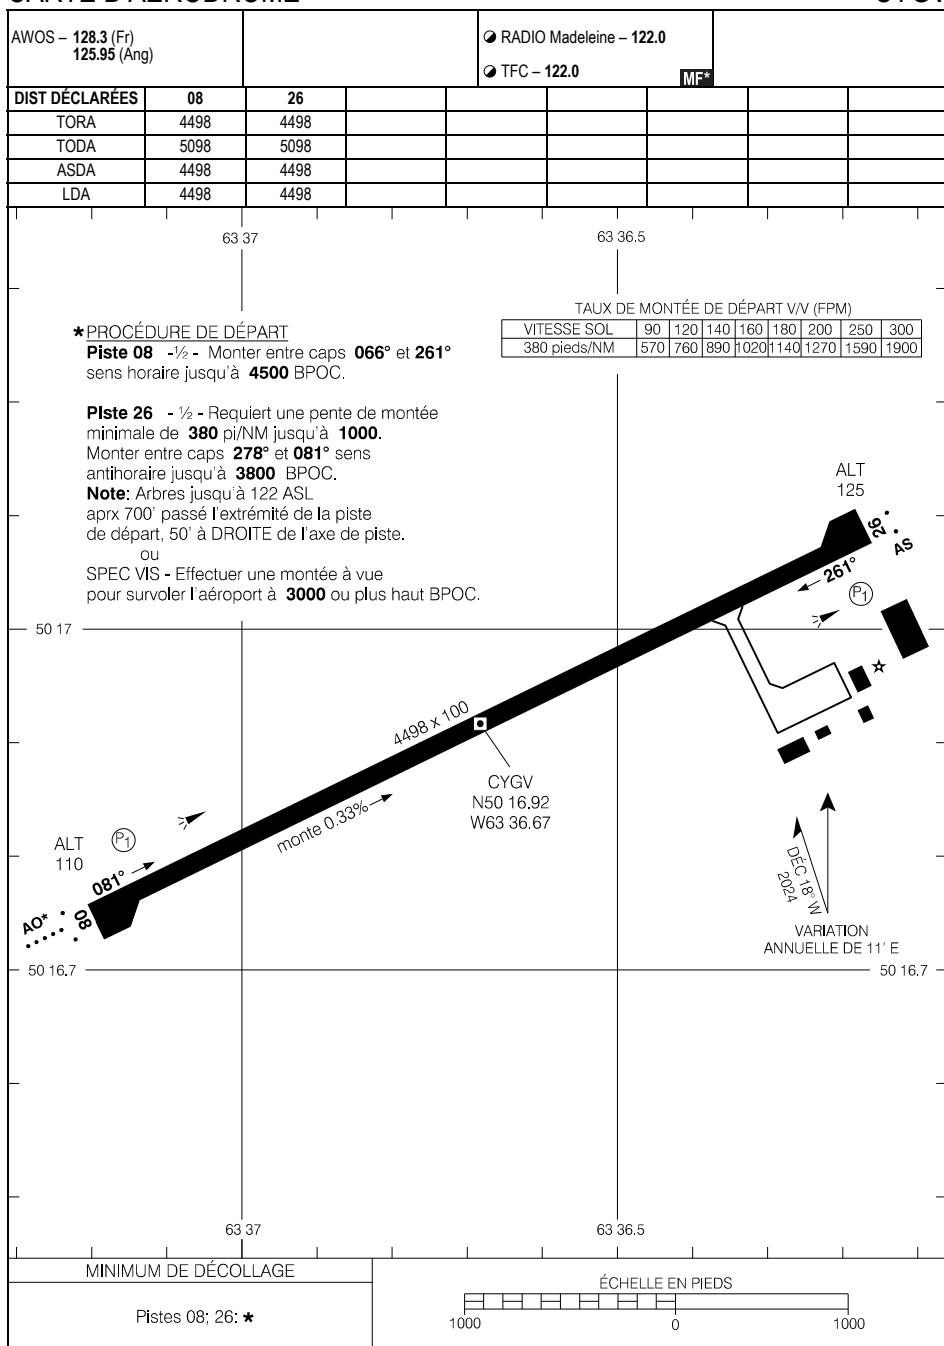

CARTE D'AÉRODROME

EFF 21 MAR 24


CYGV

CYGV-AD

CYGR-AD

ÎLES-DE-LA-MADELEINE, QC
CYGR

AERODROME CHART

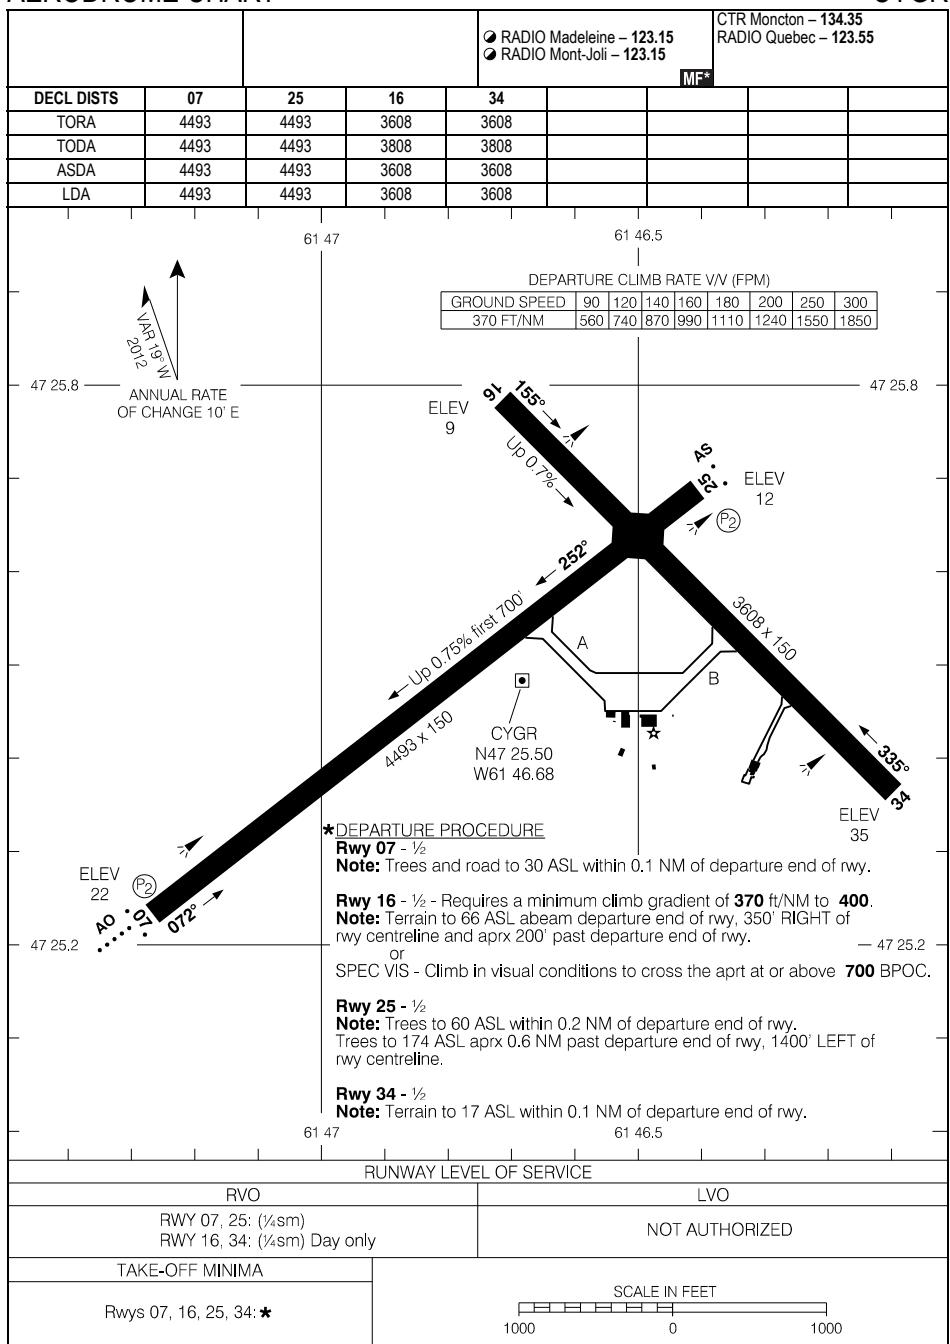


AERODROME CHART

EFF 25 FEB 21

CYGR-AD

CYGR

CARTE D'AÉRODROME

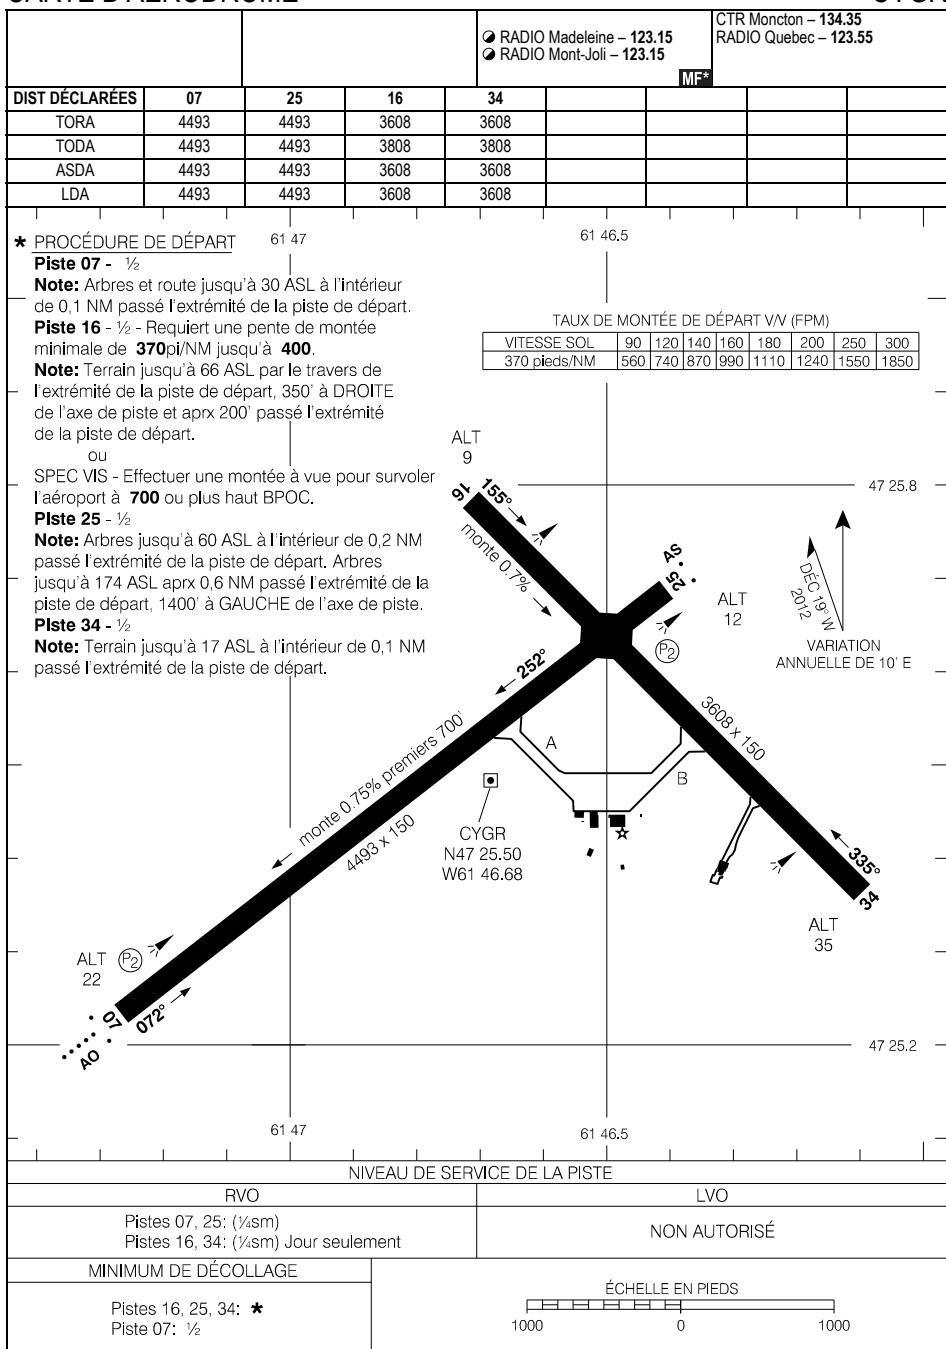

CARTE D'AÉRODROME


EFF 25 FÉV 21

CYGR

CYPH-AD

INUJKUAK, QC
CYPH

AERODROME CHART

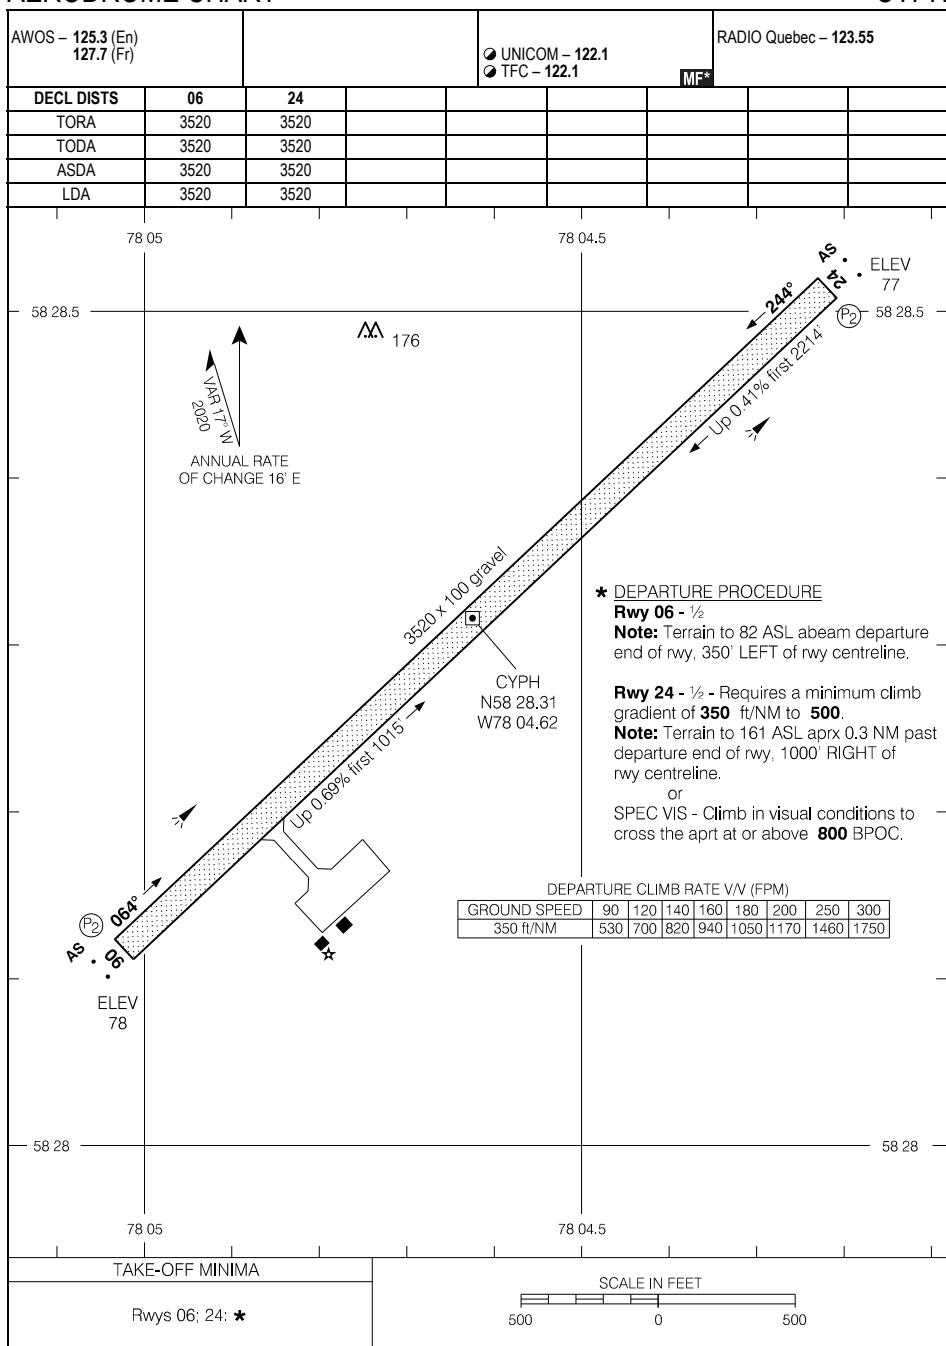

AERODROME CHART

EFF 7 AUG 25


CYPH-AD

CYPH

CYPH-AD

INUJKUAK, QC
CYPH

CARTE D'AÉRODROME

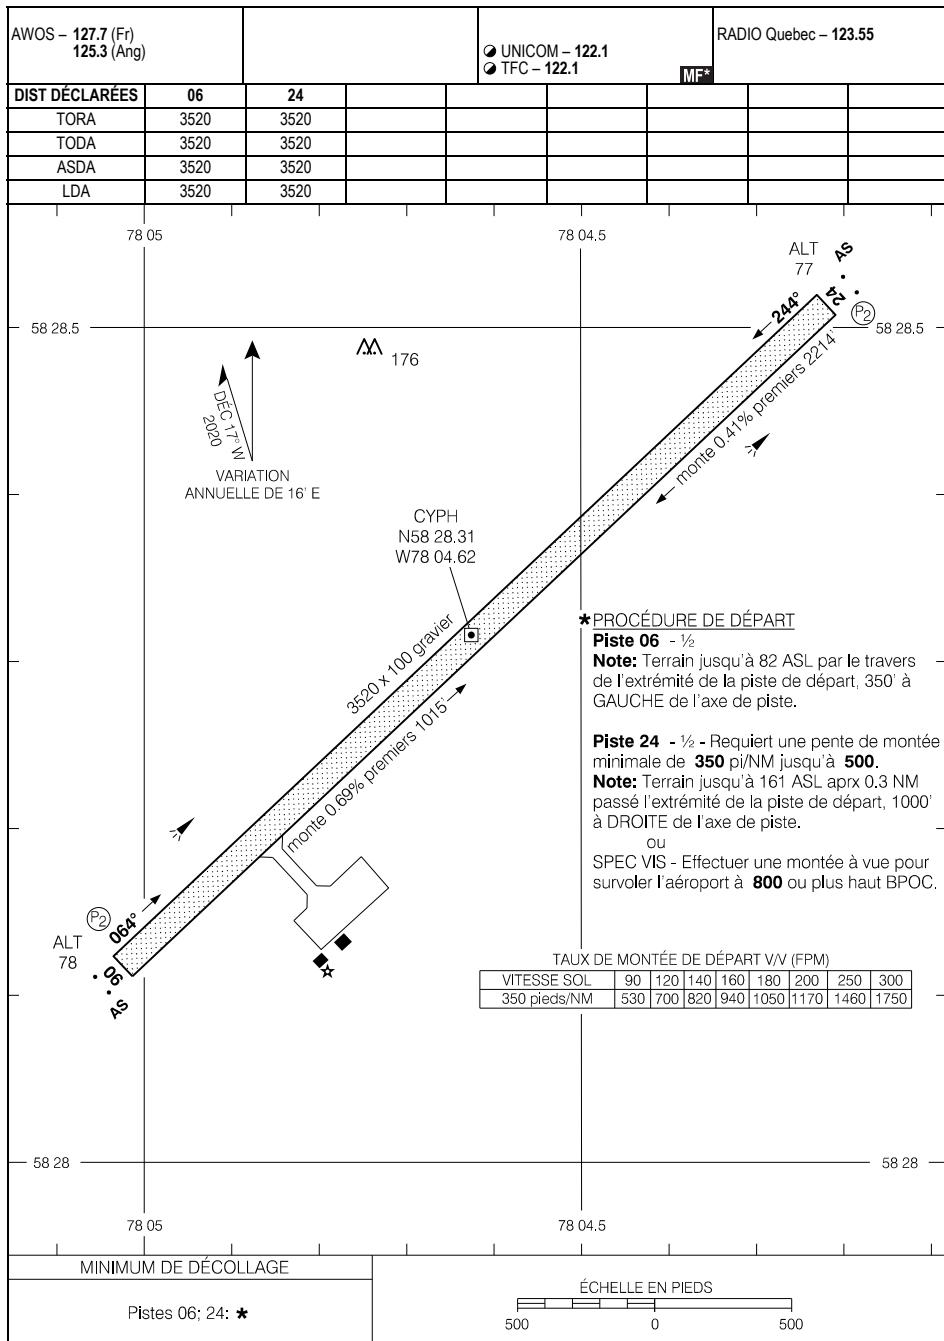CARTE D'AÉRODROME
EFF 7 AOÛT 25


CYPH

CYPH-AD

CYIK-AD

IVUJIVIK, QC
CYIK

AERODROME CHART

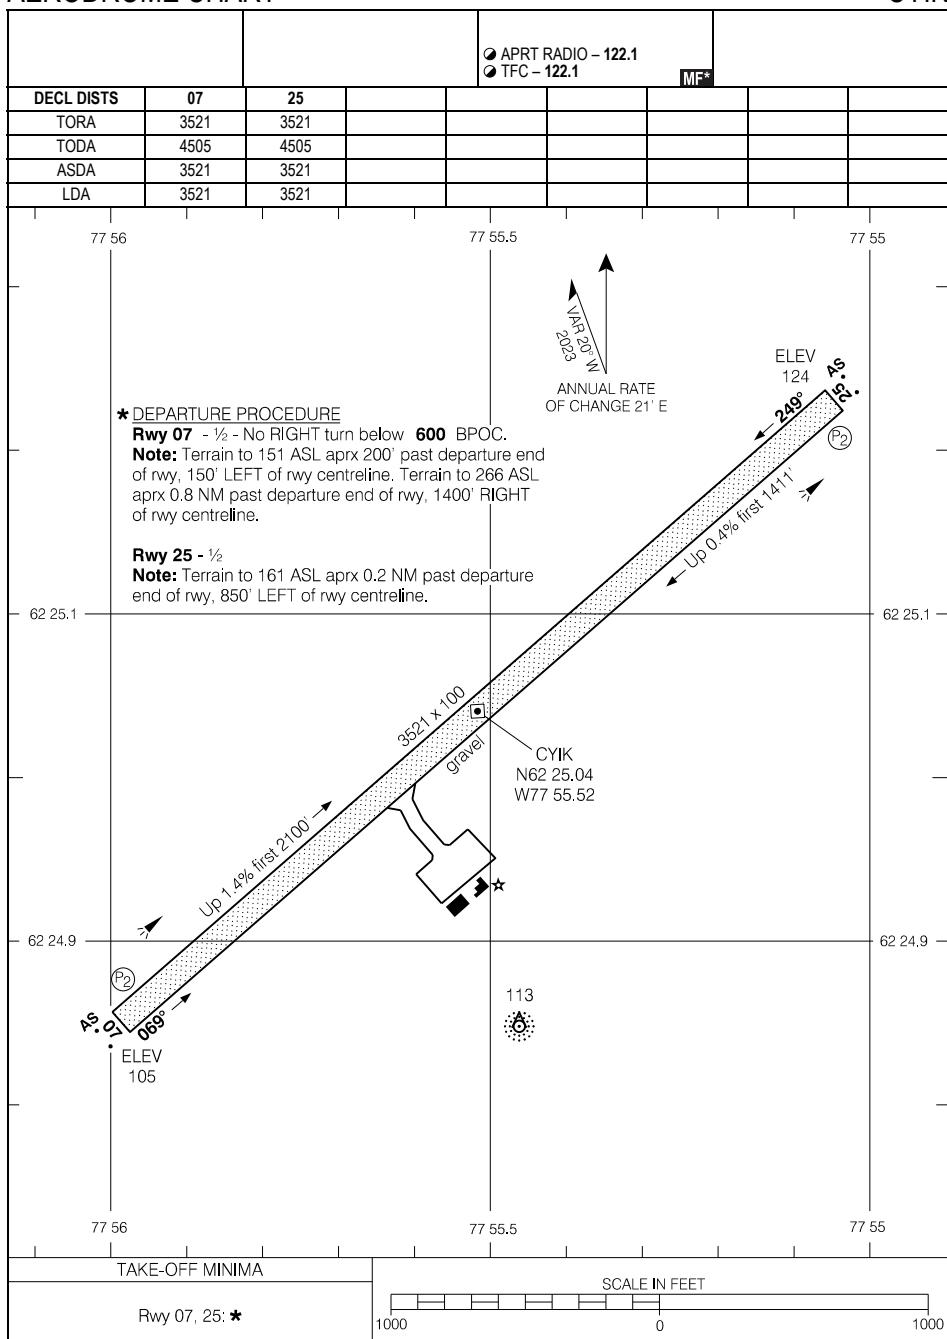

AERODROME CHART

EFF 20 APR 23


CYIK

CYIK-AD

CYIK-AD

IVUJIVIK, QC
CYIK

CARTE D'AÉRODROME

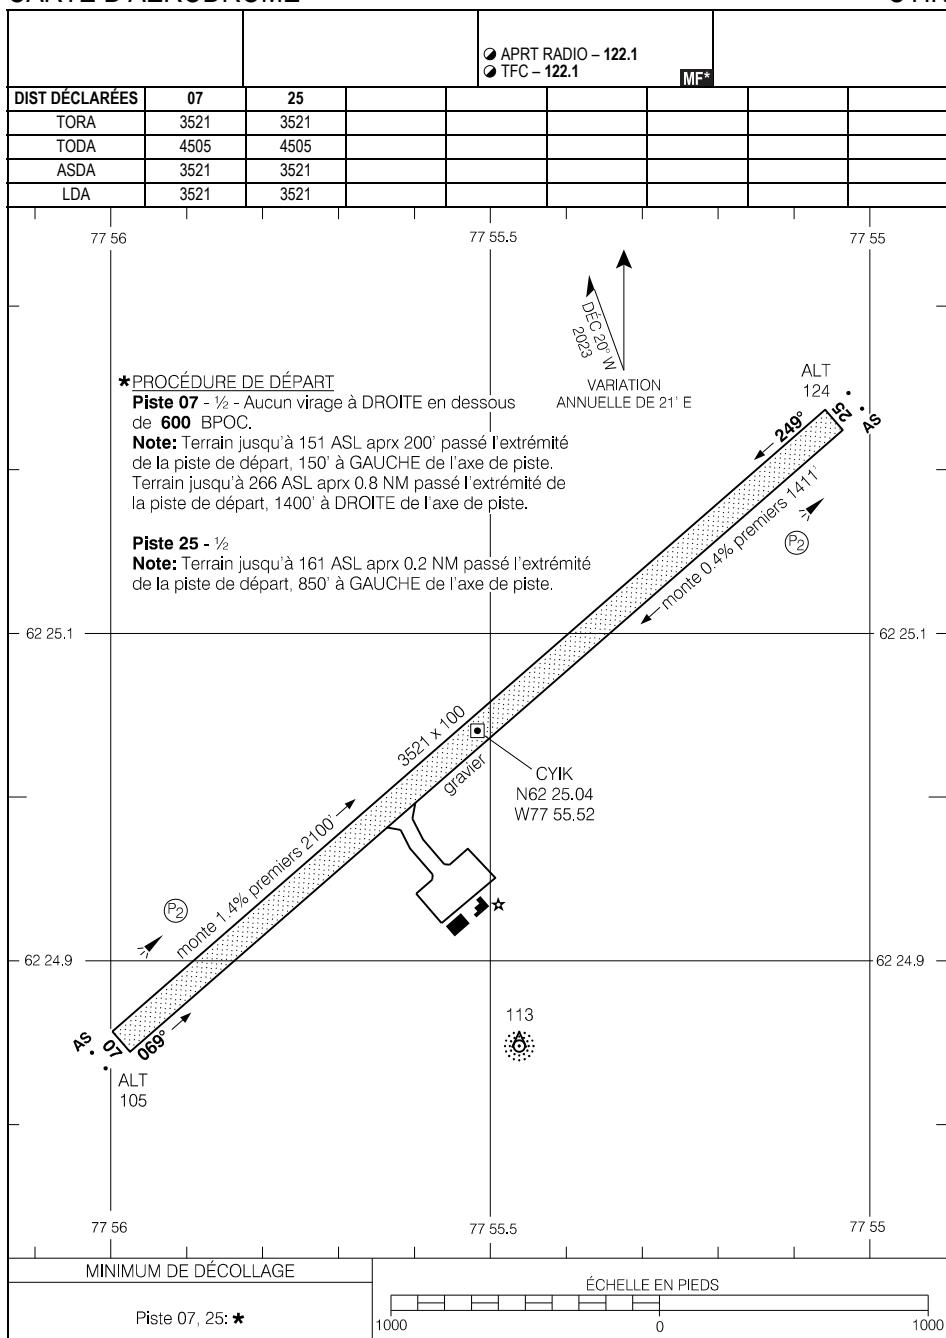

CARTE D'AÉRODROME

EFF 20 AVR 23

CYIK

CYIK-AD


CYLU-AD

KANGIQSUALUJJUAQ (GEORGES RIVER), QC
CYLU

AERODROME CHART

				<input checked="" type="radio"/> APRT RADIO – 122.1 <input checked="" type="radio"/> TFC – 122.1		MF*	
DECL DISTS	16	34					
TORA	3521	3521					
TODA	3521	3521					
ASDA	3521	3521					
LDA	3521	3521					

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

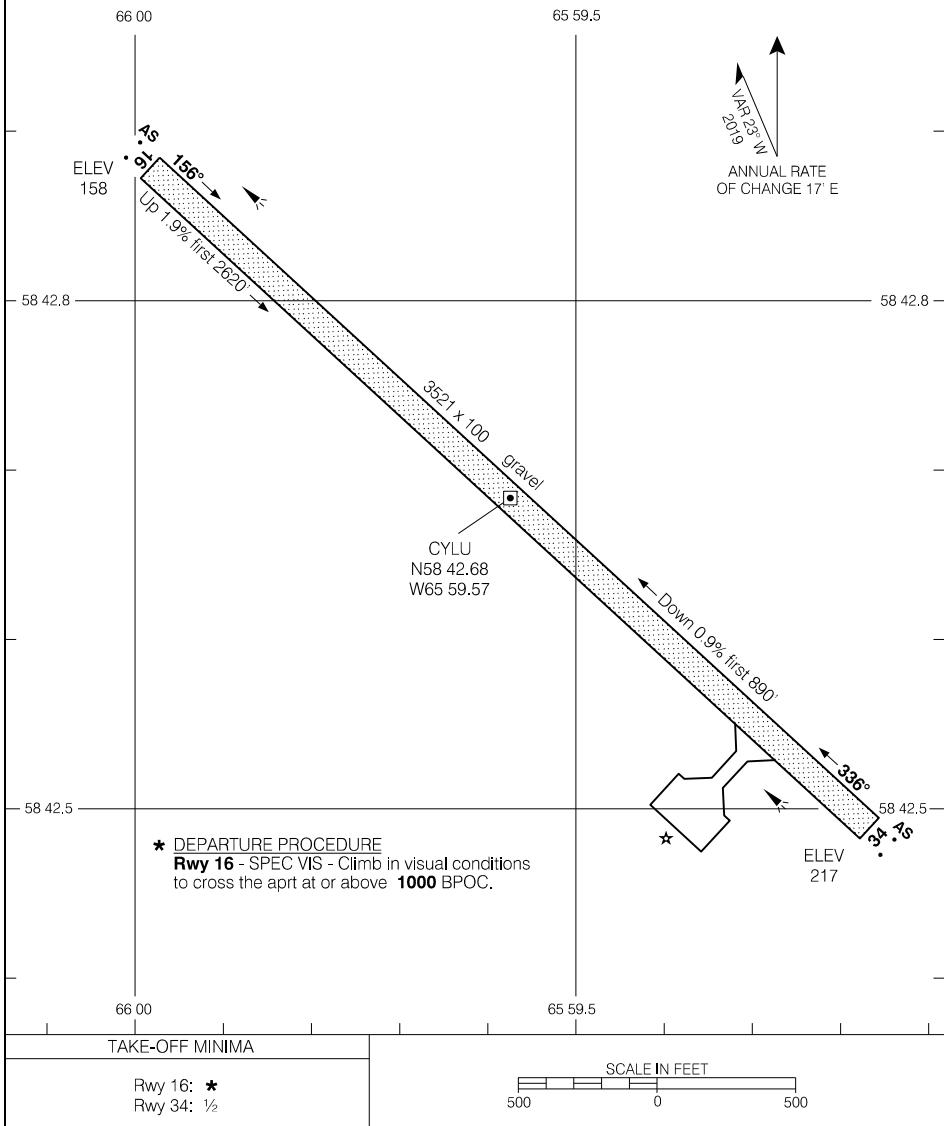

AERODROME CHART


EFF 10 SEP 20

CYLU-AD

CYLU-AD

KANGIQSUALUJUJAQ (GEORGES RIVER), QC
CYLU

CARTE D'AÉRODROME

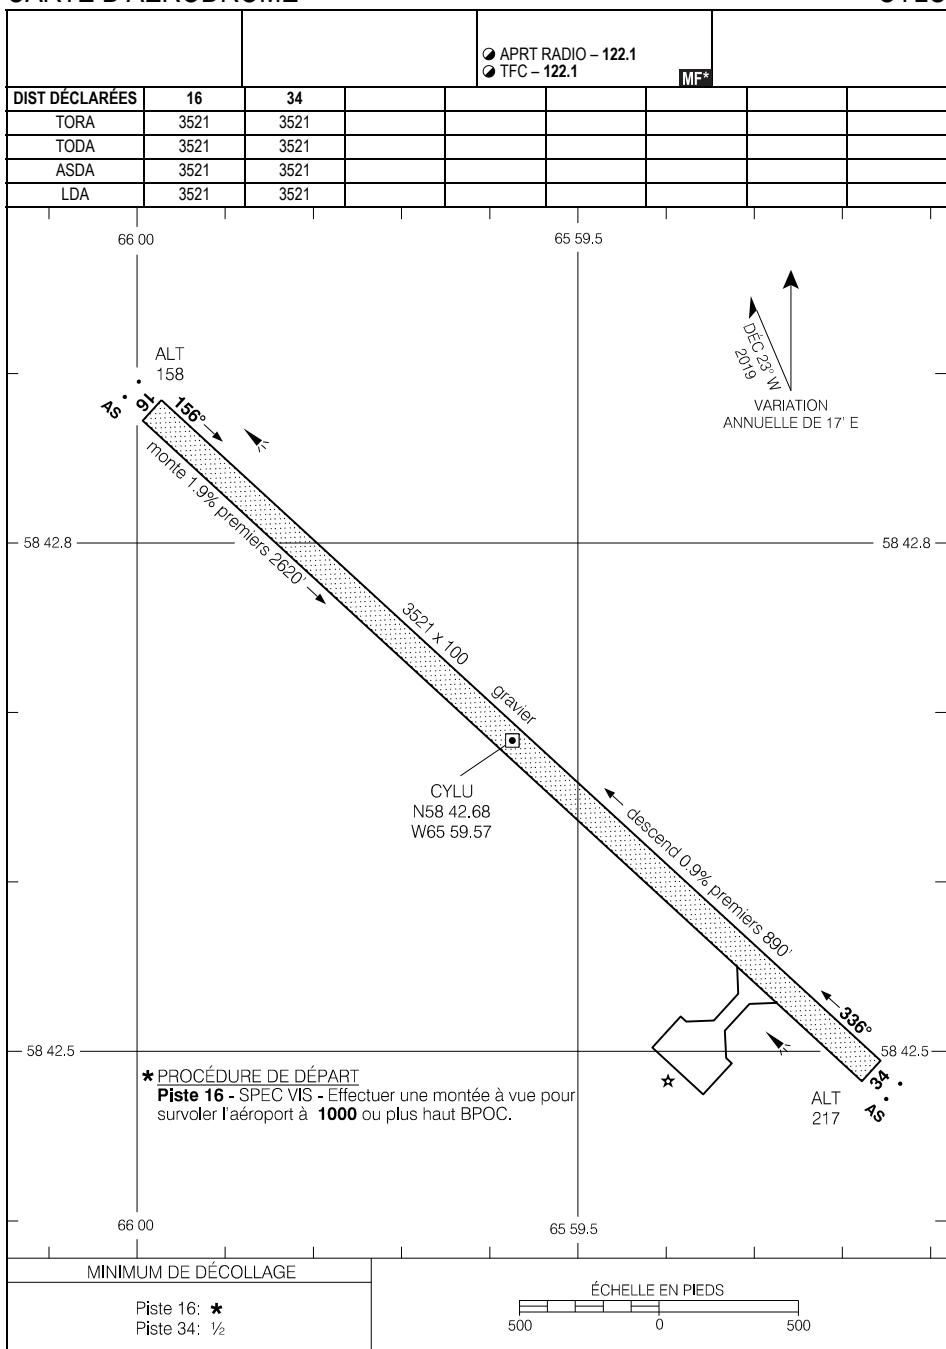

CARTE D'AÉRODROME


EFF 10 SEP 20

CYLU-AD

CYKG-AD

KANGIQSUJUAQ (WAKEHAM BAY), QC
CYKG

AERODROME CHART

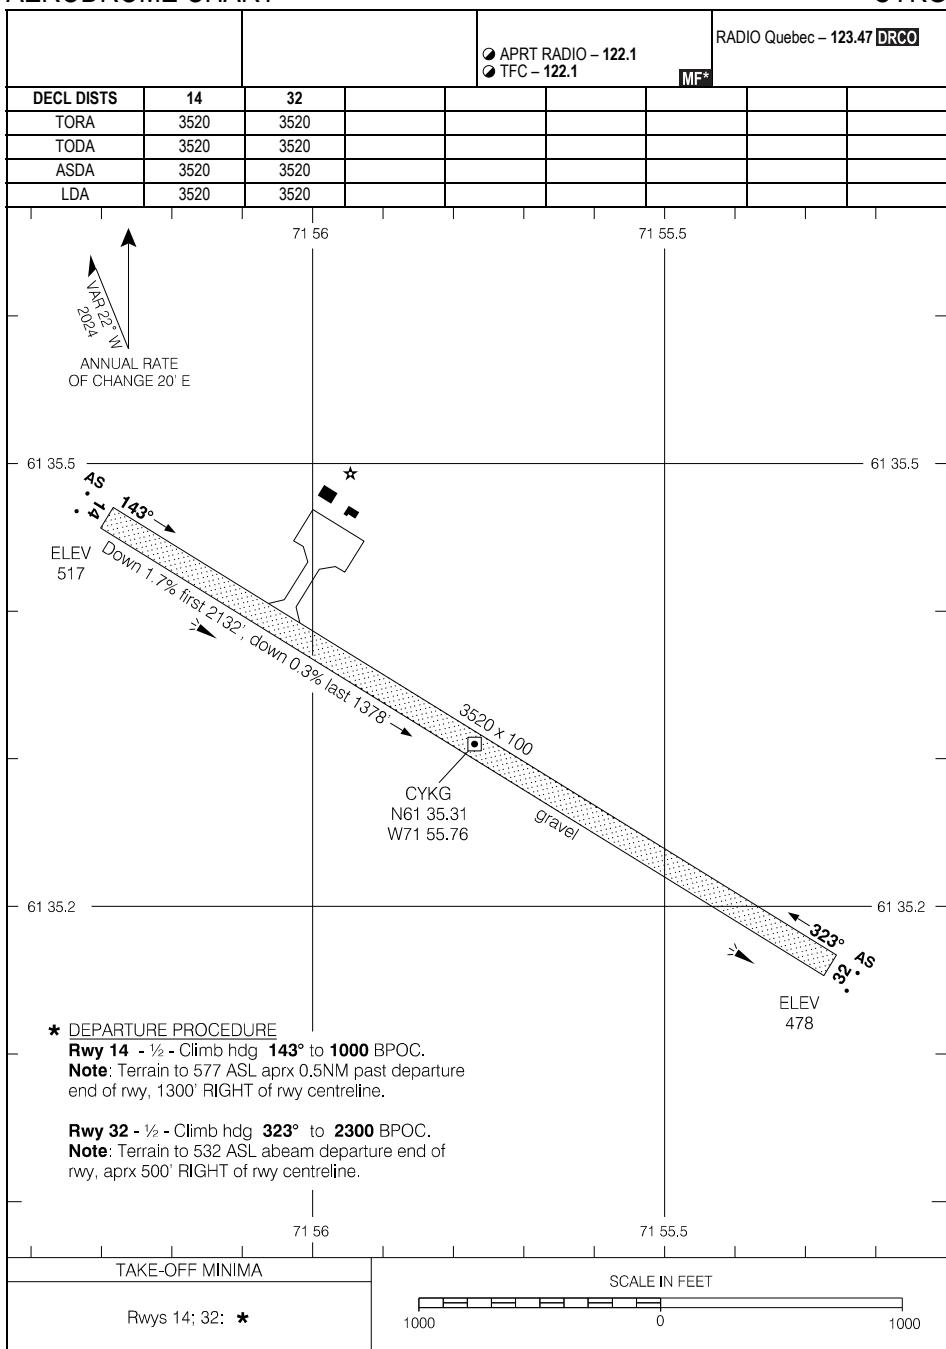

AERODROME CHART

EFF 7 AUG 25


CYKG-AD

CYKG

CYKG-AD

KANGIQSUJUAQ (WAKEHAM BAY), QC
CYKG

CARTE D'AÉRODROME

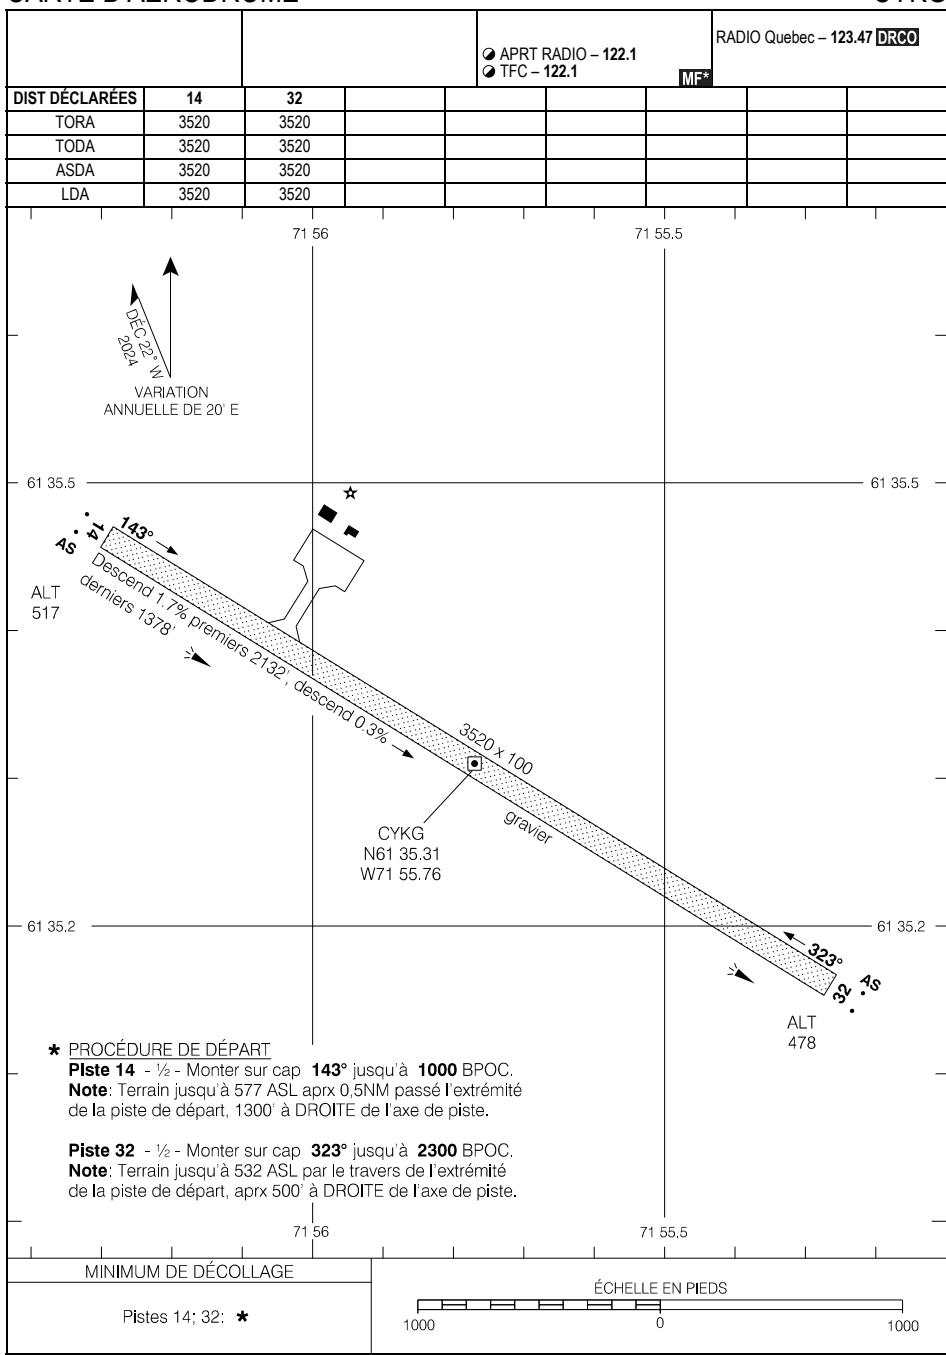

CARTE D'AÉRODROME

EFF 7 AOÛT 25


CYKG

CYKG-AD

CYAS-AD

KANGIRSUK, QC
CYAS

AERODROME CHART

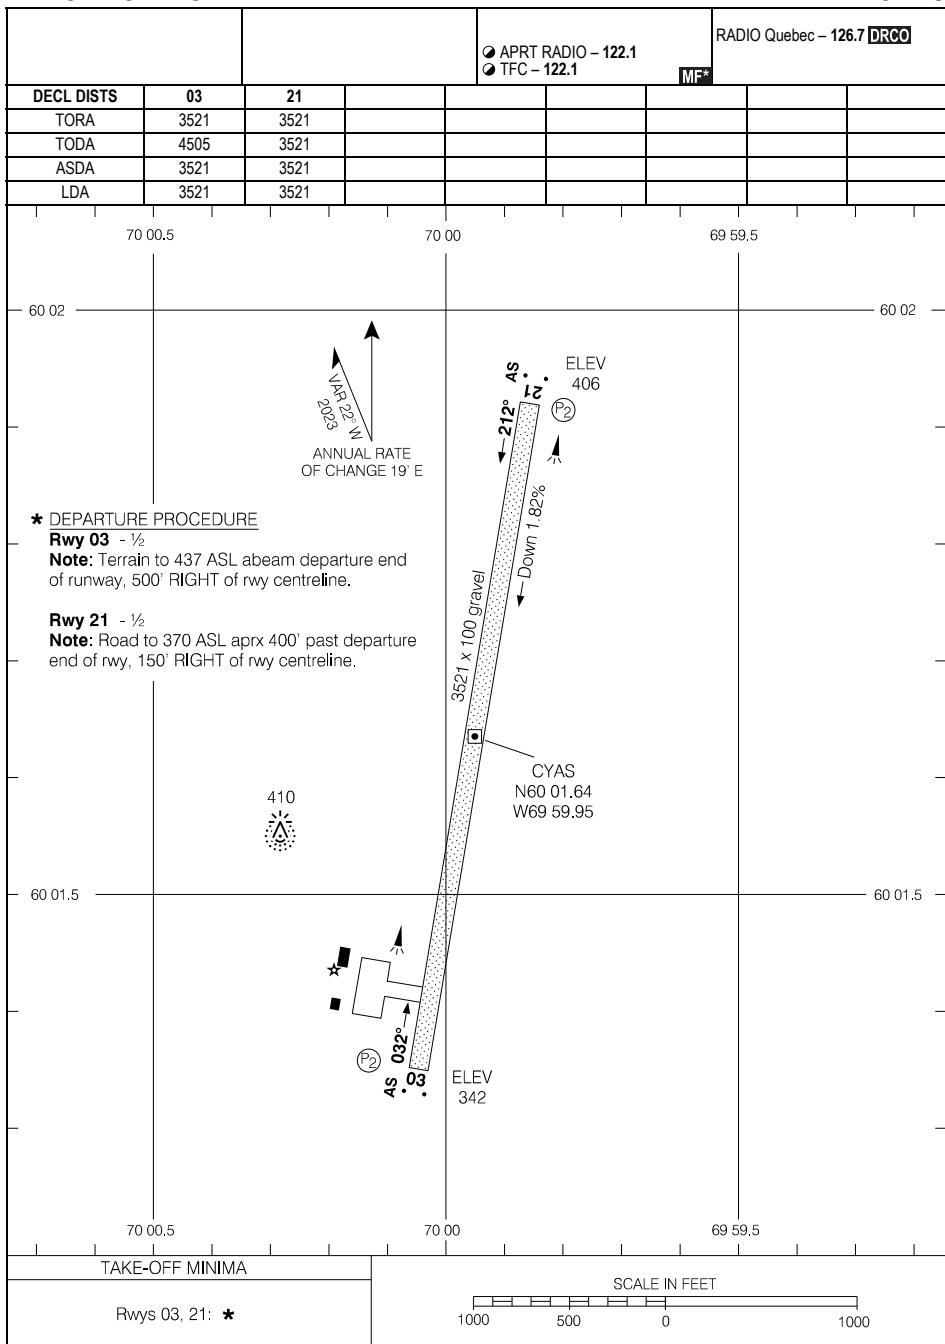

AERODROME CHART

EFF 15 JUN 23


CYAS-AD

CYAS

CYAS-AD

KANGIRSUK, QC
CYAS

CARTE D'AÉRODROME

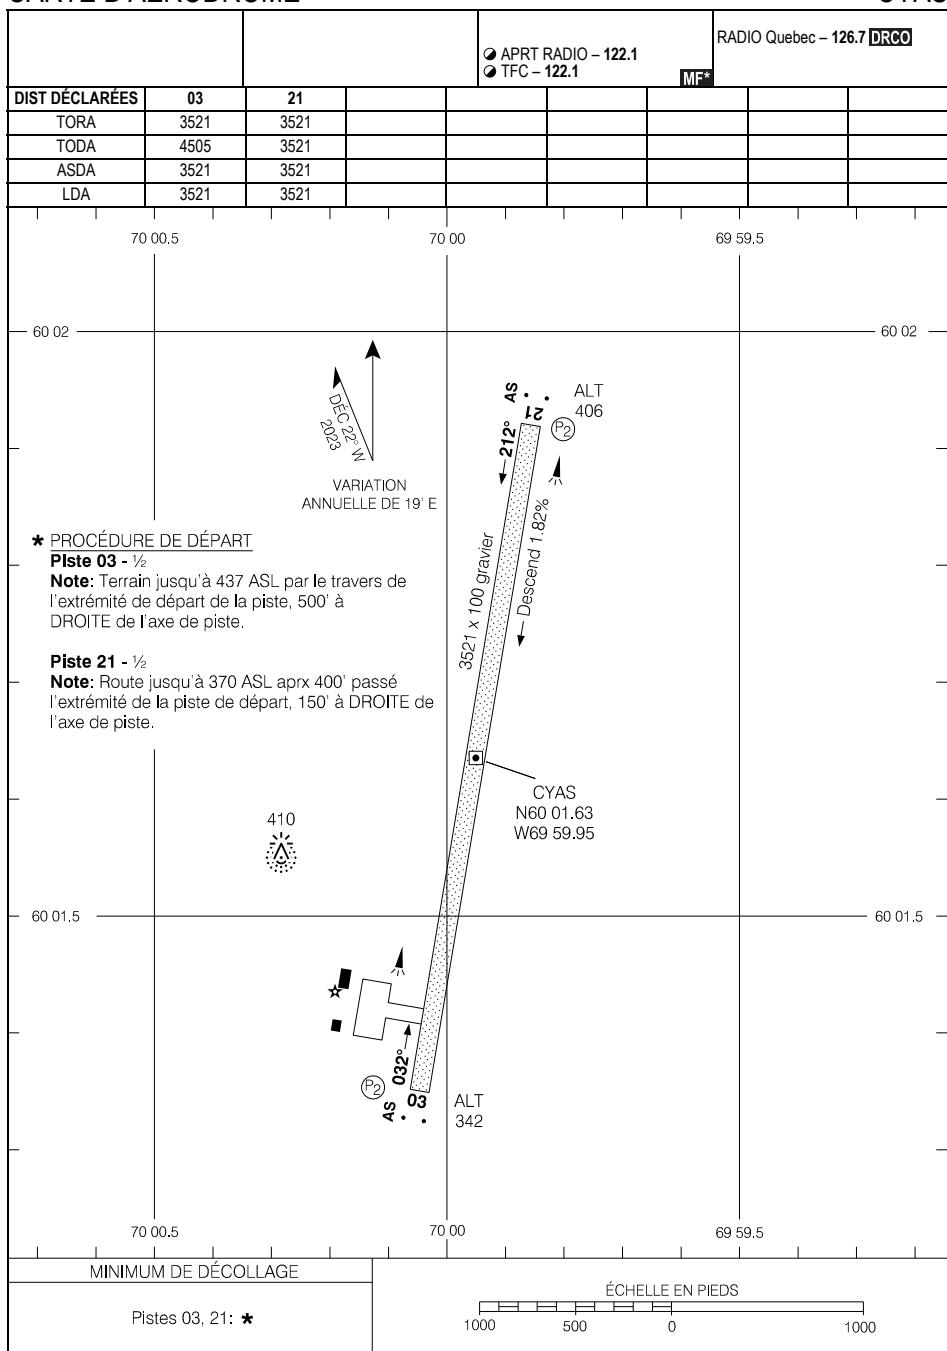


CARTE D'AÉRODROME

EFF 15 JUIN 23

CYAS

CYAS-AD

AERODROME CHART

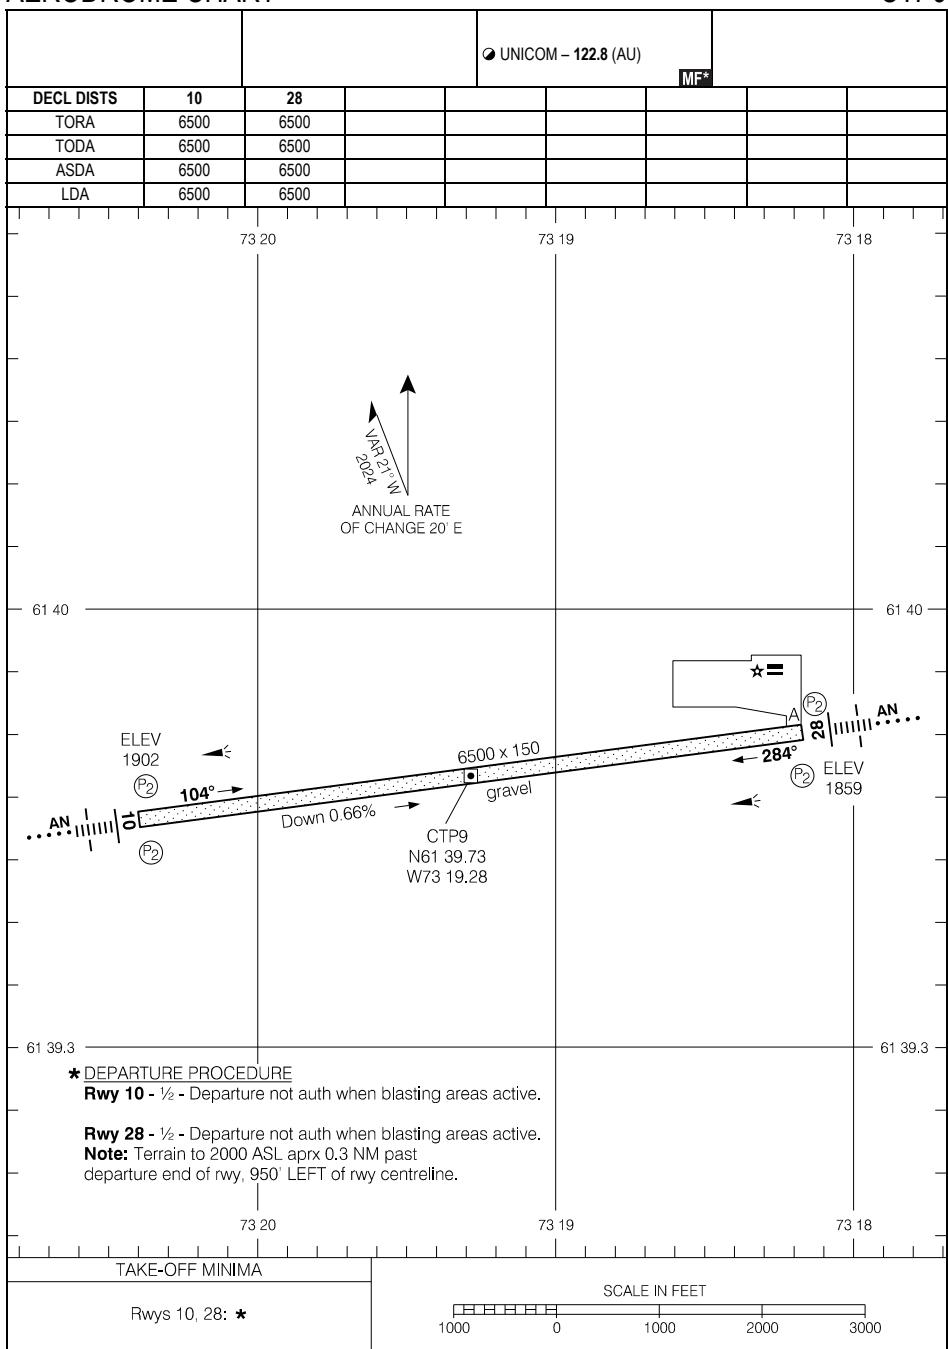


AERODROME CHART

EFF 16 MAY 24

CTP9

CARTE D'AÉRODROME

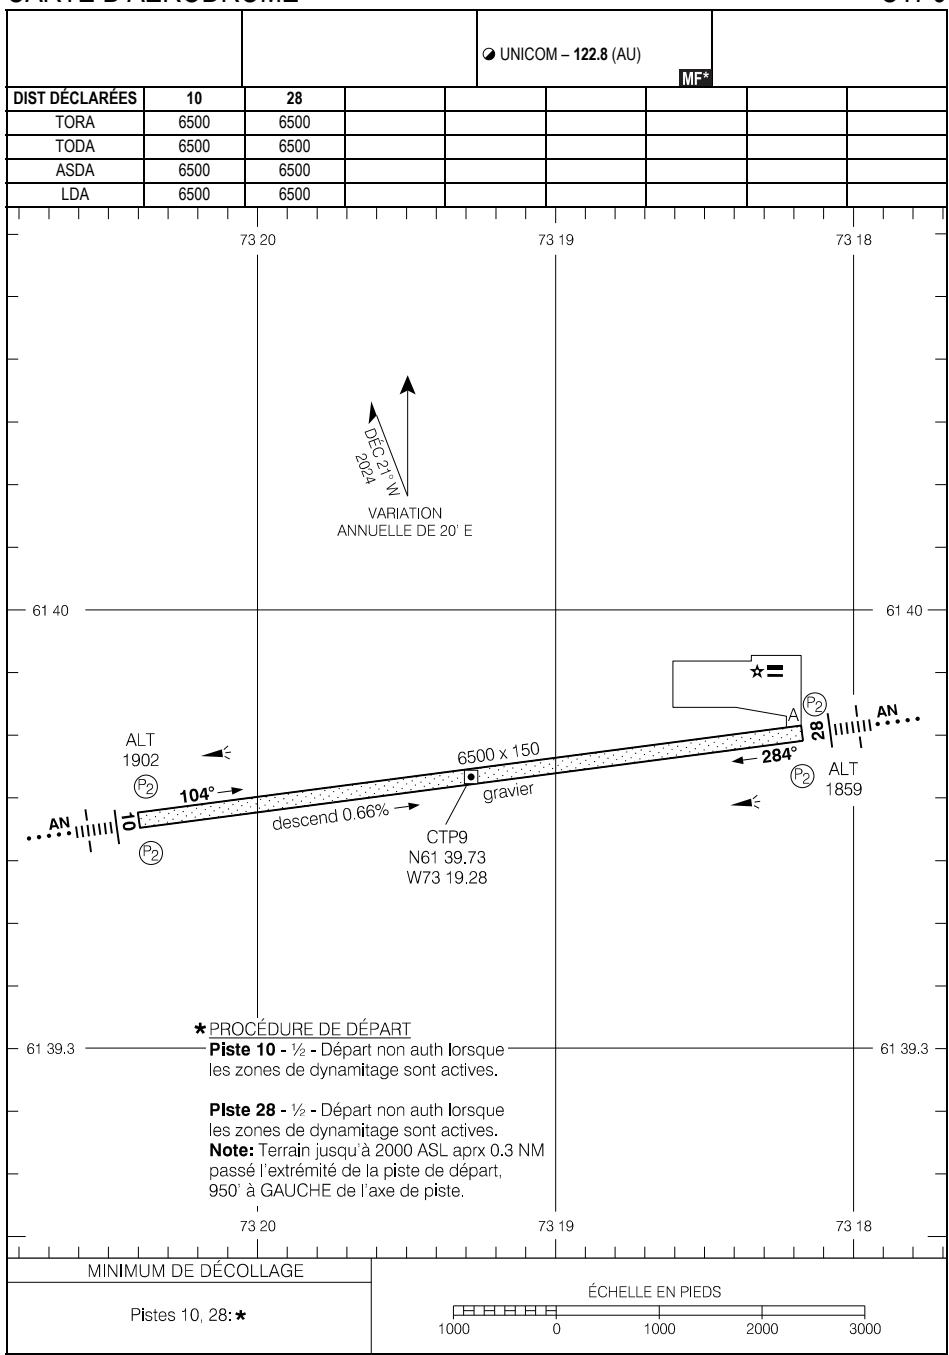

CARTE D'AÉRODROME

EFF 16 MAI 24

CTP9

CYVP-AD


KUUJJUAQ, QC
CYVP

AERODROME CHART

RADIO - 122.3 296.6

RADIO Quebec - 123.27 5680

MF*

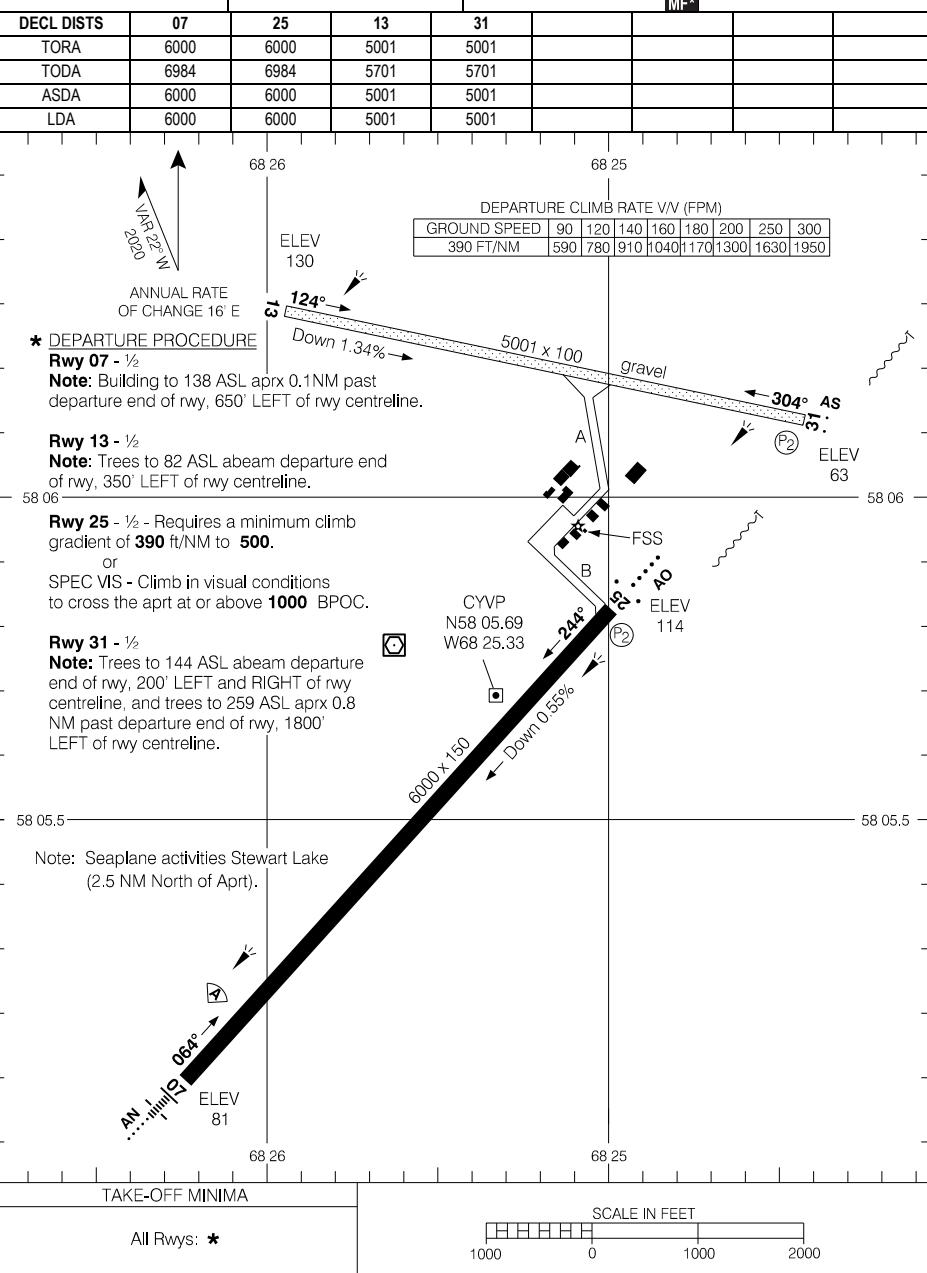

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved


AERODROME CHART

EFF 7 AUG 25

CYVP

CYVP-AD

CARTE D'AÉRODROME

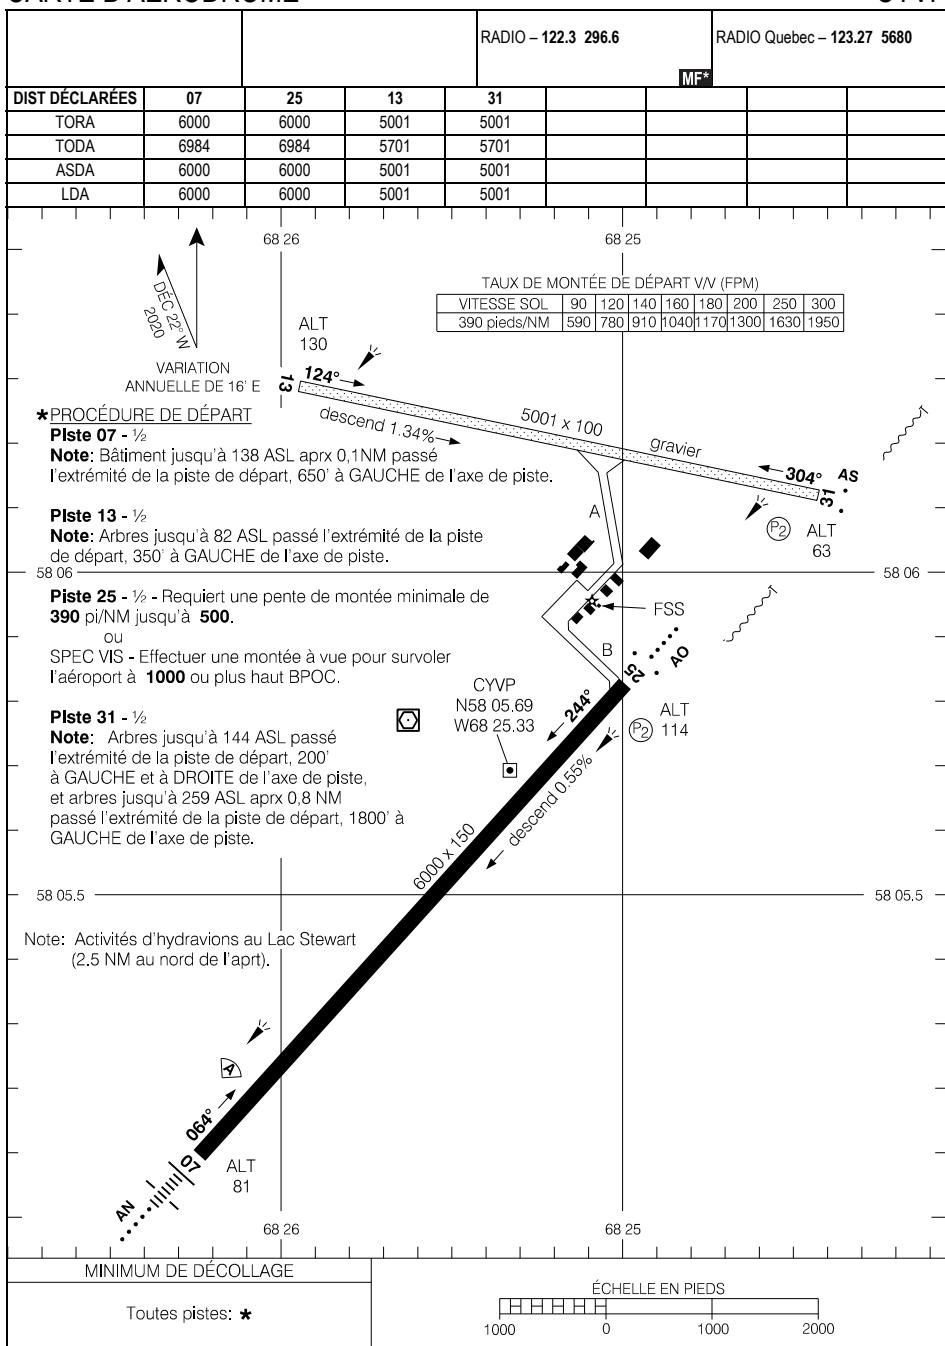

CARTE D'AÉRODROME

EFF 7 AOÛT 25


CYVP

CYGW-AD

KUUJJUARAPIK, QC
CYGW

AERODROME CHART

AWOS – 124.35 (En) 125.15 (Fr)				RADIO La Grande – 122.2	RADIO Quebec – 123.47
DECL DISTS	03	21			MF*
TORA	5082	5082			
TODA	6066	6066			
ASDA	5082	5082			
LDA	5082	5082			

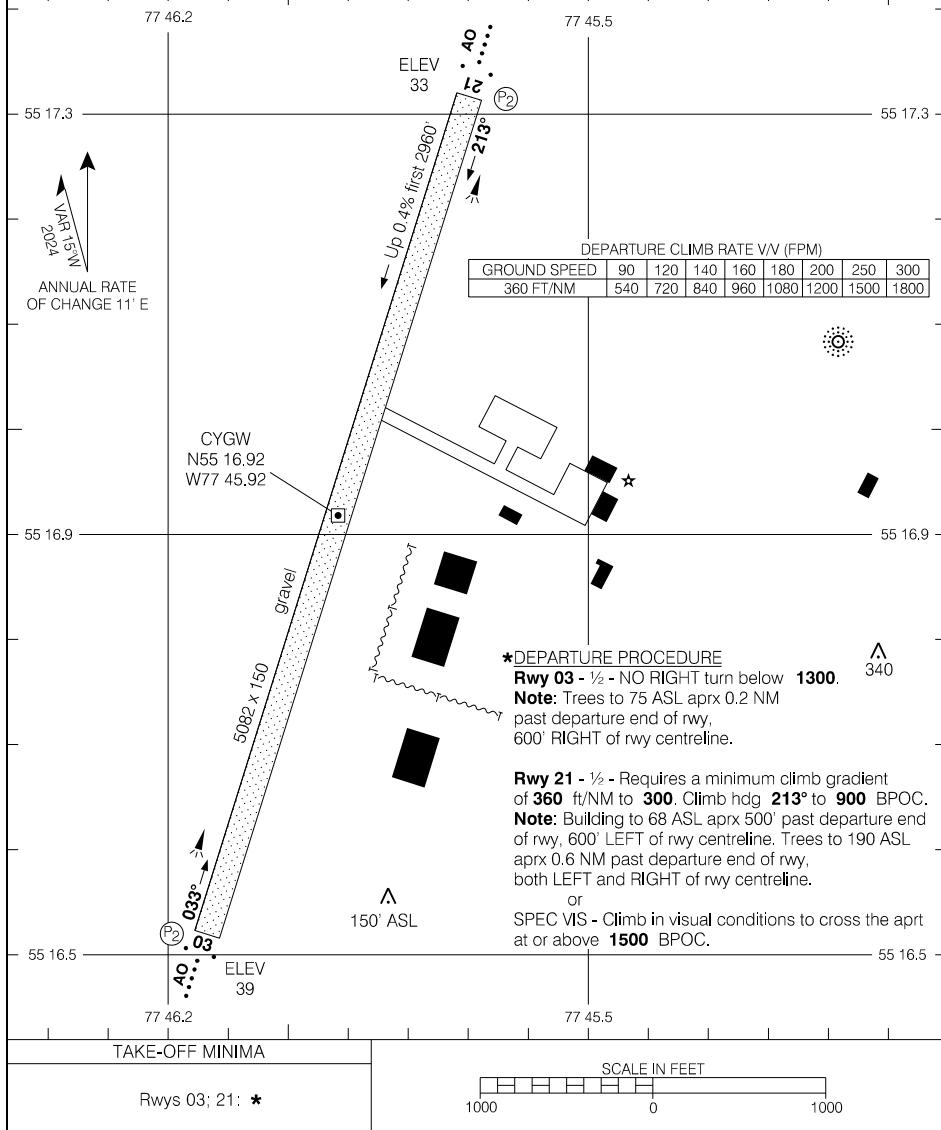

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 16 MAY 24


CYGW

CYGW-AD

CYGW-AD

KUUJJUARAPIK, QC
CYGW

CARTE D'AÉRODROME

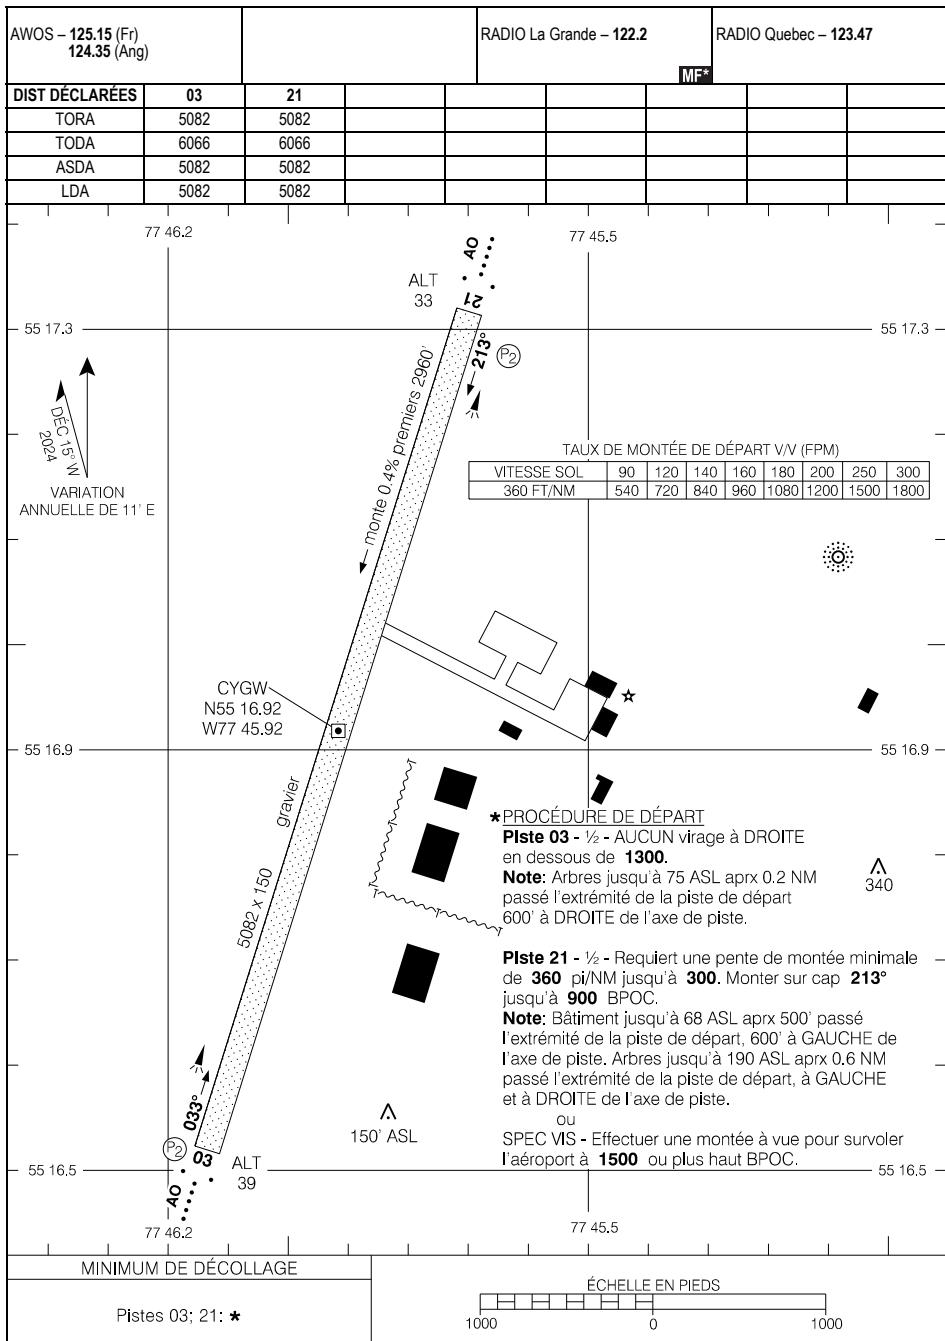

CARTE D'AÉRODROME

EFF 16 MAI 24

CYGW-AD

CYGW


CYGL-AD

LA GRANDE RIVIÈRE, QC
CYGL

AERODROME CHART

		RADIO - 122.3	RADIO Quebec - 123.37
		MF*	
DECL DISTS	13	31	
TORA	6487	6487	
TODA	6487	6487	
ASDA	6487	6487	
LDA	6487	6487	

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

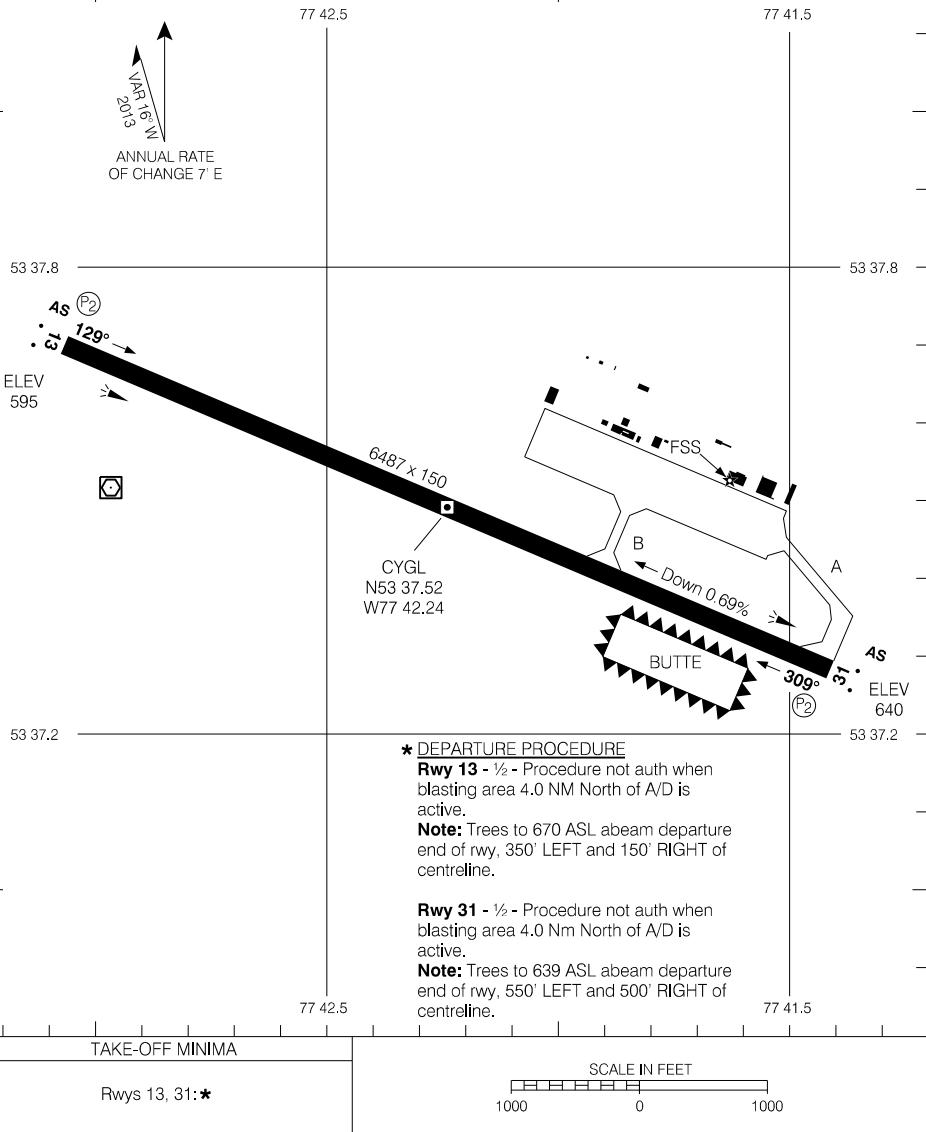


AERODROME CHART

EFF 5 SEP 24

CYGL-AD

CYGL

CARTE D'AÉRODROME

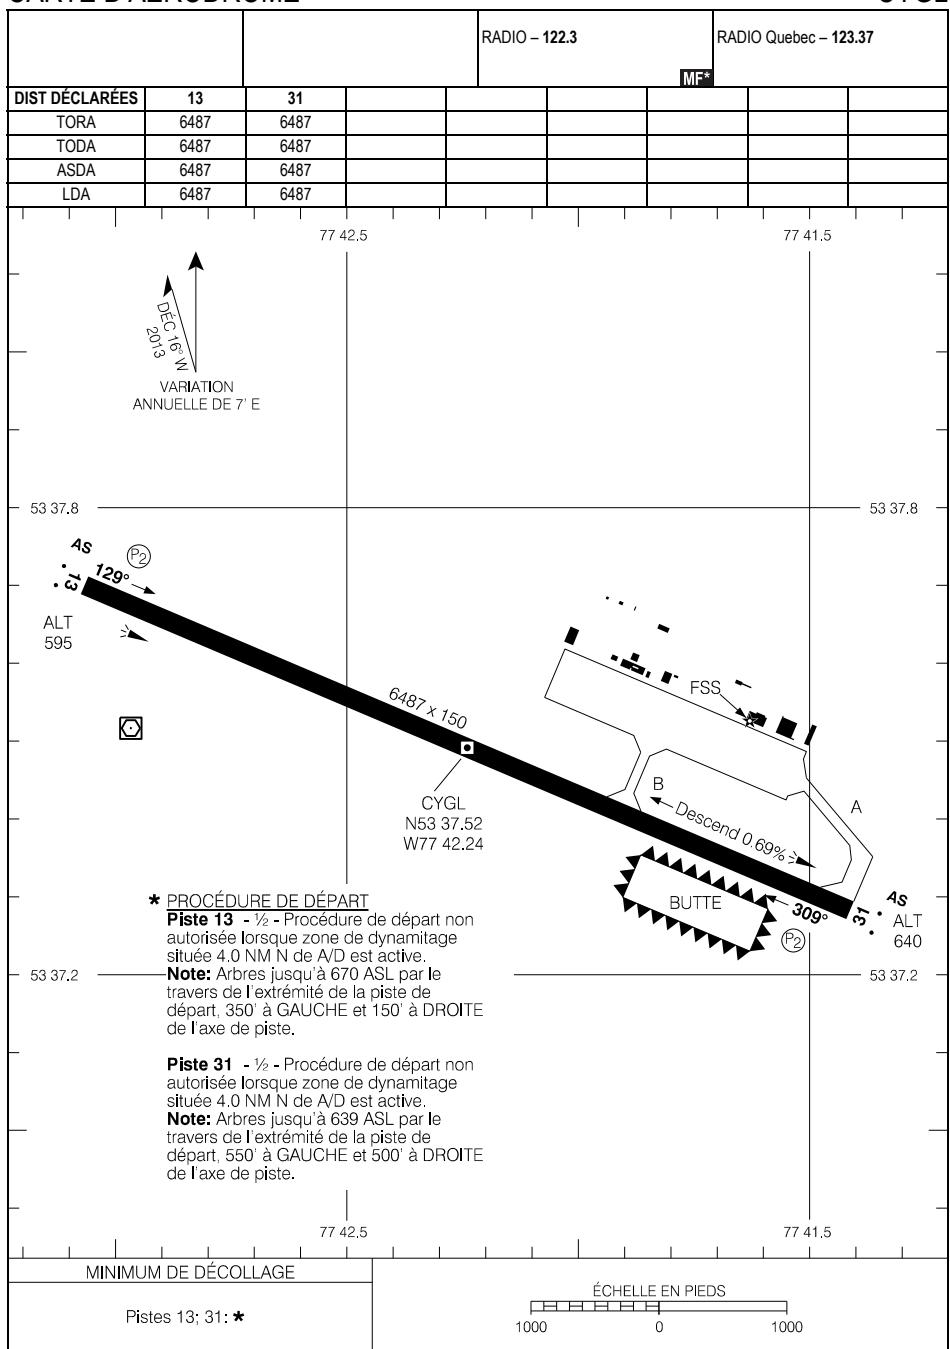


CARTE D'AÉRODROME


EFF 5 SEP 24

CYGL

PARKING AREAS

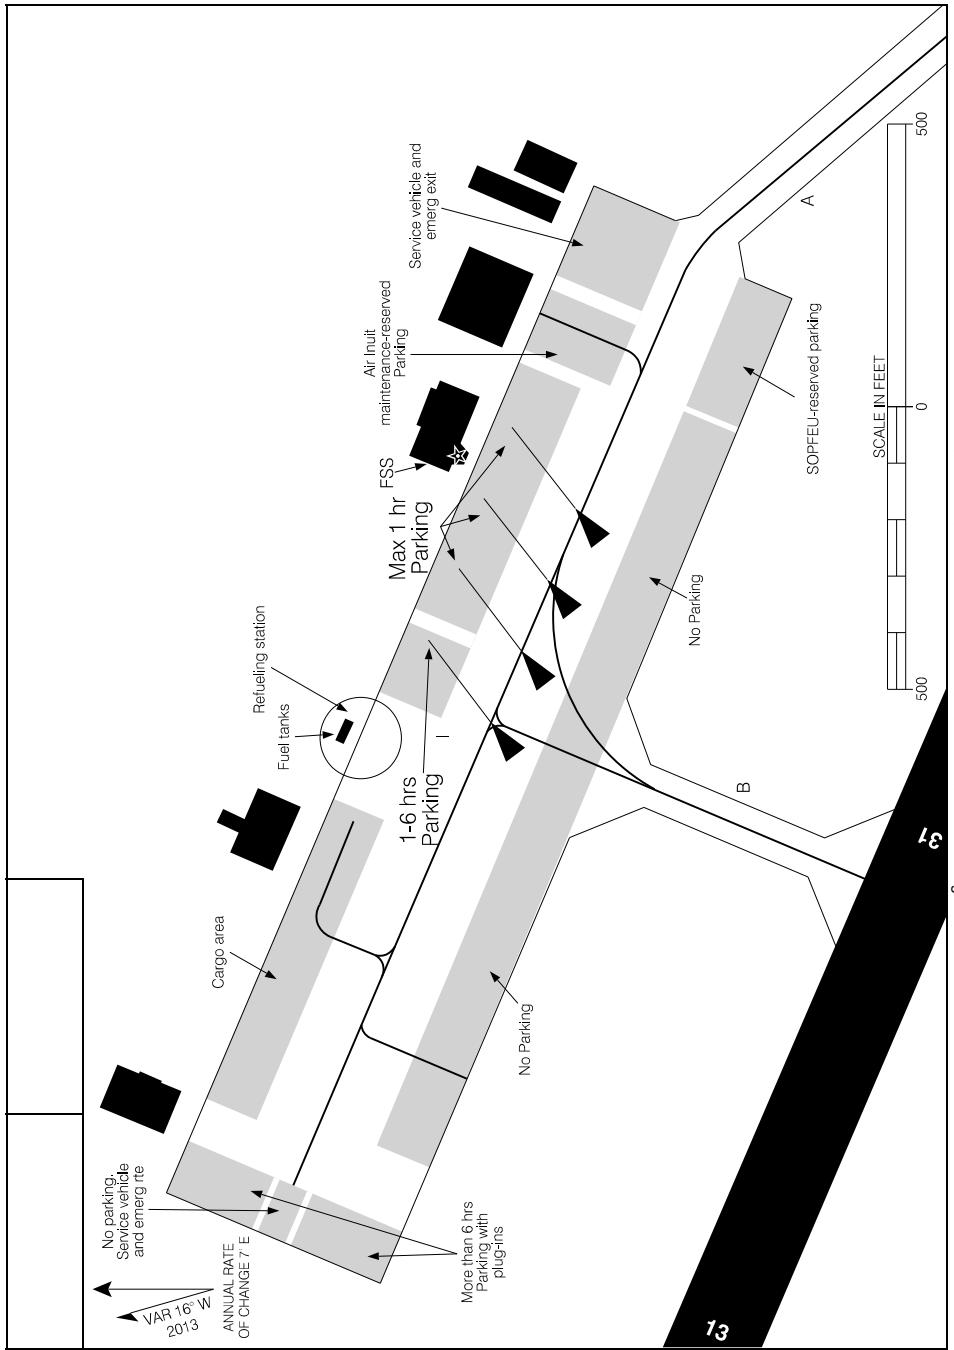

AIRES DE STATIONNEMENT

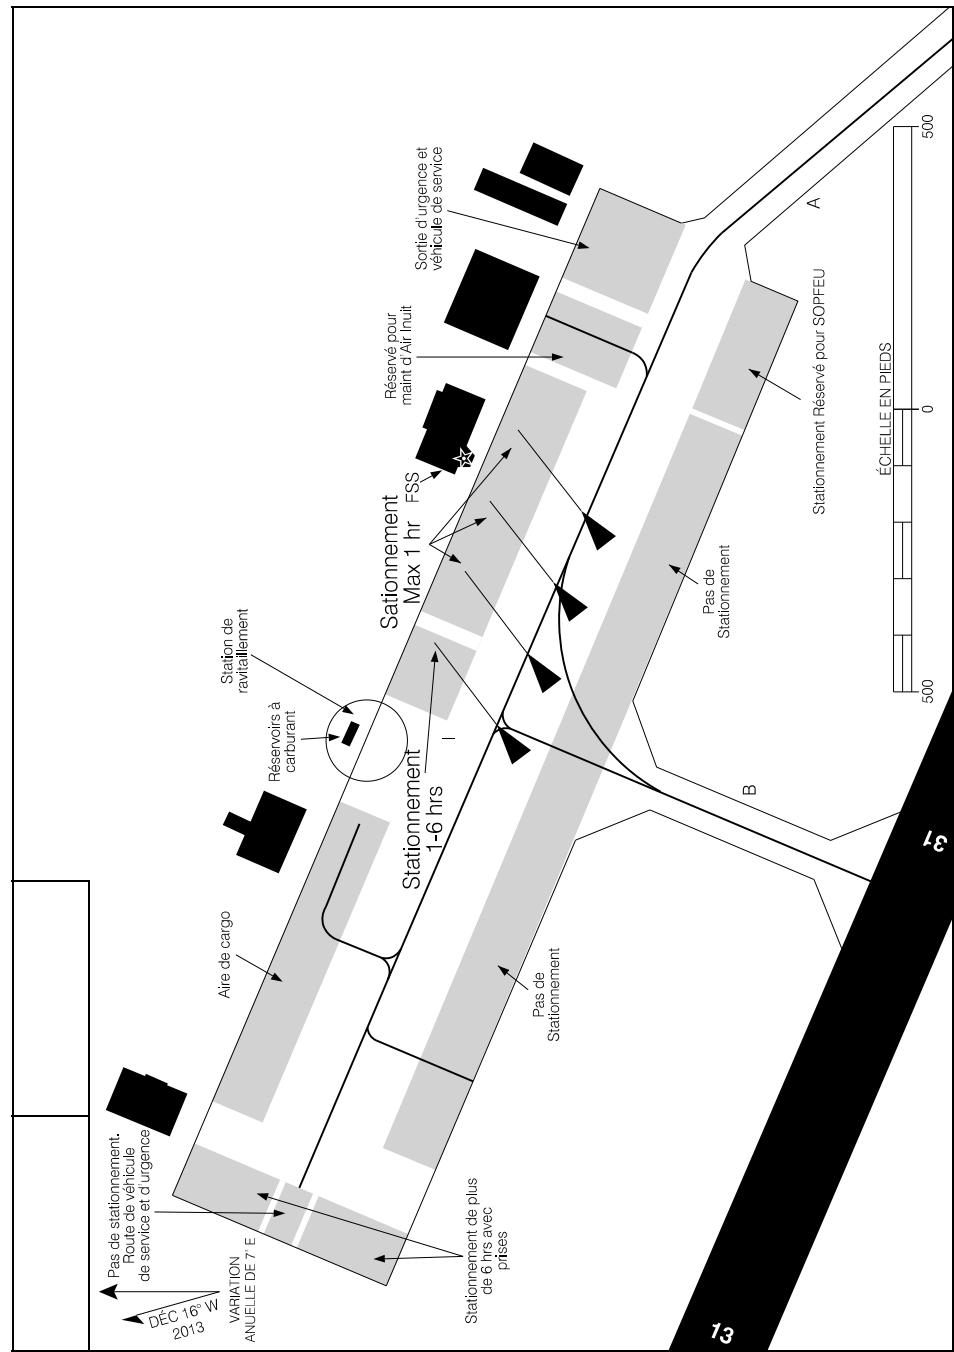LA GRANDE RIVIÈRE, QC
CYGL

AIRES DE STATIONNEMENT


EFF 7 AOÛT 25

CYGL

CYAD-AD

LA GRANDE-3, QC
CYAD

AERODROME CHART

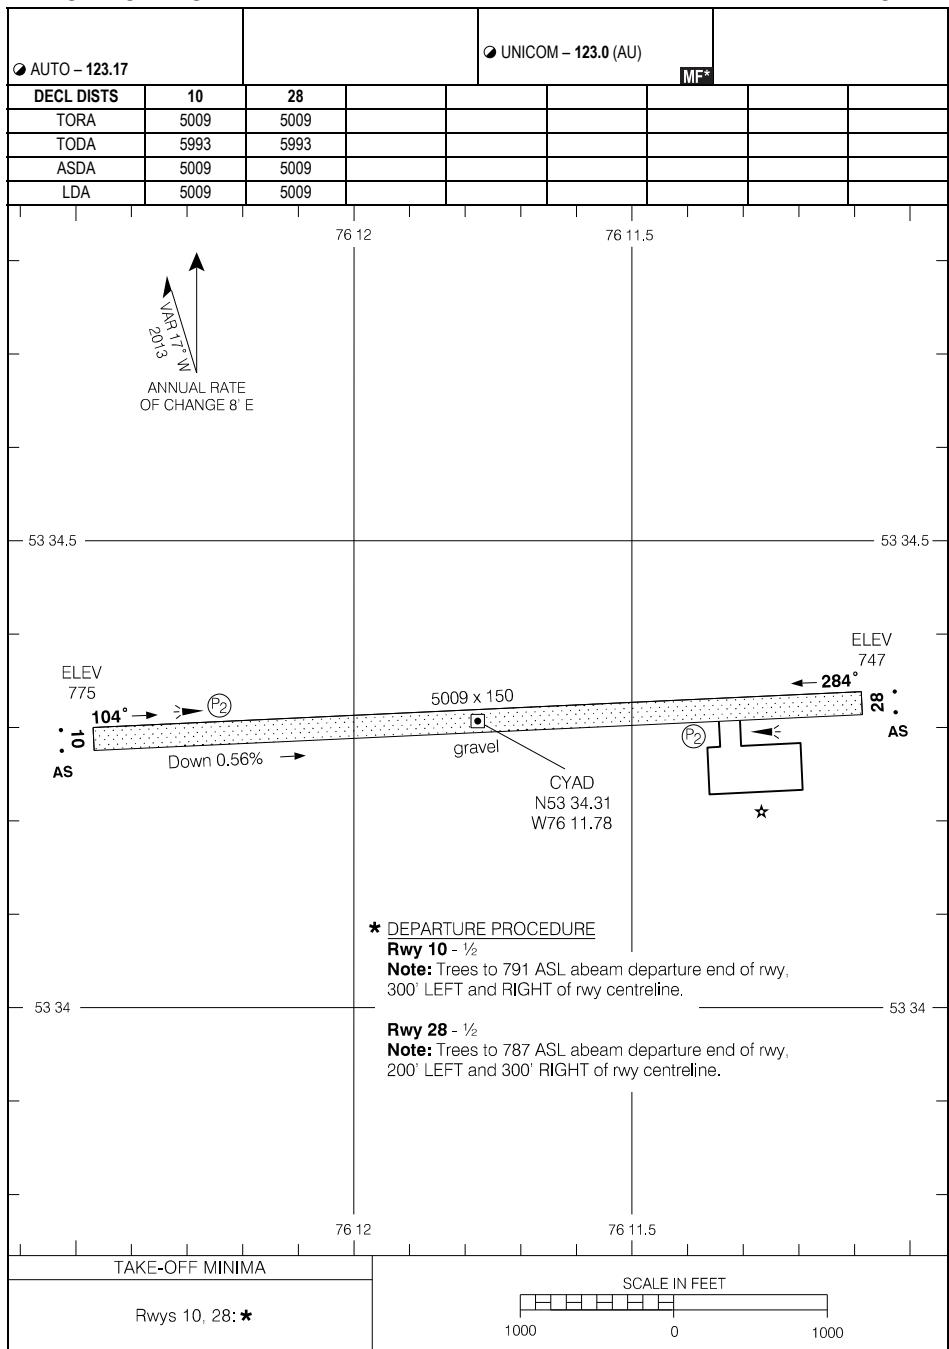


AERODROME CHART

EFF 20 FEB 25

CYAD

CYAD-AD

CARTE D'AÉRODROME

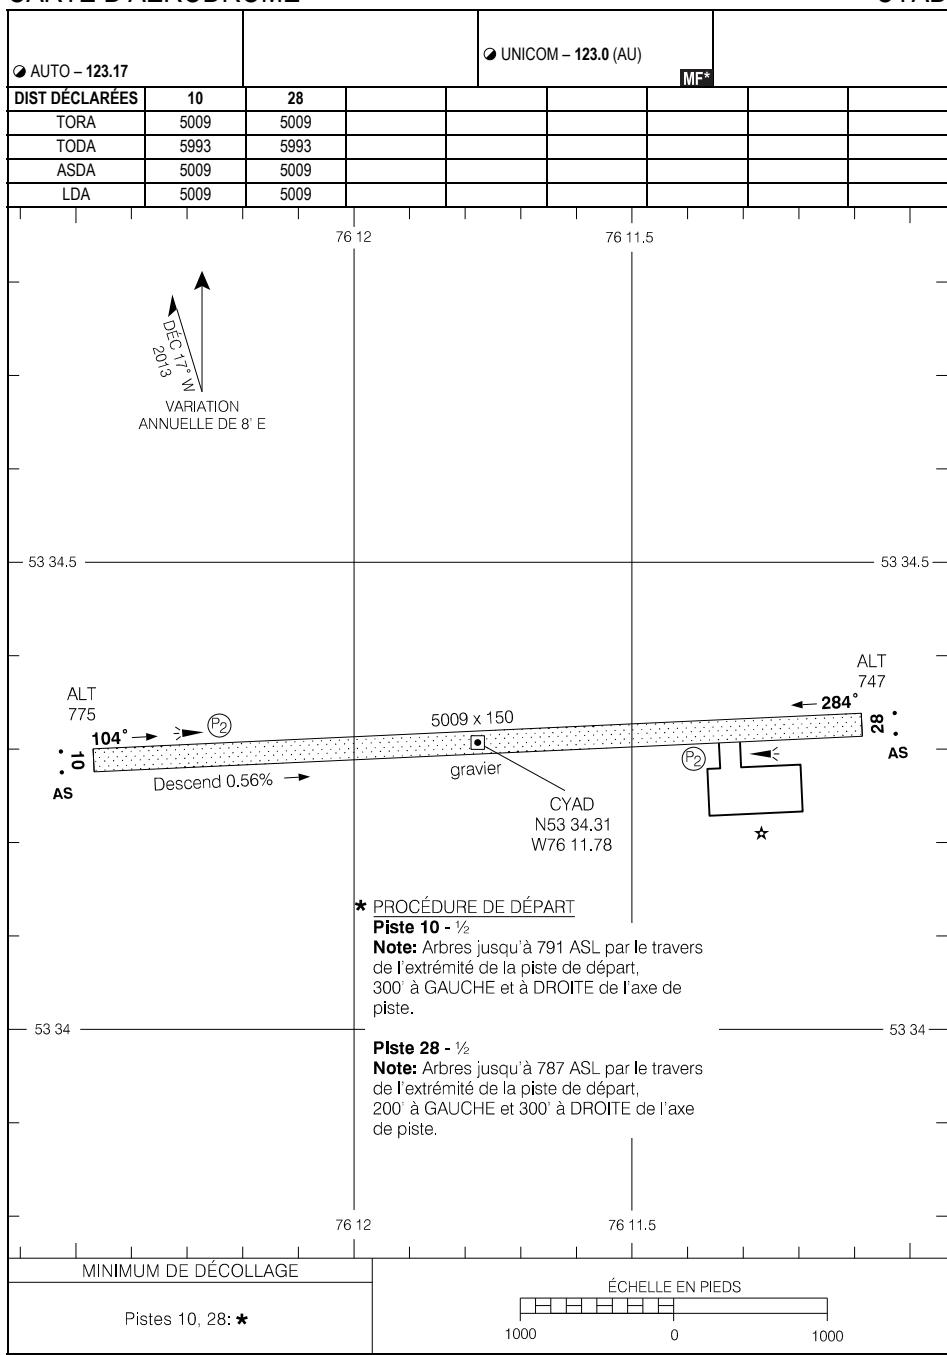

CARTE D'AÉRODROME

EFF 20 FÉV 25

CYAD

CYAH-AD

LA GRANDE-4, QC
CYAH

AERODROME CHART

AWOS – 118.45 (En)
119.65 (Fr)

● UNICOM – 131.2 (AU)

RADIO Quebec – 123.55

CYAH

DECL DISTS	09	27						MF*
TORA	5009	5009						
TODA	5993	5993						
ASDA	5009	5009						
LDA	5009	5009						

JAR 18°W
2015

ANNUAL RATE
OF CHANGE 10' E

DEPARTURE CLIMB RATE V/V (FPM)

GROUND SPEED	90	120	140	160	180	200	250	300
280 FT/NM	420	560	660	750	840	940	1170	1400
290 FT/NM	440	580	680	780	870	970	1210	1450

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

A detailed site plan showing a building with a star and a chimney, a gravel area, and survey points V2 and CYAH. The plan includes a north arrow, elevation information (ELEV 1002), and coordinates (N53 45.28, W73 40.52).

gravel

V2

5009 x 150

CYAH
N53 45.28
W73 40.52

091°

60

V2

V2

ELEV
1002

* DEPARTURE PROCEDURE

Rwy 09 - ½ - Requires a minimum climb gradient of **290 ft/NM** to **2300**.

Note: Trees to 1050 ASL aprx 0.2 NM past departure end of rwy, 50' RIGHT of rwy centreline.

— or —
SPEC VIS - Climb in visual conditions to cross
the east end of the — **\$100** PROG

Rwy 27 - 1/2 - Requires a minimum climb gradient of 280 ft/NM to 2300.

Note: Trees to 1020 ASL aprx 0.2 NM past departure end of rwy, 500' LEFT and 50' RIGHT of rwy centreline

SPEC VIS - Climb in visual conditions to cross the airport or above 2100 RPOC.

TAKE-OFF MINIMA

All Rows: *

AFRODROME CHART

AEROD EEE 30 NOV 23

CYAH

CYAH-AD

CYAH-AD

LA GRANDE-4, QC
CYAH

CARTE D'AÉRODROME


AWOS – 119.65 (Fr) 118.45 (Ang)				● UNICOM – 131.2 (AU)	RADIO Quebec – 123.55
DIST DÉCLARÉES	09	27		MF*	
TORA	5009	5009			
TODA	5993	5993			
ASDA	5009	5009			
LDA	5009	5009			

DÉC 18°N
2015

VARIATION
ANNUELLE DE 10' E

TAUX DE MONTÉE V/V (FPM)								
VITESSE SOL	90	120	140	160	180	200	250	300
280 pieds/NM	420	560	660	750	840	940	1170	1400
290 pieds/NM	440	580	680	780	870	970	1210	1450

Source des données aéronautiques civiles pour le Canada. © 2025 NAV CANADA Tous droits réservés

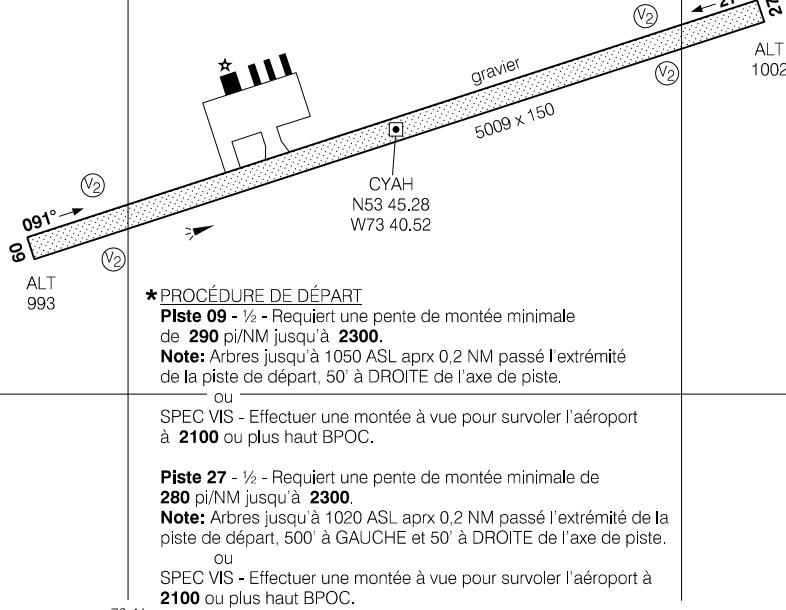

MINIMA DE DÉCOLLAGE

ÉCHELLE EN PIEDS

CARTE D'AÉRODROME


CYAH

CYAH-AD

CYFJ-AD

LA MACAZA/MONT-TREMBLANT, QC
CYFJ

AERODROME CHART

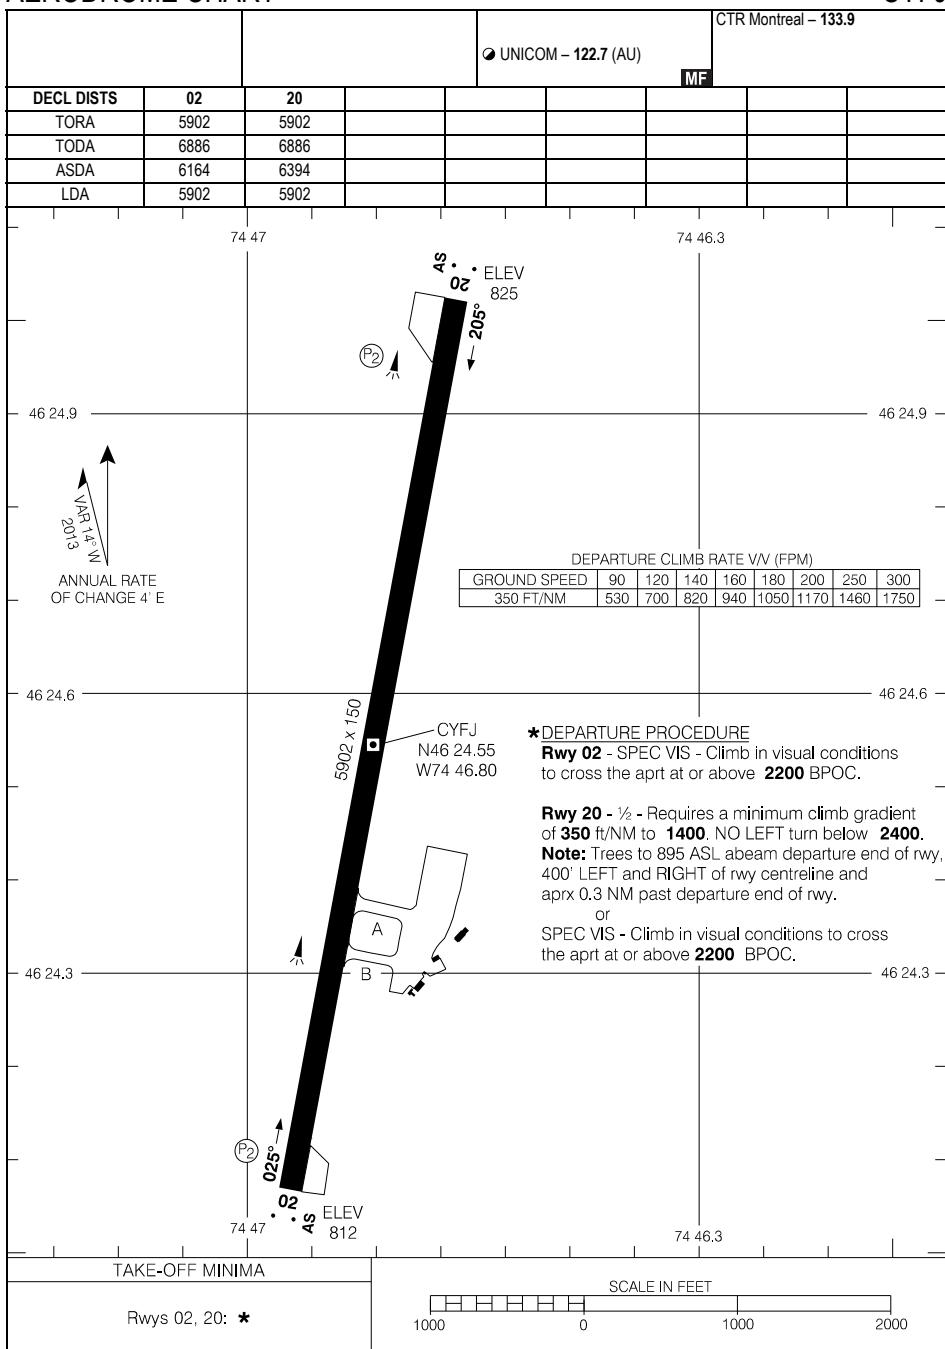

AERODROME CHART


EFF 5 OCT 23

CYFJ

CYFJ-AD

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA. All rights reserved

CARTE D'AÉRODROME

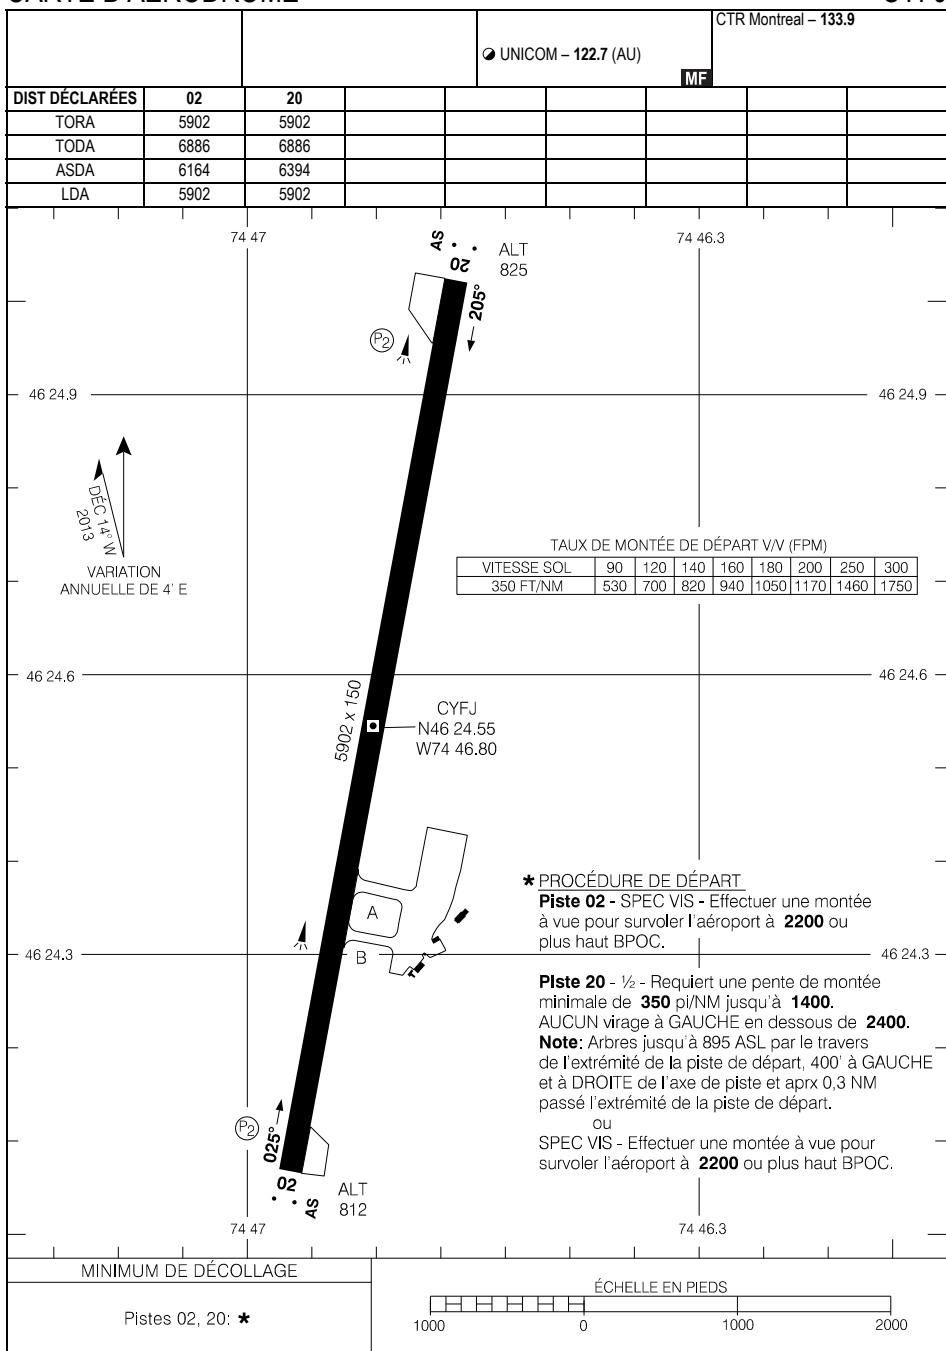
LA MACAZA/MONT-TREMBLANT, QC
CYFJ

CARTE D'AÉRODROME

EFF 5 OCT 23

CYFJ

AERODROME CHART

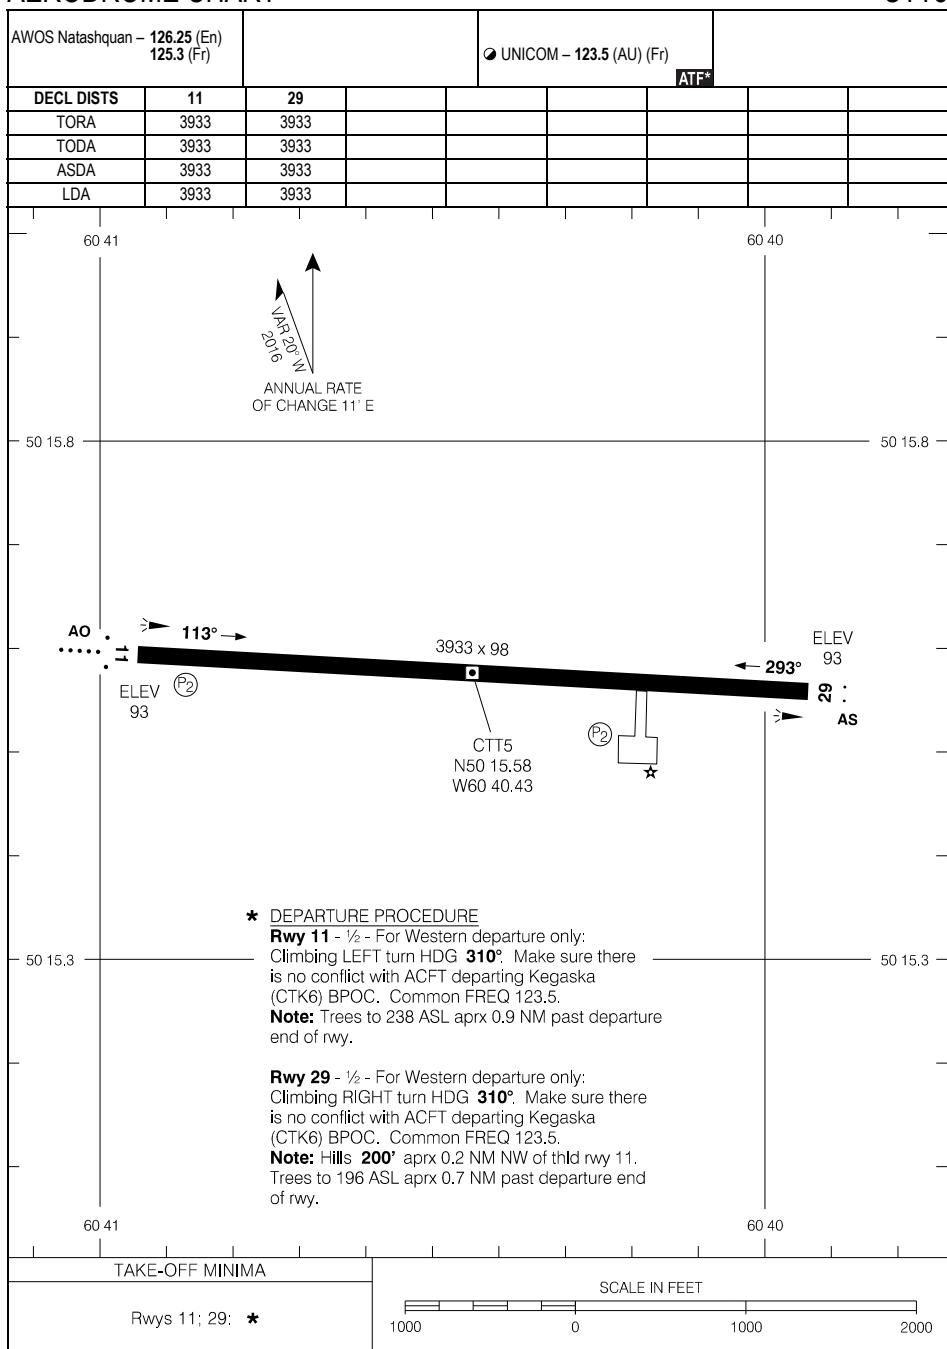


AERODROME CHART

EFF 29 DEC 22

CTT5


CARTE D'AÉRODROME

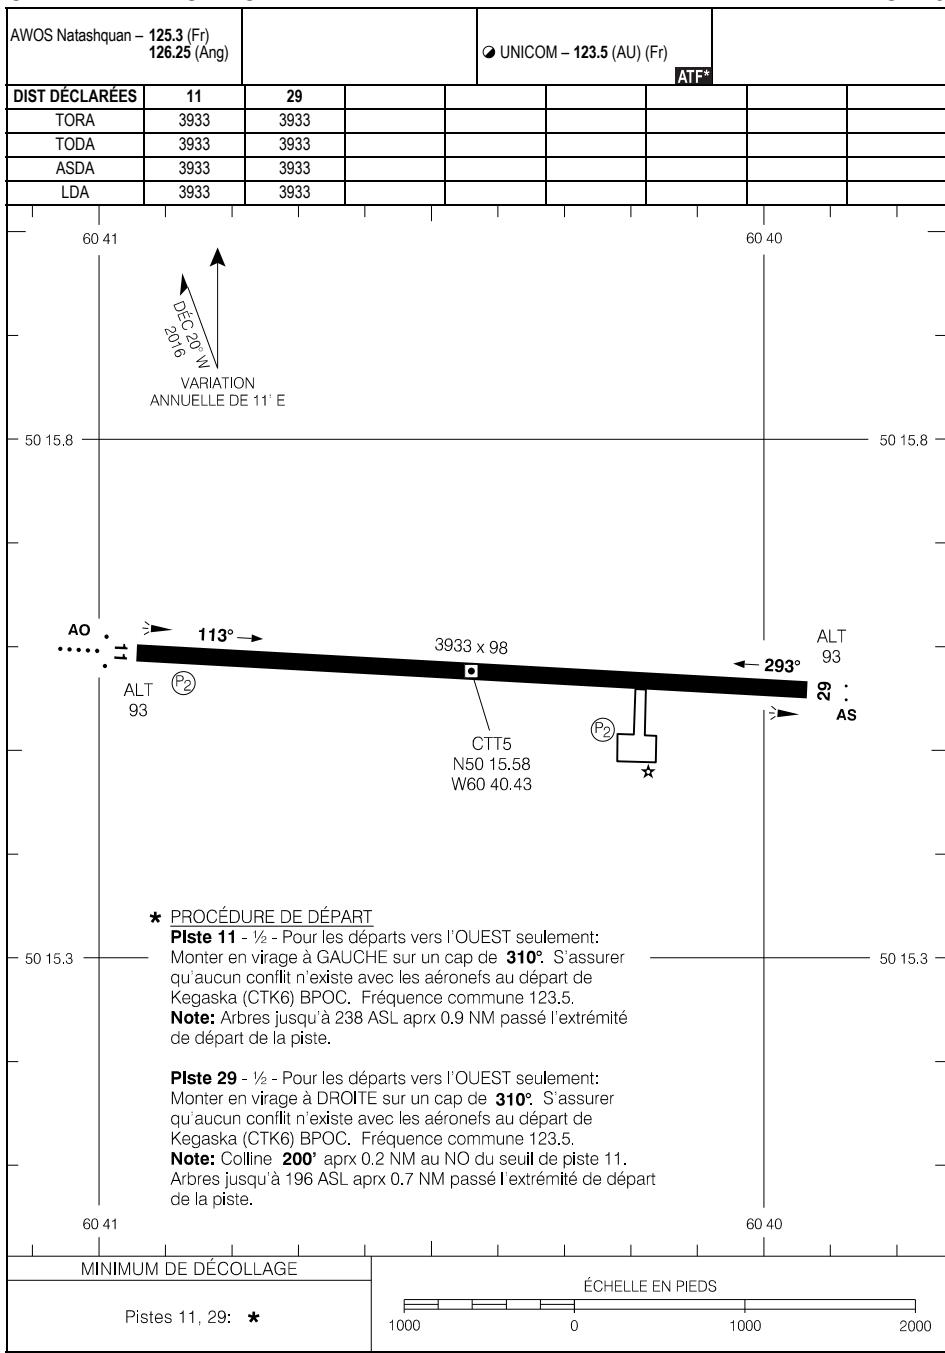CARTE D'AÉRODROME
EFF 29 DÉC 22

CSR8-AD

LA SARRE, QC
CSR8

AERODROME CHART

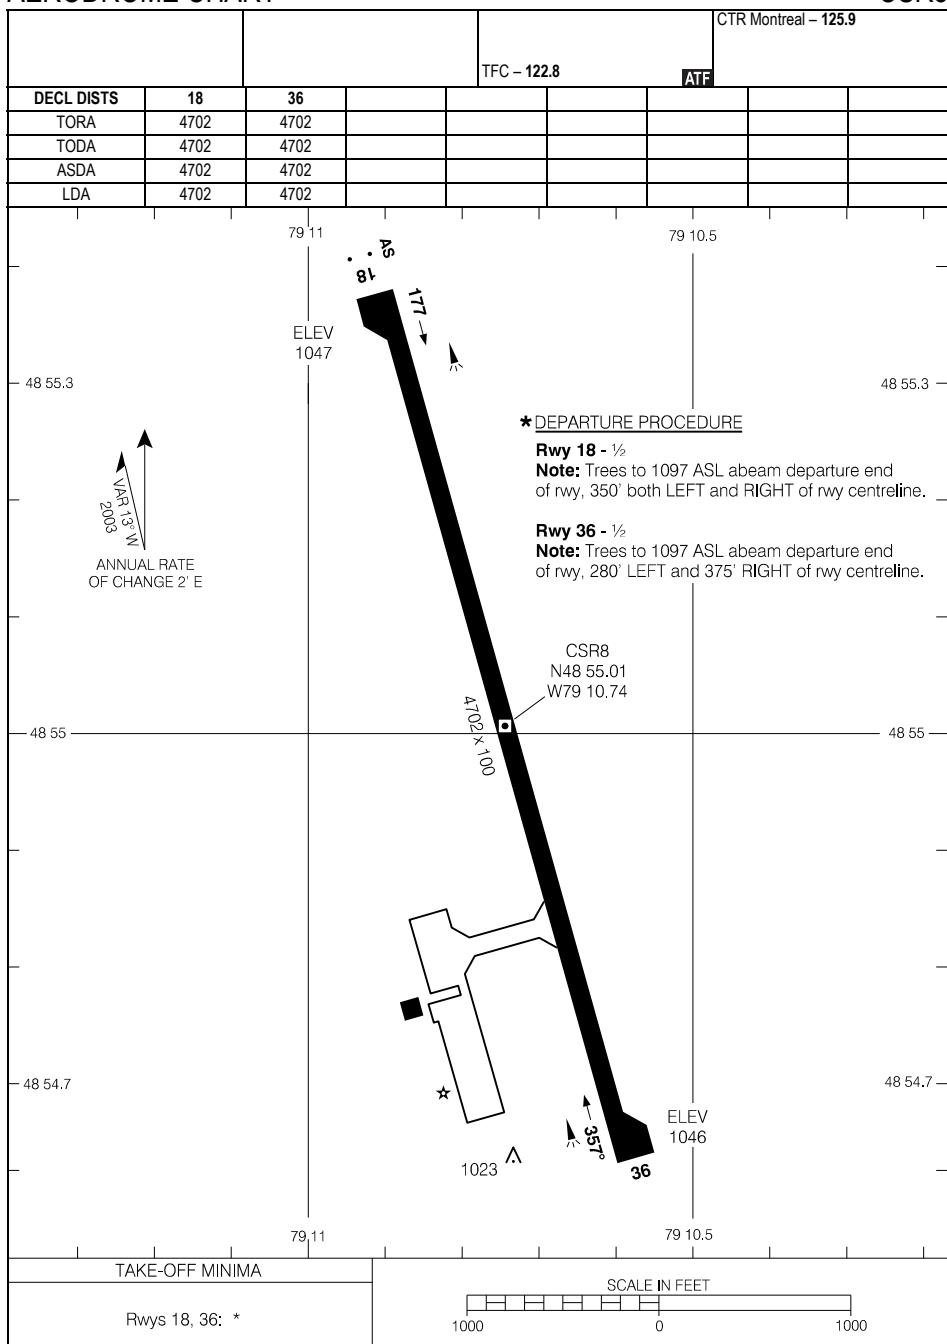


AERODROME CHART

EFF 20 FEB 25

CSR8

CSR8-AD

CARTE D'AÉRODROME

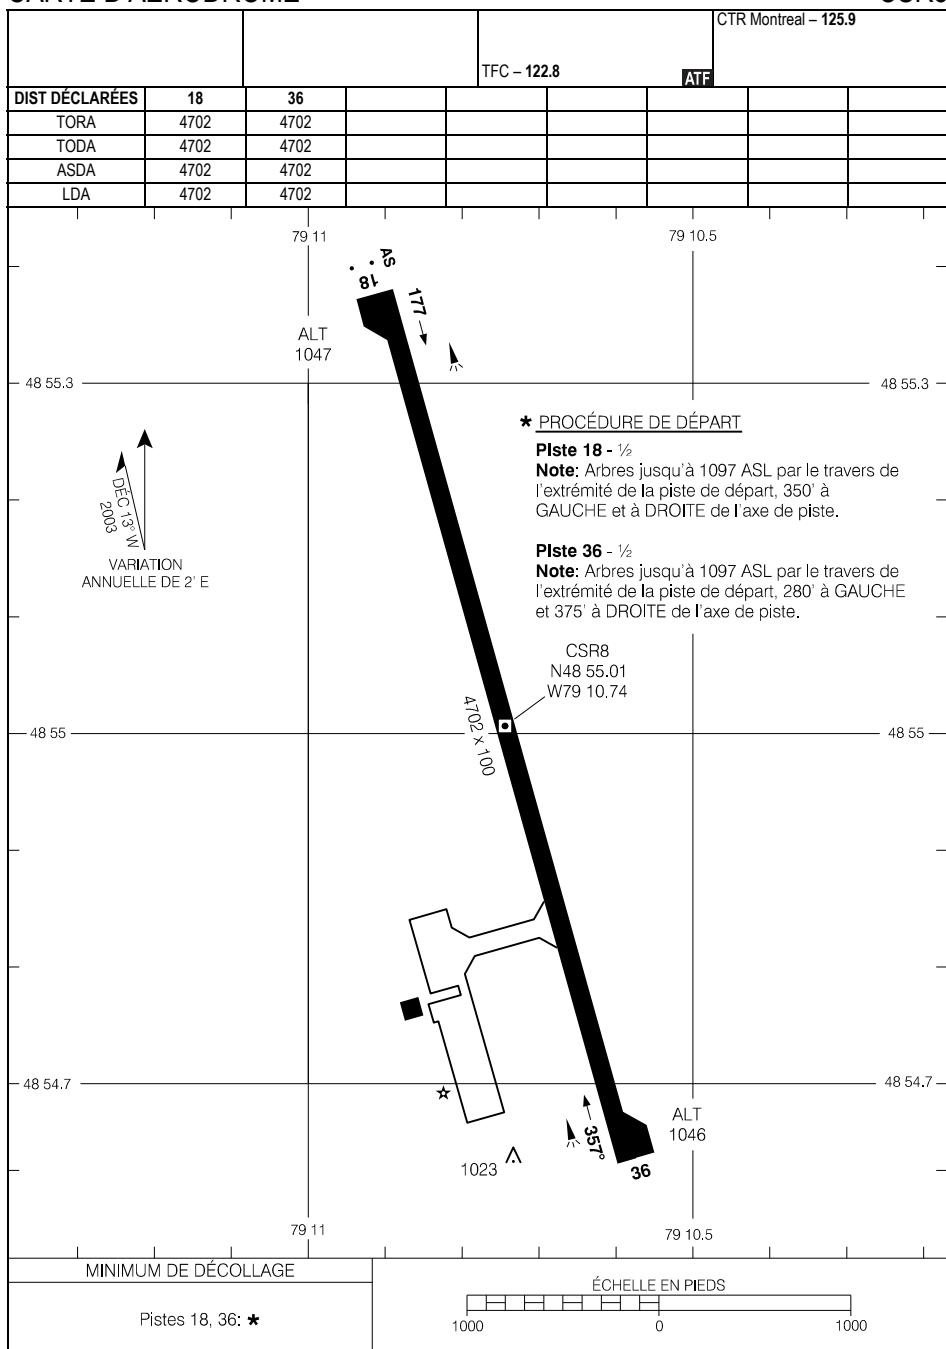

CARTE D'AÉRODROME

EFF 20 FÉV 25

CSR8

CYLQ-AD

LA TUQUE, QC
CYLQ

AERODROME CHART

AUTO - 122.97

DECL DISTS	01	19						
TORA	5000	5000						
TODA	5000	5000						
ASDA	5000	5000						
LDA	5000	5000						

AS 6t A

ELEV
550

47 24.9 —————— ↑ ↓ —————— 47 24.9

VAR₂ →

15°N
2020

ANNUAL RATE
OF CHANGE 7' E

—

CYLO

N47 24.56
W72 47.34

* DEPARTURE PROCEDURE

Rwy 01 - ½ Requires a minimum climb gradient of 400 ft/NM to 1600. or

SPEC VIS - Climb in visual condition to cross the apt at or above **1800** BPOC.

Note: Trees to 640 ASL abeam departure end of rwy, 50' LEFT and RIGHT of rwy centreline and aprx 100' past departure end of rwy.

Rwy 19 - $\frac{1}{2}$ - Requires a minimum climb gradient of 450 ft/NM to 1600

SPEC VIS - Climb in visual condition to cross


Note: Trees to 630 ASL aprx 100 past departure end of swy 500' LEFT and RIGHT of swy

end of rwy, 500' LEFT and RIGHT of rwy
centreline and aprx 0.1 NM past departure

DEPARTURE CLIMB RATE V/V (FPM)							
GROUND SPEED	90	120	140	160	180	200	250
400 FT/NM	620	820	940	1070	1200	1340	1670
600 FT/NM	620	820	940	1070	1200	1340	1670

400 FT/NM	600	800	940	1070	1200	1340	1670	2000	• • S ELEV 544
450 FT/NM	680	900	1050	1200	1350	1500	1880	2250	72 47.8

TAKE-OFF MINIMA

Rwys 01; 19; *  SCALE IN FEET

AERODROME CHART CYLG

EFF 10 AUG 23

CYLQ-AD

CYLO

LA TUQUE, QC
CYLQ


CARTE D'AÉRODROME

AUTO - 122.97

UNICOM - 122-32 (AU)

CTR Montreal – 134.5

DIST DÉCLARÉES	01	19						
TORA	5000	5000						
TODA	5000	5000						
ASDA	5000	5000						
LDA	5000	5000						

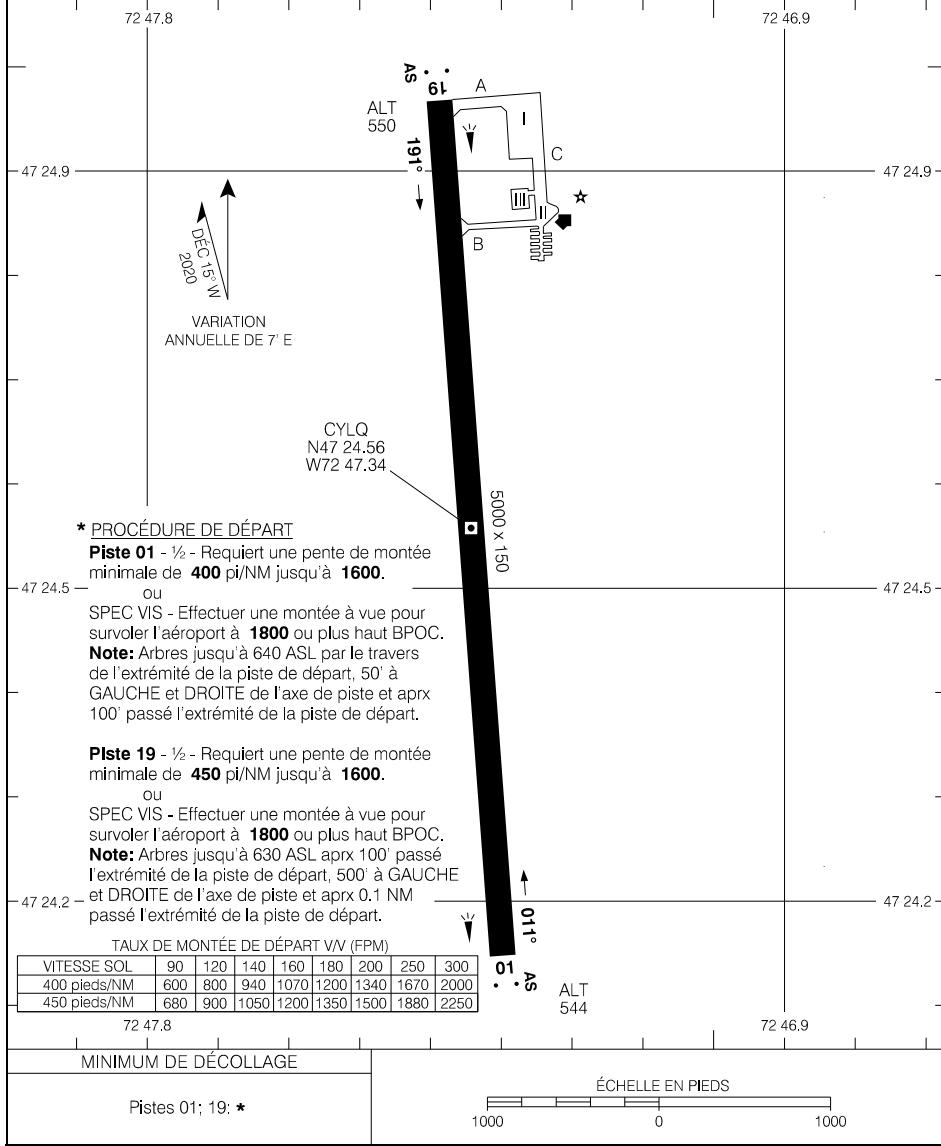


Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

CARTE D'AÉRODROME

EFF 10 AOÛT 23

CYLQ

AERODROME CHART

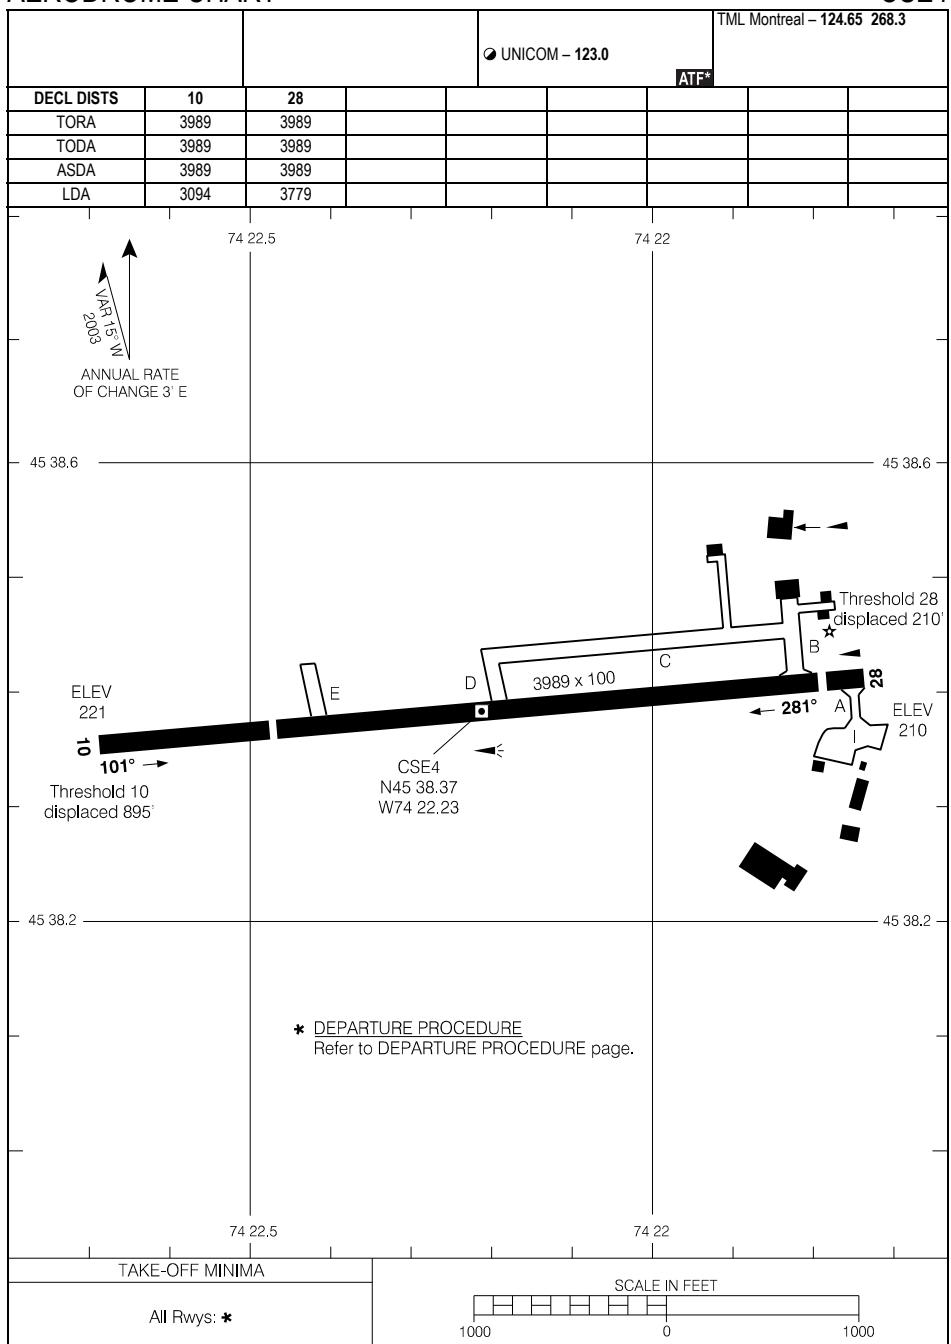


AERODROME CHART

EFF 7 AUG 25

CSE4


CARTE D'AÉRODROME

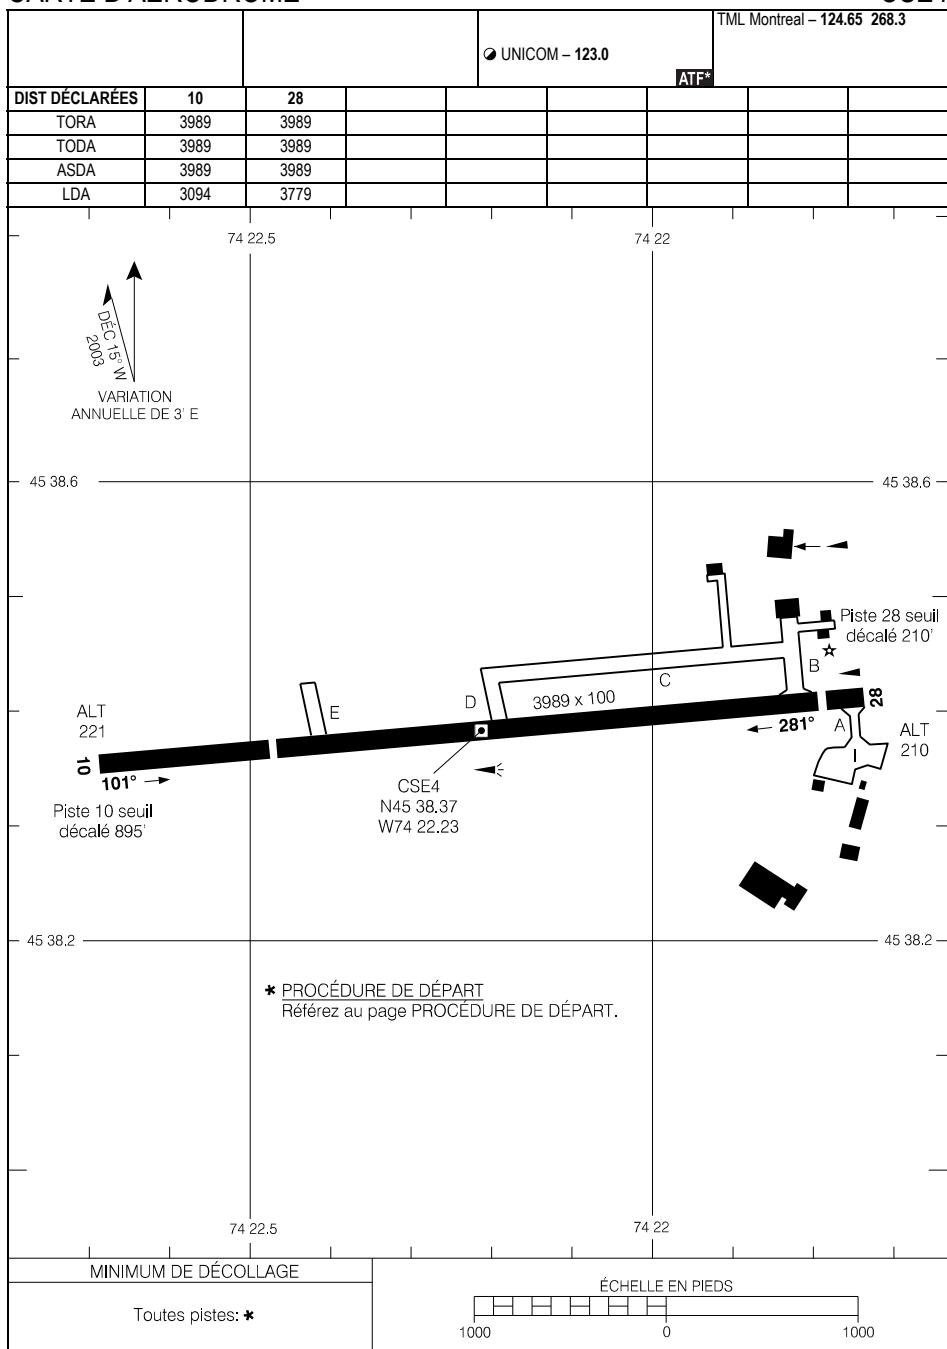

CYDO-AD

LAC-SAINT-JEAN, QC
CYDO

AERODROME CHART

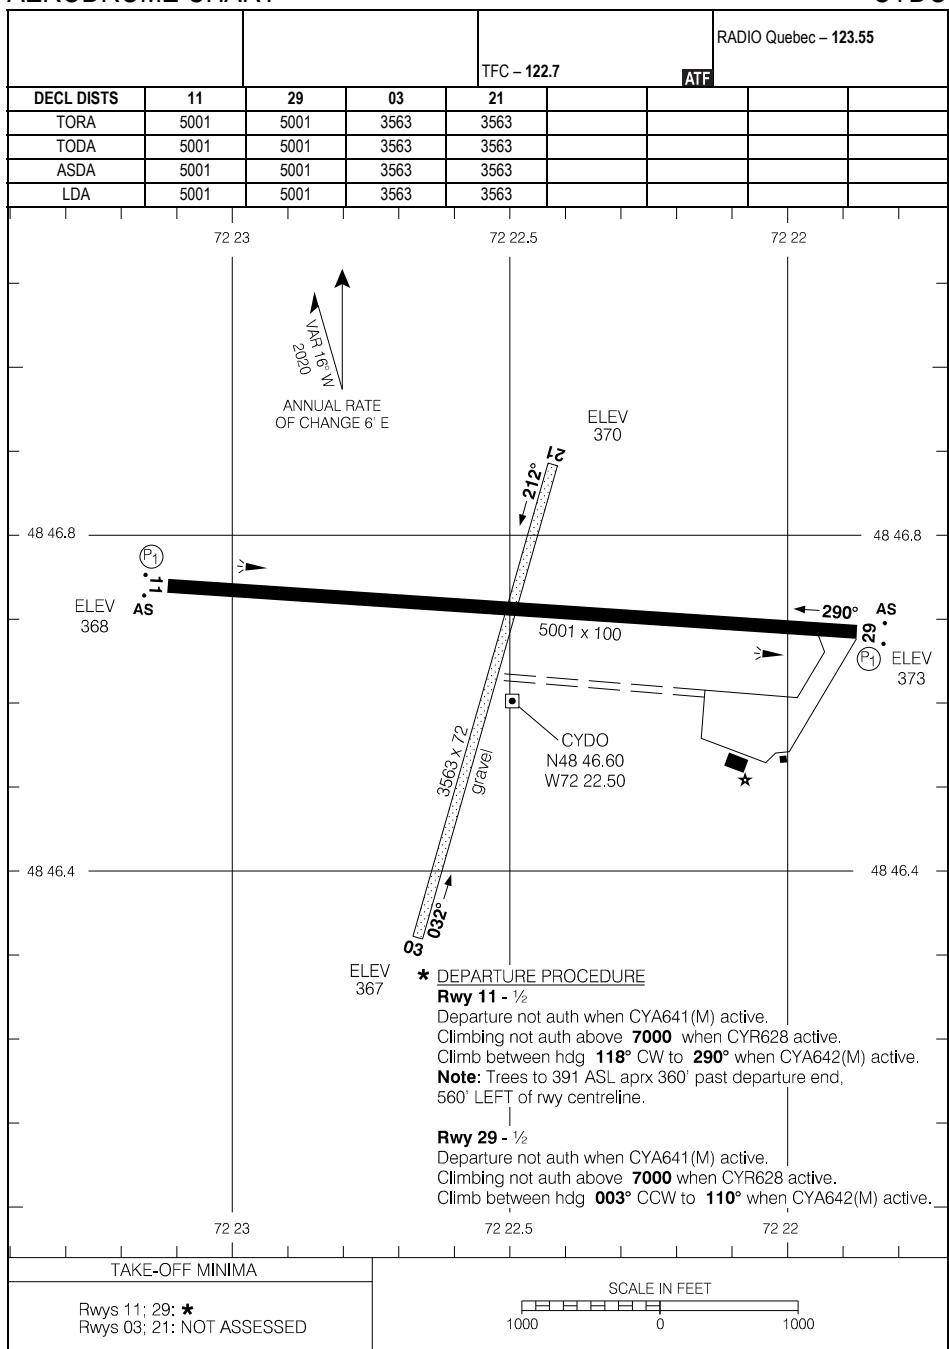

AERODROME CHART

EFF 11 JUL 24


CYDO-AD

CYDO

CYDO-AD

LAC-SAINT-JEAN, QC
CYDO

CARTE D'AÉRODROME

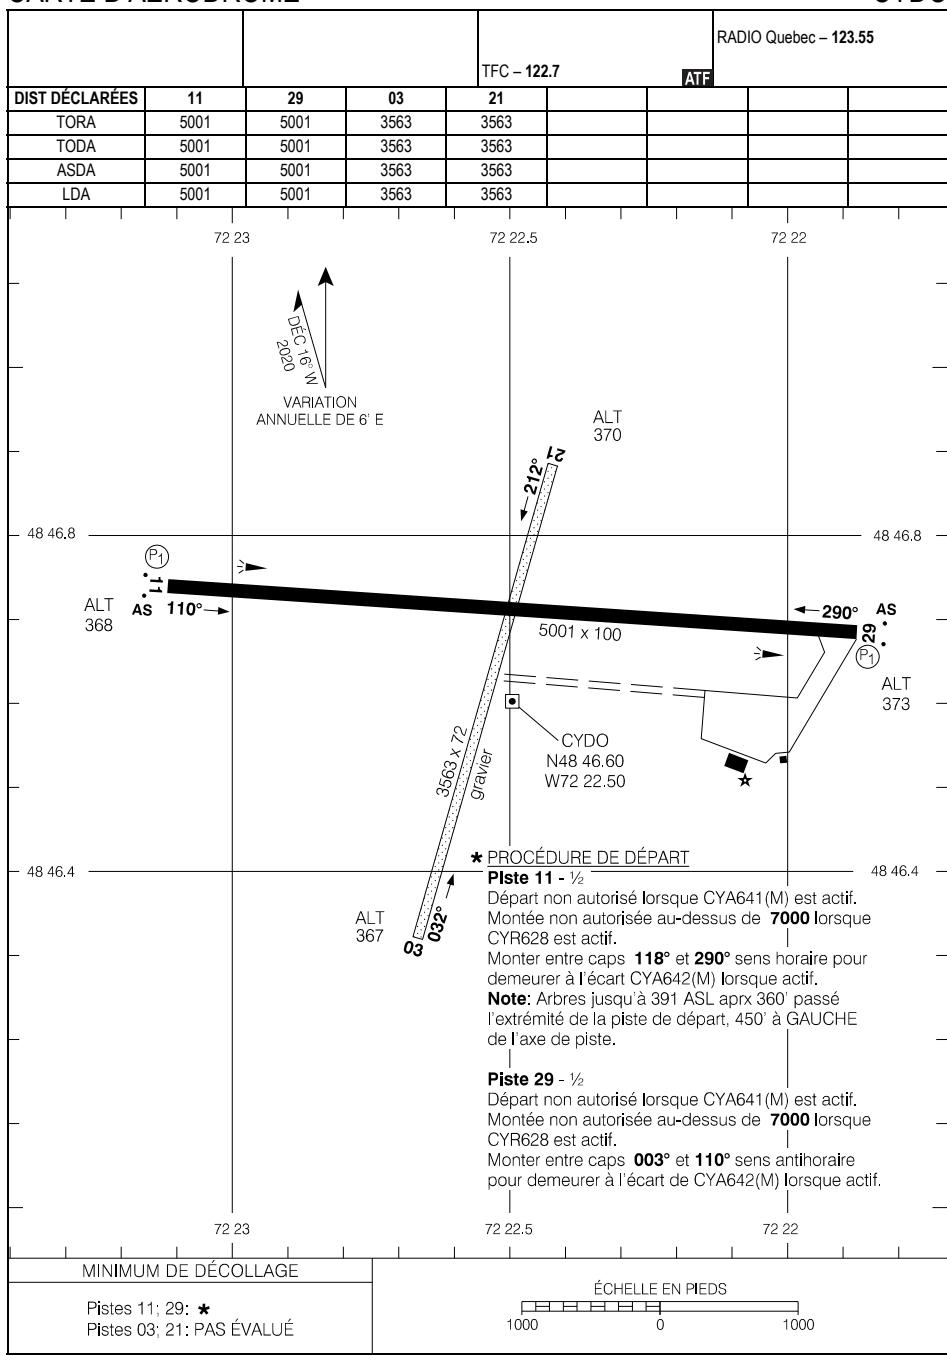

CARTE D'AÉRODROME

EFF 11 JUIL 24


CYDO

CYDO-AD

CSH4-AD

LEBEL-SUR-QUÉVILLON, QC
CSH4

AERODROME CHART

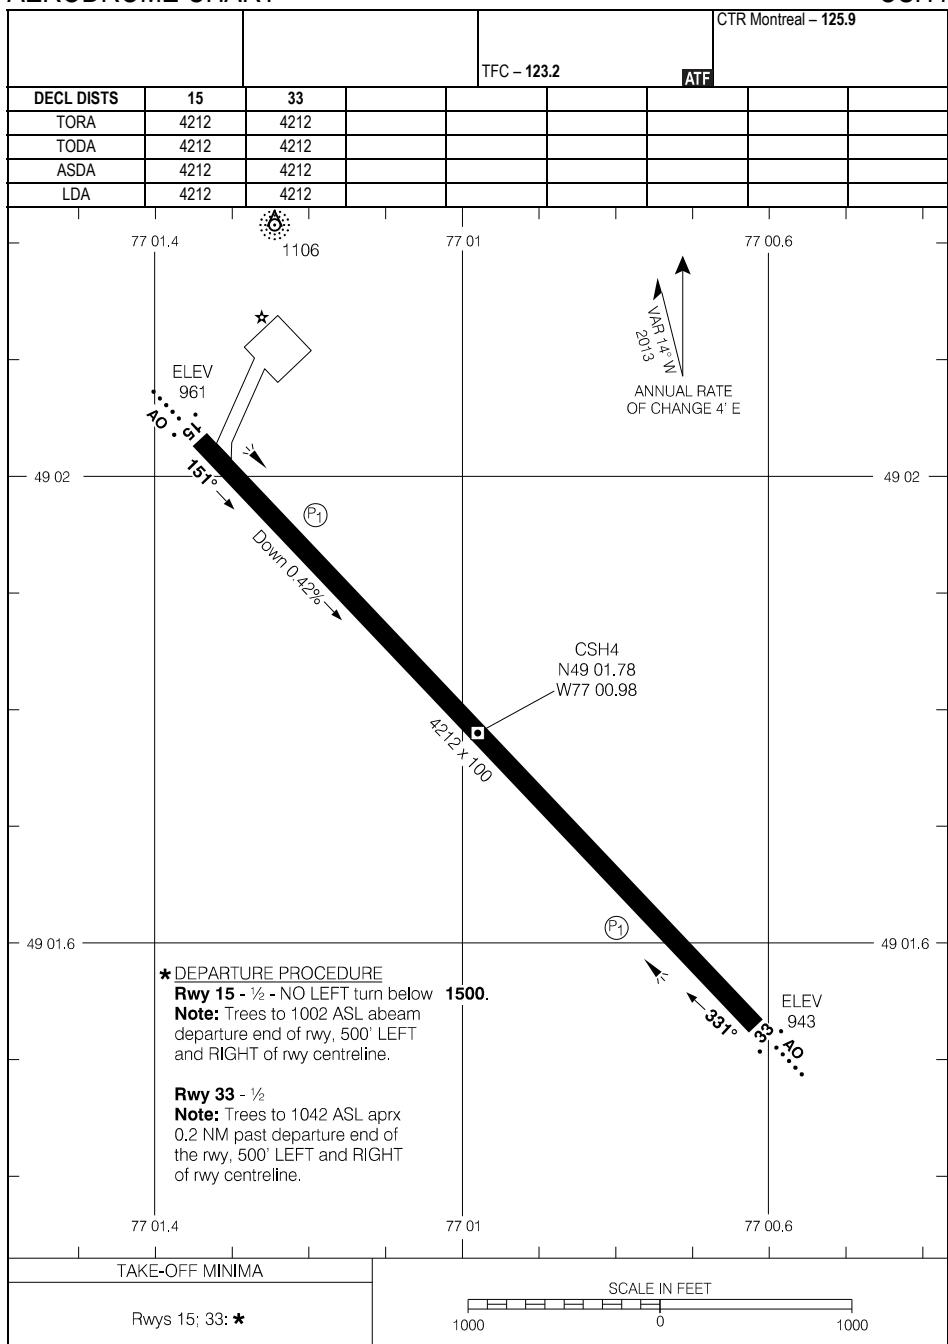

AERODROME CHART

EFF 30 NOV 23


CSH4

CSH4-AD

CSH4-AD

LEBEL-SUR-QUÉVILLON, QC
CSH4

CARTE D'AÉRODROME

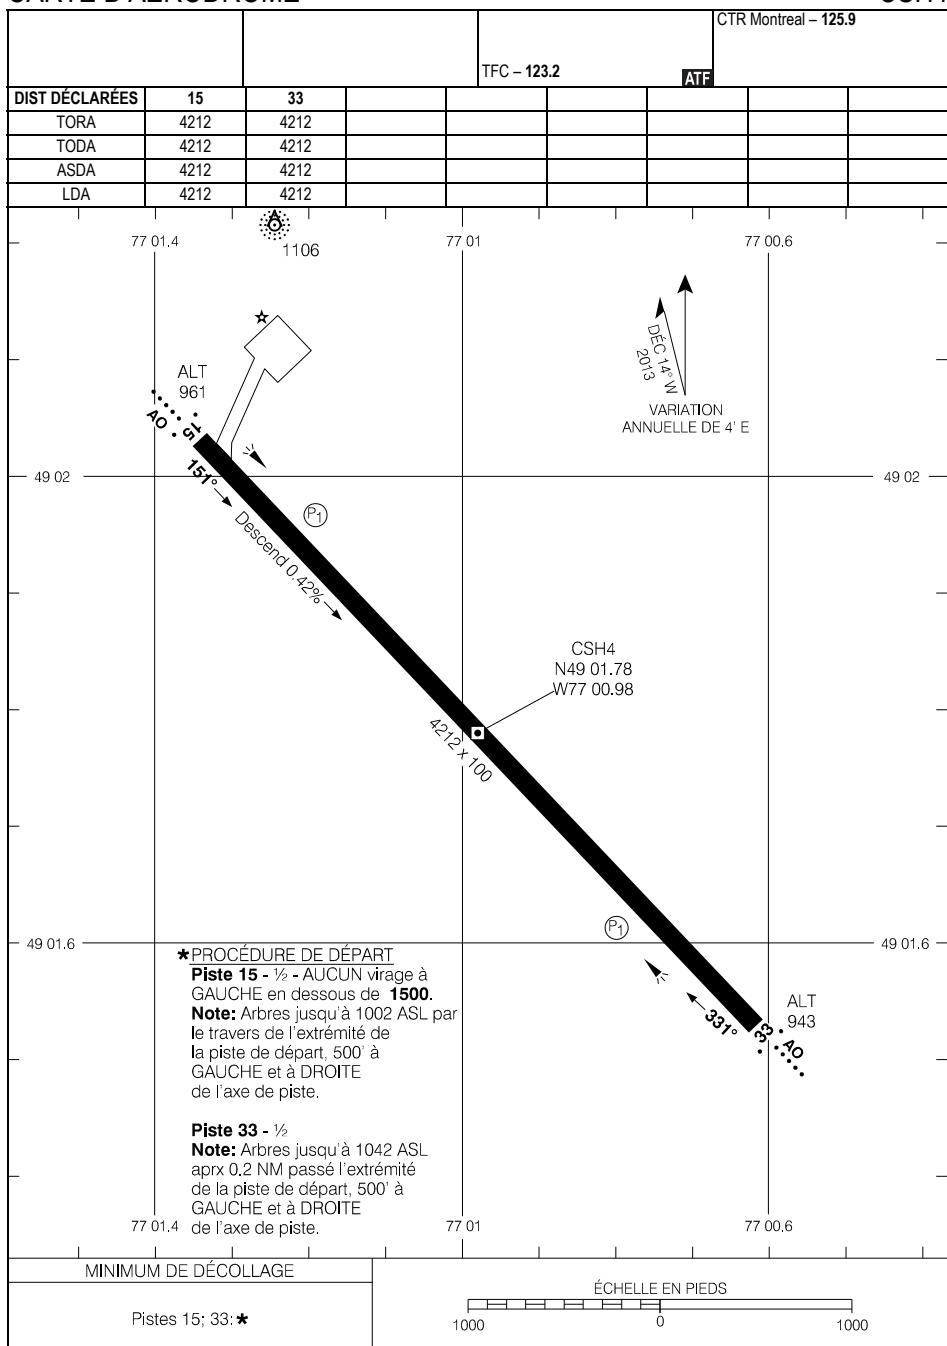

CARTE D'AÉRODROME

EFF 30 NOV 23


CSH4

CSH4-AD

CYBX-AD

LOURDES-DE-BLANC-SABLON, QC
CYBX

AERODROME CHART

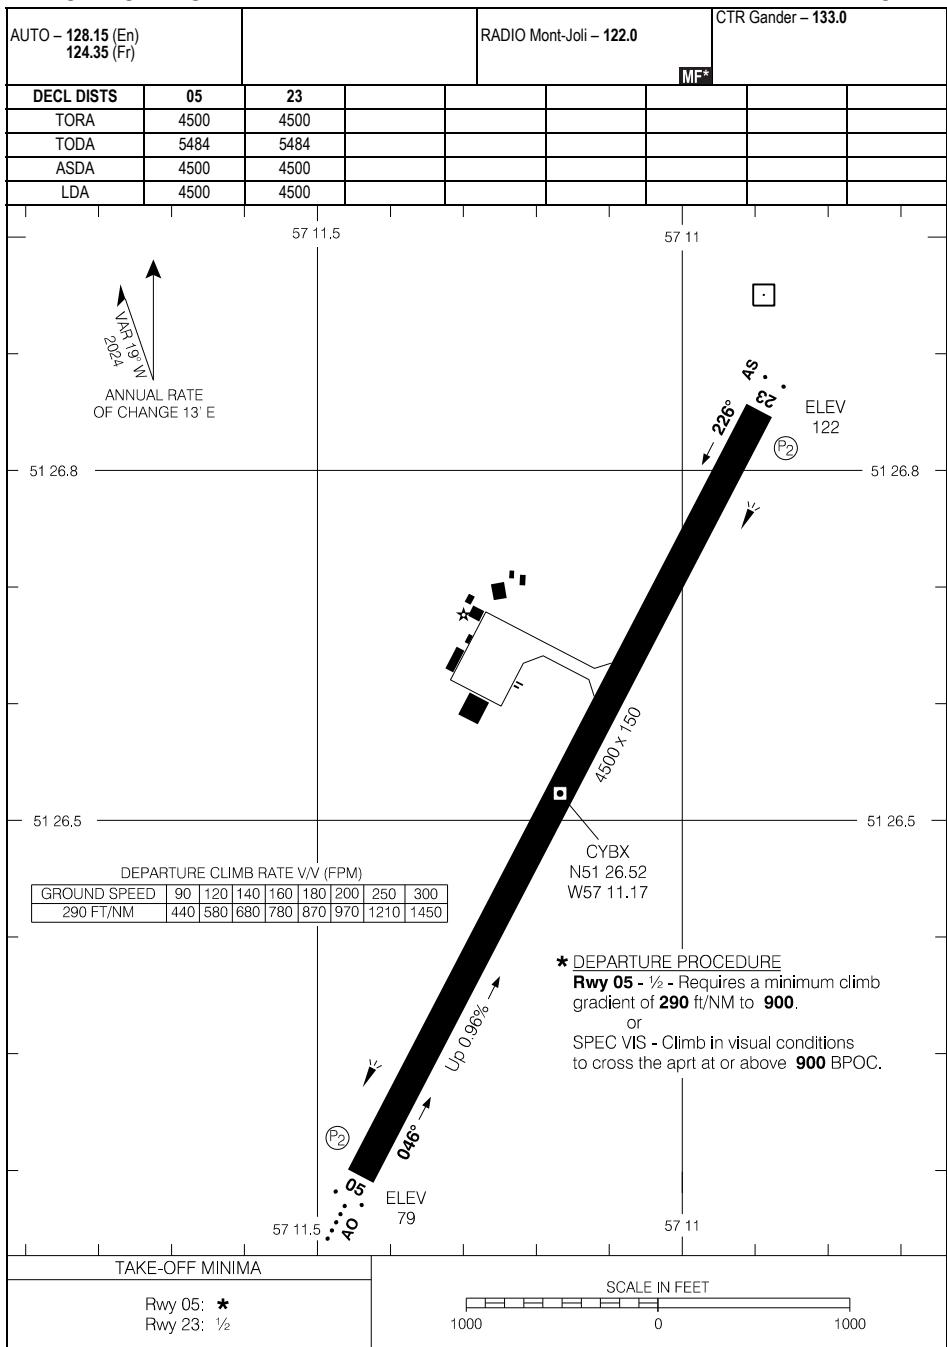

AERODROME CHART

EFF 12 JUN 25

CYBX-AD


CYBX

CYBX-AD

LOURDES-DE-BLANC-SABLON, QC

CYBX

CARTE D'AÉRODROME

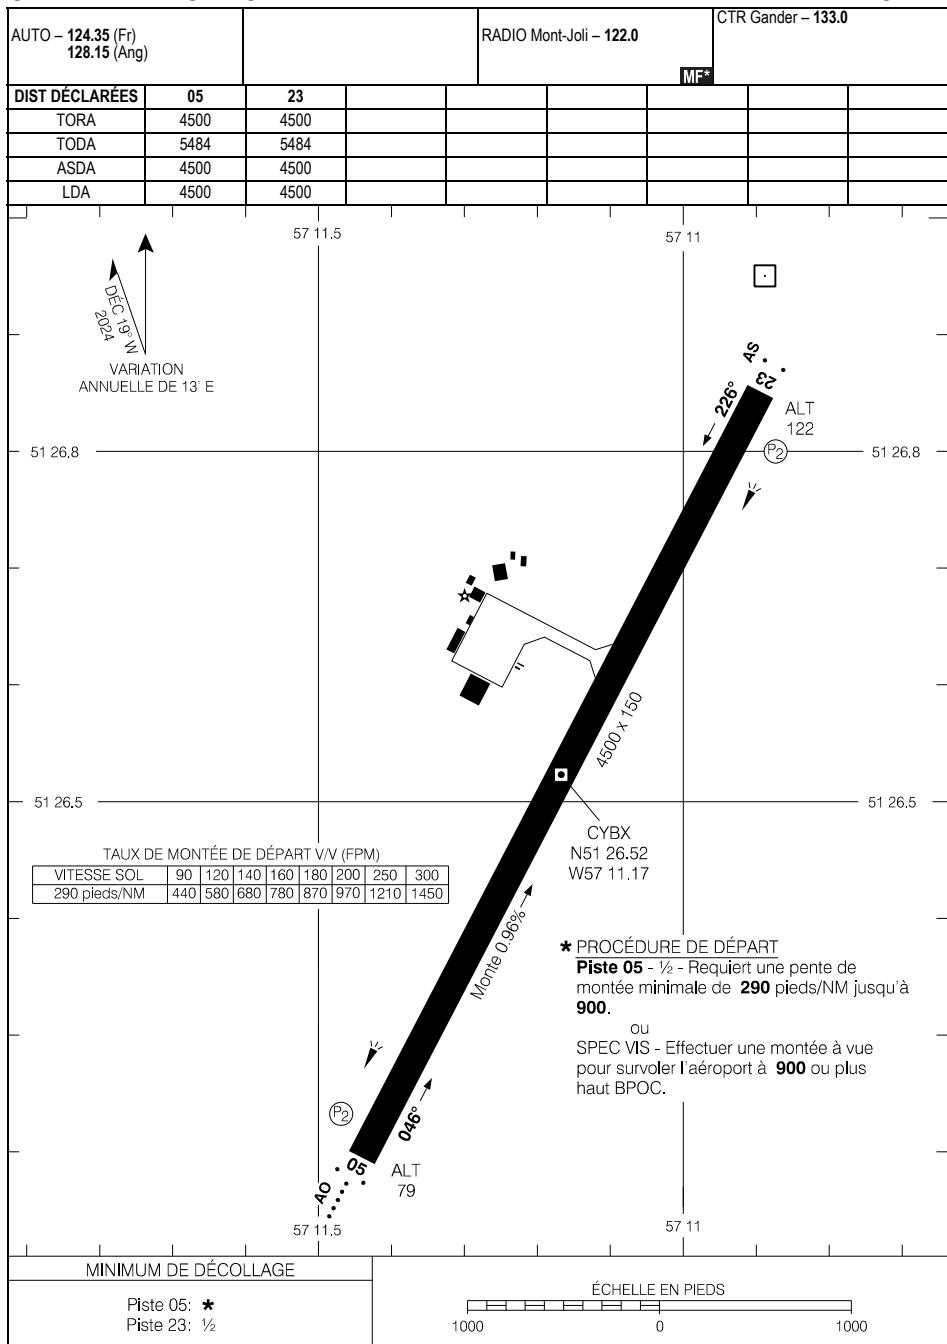

Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

CARTE D'AÉRODROME

EFF 12 JUIN 25


CYBX

CYBX-AD

CYMW-AD

MANIWAKI, QC
CYMW

AERODROME CHART

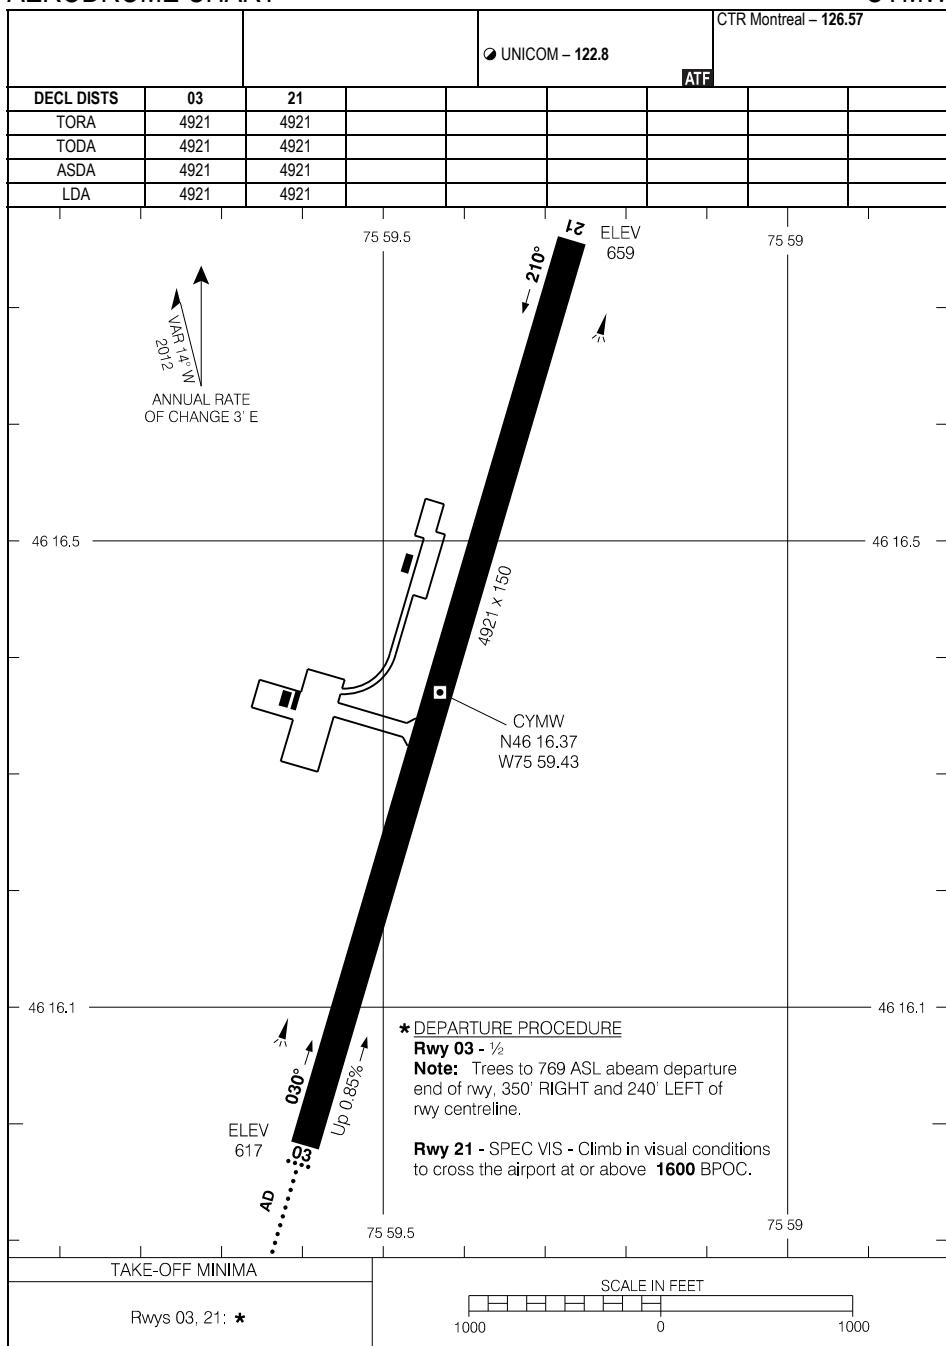

AERODROME CHART

EFF 20 FEB 25

CYMW-AD

CYMW

CYMW-AD

MANIWAKI, QC
CYMW

CARTE D'AÉRODROME


CTR Montreal - 126.57

© UNICOM - 122.8

ATF

DIST DÉCLARÉES	03	21					
TORA	4921	4921					
TODA	4921	4921					
ASDA	4921	4921					
LDA	4921	4921					

Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

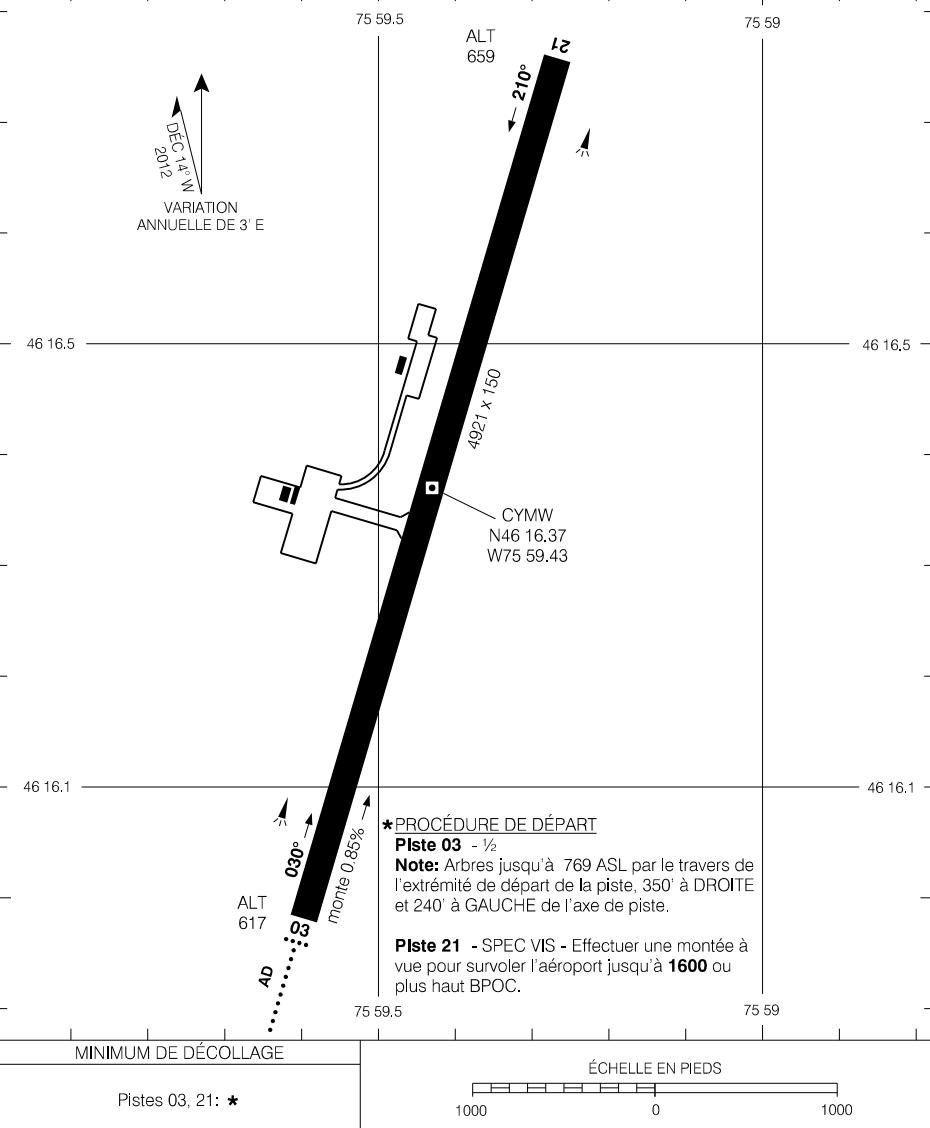

CARTE D'AÉRODROME

EFF 20 FÉV 25

CYMW

CYMW-AD

CYNM-AD

MATAGAMI, QC
CYNM

AERODROME CHART

MET – 127.45 (En) 125.3 (Fr)

TFC - 122.8


RADIO Quebec – 123.55 DRCQ

www

DECL DISTS	15	33						
TORA	5001	5001						
TODA	5985	5985						
ASDA	5001	5001						
LDA	5001	5001						

77 48.6 77 47.8

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

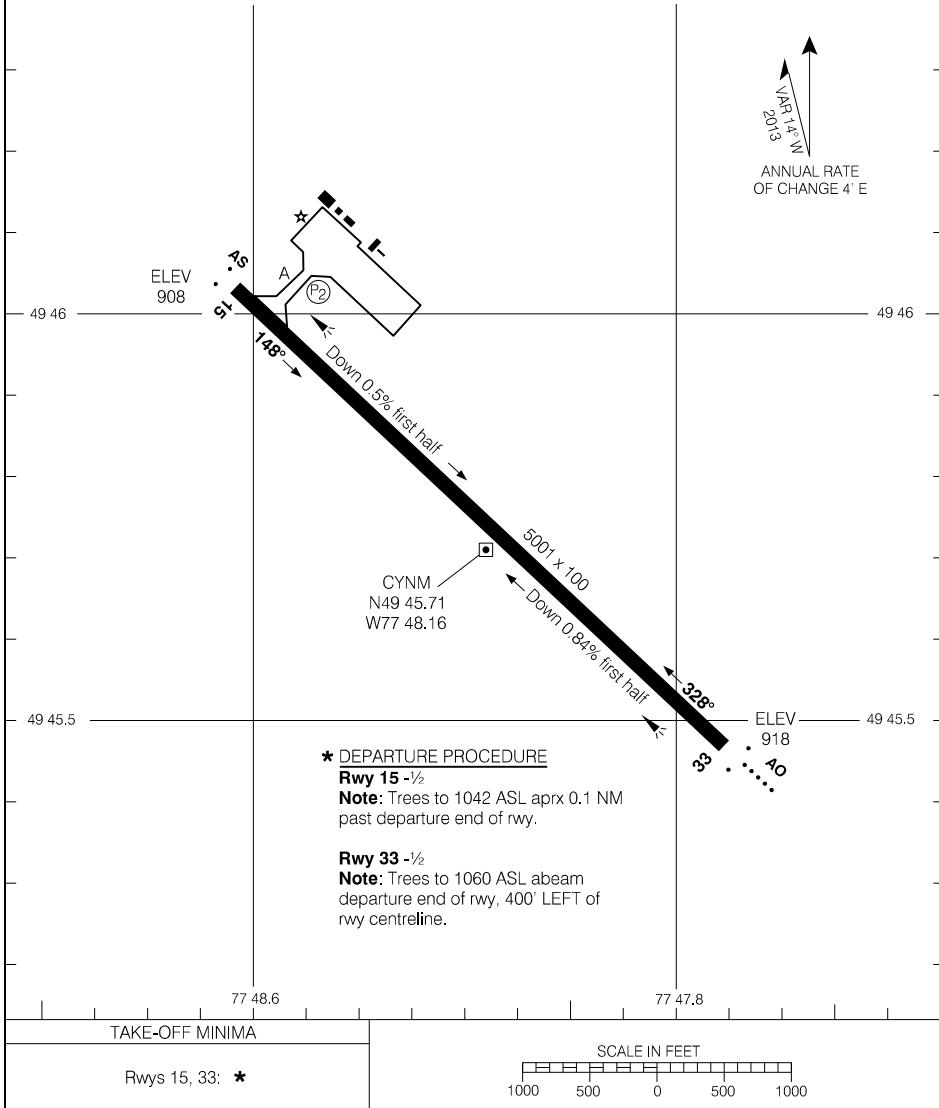

AERODROME CHART

CYNM


EFF 20 FEB 25

CYNM-AD

CYNM-AD

MATAGAMI, QC
CYNM

CARTE D'AÉRODROME

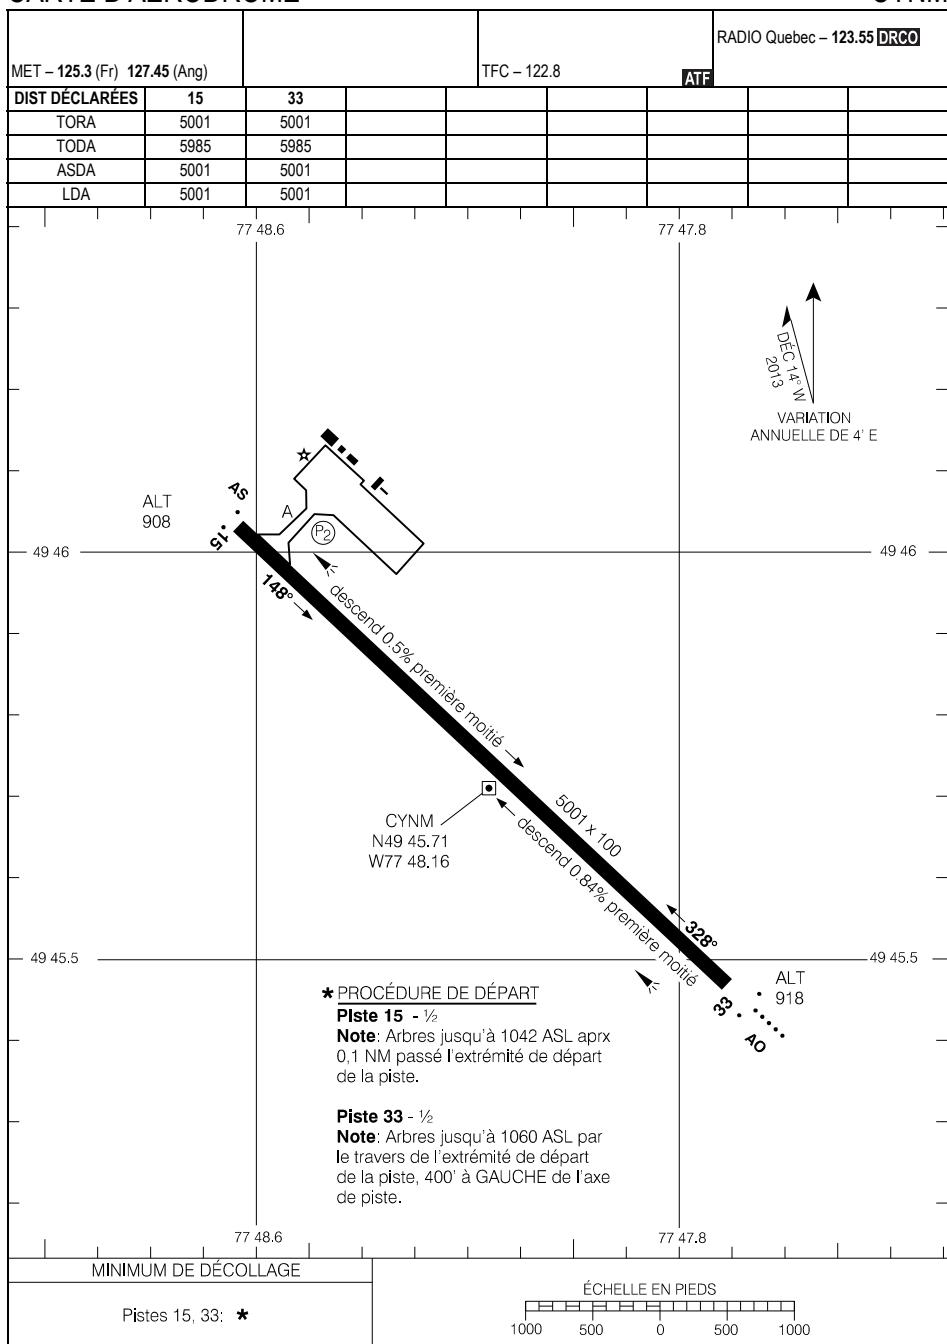CARTE D'AÉRODROME
EFF 20 FÉV 25

CYNM


CYNM-AD

CYME-AD

MATANE/RUSSELL-BURNETT, QC

CYME

CARTE D'AÉRODROME

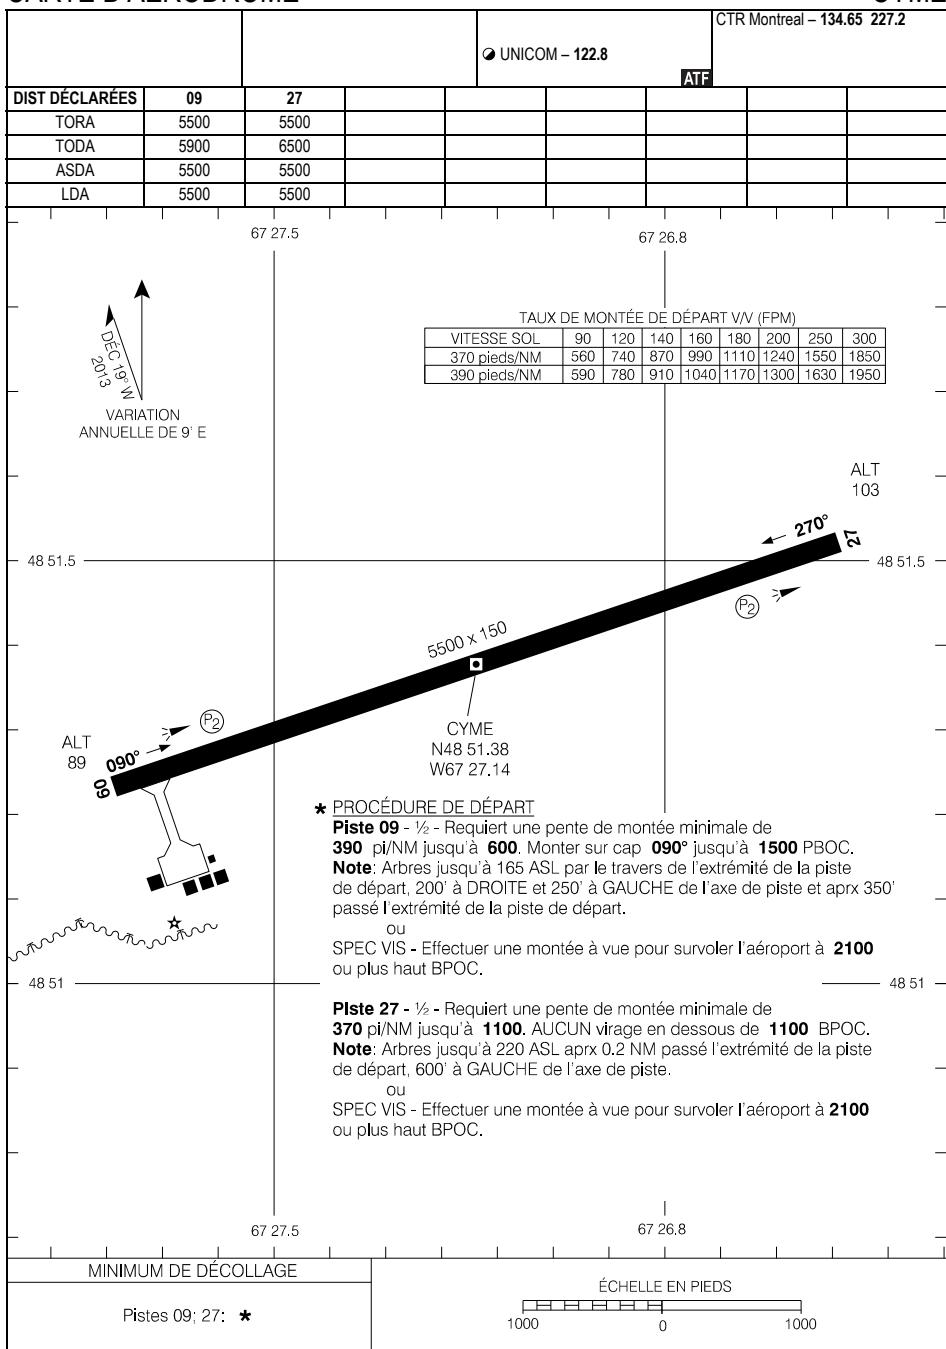

CARTE D'AÉRODROME

EFF 14 JUIL 22


CYME

CYME-AD

CYYY-AD

MONT-JOLI, QC
CYYY

AERODROME CHART

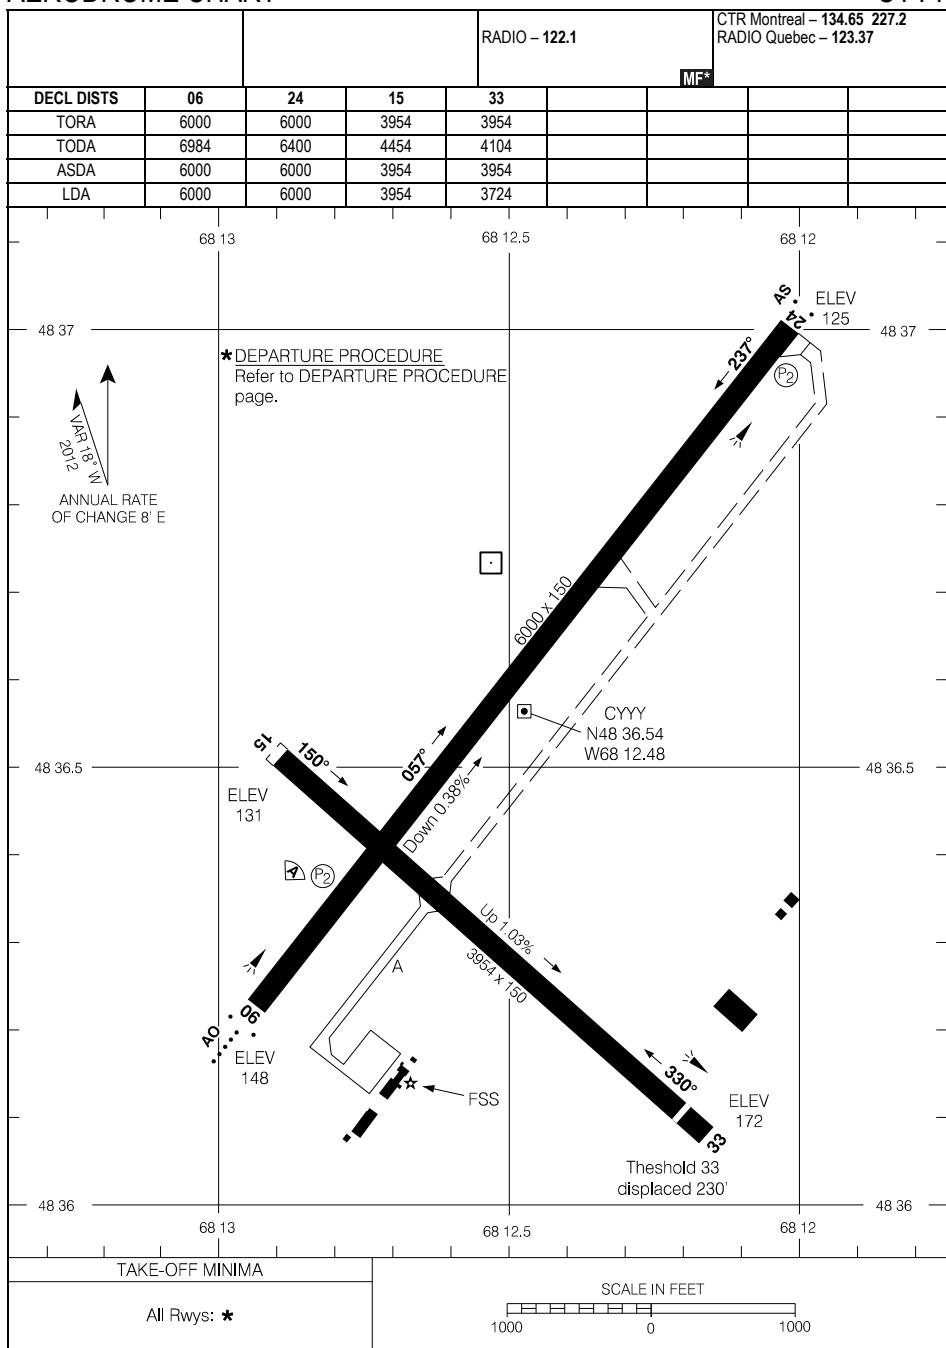

AERODROME CHART

EFF 7 AUG 25


CYYY-AD

CYYY

CYYY-AD

MONT-JOLI, QC
CYYY

CARTE D'AÉRODROME

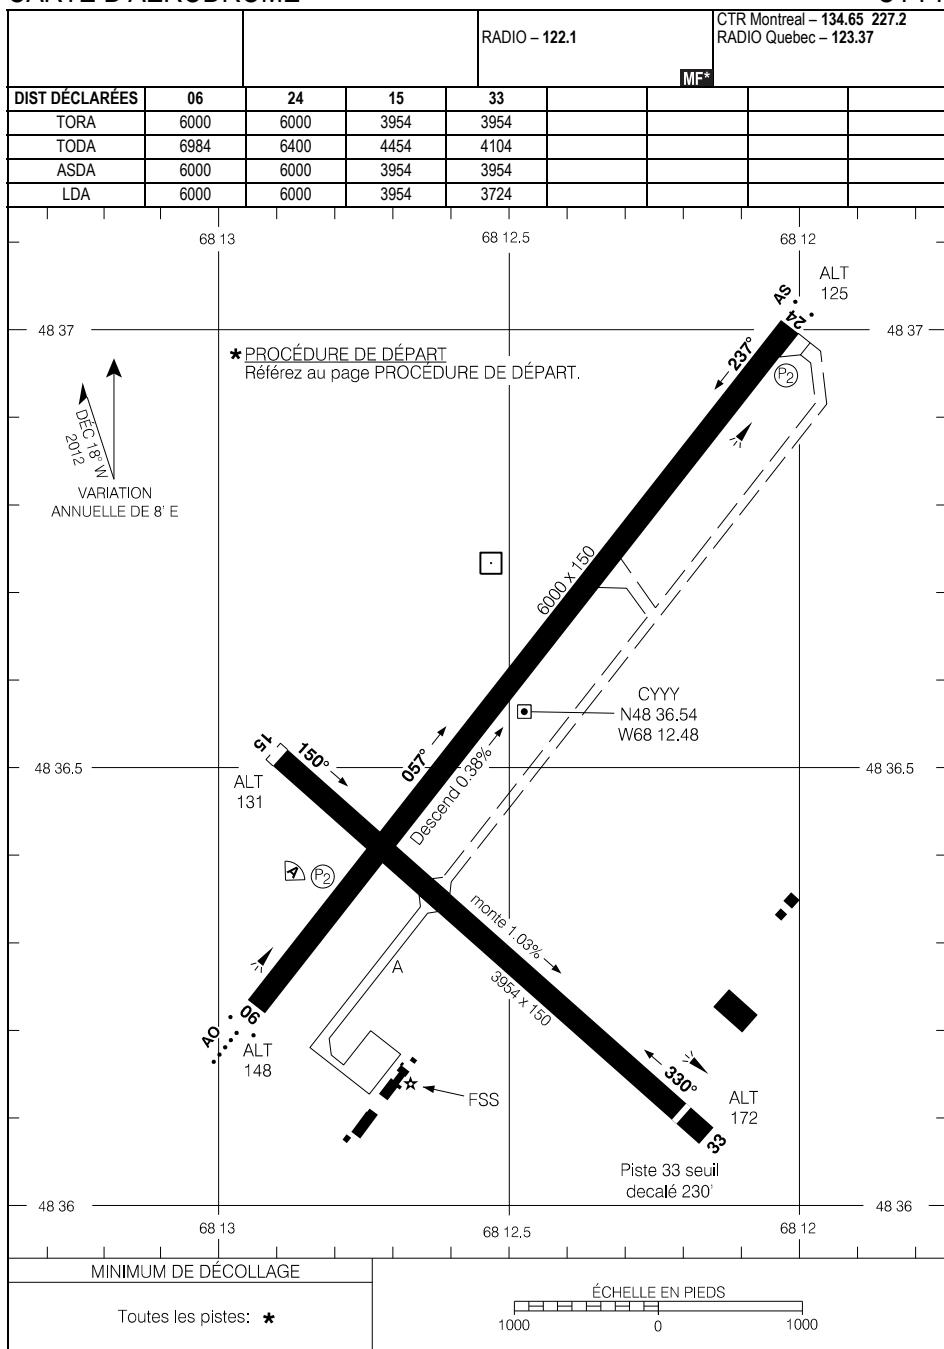


CARTE D'AÉRODROME

EFF 7 AOÛT 25

CYYY

CYYY-AD

AERODROME CHART

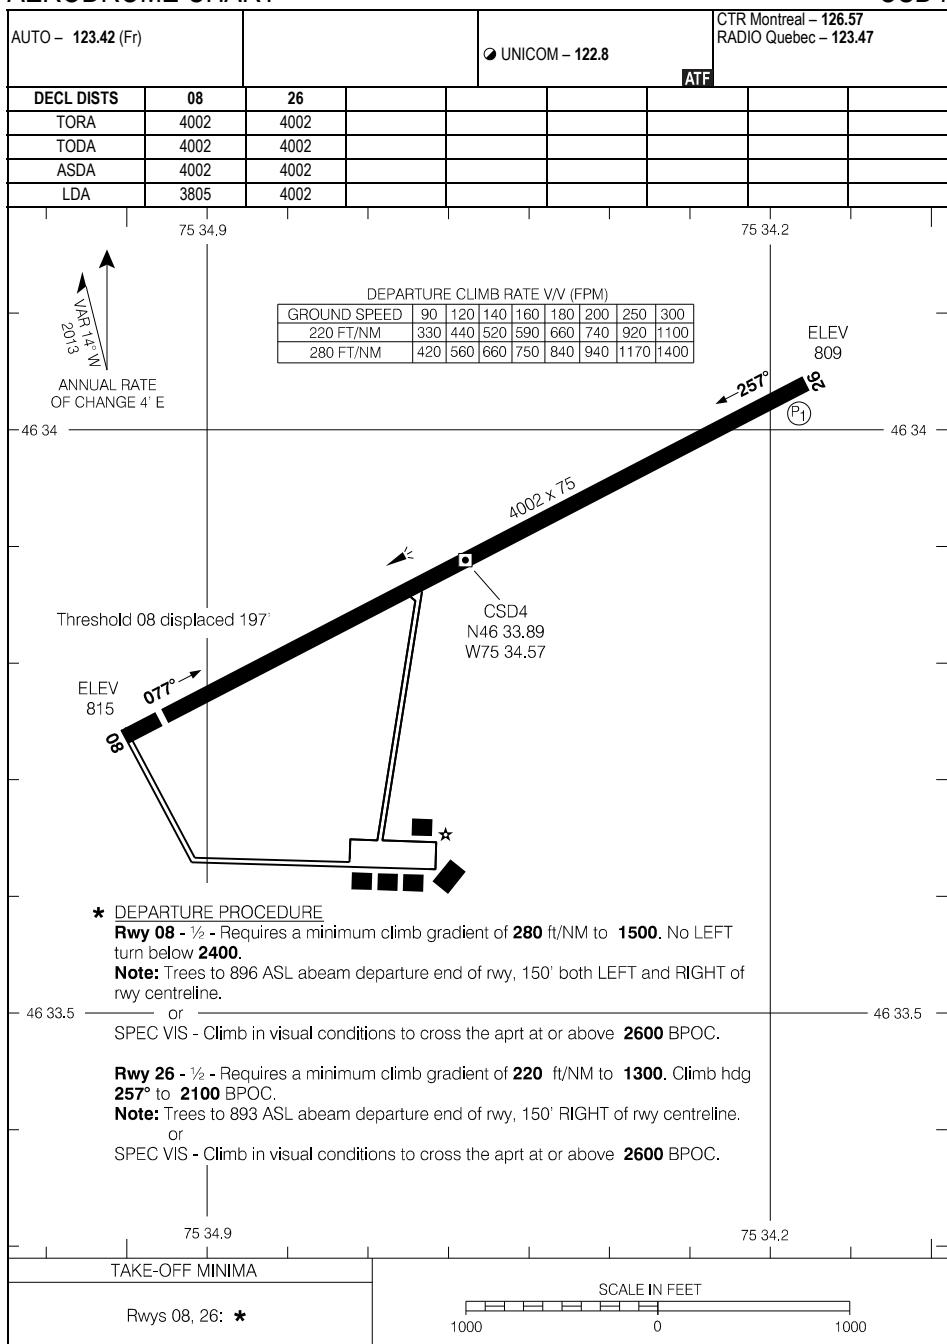


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 20 FEB 25

CSD4

CARTE D'AÉRODROME

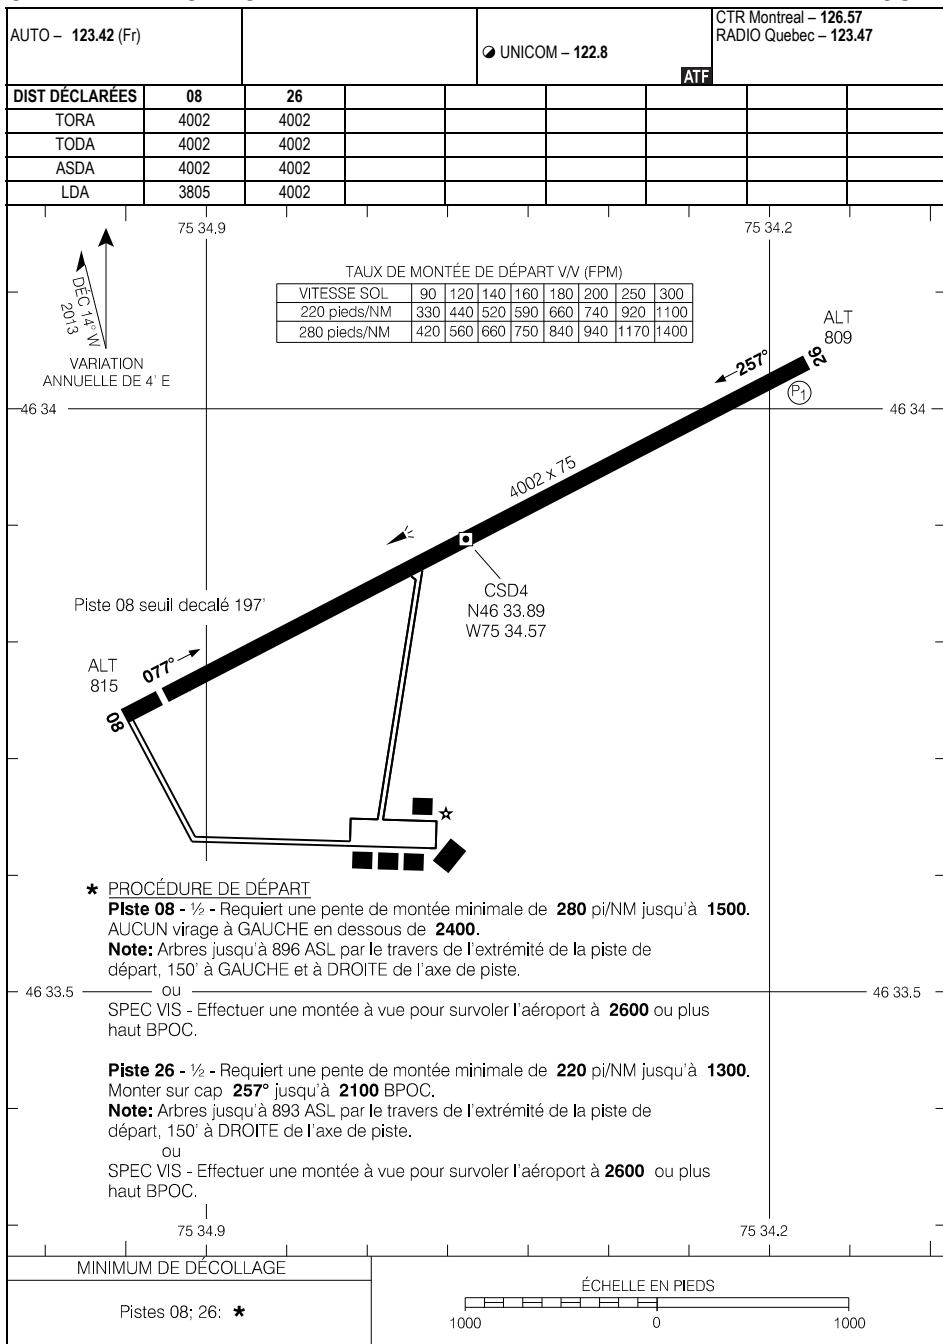

CARTE D'AÉRODROME

EFF 20 FÉV 25

CSD4

CYMX-AD

MONTRÉAL (MIRABEL), QC
CYMX

AERODROME CHART

ATIS Mirabel – 125.7 (En) 126.1 (Fr)		APRON Mirabel – 122.4 <input checked="" type="radio"/> GND – 121.8 <input checked="" type="radio"/> GND ADV – 121.8	<input checked="" type="radio"/> TWR – 119.1 <input checked="" type="radio"/> RADIO Mirabel – 119.1	TML Montreal – 124.65 268.3
DECL DISTS	06	24	11	29
TORA	12000	12000	12000	12000
TODA	12984	12984	12984	12984

74.05 74.04 74.03 74.02 74.01 74.00 73.59


TOBA FOB INTERSECTION DEPARTURES

RWY	INTXN	TORA									
06	B6	8323	24	B6	3809	11	A5	3834	29	A5	8342
	B4	6323		B4	5820		A6	8177		A6	3666
	B5	3733		B5	8401						

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

In accordance with CAR 602.96(3)(d), the pilot in command of an aircraft taxiling for departure during ILS CAT II ops shall not taxi further than the ILS CAT II holding point without a valid ATC IFR clearance.

- Refer to CFS for GND ADV procedures.
- Departing aircraft: Switch from GND ADV to MF prior to entering the manoeuvring area.

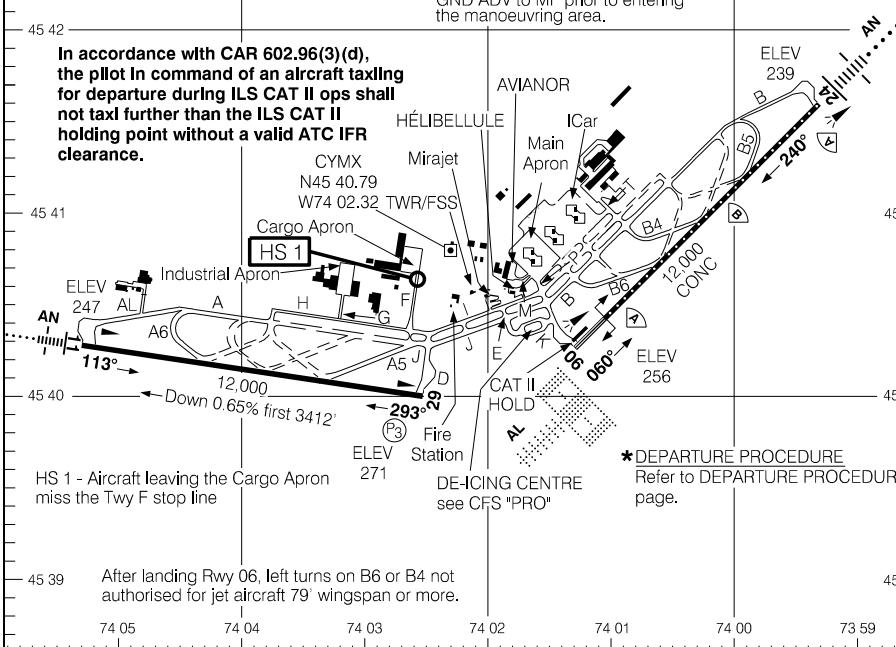

*DEPARTURE PROCEDURE
Refer to DEPARTURE PROCEDURE page.

HS 1 - Aircraft leaving the Cargo Apron
miss the Twy F stop line

After landing Rwy 06, left turns on B6 or B4 not authorised for jet aircraft 79' wingspan or more.

RUNWAY LEVEL OF SERVICE

RWY 06-24 RVR 1200

140

RWY 06: RVR 600

TAKE-OFF MINIMA

SCALE IN FEET

Rwys 06; 11; 24; 29: *

SCALE IN FEET

AFRODROME CHART

GYMX

EEG 7 AUG 25

GYMX-AD

LOW VISIBILITY PROCEDURES

Operations in Reduced and Low Visibility Conditions

- Runway 06 is certified for use in low visibility operations (RVR600).
- Runway 24 is certified for use in reduced visibility conditions (RVR1200).
- Plan activation is mandatory when one of the RVR readings or the reported ground visibility is below $\frac{1}{2}$ SM. Runways 24 and 06 can be used.
- When the reading of one of the RVR readings or the reported ground visibility is less than $\frac{1}{4}$ SM while remaining at or above $\frac{1}{6}$ SM, runway 06 must be used.
- Only one aircraft movement (RVOP and LVOP) is authorised on the manoeuvring area. In low visibility operation (LVOP), it is mandatory that the "Follow Me" vehicle escorts the aircraft.
- With the exception of aircraft returning to aprons, movement of all traffic ceases when one of the RVR reading or the reported ground visibility is below $\frac{1}{6}$ SM.
- When the two RVR readings or the reported ground visibility increases and indicates $\frac{1}{2}$ SM or more, normal operations may resume.

LOW VISIBILITY PROCEDURES

PROCÉDURES EN CONDITIONS DE FAIBLE VISIBILITÉ

Opérations en conditions de visibilité réduite et faible

- La piste 06 est homologuée pour les opérations en conditions de visibilité faible (RVR600).
- La piste 24 est homologuée pour les conditions en conditions de visibilité réduite (RVR1200).
- Le plan est déclenché lorsque la lecture d'un des RVR ou la visibilité au sol signalée est inférieure à $\frac{1}{2}$ SM. Les pistes 24 ou 06 peuvent être utilisées.
- Lorsque la lecture d'un des RVR ou la visibilité signalée au sol est de moins de $\frac{1}{4}$ SM mais de plus de $\frac{1}{8}$ SM, la piste 06 doit être utilisée.
- Un seul mouvement d'aéronef à tout moment (RVOP et LVOP) est autorisé sur l'aire de manœuvre. En condition de faible visibilité (LVOP), il doit obligatoirement être escorté d'un véhicule « Follow Me ».
- À l'exception des mouvements associés au retour des aéronefs aux aires de trafic, toute circulation au sol est interrompue lorsque la lecture d'un des RVR ou la visibilité signalée au sol est de moins de $\frac{1}{8}$ SM.
- Lorsque la lecture des deux RVR ou que la visibilité signalée au sol augmente et indique $\frac{1}{2}$ SM ou plus, le retour aux opérations normales peut être initié.

PROCÉDURES EN CONDITIONS DE FAIBLE VISIBILITÉ

CYMX

EFF 17 AVR 25


CYMX-APD

MONTRÉAL (MIRABEL), QC
CYMX

PARKING AREAS

ATIS Mirabel -125.7 (En) 126.1 (Fr)	APRON Mirabel - 122.4 DE ICE Aeromag 2000 - 122.25
--	---

VAR 15° N
2003
ANNUAL RATE
OF CHANGE 3° E

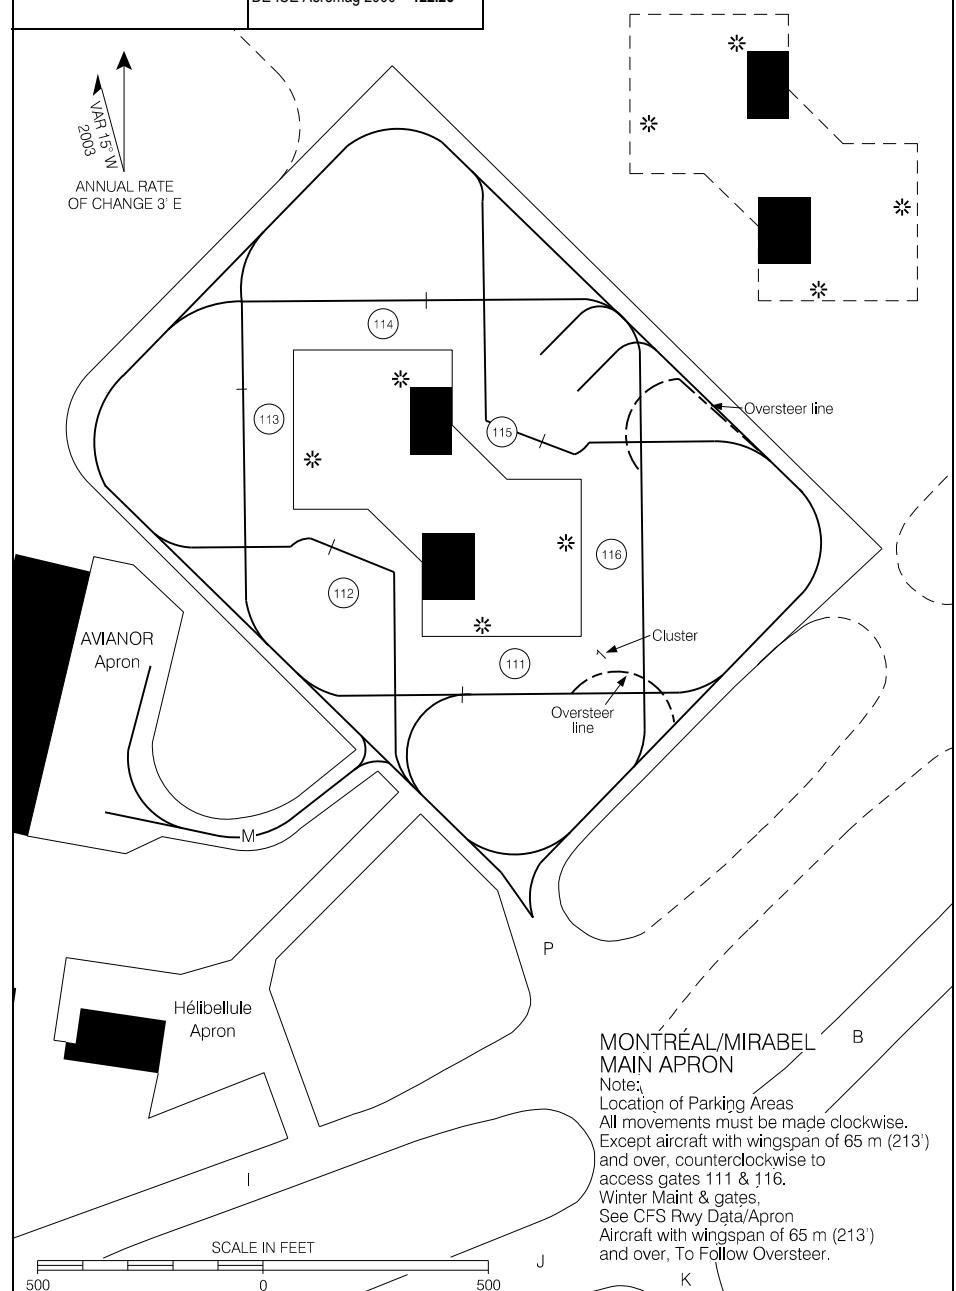

PARKING AREAS


EFF 12 JUN 25

CYMX-APD

CYMX

AIRES DE STATIONNEMENT

ATIS Mirabel – 126.1 (Fr) 125.7 (Ang)	AIRE DE TRAFIC Mirabel – 122.4 DÉGIVRAGE Aeromex 2000 – 122.25
--	---

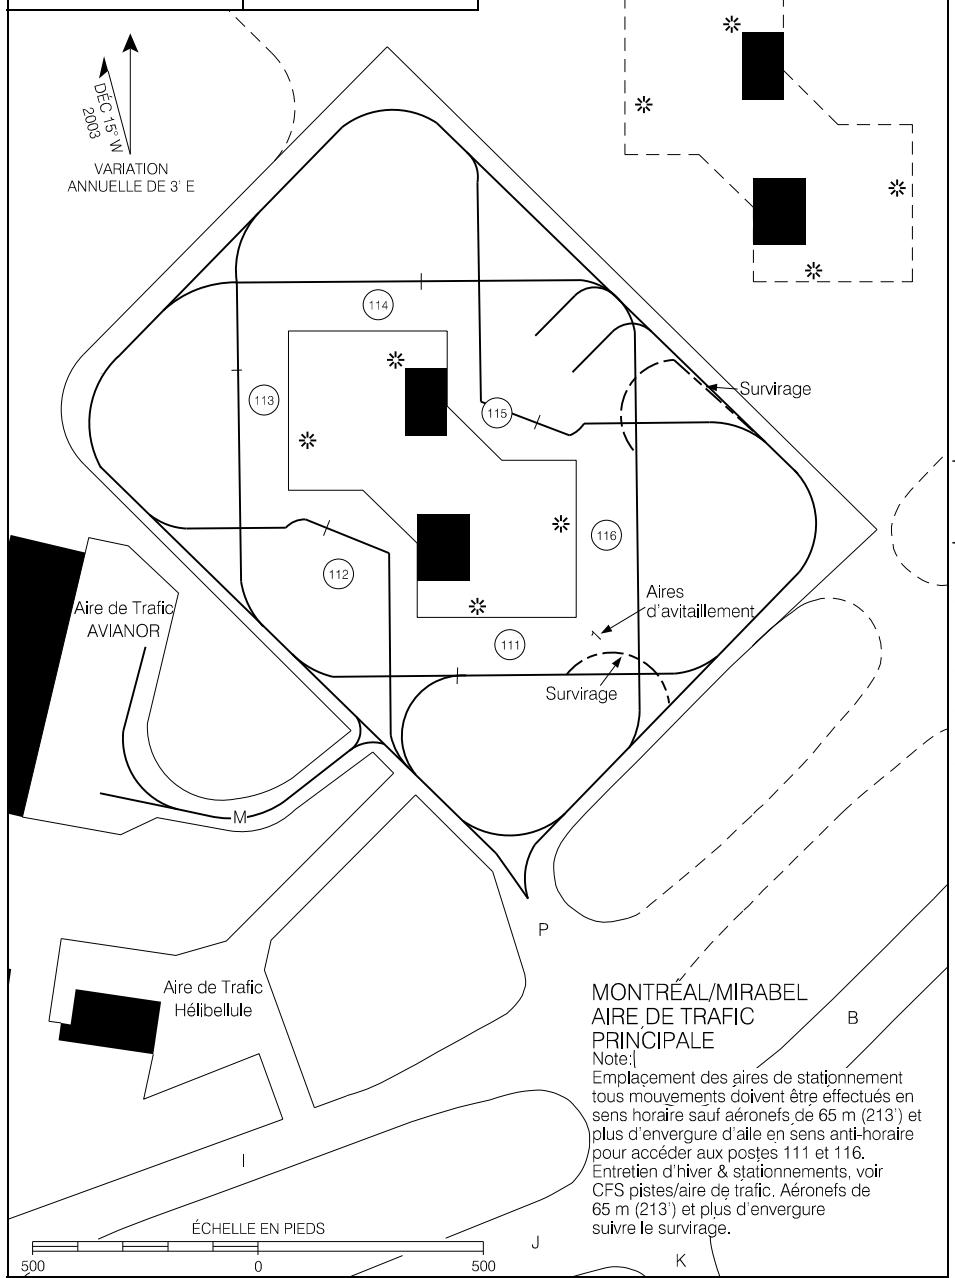


AIRES DE STATIONNEMENT

EFF 12 JUIN 25

AERODROME CHART

CYHU-AD
MONTRÉAL/MET (AÉROPORT MÉTROPOLITAIN DE MONTRÉAL), QC
CYHU

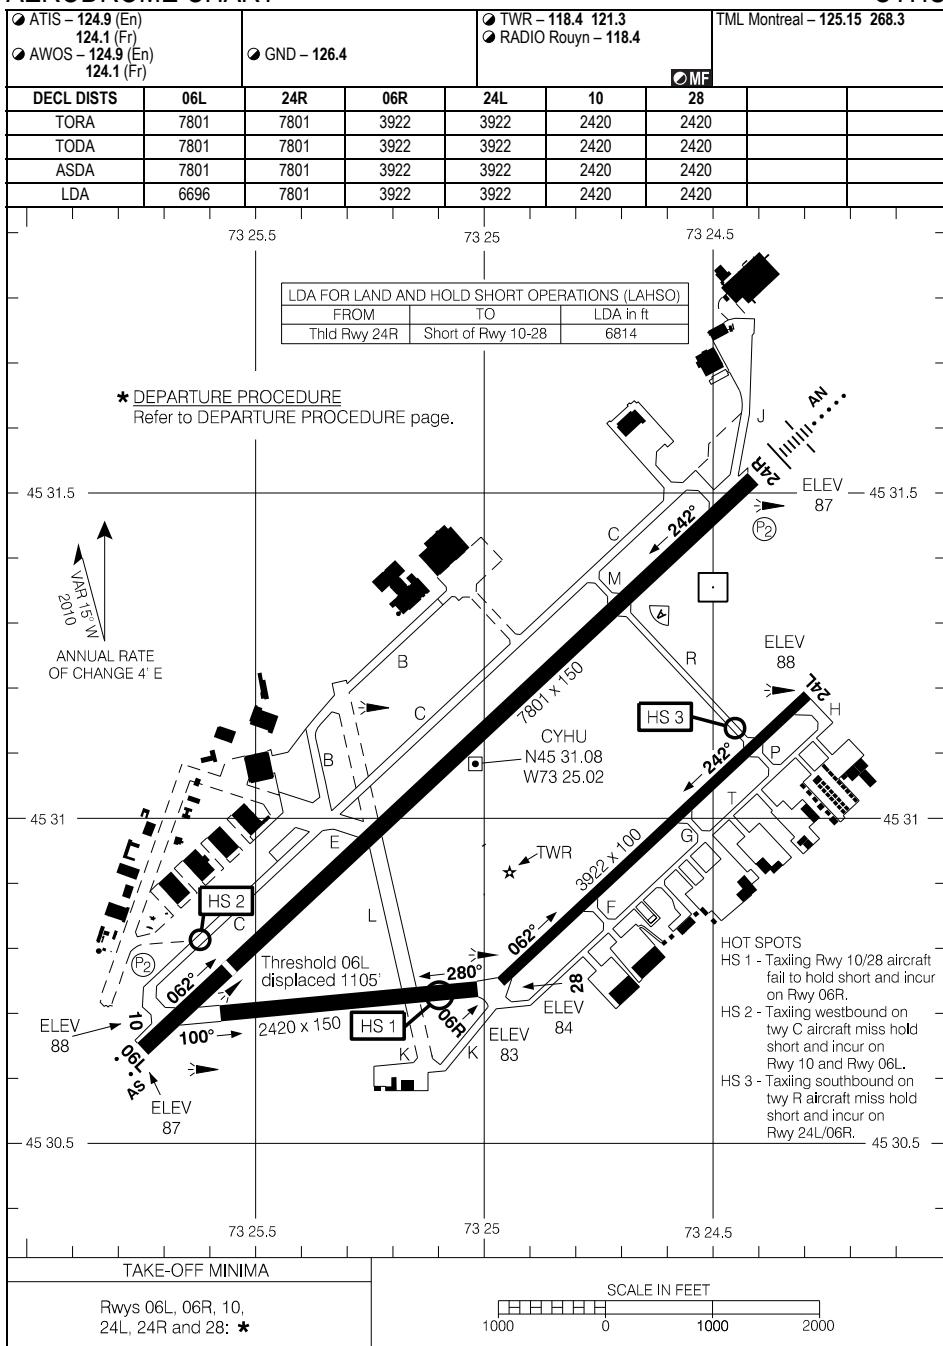

AERODROME CHART


EFF 12 JUN 25

CYHU-AD

CYHU

CARTE D'AÉRODROME

CYHU-AD
MONTRÉAL/MET (AÉROPORT MÉTROPOLITAIN DE MONTRÉAL), QC
CYHU

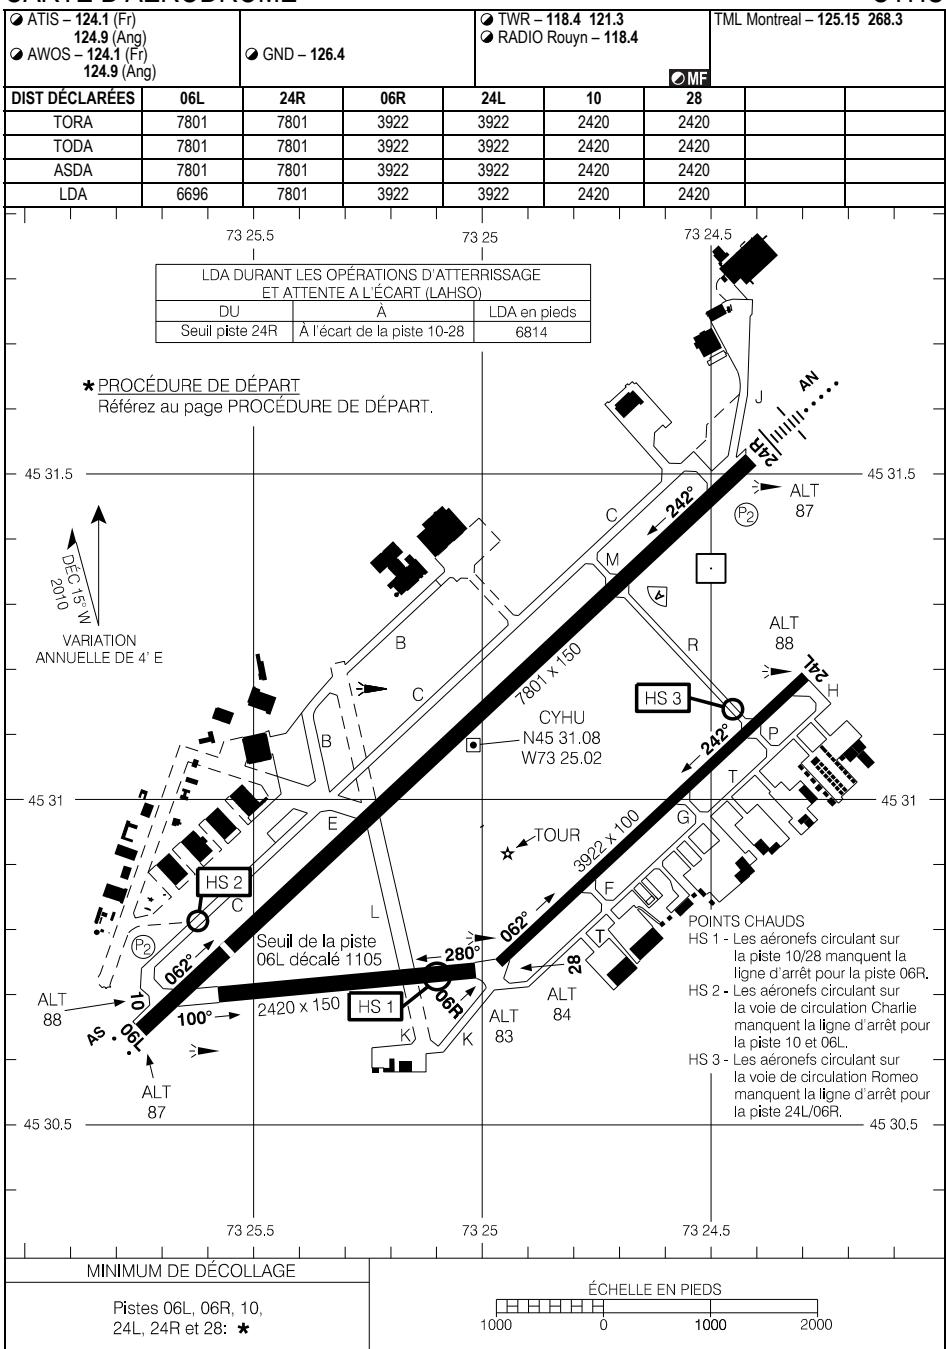

CARTE D'AÉRODROME

EFF 12 JUIN 25

CYHU-AD


CYHU

CYUL-AD-1

MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INTL, QC

CYUL

AERODROME CHART

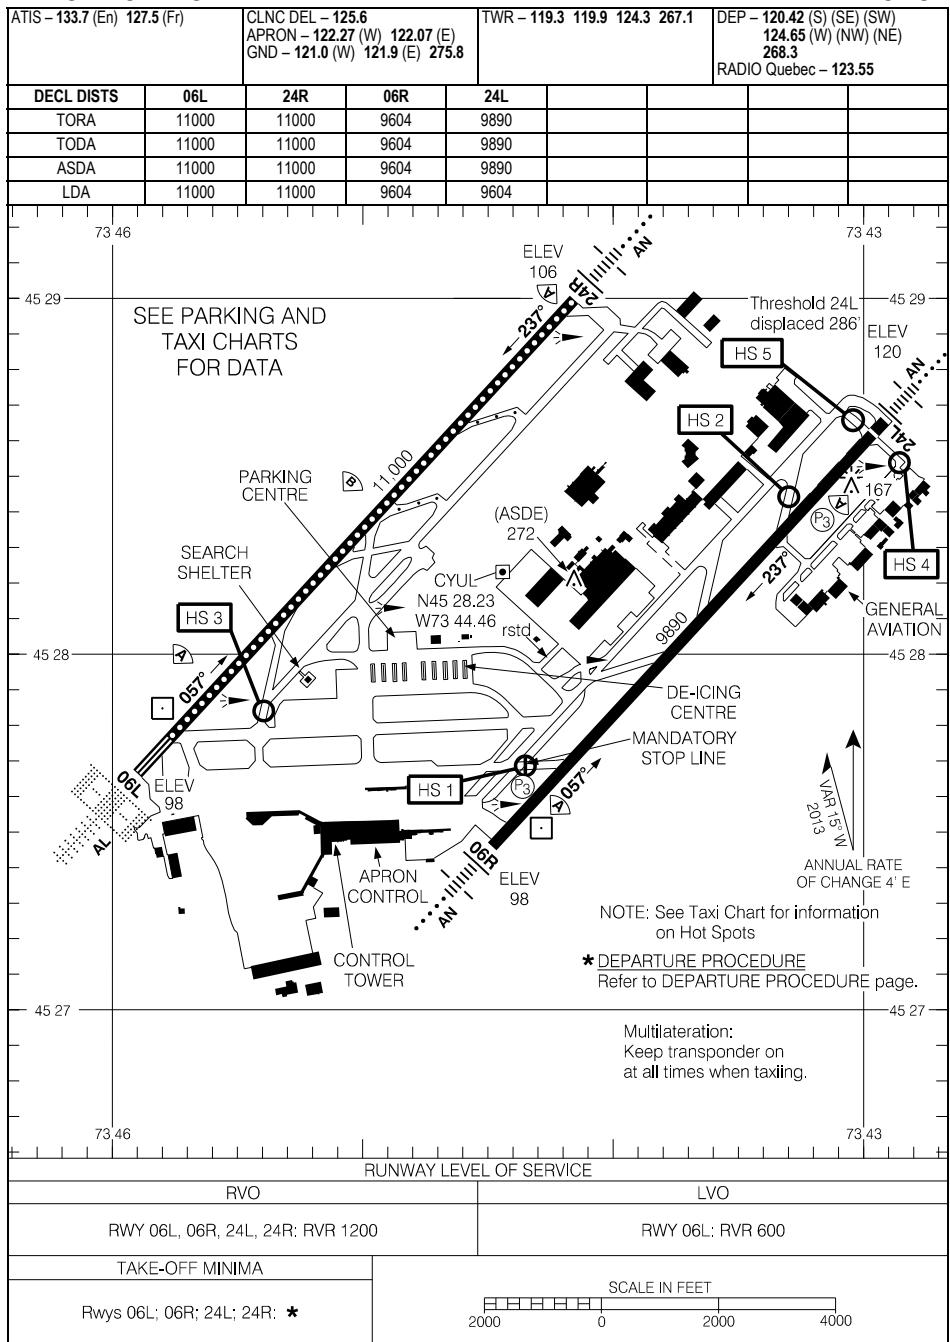

AERODROME CHART

EFF 20 FEB 25

CYUL

CYUL-AD-1

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART (REDUCED TAKE-OFF RUNS)

When authorized by ATC, intersection departures are available as follows:

RUNWAY	INTERSECTION	TORA
06L	B6	10197
	B4	7677
	B1	6002
	B2	5237
	B3	4902
	B5	2898
06R	A4	7851
	A2	5346
	A1	4342
	L	2427
	A3	2345
24L	A3	7345
	L	7226
	A1	5347
	A2	4343
	A4	1843
	A5	9604
24R	R	9604
	B5	8244
	B3	6243
	B2	5908
	B1	5145
	B4	3470
	B6	915

Departures from inner centerline of holding bay rwy 06R subtract 276' from declared distances.

AERODROME CHART (REDUCED TAKE-OFF RUNS)

CYUL-AD-1


MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INTL, QC
CYUL

CARTE D'AÉRODROME

ATIS – 127.5 (Fr) 133.7 (Ang)	CLNC DEL – 125.6 AIRE DE TRAFIC – 122.27 (W) 122.07 (E) GND – 121.0 (W) 121.9 (E) 275.8	TWR – 119.3 119.9 124.3 267.1	DEP – 120.42 (S) (SE) (SW) 124.65 (W) (NW) (NE) 268.3 RADIO Québec – 123.55
-------------------------------	--	---	--

DIST DÉCLARÉES	06L	24R	06R	24L				
TORA	11000	11000	9604	9890				
TODA	11000	11000	9604	9890				
ASDA	11000	11000	9604	9890				
LDA	11000	11000	9604	9604				

**VOIR CARTE DE CIRCULATION
ET AIRES DE STATIONNEMENT
POUR LES DONNÉES**

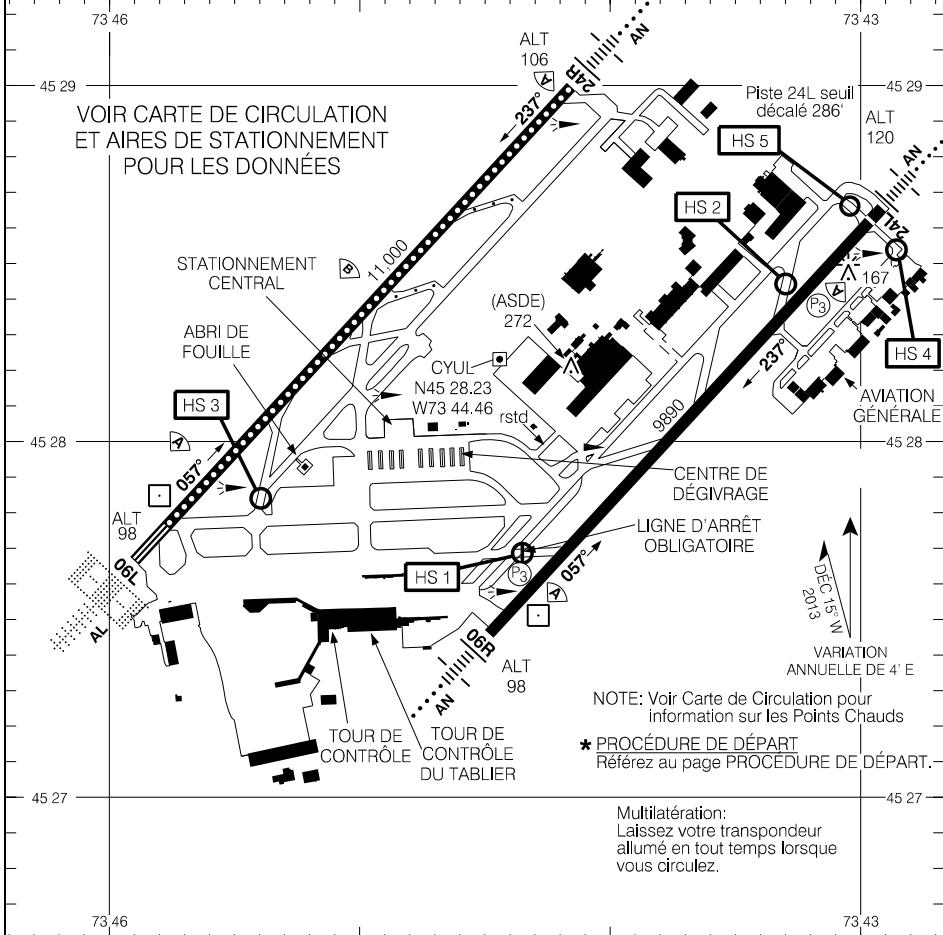

NOTE: Voir Carte de Circulation pour information sur les Points Chauds

* PROCÉDURE DE DÉPART

Référez au page PROCÉDURE DE DÉPART.

Multilatération:
Laissez votre transpondeur
allumé en tout temps lorsque
vous circulez

NIVEAU DE SERVICES DE LA PISTE	
RVO	LVO
PISTE 06L, 06R, 24L, 24R: RVR 1200	PISTE 06L: RVR 600
MINIMUM DE DÉCOLLAGE	ÉCHELLE EN PIEDS
Pistes 06L; 06R; 24L; 24R: *	 2000 0 2000 4000

CARTE D'AÉRODROME

EEE 20 FÉV 25

GYII

CARTE D'AÉRODROME (DISTANCE DE ROULEMENT UTILISABLE)

Lorsque autorisé par ATC, les départs d'intersection sont disponibles comme suit :

PISTE	INTERSECTION	TORA
06L	B6 B4 B1 B2 B3 B5	10197 7677 6002 5237 4902 2898
06R	A4 A2 A1 L A3	7851 5346 4342 2427 2345
24L	A3 L A1 A2 A4 A5 R	7345 7226 5347 4343 1843 9604 9604
24R	B5 B3 B2 B1 B4 B6	8244 6243 5908 5145 3470 915

Les départs de l'axe intérieur de la baie d'attente Piste 06R soustraire 276' des distances déclarées.

CARTE D'AÉRODROME (DISTANCE DE ROULEMENT UTILISABLE)

TAXI CHART

Notes**Widebody Aircraft:**

A380, A124, A346, B748 & B773 – Right turn prohibited from A4 or A2 to A.

A380, A124, A346, B748 & B773 – Left turn difficult from A1 to A. Use of A3 or A7 recommended.

A380, A340-500/600, A350-1000 & B777 – Right turn prohibited from A4 to D.

A380, AN124, A346, B748 – Caution for wingtip clearance when circulating on Twy A behind departing traffic on Twy A5.

Code F aircraft – Standard routes. Follow ATC and Apron Control instructions.

A380 – It is mandatory to use the procedures for runway widths of 58 m or less without paved shoulders. (All runways 60 m wide with 7.5 m shoulders: first meter paved, remaining, grass).

Minimum Rwy to Twy Separation			
	Rwy	Twy	Separation (m)
1	06L – 24R	B	225
2	06R – 24L	A	232
3	06L – 24R	North Ramp	210
4	06R – 24L	AM	233

Minimum Twy to Twy Separation			
	Twy	Twy	Separation (m)
1	I	H	195.9
2	K	J	195.8
3	A	D	85.6
4	M	B	91.1

Minimum Twy to Taxilane Separation			
	Twy	Taxilane	Separation (m)
1	North Ramp	South taxilane*	80.5
2	AM	East Holding point*	80.6

* closed during code F Aircraft operations

Minimum Twy to Obstacle Separation			
	Twy	Obstacle	Separation (m)
1	B6	T395	50.9
2	A	Road 630*	47.5
3	North Ramp	Road E1 to E3*	43.3
4	North Ramp	Road, stands 17 to 27*	47.7
5	Ramp NW – SE	Road, stands 11B to 15*	47
6	Ramp NW – SE	Road, stands 15 to 15B*	42.5


* closed during code F Aircraft operations

TAXI CHART


CYUL

EFF 31 OCT 24

TAXI CHART

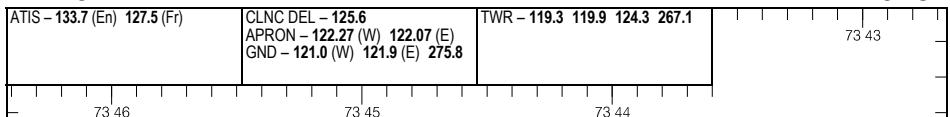

SEE PARKING AREAS CHART
FOR PASSENGER TERMINAL
APRON DATA

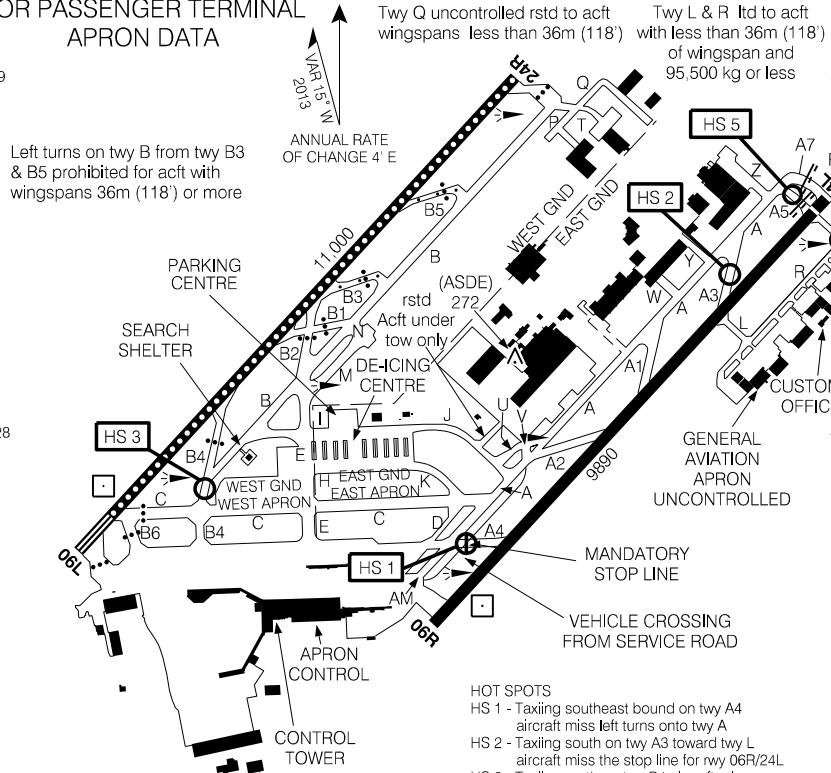

Holding bays capacity:

2 acft with wingspans of less than 36m (118')

Acft with wingspans of 36m (118') or greater:

Holding bay 06L: use North line

Holding bay 24R: use centre line

Holding bay 06R: 2 acft simultaneously: acft with wingspans of less than 65m (213') use South line and acft with wingspans of 65m (213') or greater use North line.

NOTE:
See TAXI CHART and PARKING CENTRE AREAS and DE-ICING POSITIONS and PROCEDURES for additional information.

Multilateration:
Keep transponder on at all times when taxiing.



TAXI CHART

EFF 20 FEB 25

CYUL

CARTE DE CIRCULATION

Notes**Avion gros-porteurs :****A380, A124, A346, B748 & B773** – Virage à droite interdit de A4 ou A2 vers A.**A380, A124, A346, B748 & B773** – Virage à gauche difficile de A1 vers A.

Utilisation de A3 ou A7 recommandée.

A380, A340-500/600, A350-1000 & B777 – Virage à droite interdit de A4 vers D.**A380, AN124, A346, B748** – Attention à la distance de dégagement des ailes lors du déplacement sur Twy A derrière le trafic au départ du Twy A5.**Aéronefs de code F** – Routes normalisées. Suivre les instructions d'ATC et contrôle du tablier.**A380** – Il est obligatoire d'utiliser les procédures pour pistes de 58 m ou moins sans accotement pavé. (Pistes 60 m de largeur avec accotements de 7.5 m; premier mètre pavé, reste en gazon).

Dégagement minimum RWY à TWY			
	RWY	TWY	Dégagement (m)
1	06L – 24R	B	225
2	06R – 24L	A	232
3	06L – 24R	Rampe nord	210
4	06R – 24L	AM	233

Dégagement minimum TWY à TWY			
	TWY	TWY	Dégagement (m)
1	I	H	195.9
2	K	J	195.8
3	A	D	85.6
4	M	B	91.1

Dégagement minimum TWY à voie d'accès de poste de stationnement			
	TWY	Voie d'accès de poste de stationnement	Dégagement (m)
1	Rampe nord	Voie d'accès de poste de stationnement Sud*	80.5
2	AM	Point d'attente Est*	80.6

*Fermé pendant opérations d'aéronefs de code F

Dégagement minimum TWY à obstacle			
	TWY	Obstacle	Dégagement (m)
1	B6	T395	50.9
2	A	Route 630*	47.5
3	Rampe nord	Route E1 à E3*	43.3
4	Rampe nord	Route, postes 17 à 27*	47.7
5	Rampe NW – SE	Route, postes 11B à 15*	47
6	Rampe NW – SE	Route, postes 15 à 15B*	42.5

*Fermé pendant opérations d'aéronefs de code F

CARTE DE CIRCULATION

EFF 31 OCT 24

CARTE DE CIRCULATION

ATIS - 127.5 (Fr) 133.7 (Ang)	CLNC DEL - 125.6 AIRE DE TRAFIC - 122.27 (W) 122.07 (E) GND - 121.0 (W) 121.9 (E) 275.8	TWR - 119.3 119.9 124.3 267.1	73 43
-------------------------------	--	-------------------------------	-------

VOIR CARTE D'AIRES
DE STATIONNEMENT
POUR PROCÉDURES
SUR LE TABLIER

45 29



Virages à gauche sur twy B de twy B3 & B5
interdits aux aéronefs de 36m (118')
et plus d'envergure

VARIATION
ANNUELLE DE 4' E

STATIONNEMENT CENTRE

ABRI DE FOUILLE

45 28

HS 3

B4

C

B6

B4

C

B1

B2

B3

B5

B5

B2

rstd

aéronef en
remorquage
seulementCENTRE DE
DÉGIVRAGE

J

K

L

H

GND OUEST

AIRE DE TRAFIC OUEST

E

C

D

A4

AM

HS 1

06L

TOUR DE CONTRÔLE
DU TABLIERTOUR DE
CONTROLE

06R

Capacité des bajes d'attente:

2 aéronefs de moins de 36m (118') d'envergure
Aéronefs de 36m (118') ou plus d'envergure:
Baie d'attente 06L: utiliser ligne nord
Baie d'attente 24R: utiliser ligne centre
Baie d'attente 06R: 2 aéronefs simultanés,
aéronef de 65m (213') et moins d'envergure
utiliser la ligne sud, aéronefs de 65m (213')
d'envergure et plus utiliser la ligne nord.

NOTE:

Voir CARTE DE CIRCULATION et AIRES DE
STATIONNEMENT CENTRE et POSITIONS DE
DÉGIVRAGE et PROCÉDURES pour notes additionnelles.

Multilateration:

Laissez votre transpondeur allumé en tout
temps lorsque vous circulez.

73 46

73 45

73 44

Voie de circulation Q non contrôlée limitée
aux aéronefs d'une envergure
de moins de 36m (118')

Voies de circulation L et R limitées
aux aéronefs avec une
envergure de moins de
36m (118') et de
95,500 kg ou moins

45 29
CAT I
POINT
D'ATTENTE
A7
180
A8
R
HS 5
HS 2
HS 4
DOUANES

45 28

HS 3

B4

C

B6

B4

C

B1

B2

B3

B5

B2

rstd

aéronef en
remorquage
seulementCENTRE DE
DÉGIVRAGE

J

K

L

H

GND OUEST

AIRE DE TRAFIC EST

E

C

D

A2

A3

A1

HS 2

A

W

A3

A

Y

A

Z

A

R

HS 4

DOUANES

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

A

LOW VISIBILITY PROCEDURES

Low Visibility Procedures (RVR less than 1200 to 600 ft)

1. Application

These procedures apply to ground movements of aircraft during low visibility conditions (Runway Visual Range [RVR] less than 1200 to 600 ft). Arrivals and departures below RVR 600 are not authorized. When weather conditions indicate visibility below RVR 1200 is imminent, procedures will be implemented to ensure the safe and efficient movement of aircraft. The following message will be added to the ATIS broadcast: "**LOW VISIBILITY PROCEDURES IN EFFECT**"

2. Surface Guidance and Control System

Surface guidance and control system have been installed to facilitate the ground movements of aircraft under low visibility conditions. This system, controlled by ATC, is:

- Taxiway centreline lights on holding bay 24R.
- Taxiway uni-directional centreline lights on taxiways A (between J and A4), A4 between A and the apron), B, B3, B4 (from B to the apron), B5, D, E (from the apron to I), H, I, J and K.
- Bi-directional centreline lights on the North ramp from taxiway B6 to A4, South ramp from B6 to gate 65, and East and West taxilanes up to gate 66.
- Stop Bars on all access to runway 06L/24R: on the holding bays of runways 06L and 24R, at the end of taxiway C before the intersection with runway 06L/24R and on taxiways B1, B2, B3, B4, B5, and B6 (illuminated under 1200 RVR).

NOTE: AT NO TIME SHALL A PILOT CROSS AN ILLUMINATED RED STOP BAR

- Runway guard lights on all access to runways: on the holding bays of runways 06L, 24R and 06R, at the end of taxiway C before the intersection with runway 06L/24R, and on taxiways A, A1, A2, A3, A4, A5, A7, B1, B2, B3, B4, B5, B6, L and R (illuminated whenever the associated runway is in use).

NOTE: The above mentioned taxiway centreline lights and stop bars may be used at or above 1200 RVR.

LOW VISIBILITY PROCEDURES

LOW VISIBILITY PROCEDURES

3. Airport Surface Detection Equipment (ASDE)

Ground radar is used to monitor the position of aircraft and vehicles operating on the manoeuvring area. In the event of an ASDE failure, ATC may restrict low visibility operations.

4. "Follow me" Vehicle

A "Follow Me" vehicle will be provided on pilot's request.

5. Departure Routes

Runway 06L is the only one certified for take-offs during low visibility conditions (RVR less than 1200 to 600 ft). All departures under low visibility conditions will be on runway 06L. Intersection take-offs are not authorized.

Sequencing of aircraft ground movements for take-off: Do not request start, push back or taxi clearance until reported RVR is greater than:

Aircraft/Pilot Take-off Minima	Minimum RVR for Start
1200 RVR	1000 RVR
600 RVR	600 RVR

Unless otherwise advised by ATC, the following standard routes will be used, under low visibility conditions, for aircraft departing on runway 06L (see low visibility taxi chart).

From the main apron to the de-icing bay: aircraft will taxi on E and H or on D and K.

From the main apron to runway 06L: aircraft will taxi on the main apron to the holding bay runway 06L.

From the de-icing bay to runway 06L: aircraft will taxi on I, B, B4, and on the apron to the holding bay runway 06L.

From the de-icing bay to the main apron aircraft will taxi on taxiways J, A and A4.

From general aviation to 06L, aircraft will taxi on taxiway R, across threshold 24L, taxiways A5, A and A4, north side of the apron to the holding 06L.

6. Arrival Routes

Aircraft will exit runway 06L on taxiways B1, B3, B5 or holding bay 24R, taxiways B, B4 and then follow Apron Control instructions. Aircraft destined to the general aviation sector will exit the main apron at A4, and will taxi via runway 06R, and taxiways L and R.

LOW VISIBILITY PROCEDURES


LOW VISIBILITY TAXI CHART
(RVR LESS THAN 1200 TO 600 FT)

MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INTL, QC
CYUL

ATIS - 133.7 (En) 127.5 (Fr)	CLNC DEL - 125.6 APRON - 122.27 (W) 122.07 (E) GND - 121.0 (W) 121.9 (E) 275.8	TWR - 119.3 119.9 124.3 267.1	
------------------------------	--	-------------------------------	--

LEGEND

- STOP BARS
- RUNWAY GUARD LIGHTS
- TAXIWAY CENTRELINES (BIDIRECTIONAL)
- DIRECTION OF AIRCRAFT MOVEMENTS

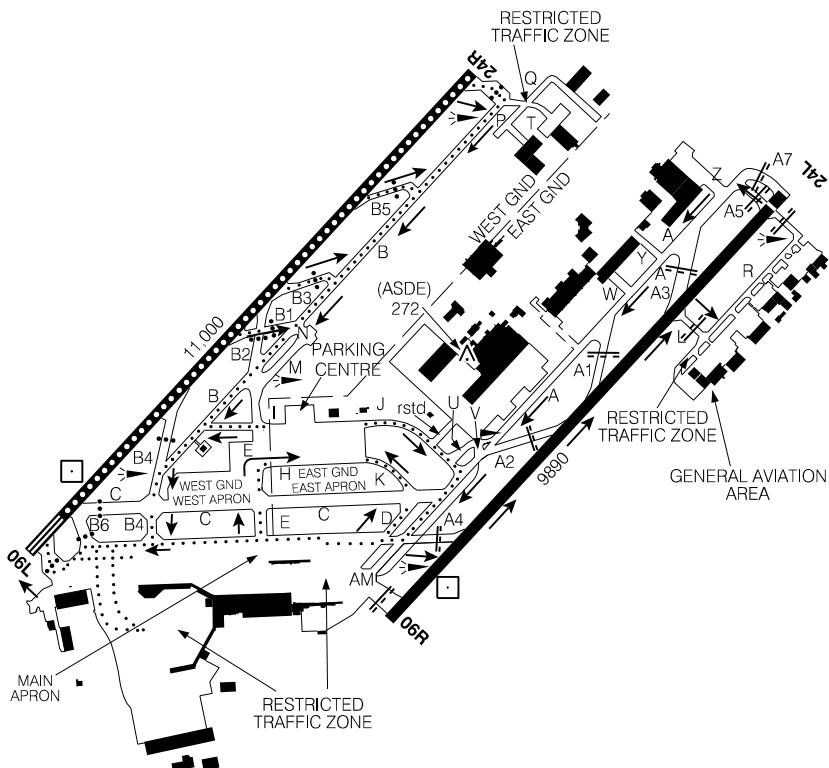

Multilateration:
Keep transponder on
at all times when taxiing.

(RVR LESS THAN 1200 TO 600 FT)
LOW VISIBILITY TAXI CHART

CYUL
EFF 7 AUG 25

Procédures en conditions de faible visibilité (RVR en dessous de 1200 jusqu'à 600 pieds)

1. Application

Ces procédures s'appliquent aux aéronefs circulant au sol en conditions de faible visibilité (portée visuelle de piste [RVR] en dessous de 1200 jusqu'à 600 pieds). Les départs et les arrivées en dessous de 600 RVR ne sont pas autorisés. Lorsque les conditions météorologiques indiquent que la portée visuelle de piste pourrait descendre en dessous de 1200 RVR, les procédures suivantes seront mises en place afin d'assurer la sécurité et l'efficacité des mouvements d'aéronefs. Le message suivant sera alors diffusé l'ATIS : « **PROCÉDURES EN CONDITIONS DE FAIBLE VISIBILITÉ EN VIGUEUR** ».

2. Système de guidage et de contrôle de la circulation de surface

Un système de guidage et de contrôle de la circulation de surface a été mis en place afin de faciliter le mouvement des aéronefs en conditions de faible visibilité. Ce système, commandé par l'ATC, comprend :

- Des feux axiaux de sortie sur la baie d'attente 24R.
- Des feux axiaux unidirectionnels sur les voies de circulation A (entre J et A4), A4 (entre A et l'aire de trafic), B, B3, B4 (de B à l'aire de trafic), B5, D, E (de l'aire de trafic à I), H, I, J et K.
- Des feux axiaux bi-directionnels sur la rampe nord de la voie de circulation B6 à A4, sur la rampe sud entre B6 et la barrière 65, et sur les lignes de guidage est et ouest jusqu'à la barrière 66.
- Des barres d'arrêt sur tous les accès à la piste 06L/24R : dans les baies d'attente des pistes 06L et 24R, à l'extrémité de C avant l'intersection de la piste 06L/24R et sur les voies de circulation B1, B2, B3, B4, B5, et B6 (allumées en dessous de 1200 RVR).

Note : NE JAMAIS TRAVERSER UNE BARRE D'ARRÊT ALLUMÉE

- Des feux de protection de piste sur les accès de toutes les pistes : les baies d'attente des pistes 06L, 24R et 06R, à l'extrémité de C avant l'intersection de la piste 06L/24R, et sur les voies de circulation A, A1, A2, A3, A4, A5, A7, B1, B2, B3, B4, B5, B6, L et R (allumés en tout temps sur les accès des pistes en service).

Note : Les feux axiaux de voies de circulation et les barres d'arrêt sus-mentionnées pourraient être utilisés dans des conditions égales ou supérieure à 1200 RVR.

3. Radar de surveillance des mouvements de surface (ASDE)

Un radar de surveillance des mouvements de surface est utilisé pour la localisation des aéronefs et des véhicules sur les aires mouvements. En cas de panne de ce radar l'ATC peut restreindre les actions en conditions de faible visibilité.

4. Véhicule « Follow Me »

Un véhicule équipé d'une affiche « Follow Me » sera disponible à la demande des pilotes.

PROCÉDURES EN CONDITIONS DE FAIBLE VISIBILITÉ

CYUL

5. Trajets pour les départs

Seule la piste 06L est homologuée pour des décollages en conditions de faible visibilité (RVR en dessous de 1200 et pouvant atteindre 600 pieds). Tous les départs en conditions de faible visibilité se feront sur la piste 06L. Les décollages à partir d'intersections ne sont pas autorisés.

Mise en séquence des mouvements au sol d'aéronefs pour décollages : ne pas demander de démarrer les moteurs, de refouler ou une autorisation de circuler à moins que le RVR rapporté ne soit supérieur aux valeurs suivantes :

Minima de décollage du pilote ou de l'aéronef	RVR minimum pour démarrer les moteurs
1200 RVR	1000 RVR
600 RVR	600 RVR

À moins d'avis contraire de l'ATC, les trajets suivants seront utilisés en conditions de faible visibilité pour les aéronefs au décollage de la piste 06L (voir carte de circulation en conditions de faible visibilité).

Du tablier principal en direction de l'aire de dégivrage : les aéronefs circuleront sur les voies de circulation E et H ou D et K.

Du tablier principal en direction de la piste 06L : les aéronefs circuleront sur le tablier jusqu'à la baie d'attente de la piste 06L.

De l'aire de dégivrage en direction de la piste 06L : les aéronefs circuleront sur les voies de circulation I, B, B4, et le tablier jusqu'à la baie d'attente de la piste 06L.

De l'aire de dégivrage en direction du tablier principal : les aéronefs circuleront sur les voies de circulation J, A et A4.

De l'aviation générale, la voie de circulation R, traverser le seuil 24L, les voies de circulation A5, A et A4, voie de circulation du côté nord de l'aire de trafic jusqu'à la baie d'attente 06L.

6. Trajets pour les arrivées

Les aéronefs quitteront la piste 06L en utilisant les voies de circulation B1, B3, B5 ou par la baie d'attente de la piste 24R, les voies de circulation B, B4 puis suivront les instructions du contrôle du tablier. Les aéronefs se dirigeant à l'aviation générale quitteront l'aire de trafic à A4 et utiliseront la piste 06R, et les voies de circulation L et R.

PROCÉDURES EN CONDITIONS DE FAIBLE VISIBILITÉ

CYUL

CARTE DE CIRCULATION EN CONDITIONS DE FAIBLE VISIBILITÉ (RVR en dessous de 1200 jusqu'à 600 pieds)


MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INTL, QC

CYUL

ATTIS - 127.5 (Fr) 133.7 (Ang)	CLNC DEL - 125.6 AIRE DE TRAFIC - 122.27 (W) 122.07 (E) GND - 121.0 (W) 121.9 (E) 275.8	TWR - 119.3 119.9 124.3 267.1	
--------------------------------	--	-------------------------------	--

LÉGENDE

- BARRES D'ARRÊT
- FEUX DE PROTECTION DE PISTE
- FEUX AXIAUX DE VOIES DE CIRCULATION (BIDIRECTIONNELS)
- SENS DE LA CIRCULATION

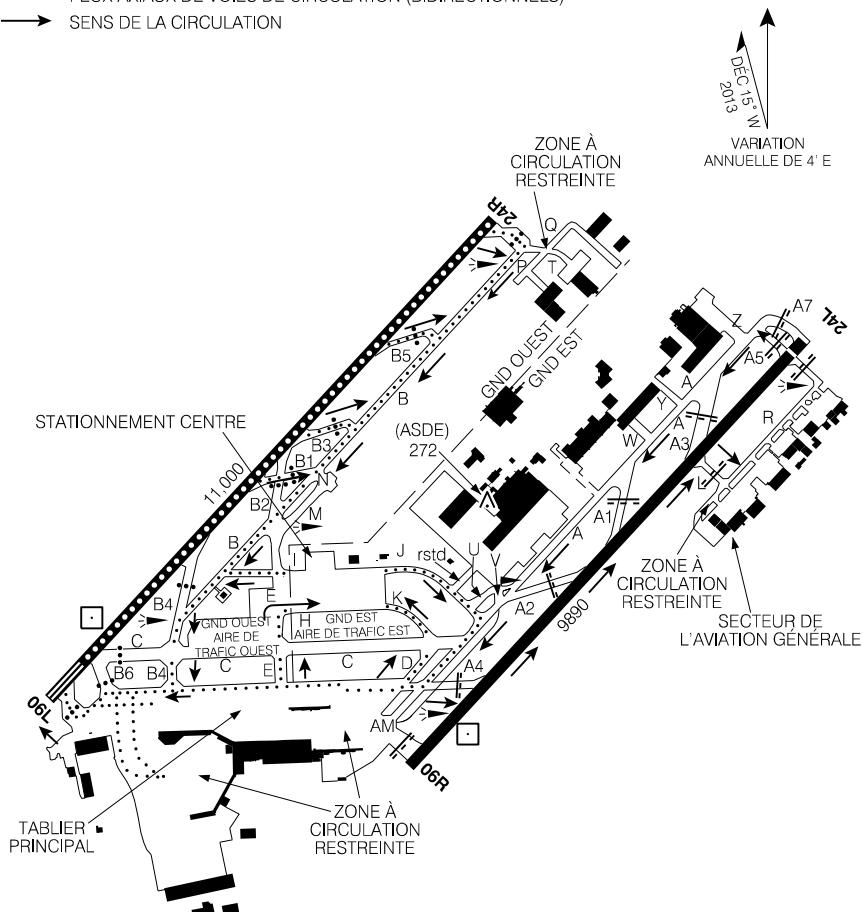

Multilateration:
Laissez votre transpondeur
allumé en tout temps lorsque
vous circulez.


(RVR en dessous de 1200 jusqu'à 600 pieds)

CARTE DE CIRCULATION EN CONDITIONS DE FAIBLE VISIBILITÉ

CYUL-GM-3C

CYUL
EFF 7 AOÛT 25

PARKING CENTRE AREAS AND DE-ICING POSITIONS AND PROCEDURES CYUL

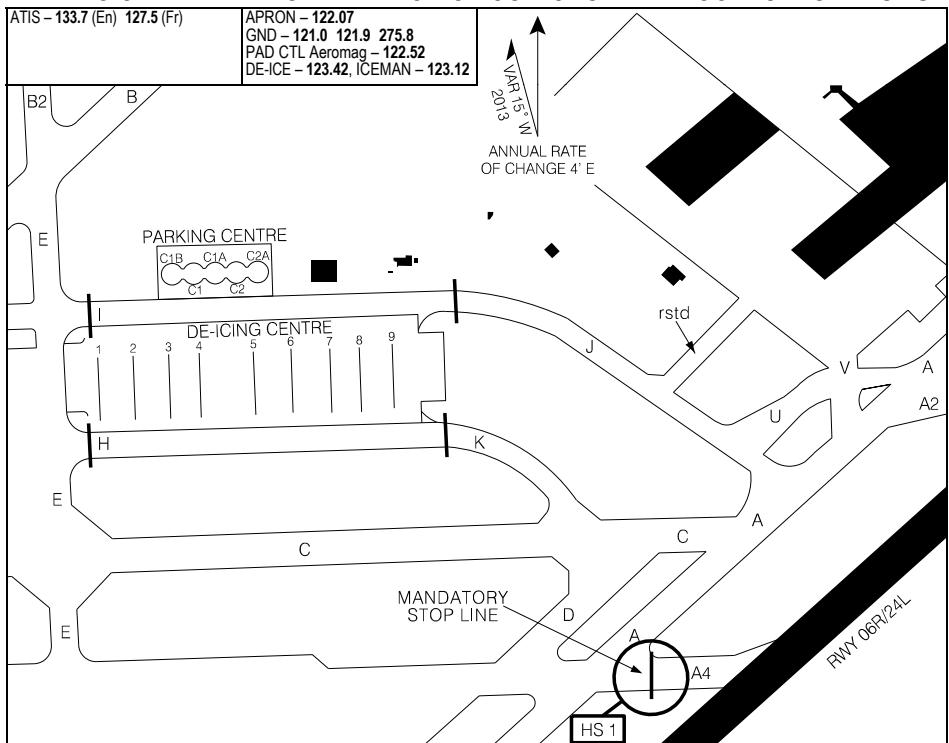

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

DE-ICING CENTRE Oct 1 - Apr 30

1. Contact MONTREAL DE-ICE on 123.425, no later than 30 min prior push-back, with de-icing type.
2. On Twys J or K, hold short of the de-icing pad and contact AEROMAG PAD CONTROL 122.525.
3. On Twy E hold short of H or I and contact AEROMAG PAD CONTROL on 122.525.
4. Follow AEROMAG PAD CONTROL instructions and guiding lines to the assigned de-icing bay and confirm "brakes set" when in position.
5. On AEROMAG PAD CONTROL instructions, contact ICEMAN on 123.125 & confirm aircraft configured for de-icing and engines at idle.
6. When de-icing is completed and on ICEMAN instructions only, contact AEROMAG PAD CONTROL on 122.525 before moving aircraft.
7. Exiting de-icing pad on AEROMAG PAD CONTROL instructions contact ground control:
on Twy J, holding short of Twy U,
on Twy K, holding short of Twy C,
on Twy H or I holding short of Twy E.

De-Icing bays capacity:

- 1 & 3: Maximum wingspan 36m (118');
- 2: Maximum wingspan 80m (262');
- 4, 5 & 9: Maximum wingspan 65m (213');
- 6 & 8: Maximum wingspan 36m (118');
- 7: Maximum wingspan 45.8m (150');

Note: May 1 - Sep 30 DE-ICING CENTRE used as apron area ctc 122.075.

PARKING CENTRE AREAS AND DE-ICING POSITIONS AND PROCEDURES CYUL

EFF 12 JUN 25

ENGINE FAN BLADE ICE SHEDDING PROCEDURES

The undertaking of aircraft engine run-up for engine fan-blade ice-shedding must be conducted on taxiway areas outlined in ENGINE FAN-BLADE ICE-SHEDDING PROCEDURES.

Strict adherence to the center line is mandatory during engine fan-blade ice-shedding. The crew must make first contact on the clearance frequency (125.6 MHz), to provide the following information:

- De-Icing requirements
- Ice-shedding requirements before takeoff
- Runway run-up requirements on the runway before takeoff

In addition, the following elements needs be considered:

- The crew will communicate on the Ground frequency (121.9 MHz or 121.0 MHz) to report any changes that occur following initial contact. NAV CANADA must be informed if the ice-shedding procedure has been completed on taxiway Juliette.
- If the taxiway surface conditions are not suitable for the crew, communication must be made to ATC to arrange another location.

Departing Rwy 24R Ice-Shed Area (IS) see chart.

- IS1 Taxiway B short of holding bay 24R. Available for aircraft AGN V & smaller.
- IS2 Taxiway B short of taxiway B5. Available for aircraft AGN V & smaller.
- IS3 Taxiway B short of taxiway B3. Available for aircraft AGN IIIB & smaller.

Departing Rwy 06L Ice-Shed Area (IS) see chart.

- IS4 Taxiway B short of taxiway B4. Available for aircraft AGN V & smaller.

Departing Rwy 24L Ice-Shed Area (IS) see chart.

- IS5 Taxiway A short of taxiway A5. Available for aircraft AGN V & smaller.
- IS6 Taxiway A short of taxiway A3. Available for aircraft AGN IIIB & smaller.
- IS7 Taxiway A short of taxiway A1. Available for aircraft AGN V & smaller.
- IS8 Taxiway A short of taxiway A2. Available for aircraft AGN IIIB & smaller.

Departing Rwy 06R Ice-Shed Area (IS) see chart.

- IS9 Taxiway A short of taxiway C. Available for aircraft AGN V & smaller.
- IS10 Taxiway A short of taxiway A4. Available for aircraft AGN V & smaller.

Additional locations depending on operational needs.

- IS11 Facing East on taxiway C short of taxiway D. Available for aircraft AGN V & smaller.
- IS12 Facing West on taxiway C short of taxiway E. Available for aircraft AGN V & smaller.
- IS13 Facing East on taxiway J short of taxiway U. Available for the following aircraft belonging to AGN IIIB: all Embraer, CRJ and Airbus. No B737 group aircraft is authorized to perform the ice-shedding procedure on taxiway J.

CYUL-GM-4C

MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INTL, QC

CYUL

ENGINE FAN BLADE ICE SHEDDING PROCEDURES

ATIS - 133.7 (En) 127.5 (Fr)

CLNC DEL - 125.6

TWR - 119.3 119.9 124.3 267.1


APRON - 122.27 (W) 122.07 (E)
GND - 121.0 (W) 121.9 (E) 275.8

LEGEND

••• STOP BARS

— RUNWAY GUARD LIGHTS

MAP 15° N
2013
ANNUAL RATE
OF CHANGE 4' E

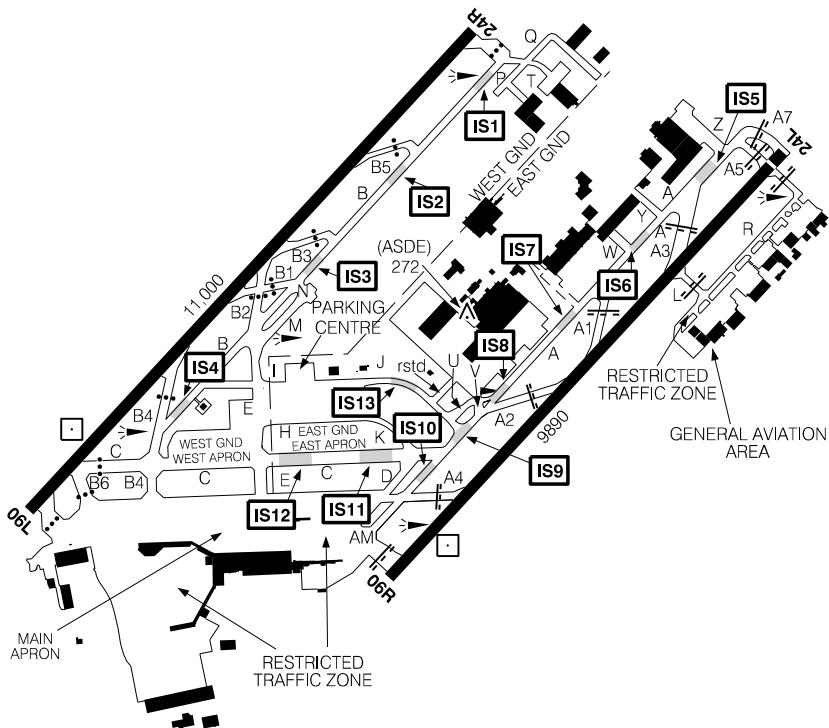


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA. All rights reserved.

ENGINE FAN BLADE ICE SHEDDING PROCEDURES

EFF 12 JUN 25

CYUL

CYUL-GM-4C

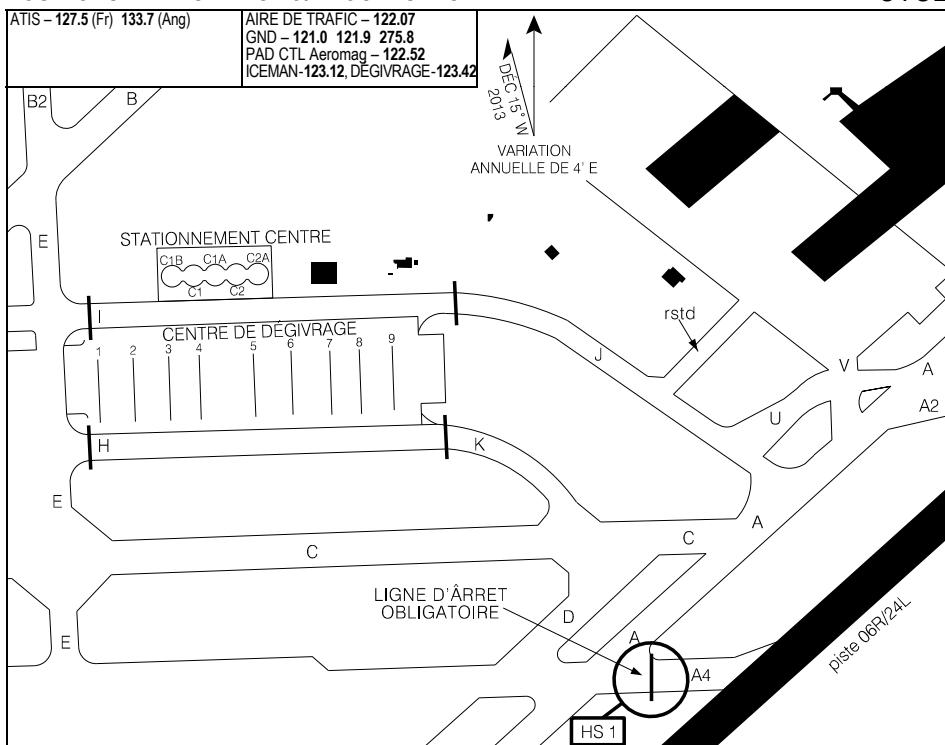**AIRES DE STATIONNEMENT CENTRE et
POSITIONS DE DÉGIVRAGE et PROCÉDURES**
MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INTL, QC
CYUL

CENTRE DÉGIVRAGE 1 oct - 30 avr

1. Contacter MONTRÉAL CENTRE DÉGIVRAGE sur 123.425, au plus tard 30 minutes avant le refoulement, et confirmer le type de dégivrage.
2. Sur Twys J ou K à l'écart du tablier de dégivrage, contacter AEROMAG CONTRÔLE DÉGIVRAGE sur 122.525.
3. Sur Twy E à l'écart de H ou I, contacter AEROMAG CONTRÔLE DÉGIVRAGE sur 122.525.
4. Suivez les instructions d'AEROMAG CONTRÔLE DÉGIVRAGE et les lignes de guidage jusqu'à la baie assignée et confirmer que les freins sont serrés après arrêt.
5. Sur instructions d'AEROMAG CONTRÔLE DÉGIVRAGE contacter ICEMAN sur 123.125 et confirmer que l'appareil est configuré pour le dégivrage et que les moteurs sont sur régime ralenti.
6. Lorsque le dégivrage est complété et seulement sur instructions du ICEMAN contacter AÉROMAG CONTRÔLE DÉGIVRAGE sur 122.525 avant tout mouvement.
7. À la sortie du tablier de dégivrage, sur instructions d'AÉROMAG CONTRÔLE DÉGIVRAGE, contacter le contrôle-sol:

sur Twy J, à l'écart Twy U:

sur Twy K, à l'écart Twy C:

sur Twy H ou à l'écart Twy E:

Capacité des baies

1 & 3:	Envergure maximale 36m (118');
2:	Envergure maximale 80m (262');
4, 5 & 9:	Envergure maximale 65m (213');
6 & 8:	Envergure maximale 36m (118');
7:	Envergure maximale 45.8m (150');

Note: 1 mai - 30 sep CENTRE DÉGIVRAGE utilisé comme aire de trafic ctc 122.075.

AIRES DE STATIONNEMENT CENTRE et POSITIONS DE DÉGIVRAGE et PROCÉDURES
CYUL

EFF 12 JUIN 25

PROCÉDURES D'ÉLIMINATION DE LA GLACE SUR LES AILETTES DE SOUFFLANTE

MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INTL, QC
CYUL

Les points fixes des moteurs d'avion pour l'élimination de la glace doivent être effectués sur certaines voies de circulation indiquées sur PROCÉDURES D'ÉLIMINATION DE LA GLACE SUR LES AILETTES DE SOUFFLANTE. Une bonne adhérence à l'axe central est obligatoire lors de l'élimination de la glace. L'équipage doit établir un premier contact sur la fréquence d'autorisation (125,6 MHz), afin de fournir les informations suivantes :

- Exigences de dégivrage
- Exigences en matière d'élimination de la glace avant le décollage
- Exigence de point fixe sur la piste avant le décollage

De plus, les éléments suivants devront être considérés :

- L'équipage devra communiquer sur la fréquence Sol (121.9 MHz ou 121.0 MHz) afin de signaler tout changement survenu suite au contact initial. NAV CANADA devra être informé si la procédure d'élimination de la glace a été complétée sur la voie de circulation Juliette.
- Si les conditions de la surface de la voie de circulation ne conviennent pas à l'équipage, une communication devra être effectuée auprès de ATC afin de prévoir un autre emplacement.

Départ de la piste 24R Élimination de la Glace (IS) voir carte.

- IS1 Sur la voie de circulation B à l'écart de la baie d'attente 24R. Disponible pour le AGN V et plus petit.
- IS2 Sur la voie de circulation B à l'écart de la voie de circulation B5. Disponible pour le AGN V et plus petit.
- IS3 Sur la voie de circulation B à l'écart de la voie de circulation B3. Disponible pour le AGN IIIB et plus petit.

Départ de la piste 06L Élimination de la Glace (IS) voir carte.

- IS4 Sur la voie de circulation B à l'écart de la voie de circulation B4. Disponible pour le AGN V et plus petit.

Départ de la piste 24L Élimination de la Glace (IS) voir carte.

- IS5 Sur la voie de circulation A à l'écart de la voie de circulation A5. Disponible pour le AGN V et plus petit.
- IS6 Sur la voie de circulation A à l'écart de la voie de circulation A3. Disponible pour le AGN IIIB et plus petit.
- IS7 Sur la voie de circulation A à l'écart de la voie de circulation A1. Disponible pour le AGN V et plus petit.
- IS8 Sur la voie de circulation A à l'écart de la voie de circulation A2. Disponible pour le AGN IIIB et plus petit.

Départ de la piste 06R Élimination de la Glace (IS) voir carte.

- IS9 Sur la voie de circulation A à l'écart de la voie de circulation C. Disponible pour le AGN V et plus petit.
- IS10 Sur la voie de circulation A à l'écart de A4. Disponible pour le AGN V et plus petit.

Emplacements supplémentaires selon les besoins opérationnels

- IS11 Face à l'est sur la voie de circulation C à l'écart de la voie de circulation D. Disponible pour le AGN V et plus petit.
- IS12 Face à l'ouest sur la voie de circulation C à l'écart de la voie de circulation E. Disponible pour le AGN V et plus petit.
- IS13 Face à l'est sur la voie de circulation J à l'écart de la voie de circulation U. Disponible pour les aéronefs du AGN IIIB suivants: tous les Embraer, CRJ et Airbus. Aucun aéronef du groupe B737 n'est autorisé à effectuer la procédure de délestage de glace sur la voie J.

PROCÉDURES D'ÉLIMINATION DE LA GLACE SUR LES AILETTES DE SOUFFLANTE

CYUL

PROCÉDURES D'ÉLIMINATION DE LA GLACE SUR LES AILETTES DE SOUFFLANTE


MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INTL, QC
CYUL

ATIS - 127.5 (Fr) 133.7 (Ang)	CLNC DEL - 125.6 AIRE DE TRAFIC - 122.27 (W) 122.07 (E) GND - 121.0 (W) 121.9 (E) 275.8	TWR - 119.3 119.9 124.3 267.1
-------------------------------	--	-------------------------------

LÉGENDE

- BARRES D'ARRÊT
- FEUX DE PROTECTION DE PISTE

VARIATION
ANNUELLE DE 4° E
VAR 15° N
2013

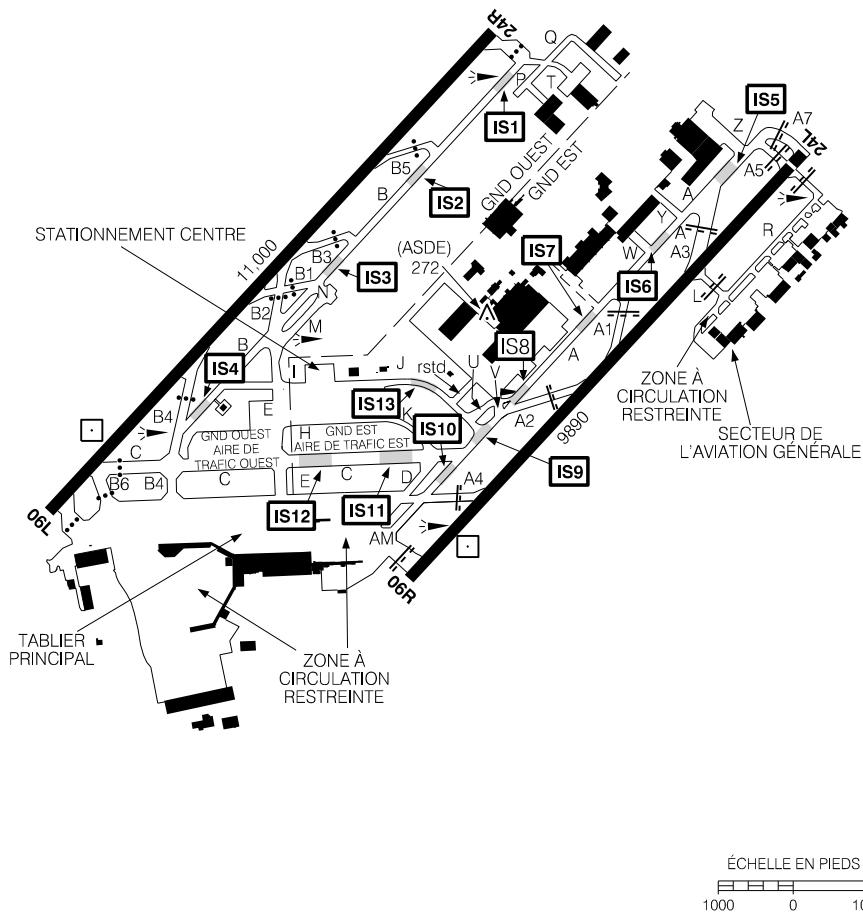

PROCÉDURES D'ÉLIMINATION DE LA GLACE SUR LES AILETTES DE SOUFFLANTE


EFF 12 JUIN 25

CYUL


CYUL-APD-2

MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INT'L, QC
CYUL

START BOXES

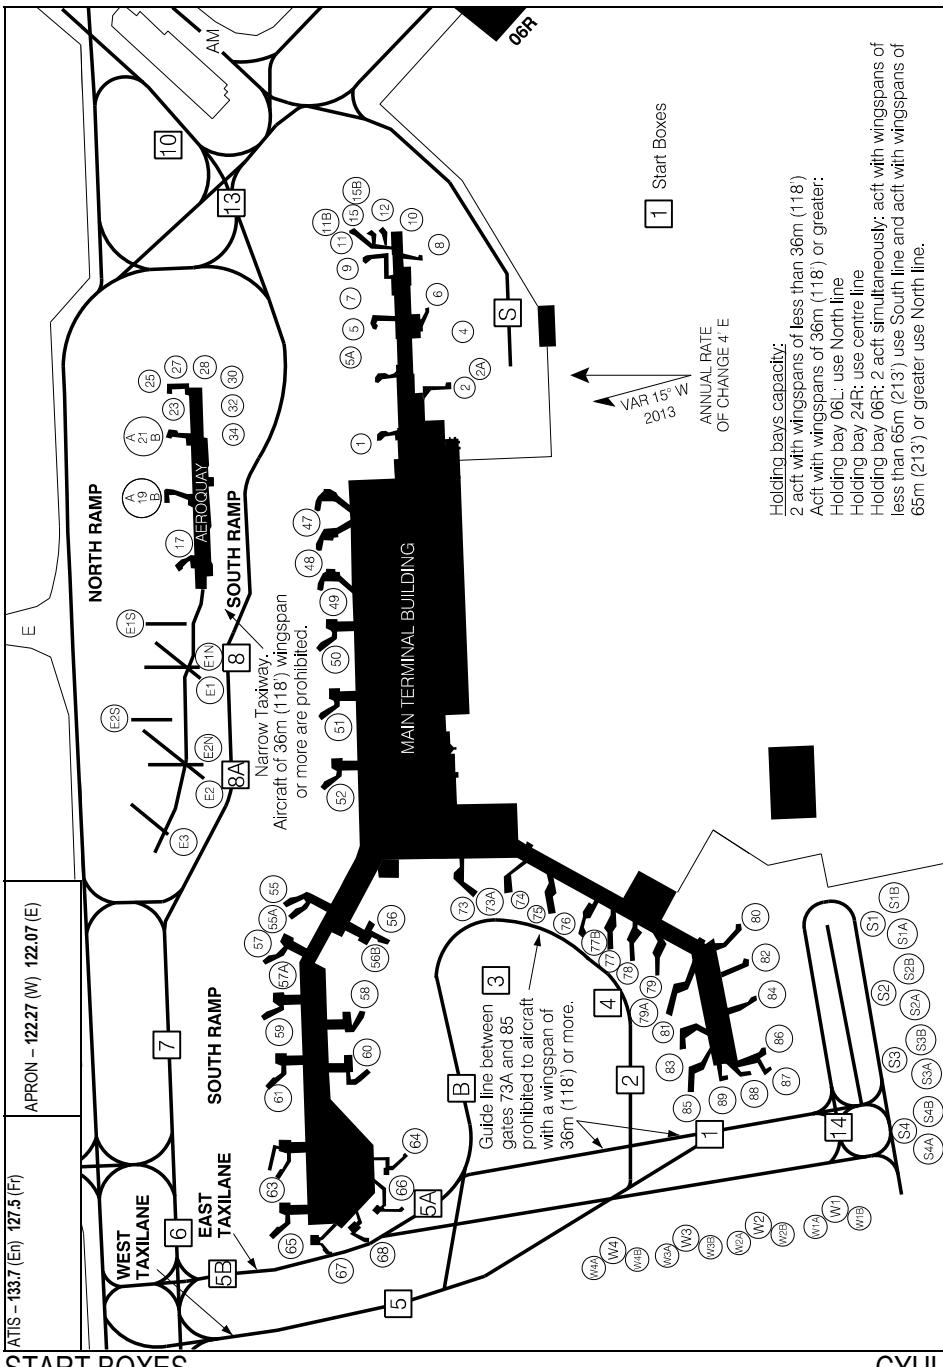

POINTS DE DÉPART

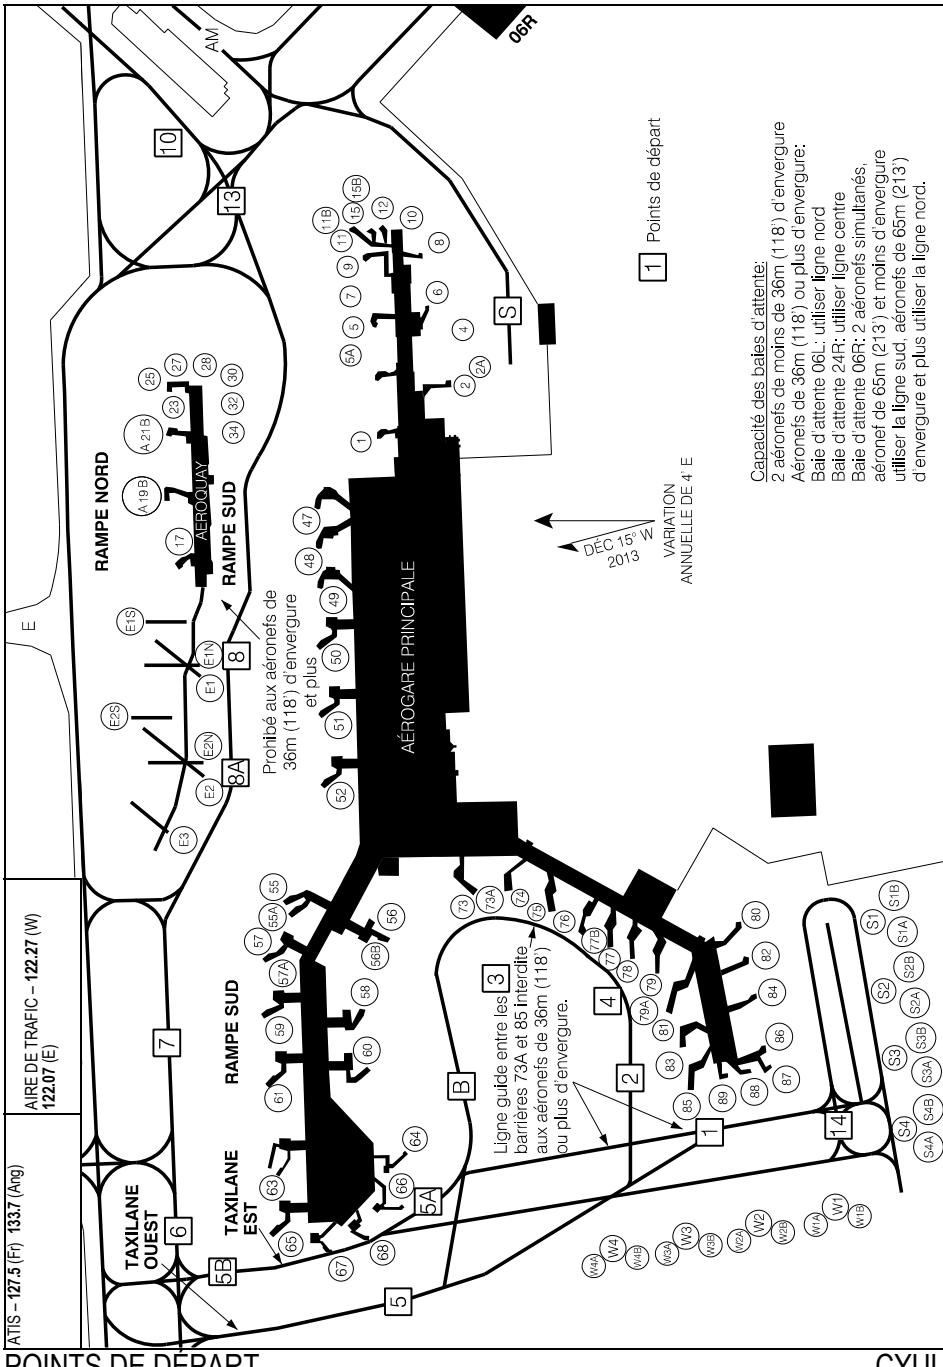

POINT 3
EEE 17 AVR 25


CYUL-APD-2 C

Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

CYUL-APD-3

MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INTL, QC
CYUL

NORTH PARKING AREA

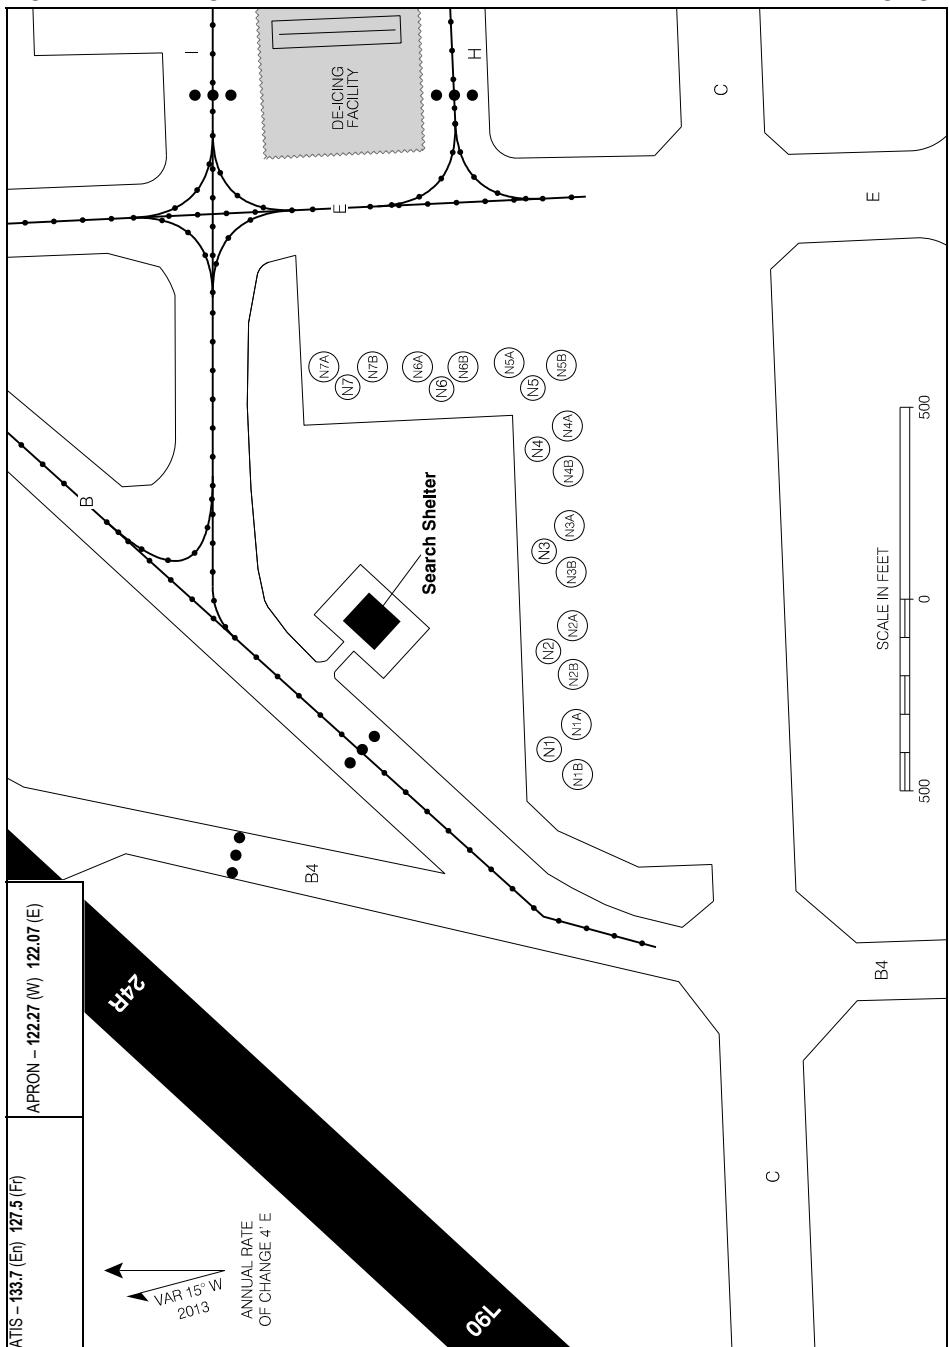

NORTH PARKING AREA

EFF 30 NOV 23


CYUL-APD-3

CYUL-APD-3

MONTRÉAL/PIERRE-ELLIOTT-TRUDEAU INTL, QC

CYUL

AIRE DE STATIONNEMENT NORD

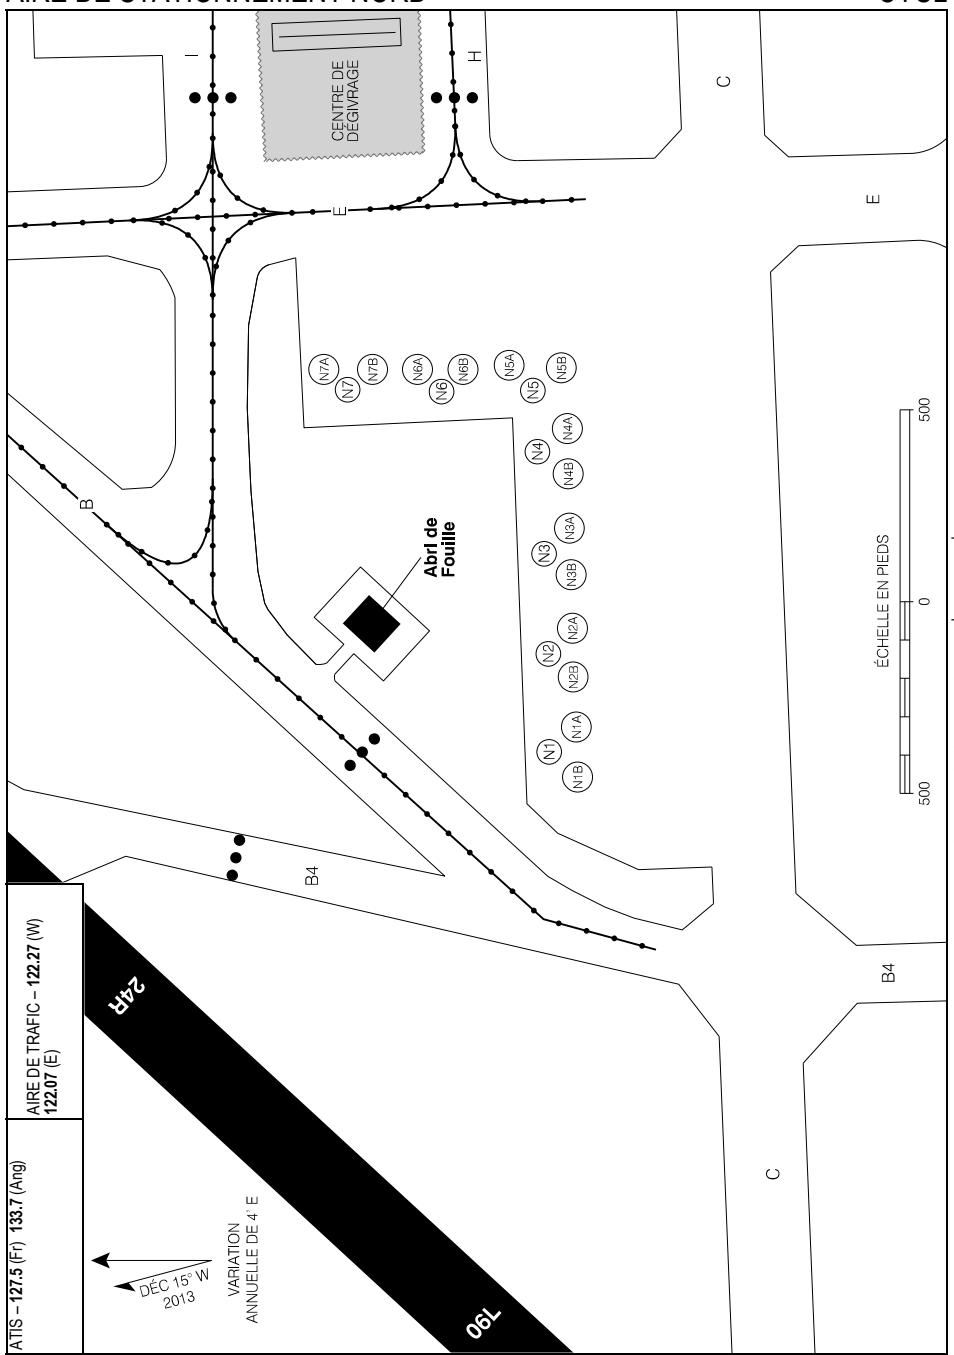

AIRE DE STATIONNEMENT NORD


EFF 30 NOV 23

CYUL-APD-3

Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

PLAN OF OPERATIONS IN THE ABSENCE OF APRON CONTROL

CYUL

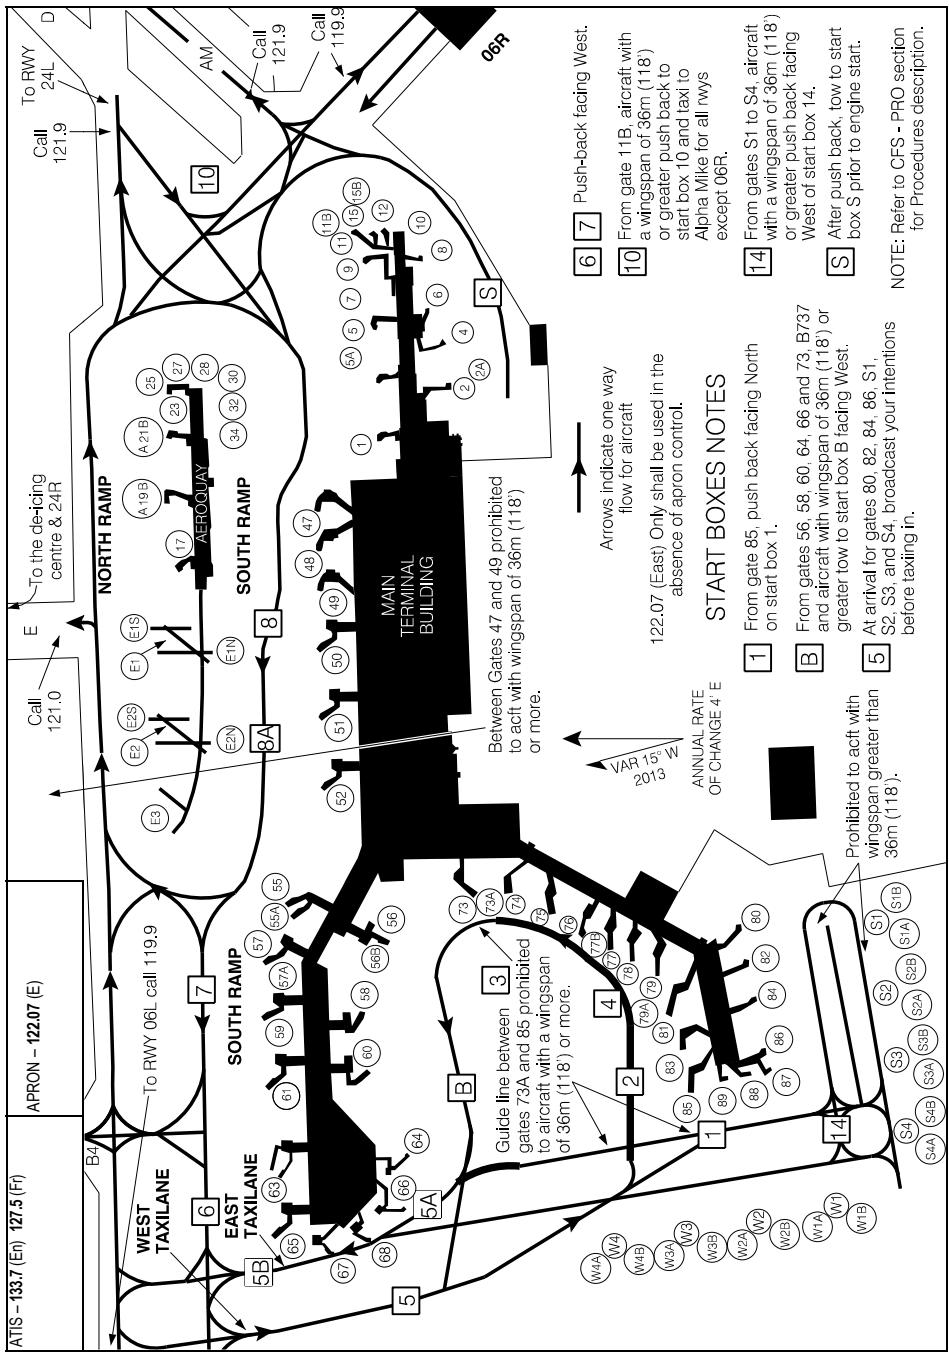


PLAN OF OPERATIONS IN THE ABSENCE OF APRON CONTROL

CYUL

EFF 17 APR 25


PLAN D'OPÉRATIONS EN L'ABSENCE DE CONTRÔLE SUR L'aire de TRAFIC

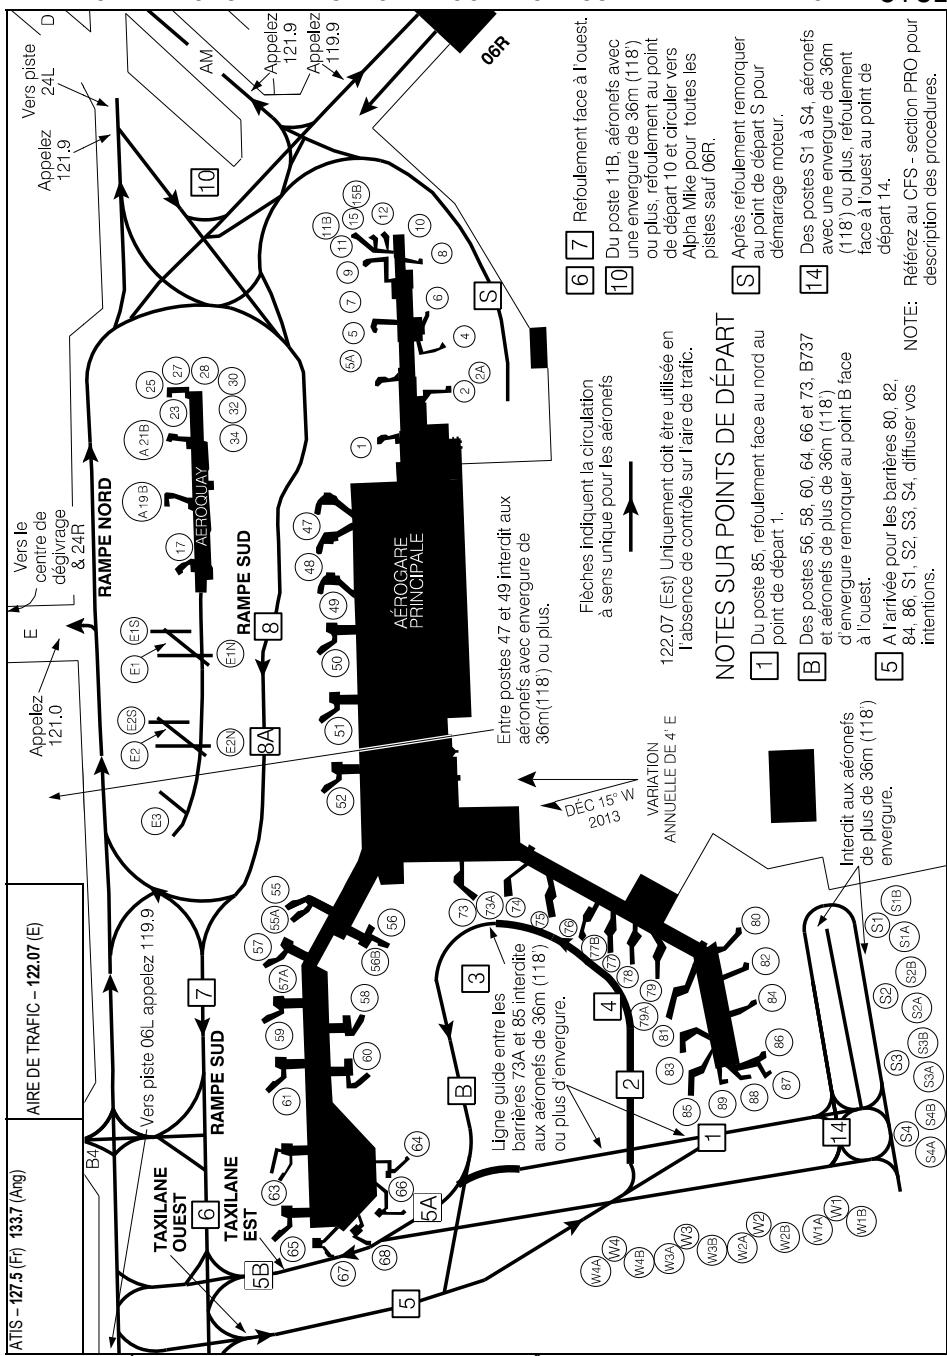

CYNA-AD

NATASHQUAN, QC
CYNA

AERODROME CHART

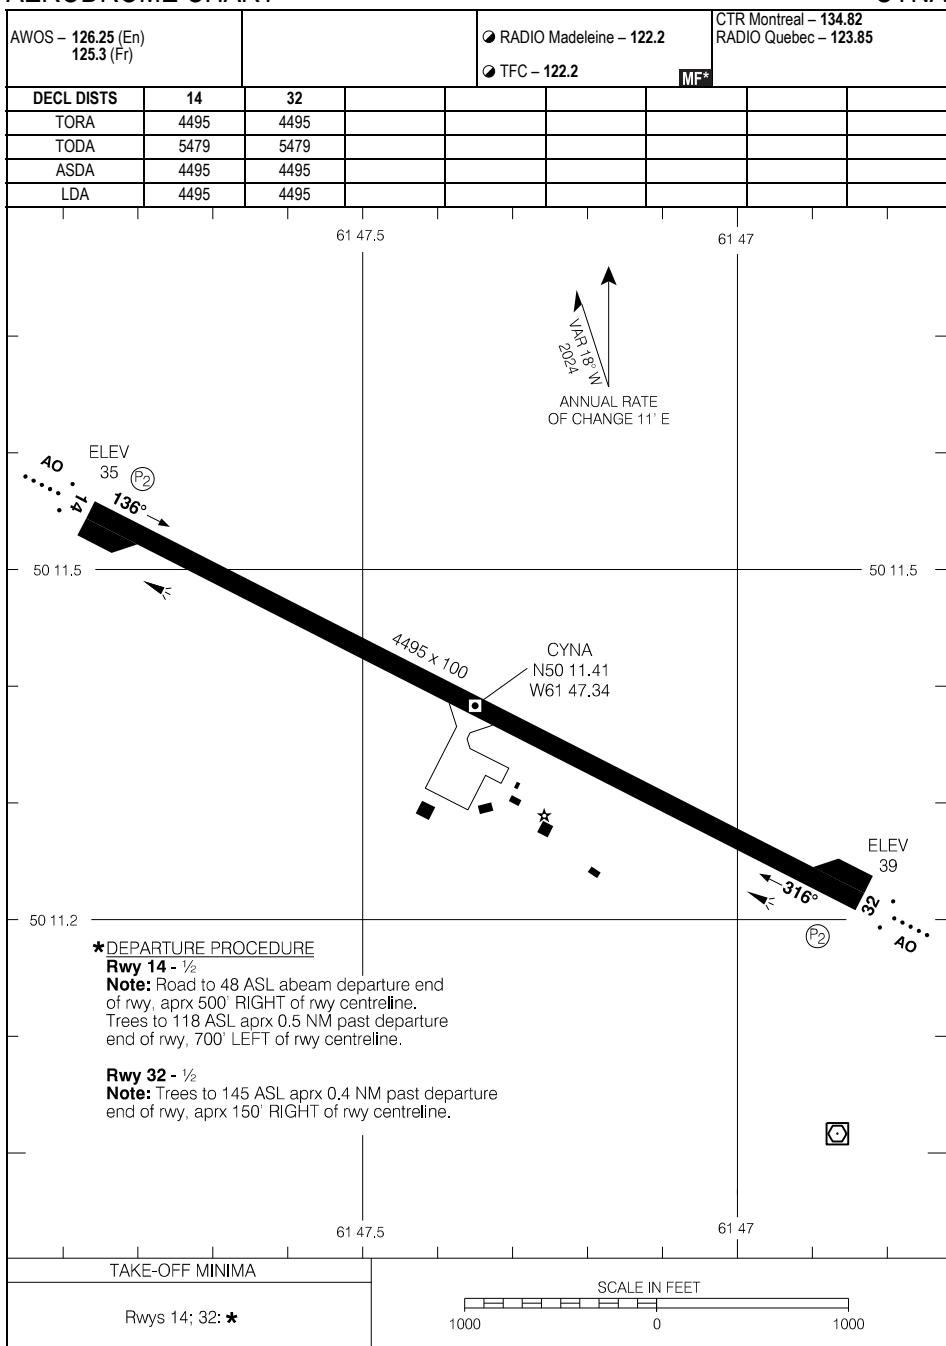

AERODROME CHART

EFF 11 JUL 24


CYNA-AD

CYNA

CYNA-AD

NATASHQUAN, QC
CYNA

CARTE D'AÉRODROME

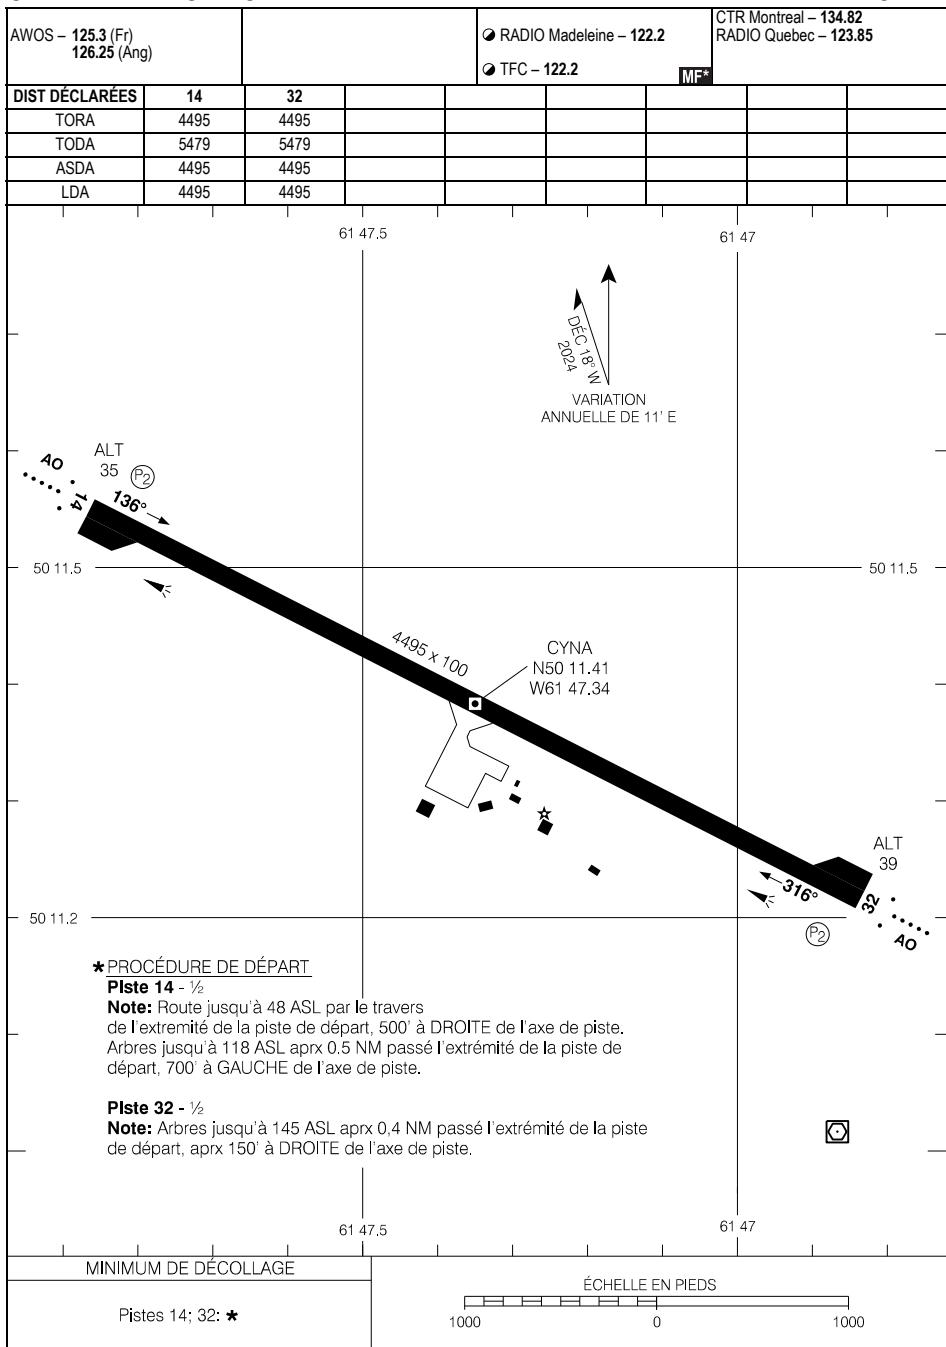

CARTE D'AÉRODROME

EFF 11 JUIL 24


CYNA

CYNA-AD

CYHH-AD

NEMISCAU, QC
CYHH

AERODROME CHART

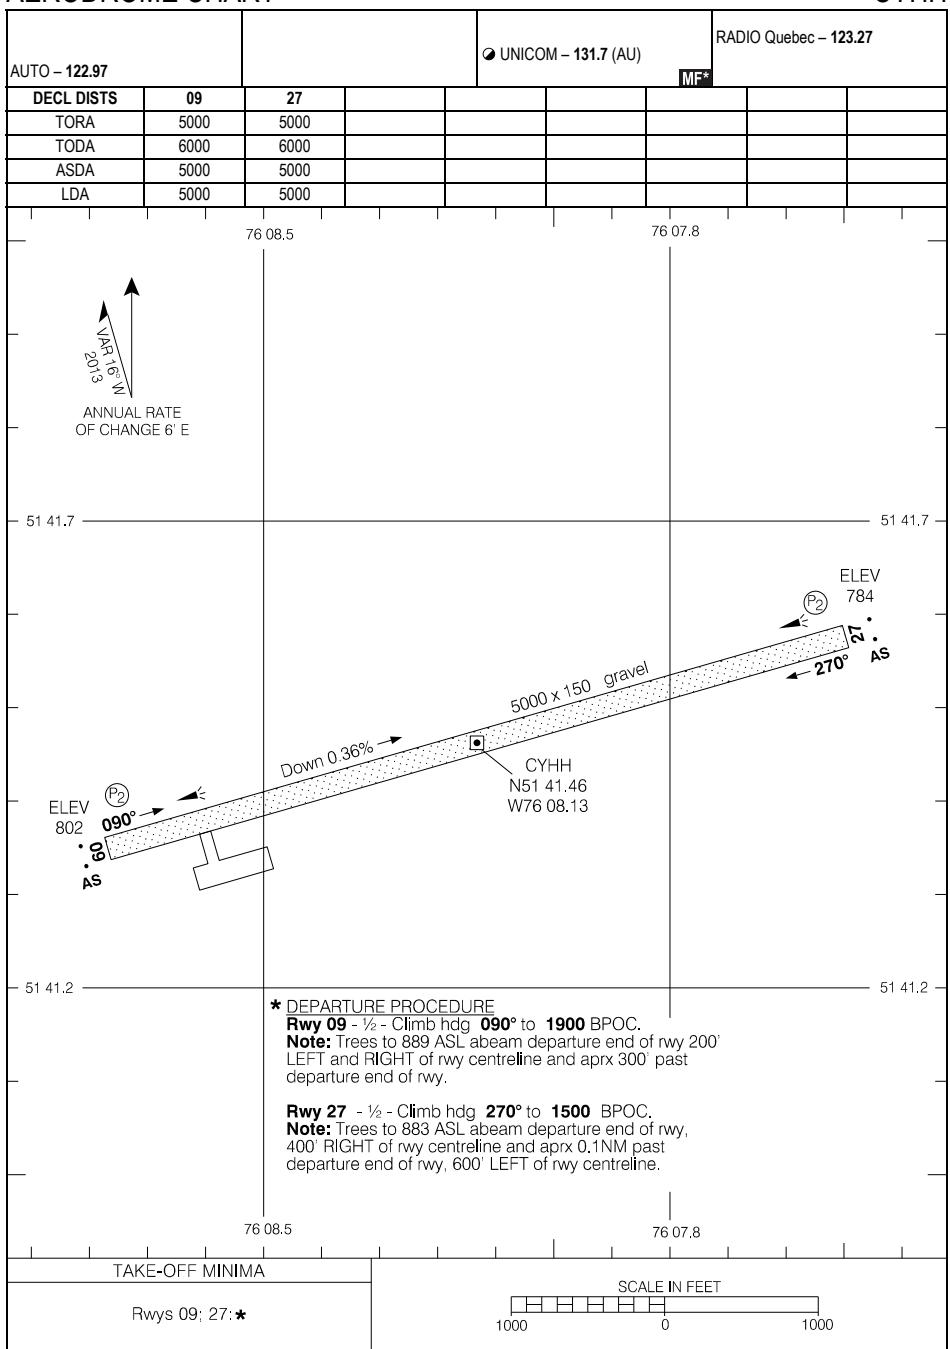

AERODROME CHART


EFF 5 SEP 24

CYHH-AD

CYHH

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CARTE D'AÉRODROME

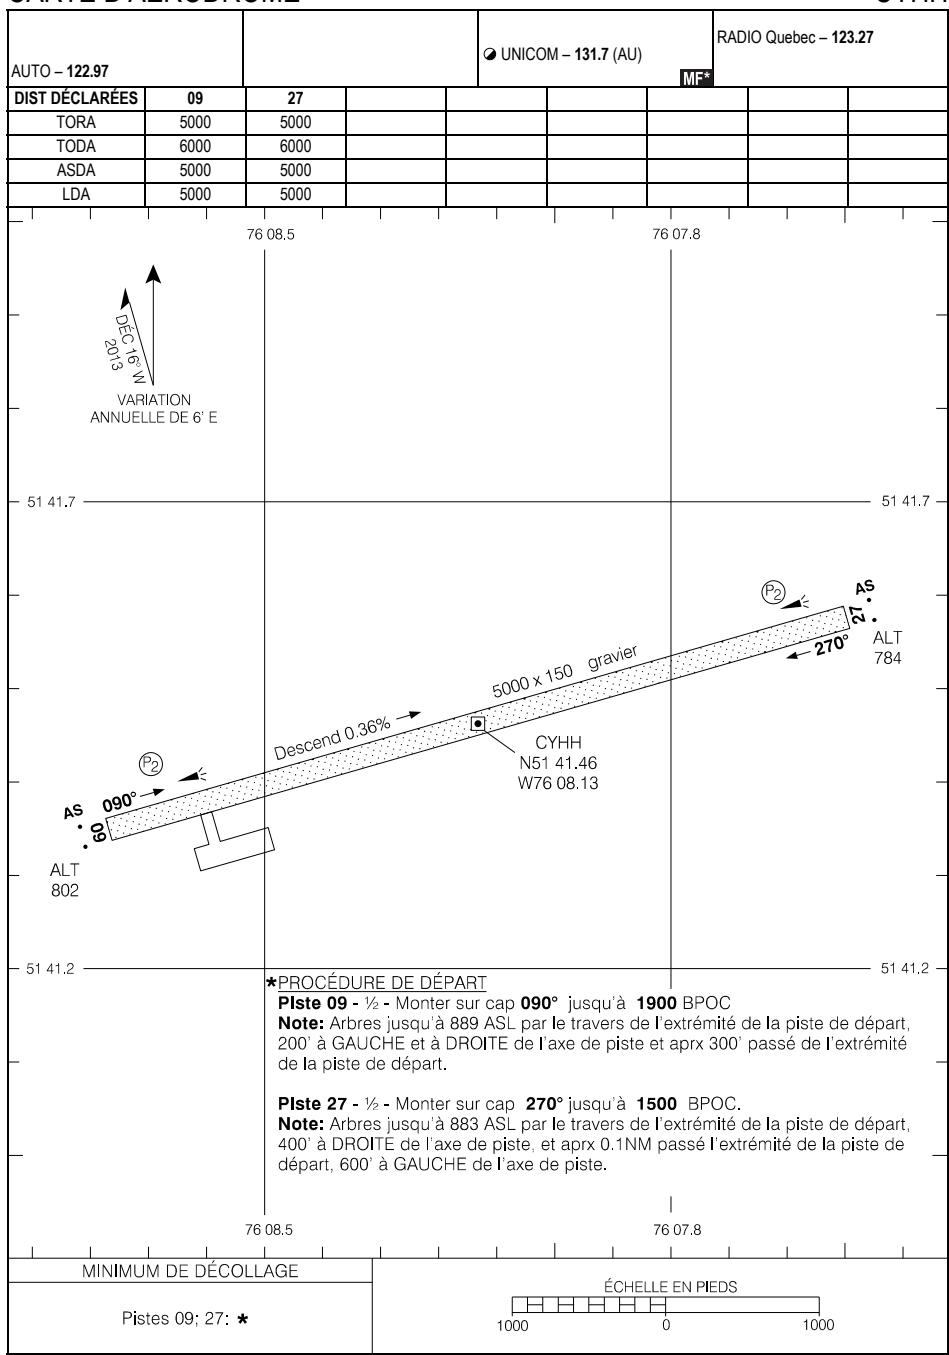

CARTE D'AÉRODROME


EFF 5 SEP 24

CYHH

CYND-AD

OTTAWA/GATINEAU, QC
CYND

AERODROME CHART

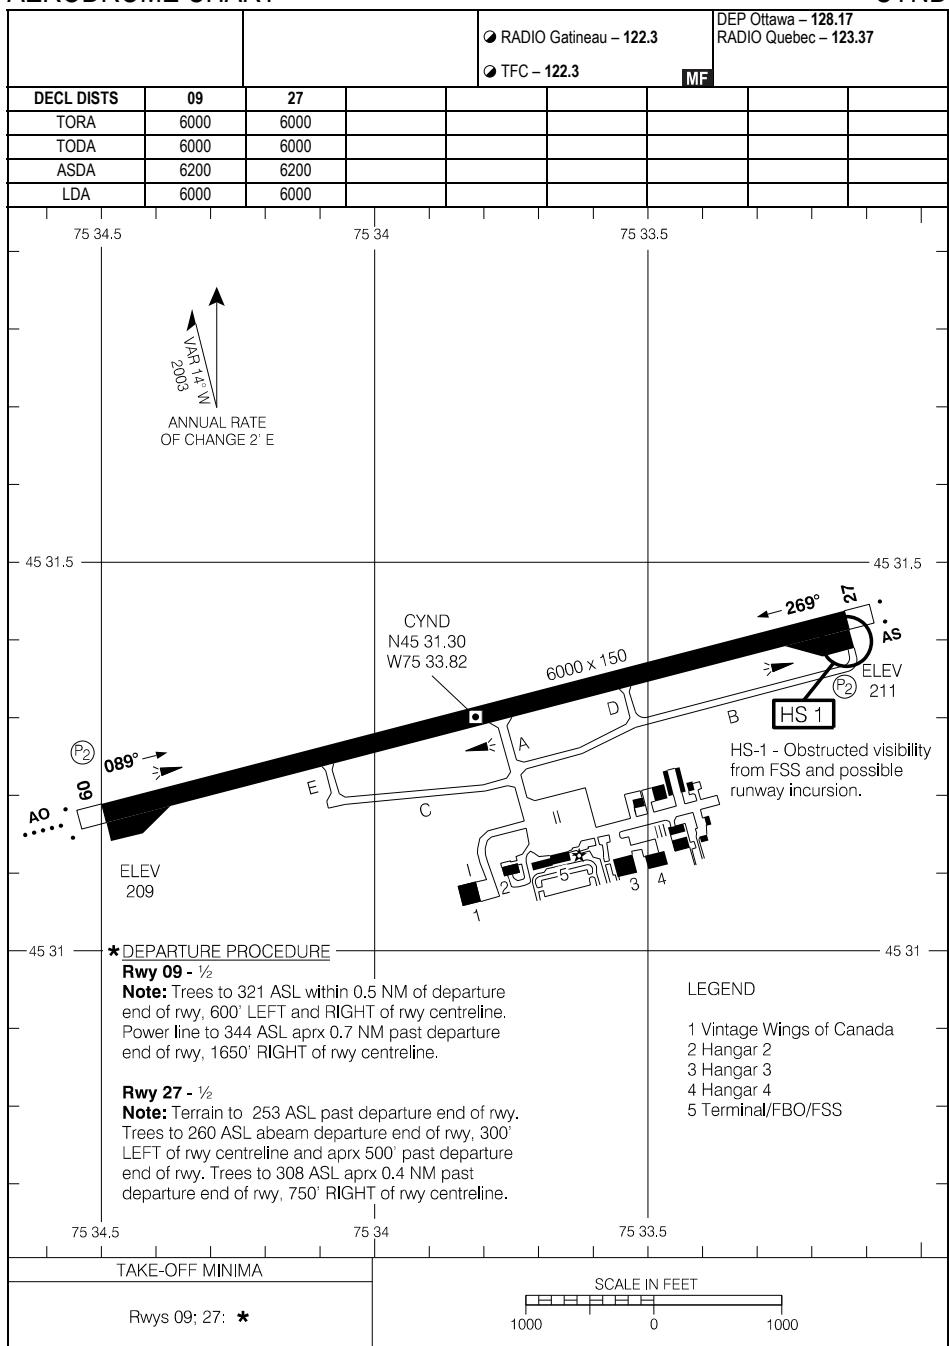

AERODROME CHART

EFF 21 MAR 24


CYND

CYND-AD

CYND-AD

OTTAWA/GATINEAU, QC
CYND

CARTE D'AÉRODROME

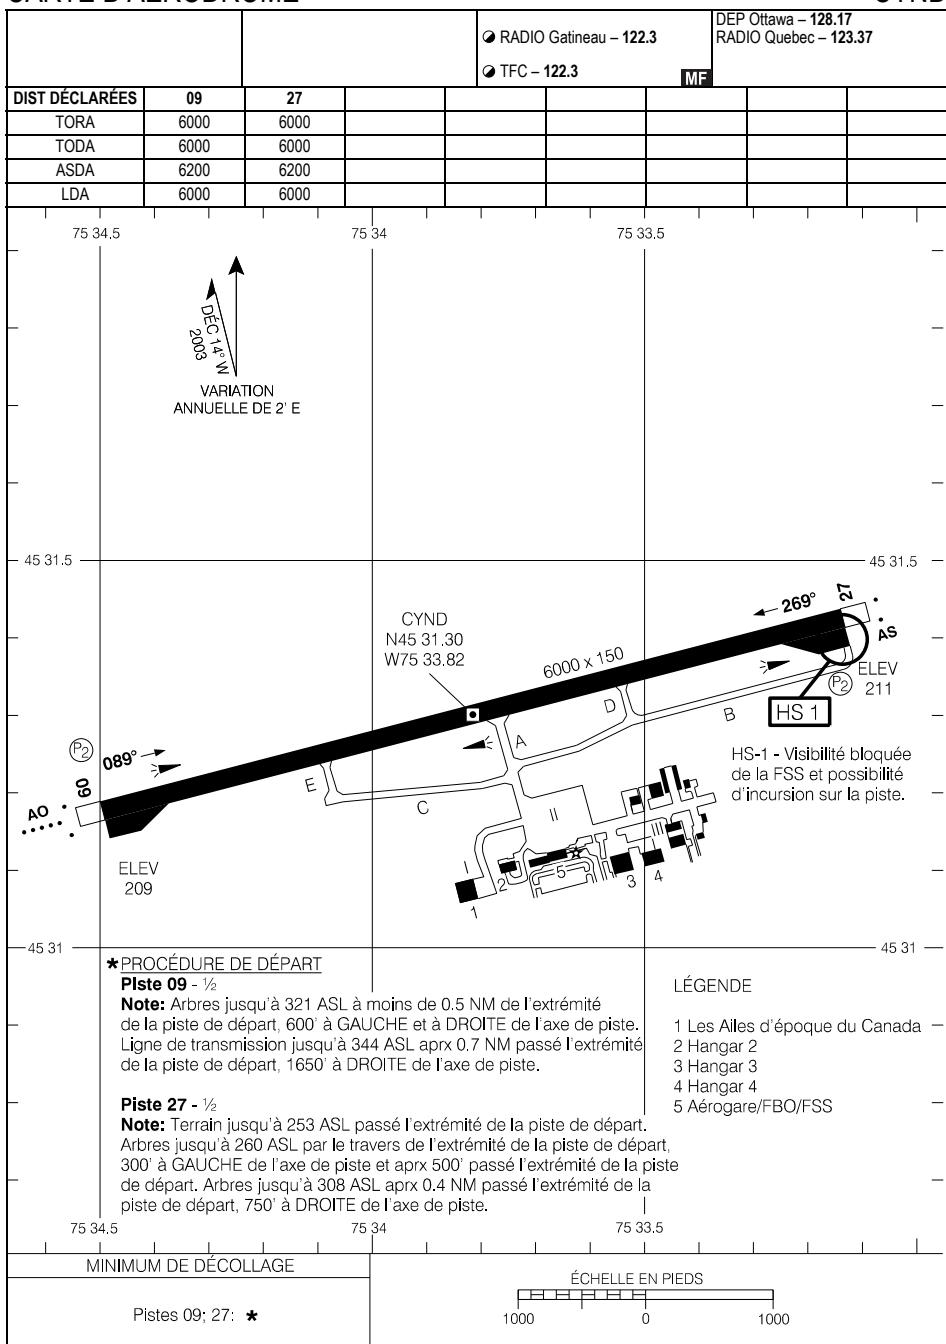

CARTE D'AÉRODROME

EFF 21 MAR 24


CYND

CYND-AD

CYPN-AD

PORT-MENIER, QC
CYPN

AERODROME CHART

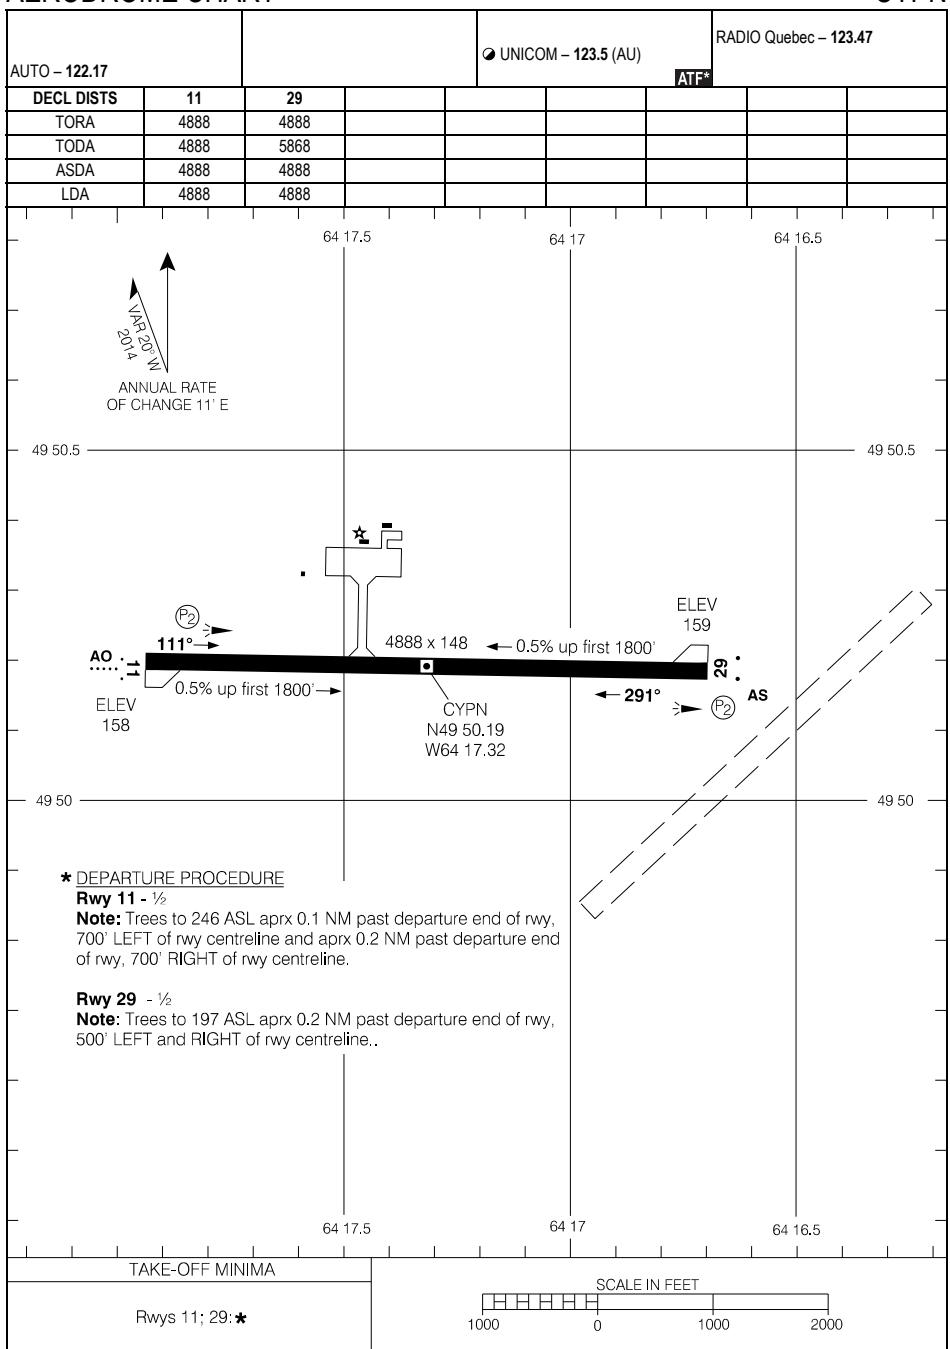


AERODROME CHART

EFF 17 APR 25

CYPN-AD

CYPN


CARTE D'AÉRODROME

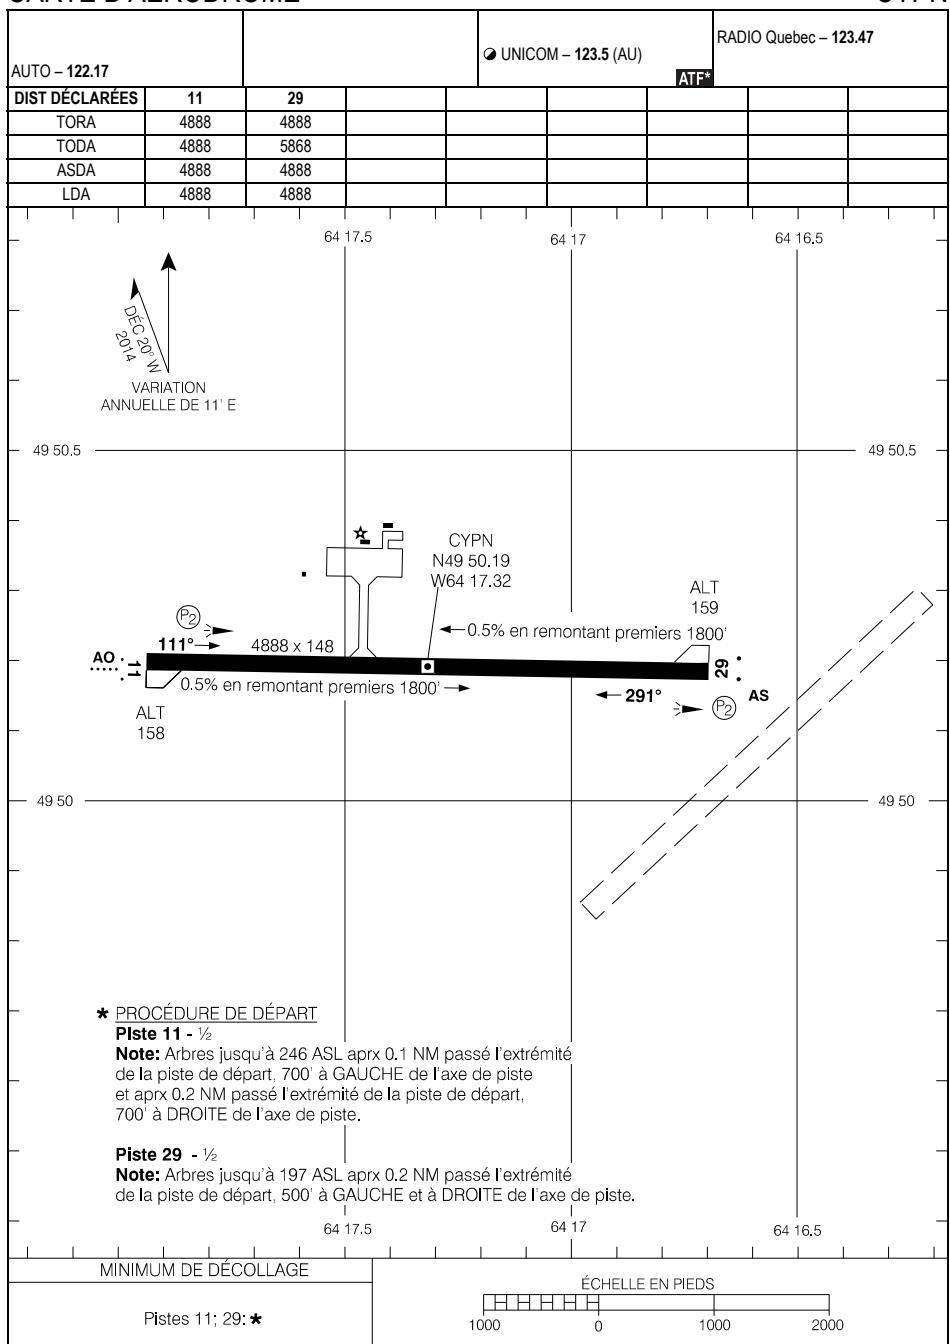

CARTE D'AÉRODROME

EFF 17 AVR 25

AERODROME CHART

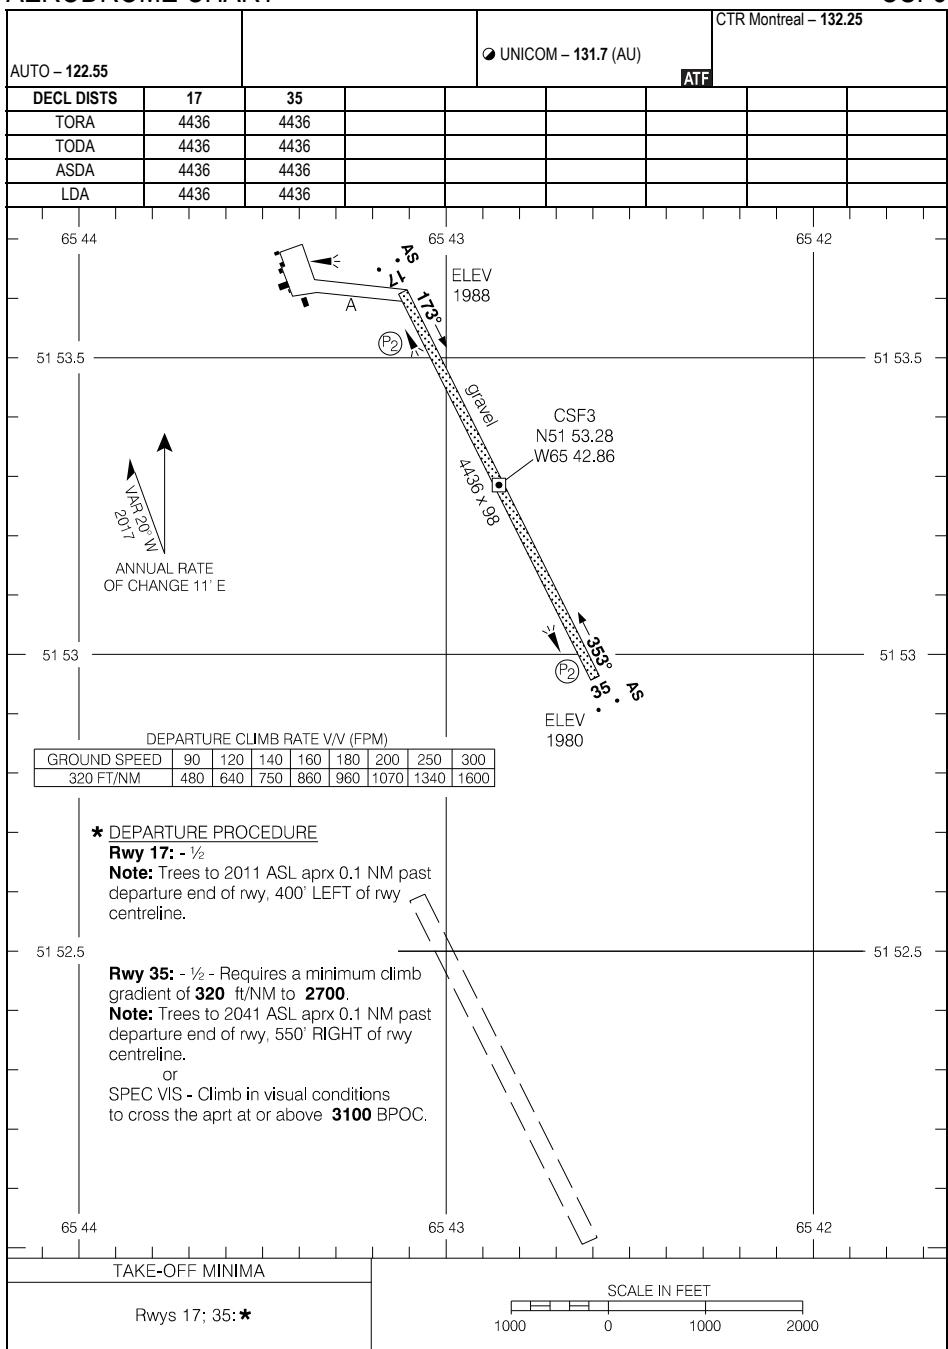


AERODROME CHART

EFF 17 APR 25

CSF3

CARTE D'AÉRODROME

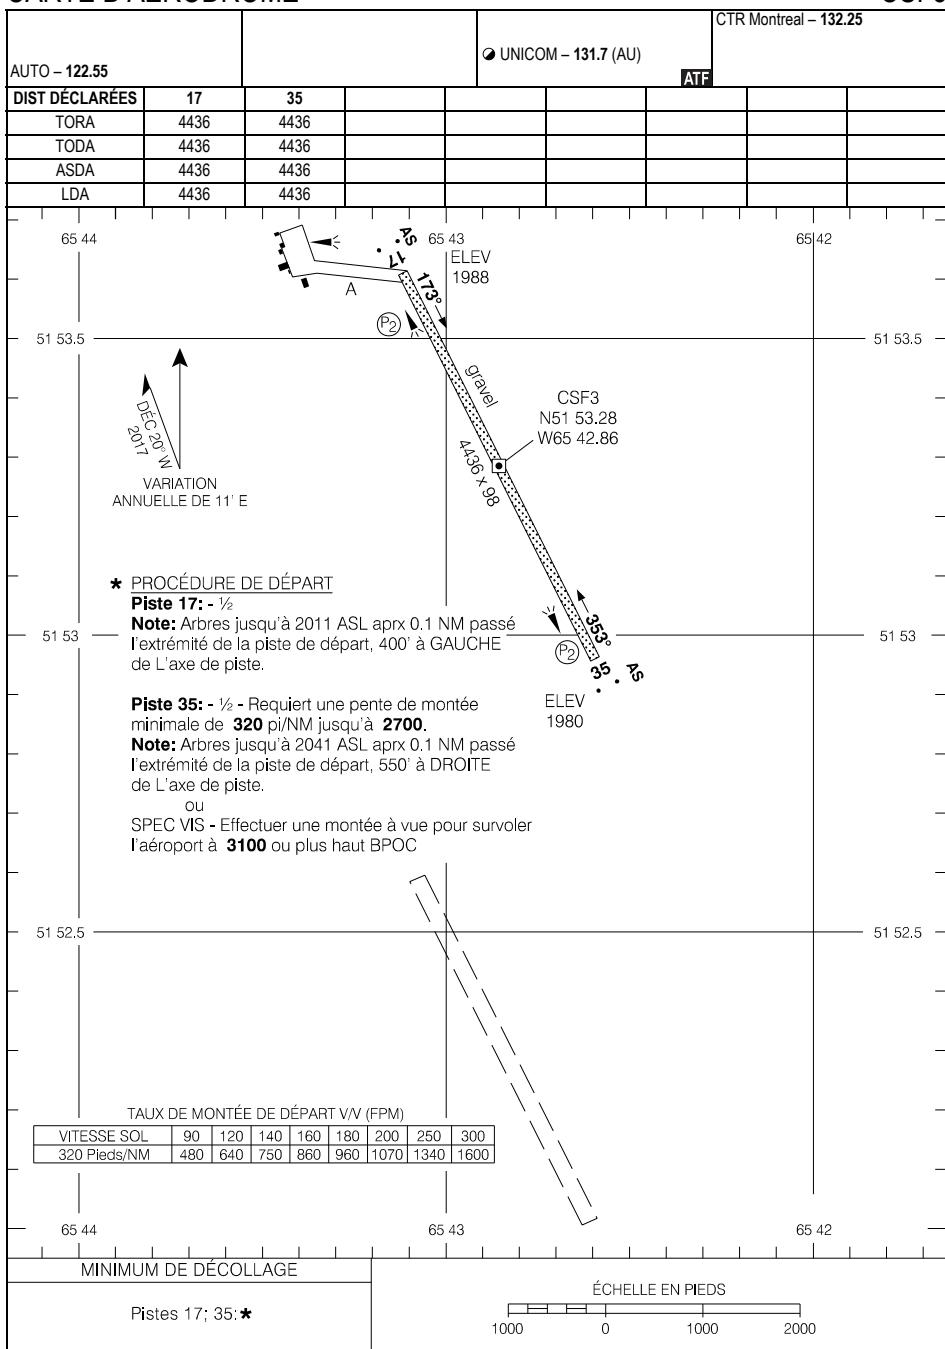


CARTE D'AÉRODROME

EFF 17 AVR 25

CSF3

AERODROME CHART

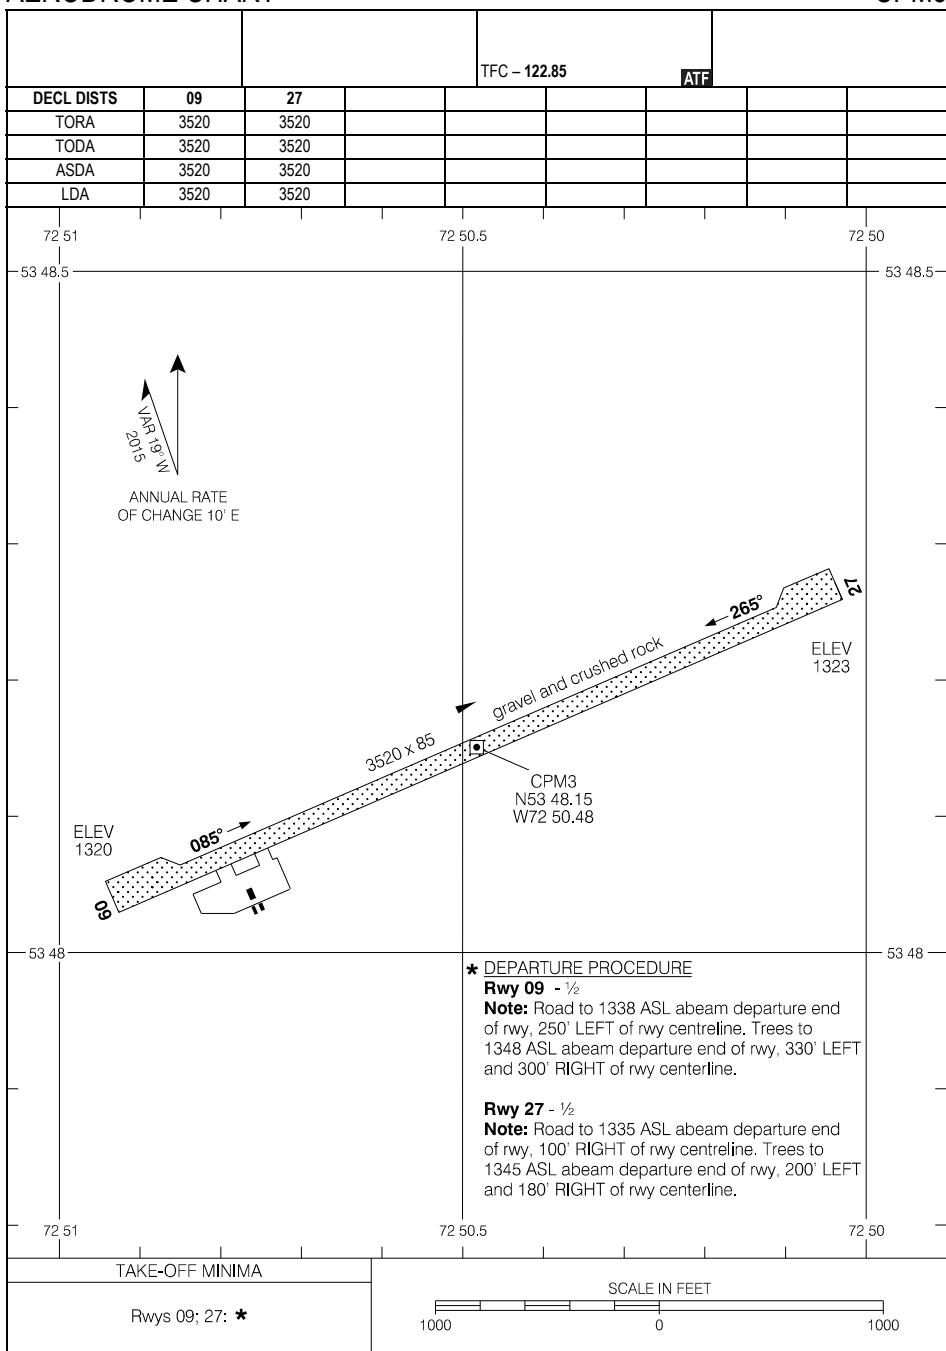


AERODROME CHART

EFF 5 OCT 23

CPM3

CARTE D'AÉRODROME

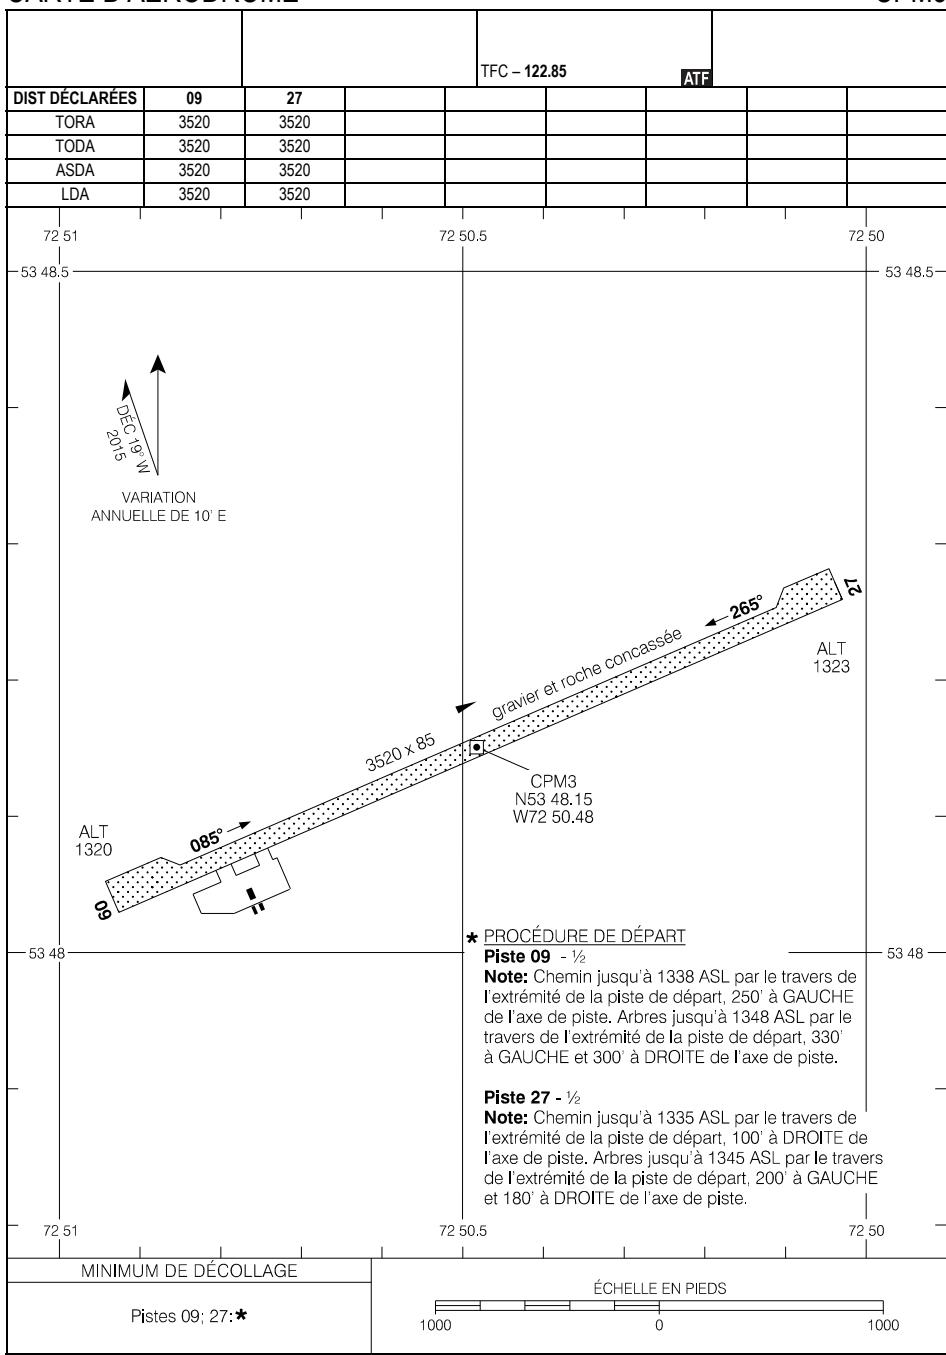

CARTE D'AÉRODROME


EFF 5 OCT 23

CPM3

CYPX-AD

PUVIRNITUQ, QC
CYPX

AERODROME CHART

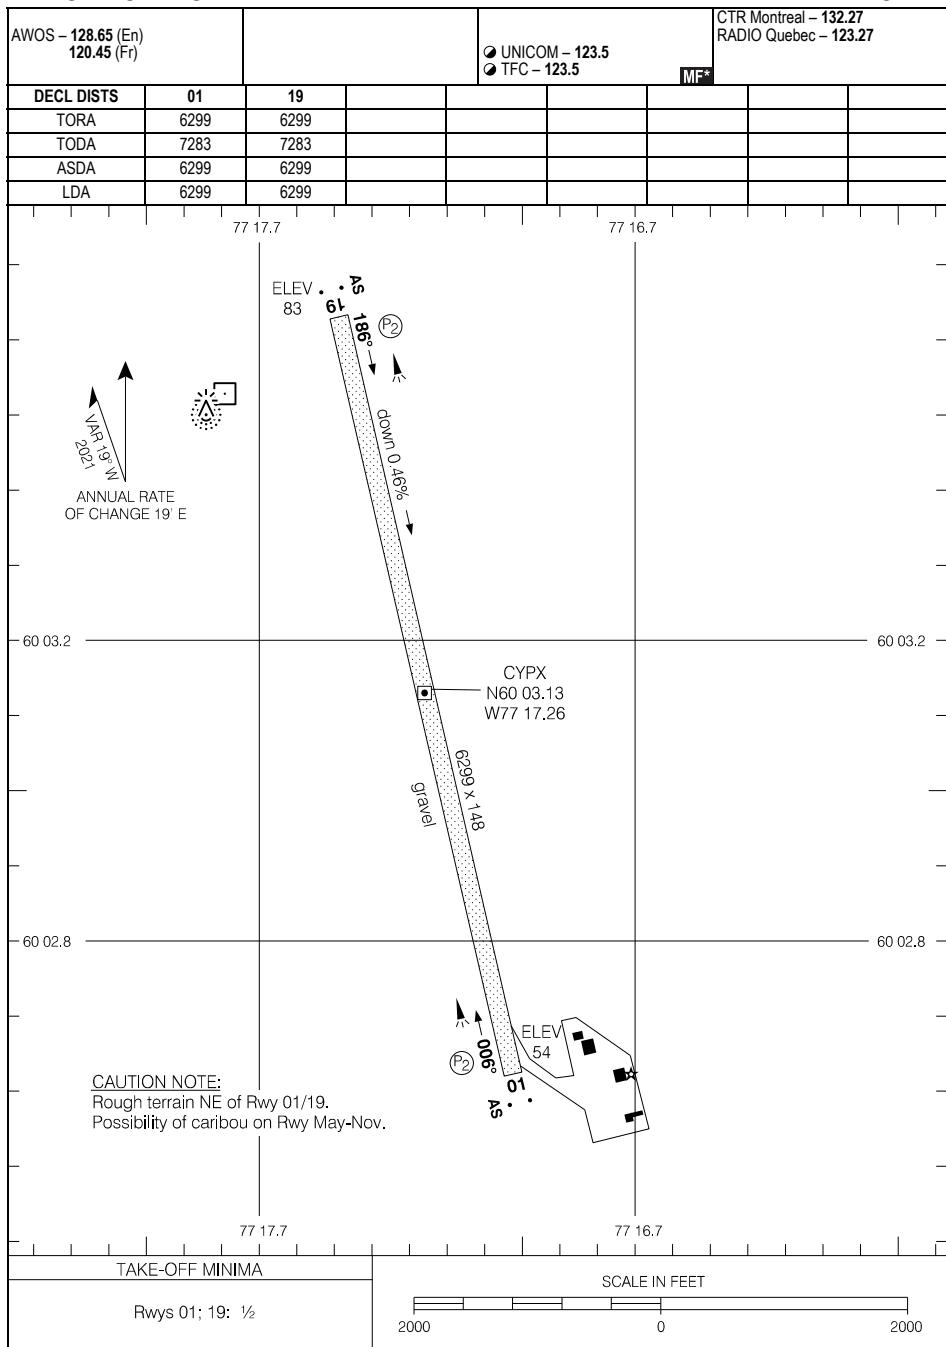

AERODROME CHART

EFF 29 DEC 22


CYPX-AD

CYPX

CYPX-AD

PUVIRNITUQ, QC
CYPX

CARTE D'AÉRODROME

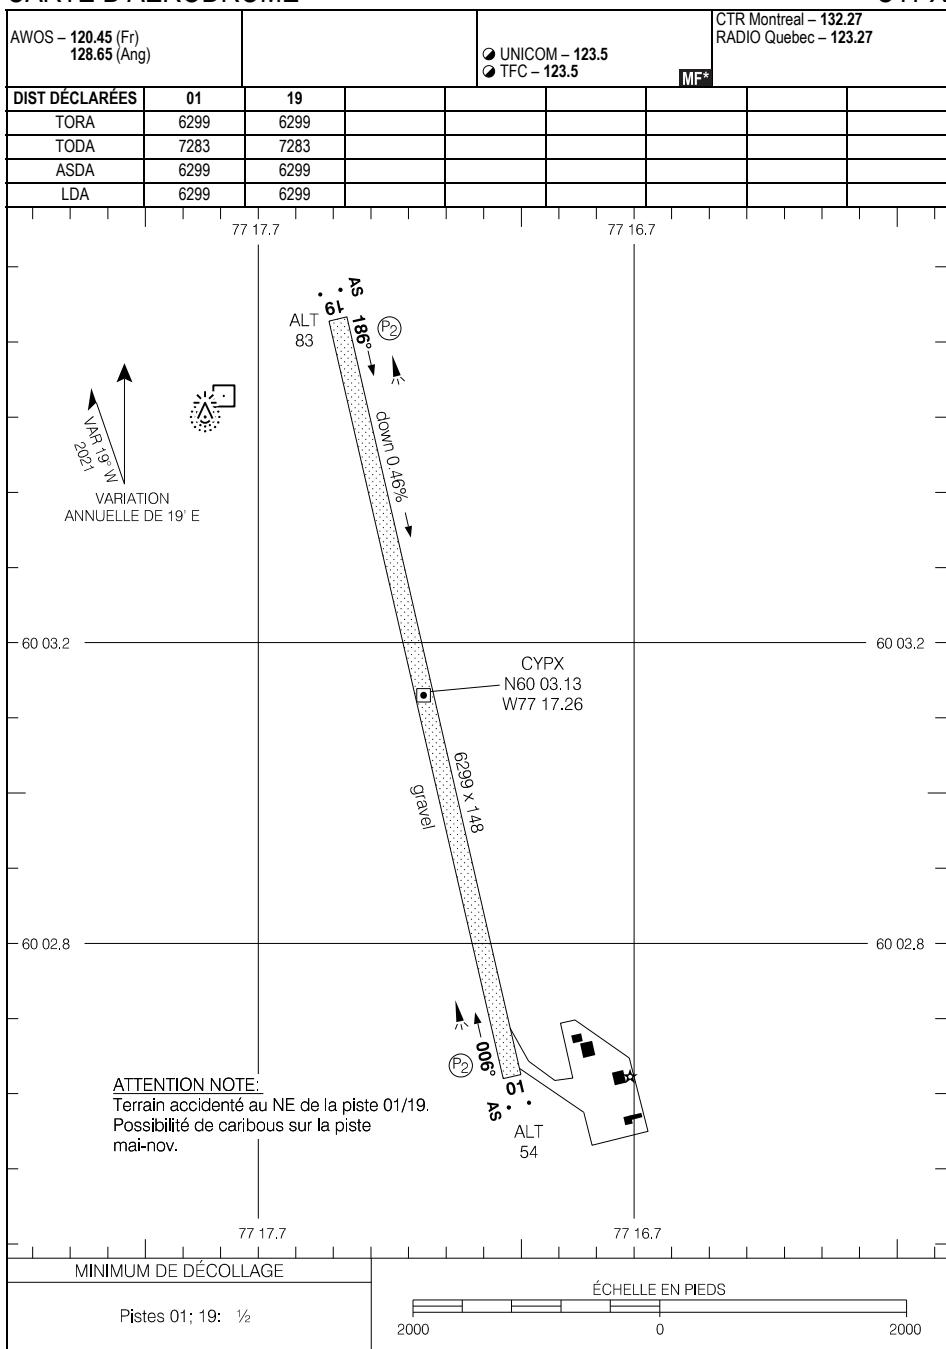CARTE D'AÉRODROME
EFF 29 DÉC 22


CYPX

CYPX-AD

CYHA-AD

QUAQTAQ, QC
CYHA

AERODROME CHART

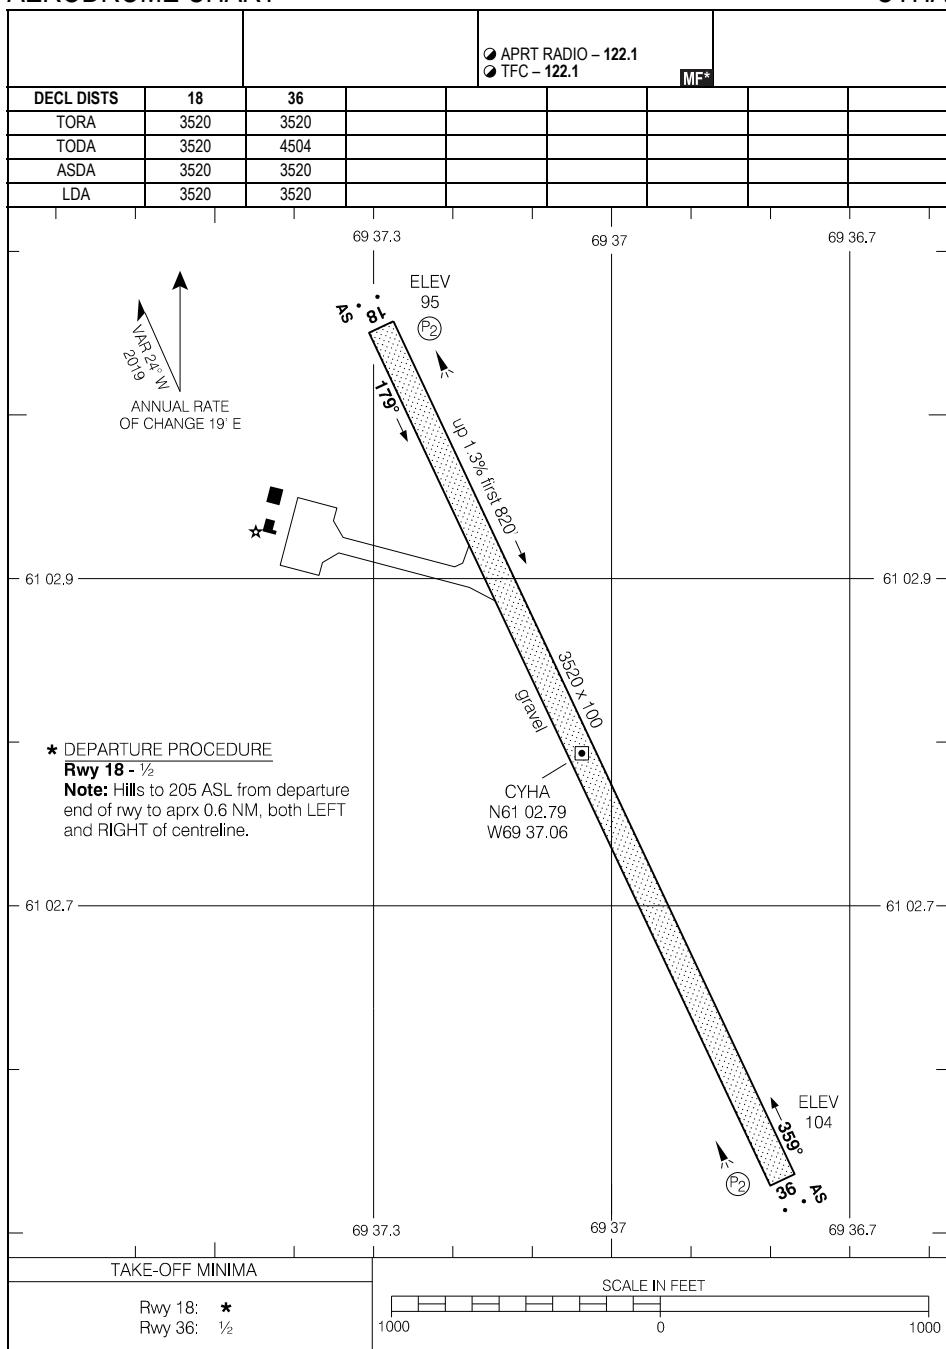

AERODROME CHART

EFF 14 JUL 22


CYHA

CYHA-AD

CYHA-AD

QUAQTAQ, QC
CYHA

CARTE D'AÉRODROME

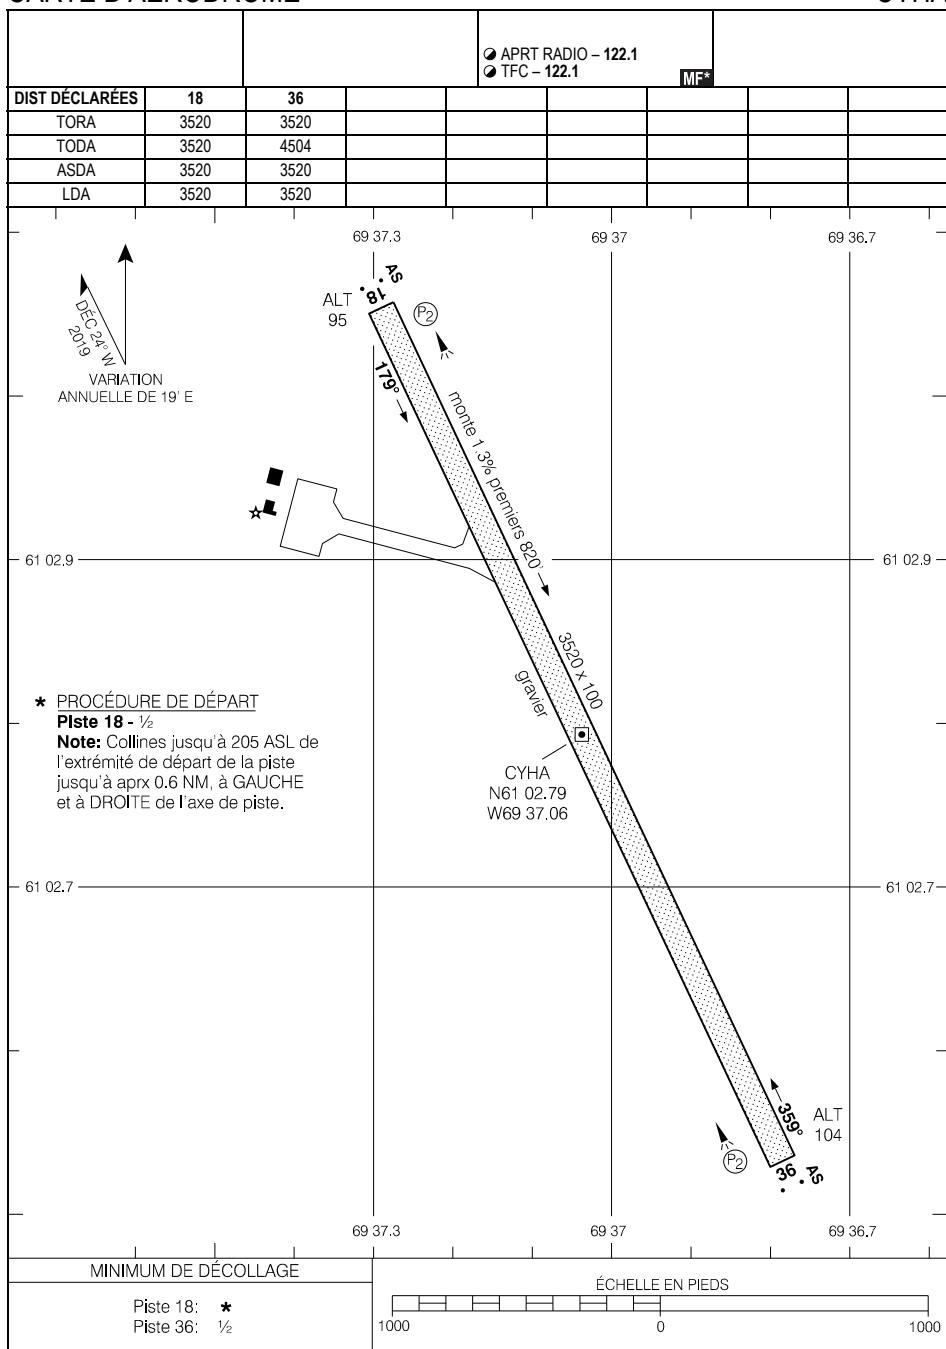

CARTE D'AÉRODROME

EFF 14 JUIL 22

CYHA

CYHA-AD


CYQB-AD

QUÉBEC/JEAN LESAGE INTL, QC
CYQB

CARTE D'AÉRODROME

ATIS - 128.3 (Fr) 134.6 (Ang)	GND - 121.9 250.0	TWR - 118.65 236.6	TML - 124.0 127.85 322.8 RADIO Québec - 123.27
-------------------------------	-------------------	--------------------	---

DIST DÉCLARÉES	06	24	11	29			
TORA	9000	9000	5700	5700			
TODA	9984	9984	5700	5700			
ASDA	9000	9000	5700	5700			
LDA	9000	9000	5700	5700			

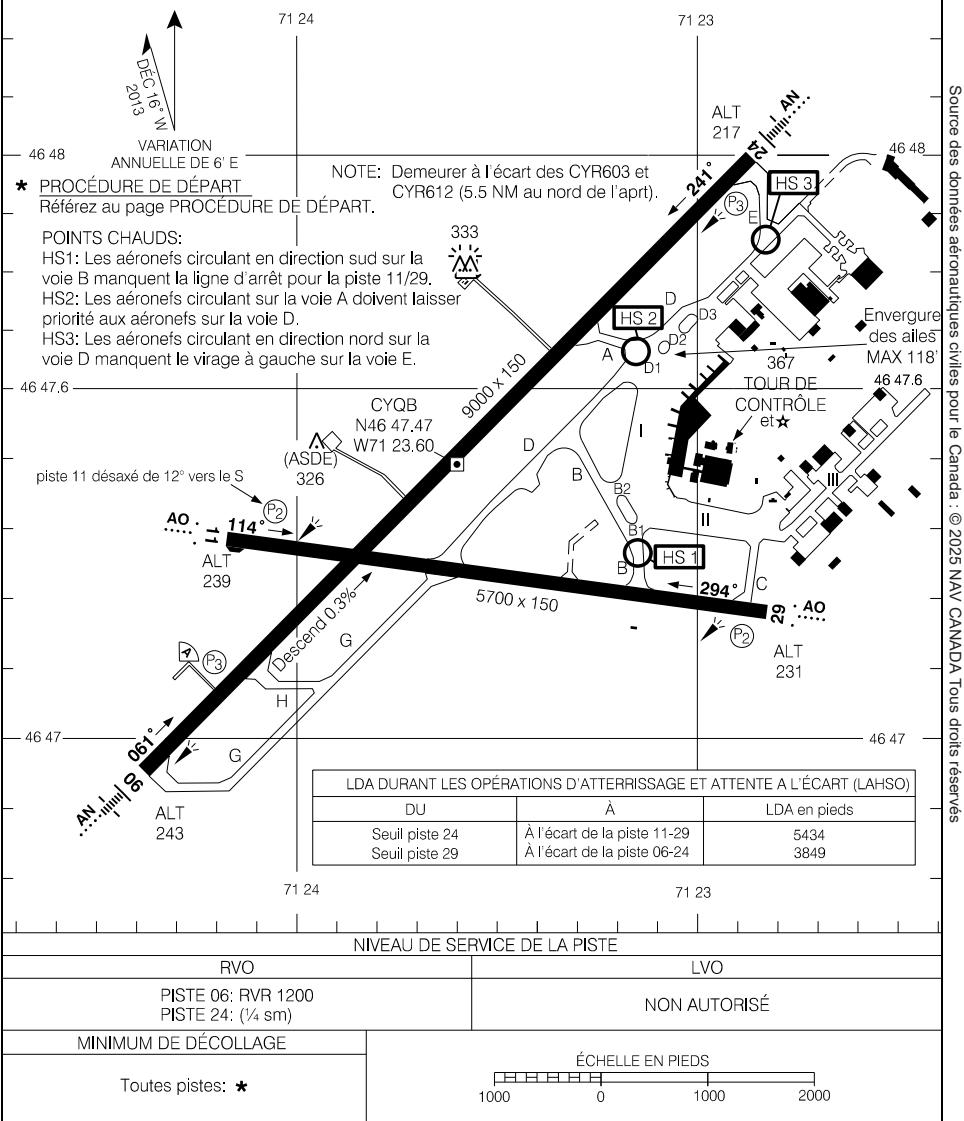

CARTE D'AÉRODROME

EFF 31 OCT 24

CYQB

CYQB-AD

REDUCED VISIBILITY PROCEDURES**Reduced Visibility Procedures (RVR less than 2600 to 1200 ft)****Reduced Visibility Operations - 24 hours**

Reduced Visibility Operations on runway 06-24: these are operations when reported visibility is less than RVR 2,600 feet or $\frac{1}{2}$ statute mile and greater than or equal to RVR 1,200 feet or $\frac{1}{4}$ statute mile, per advisory circular CI 302-001.

Low visibility operations (LVOP) (below RVR 1200') are not permitted.

Departures & Arrivals**Follow-me car**

A "Follow-me" car will be available at all times, under any circumstances, upon a pilot's request. This service is available for one aircraft at a time based on first come, first served principles; some exceptions may apply.

During RVOP conditions, run-ups and towing will not be authorized on the maneuvering areas. Furthermore, vehicle access to the maneuver area during reduced visibility operations is restricted to essential operational functions only.

Night Only: When reported visibility is less than RVR 1800 or 3/8 SM, a "Follow-me" car is mandatory per advisory circular AC 302-004.

Operation Terms

20 minutes prior to a flight's departure time, the pilot shall contact NAV CANADA's ground controller to request a "Follow-me" car escort for taxiing on the manoeuvring area.

The pilot shall provide the following information:

- Exact position on the airfield (gate or FBO);
- Type of aircraft and airline;
- Flight departure time (if available);
- Runway used for take-off;

The "Follow-me" car will position itself 30m in front of the aircraft. Hazard lights will be activated when ready for taxiing and for the duration of the escort procedure.

Upon receiving authorization to proceed, the "Follow-me" car will follow the guide lines at no more than 30kph (16 knots) up to the desired destination.

Runway Level of Service

Rwy 06	RVR 1200
Rwy 24	($\frac{1}{4}$ sm)

REDUCED VISIBILITY PROCEDURES

EFF 10 SEP 20

CYQB

Procédure d'opérations avec une visibilité réduite (RVR en-dessous de 2600 jusqu'à 1200 pieds)

Opérations visibilité réduite 24 heures

Les opérations effectuées sur la piste 06-24 : lorsque la visibilité signalée est inférieure à un RVR 2600 ou $\frac{1}{2}$ mille terrestre, mais supérieure ou égale à une RVR 1200 ou $\frac{1}{4}$ mille terrestre, est en conformité avec le circulaire CI 302-001.

Les opérations par faible visibilité (LVOP) (en bas de RVR 1200') ne sont pas permises.

Départs & Arrivées

Véhicule « Follow-me »

Un véhicule « Follow-me » sera disponible en tout temps, pour toutes circonstances, à la demande des pilotes. Ce service s'applique pour un vol à la fois, sur une base de premier arrivé, premier servi, sauf exception.

Lors d'opérations RVOP, aucun remorquage ni essai moteur n'est permis sur les aires de manœuvre. De plus, l'accès par véhicule à l'aire de manœuvre lors de conditions de visibilité réduite sera restreint aux fonctions essentielles aux opérations seulement.

Nuit seulement : Lorsque la visibilité signalée est inférieure à une RVR 1800 ou 3/8 SM, un véhicule « Follow-me » est obligatoire en conformité avec le circulaire CI 302-004.

Conditions d'exploitation

20 minutes avant l'heure de départ ou à l'arrivée du vol, le pilote place une demande pour l'assistance d'un véhicule d'escorte « Follow-me » afin de circuler sur les aires de manœuvre en communiquant avec le contrôleur sol de NAV CANADA.

Le pilote doit fournir les informations suivantes:

- La position exacte sur le site (numéro de barrière ou FBO);
- Le type d'appareil et la compagnie aérienne;
- L'heure de départ du vol (si applicable);
- La destination sur le site (seuil de piste, numéro de barrière ou FBO);

Le véhicule « Follow-me » se présentera devant l'appareil à une distance de 30m et les feux de détresse (Hazard) seront activés afin de démontrer qu'il est prêt à circuler, et ce, pour toute la durée de l'escorte;

Après autorisation de circuler, le véhicule « Follow-me » suivra les lignes guides à une vitesse de 30 kph (16 noeuds) jusqu'à la destination demandée.


Niveau de service de la piste

Piste 06	RVR 1200
Piste 24	($\frac{1}{4}$ sm)

CYQB-APD

QUÉBEC/JEAN LESAGE INTL, QC
CYQB

PARKING AREAS

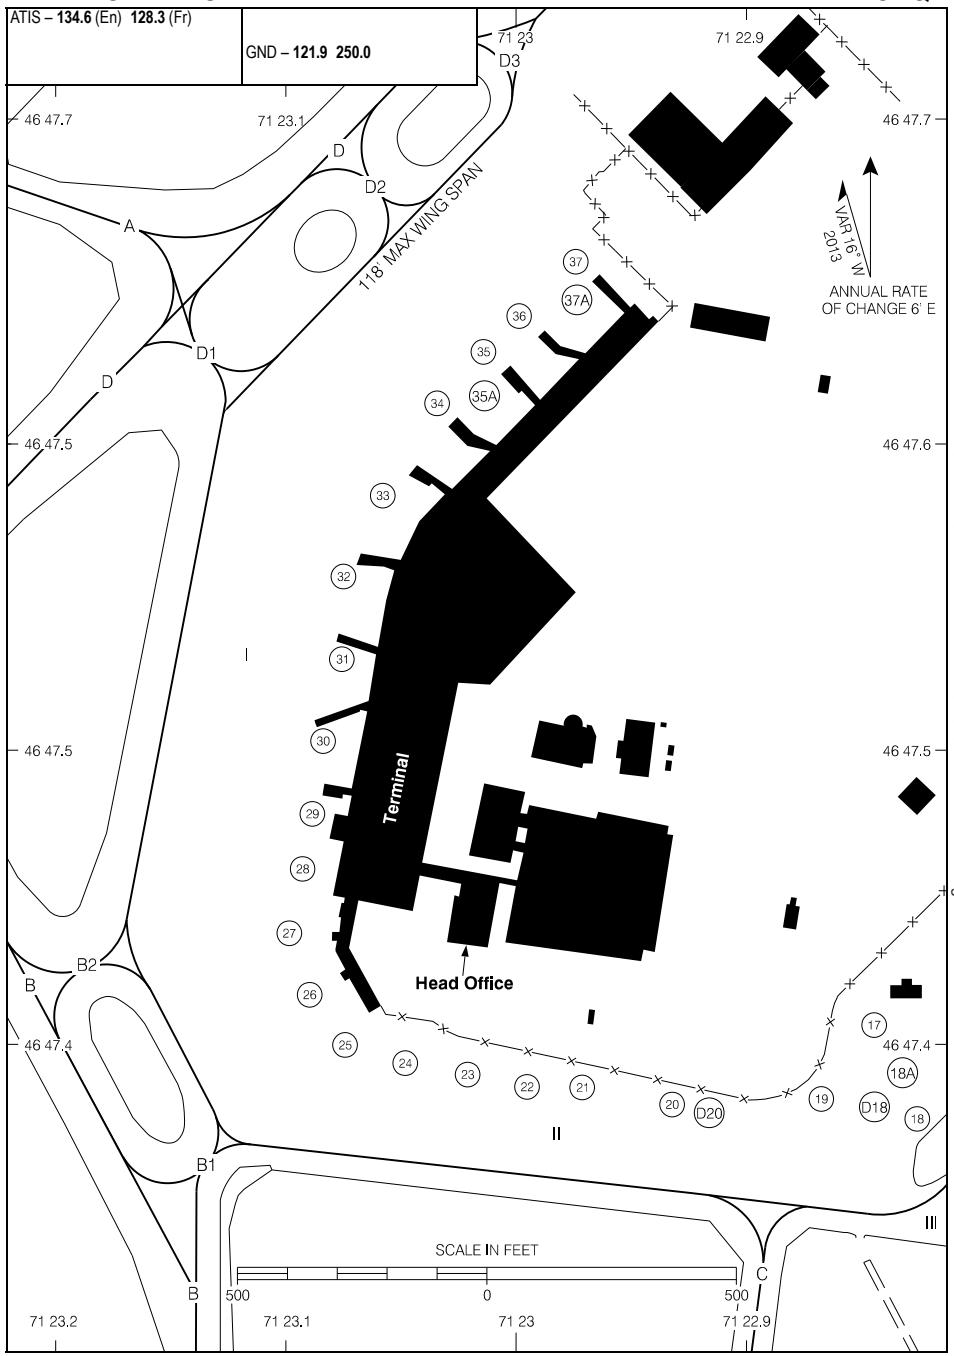

PARKING AREAS

EFF 27 JAN 22


CYQB

CYQB-APD

CYQB-APD

QUÉBEC/JEAN LESAGE INTL, QC
CYQB

AIRES DE STATIONNEMENT

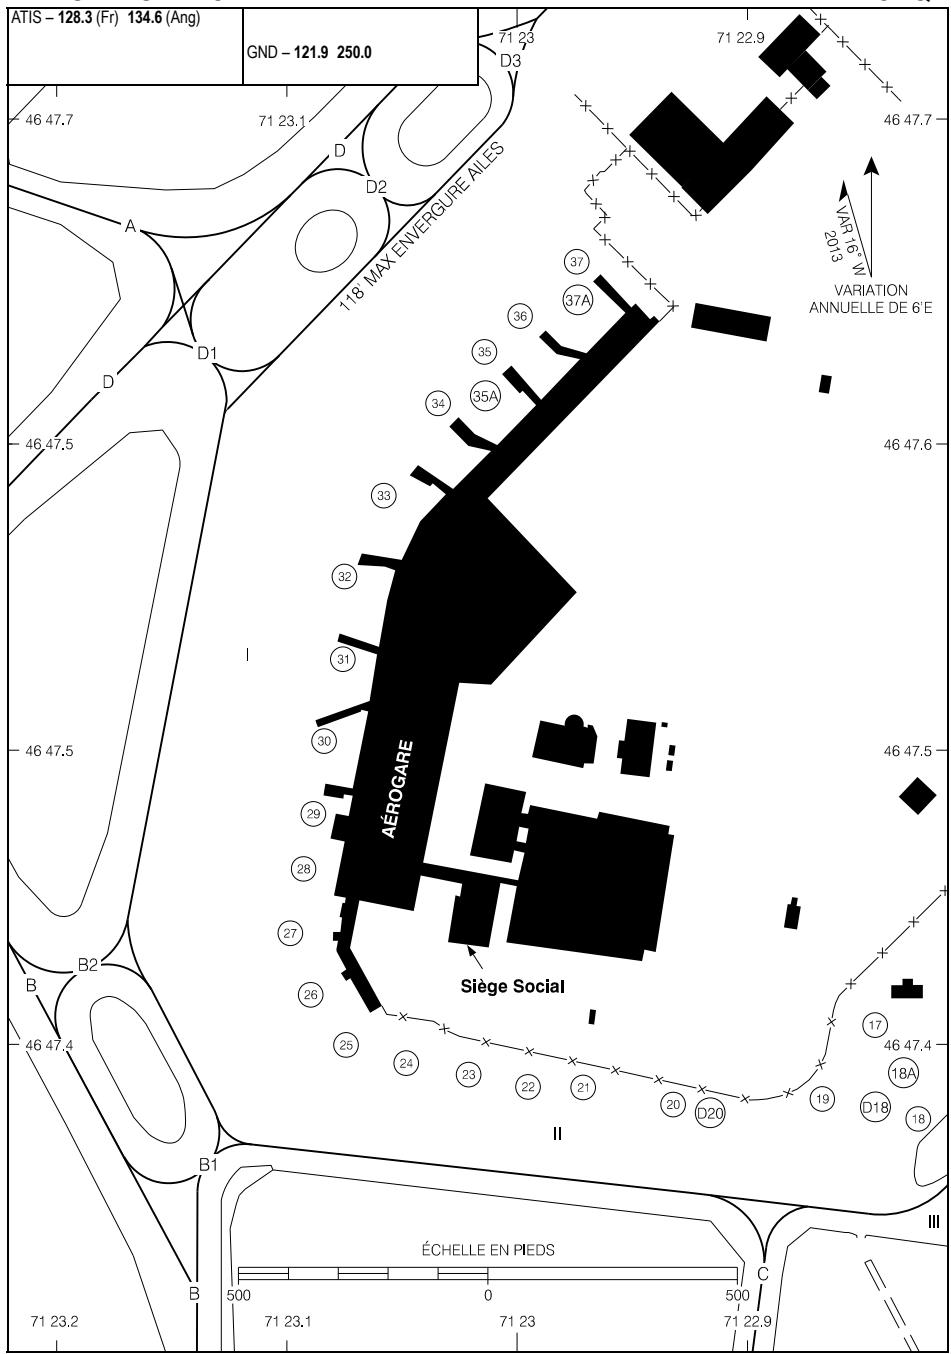


AIRES DE STATIONNEMENT

EFF 27 JAN 22

CYQB-APD

AERODROME CHART

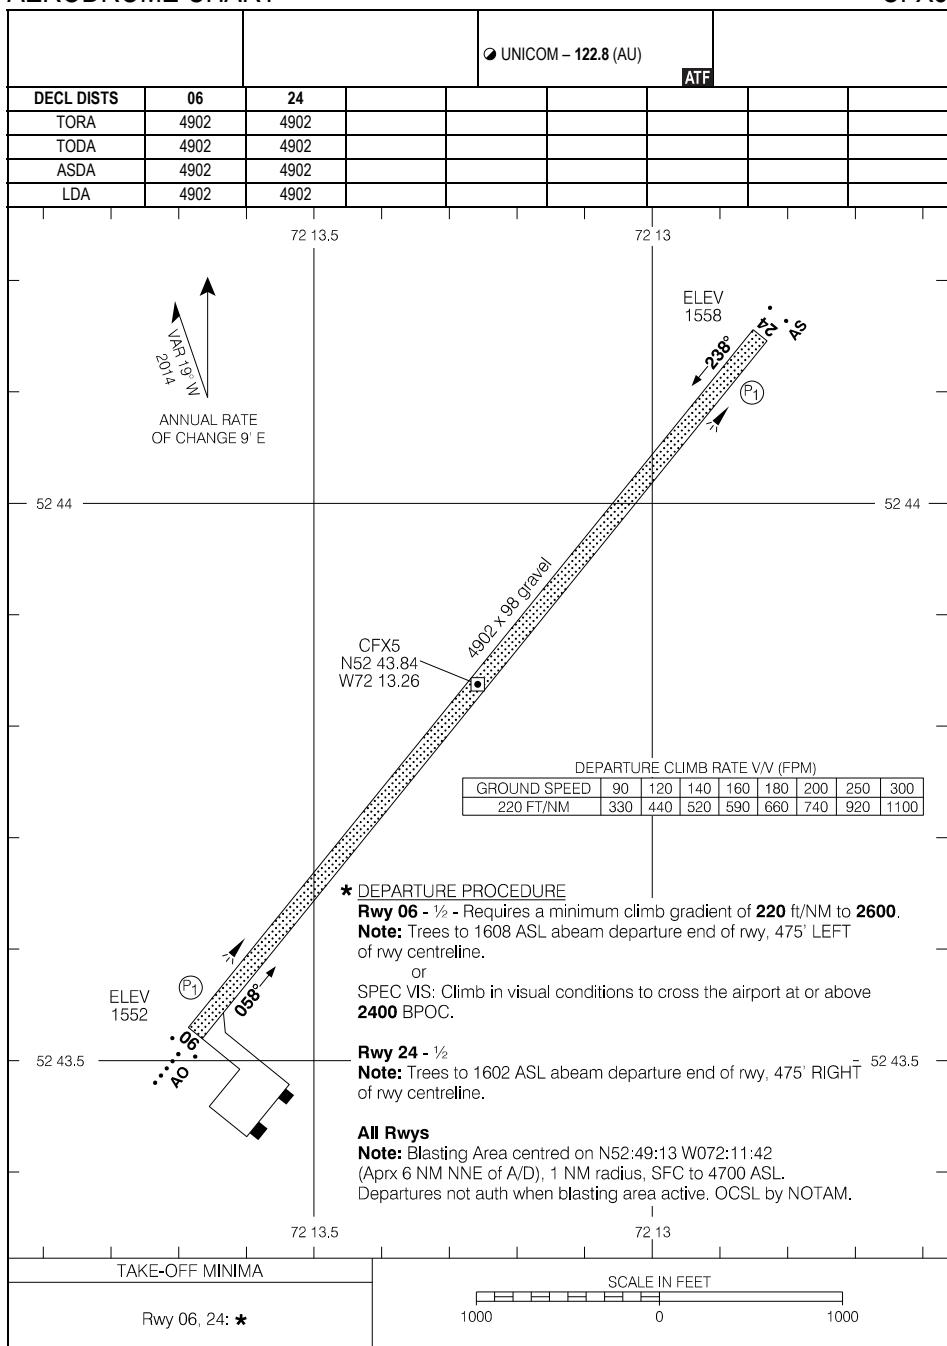


AERODROME CHART

EFF 8 SEP 22

CFX5


CARTE D'AÉRODROME

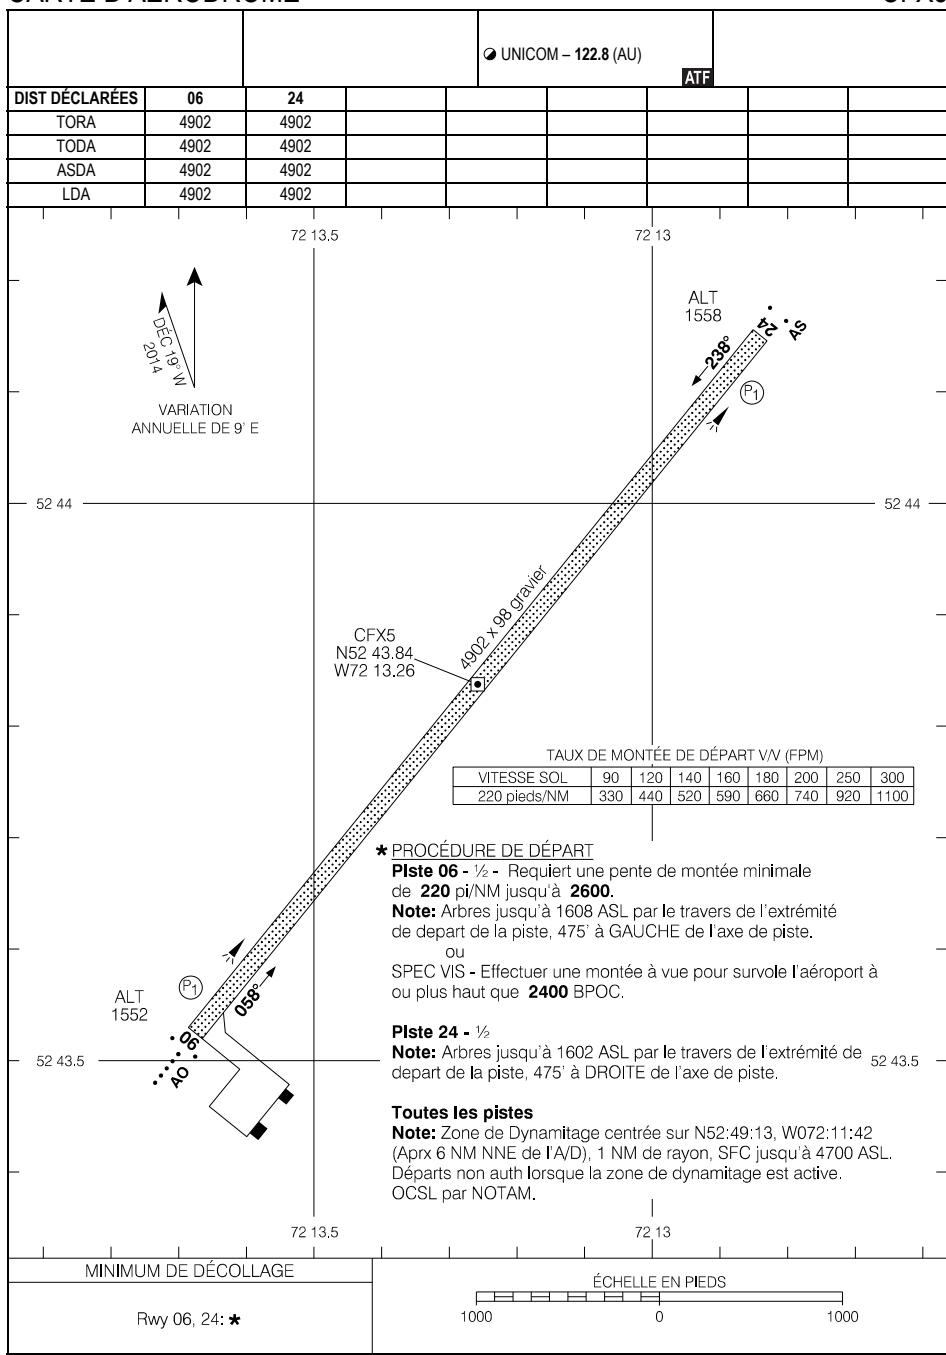

CYXK-AD

RIMOUSKI, QC
CYXK

AERODROME CHART

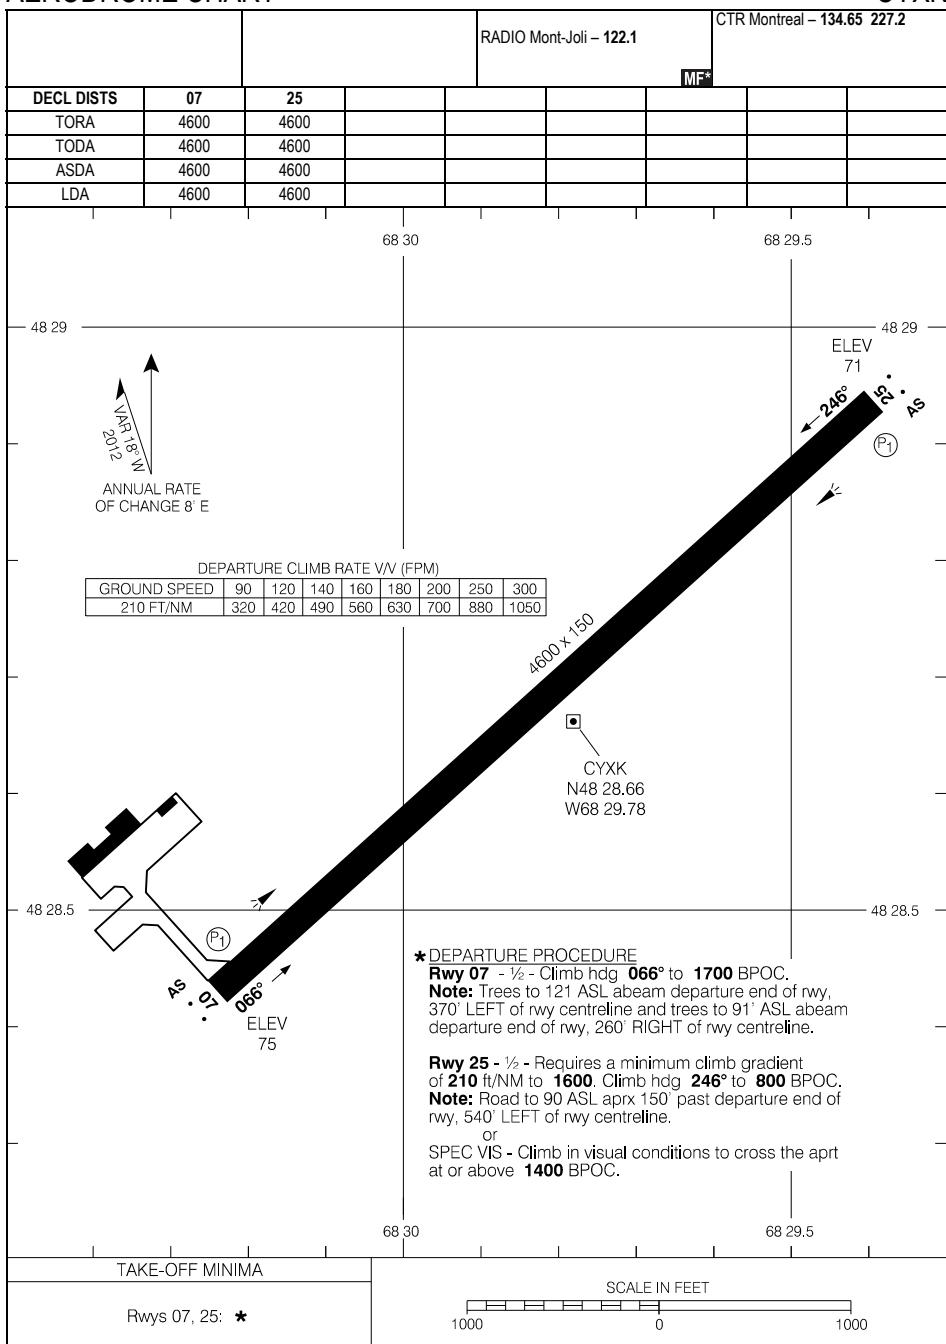

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART


EFF 7 AUG 25

CYXK

CYXK-AD

CYXK-AD

CARTE D'AÉRODROME

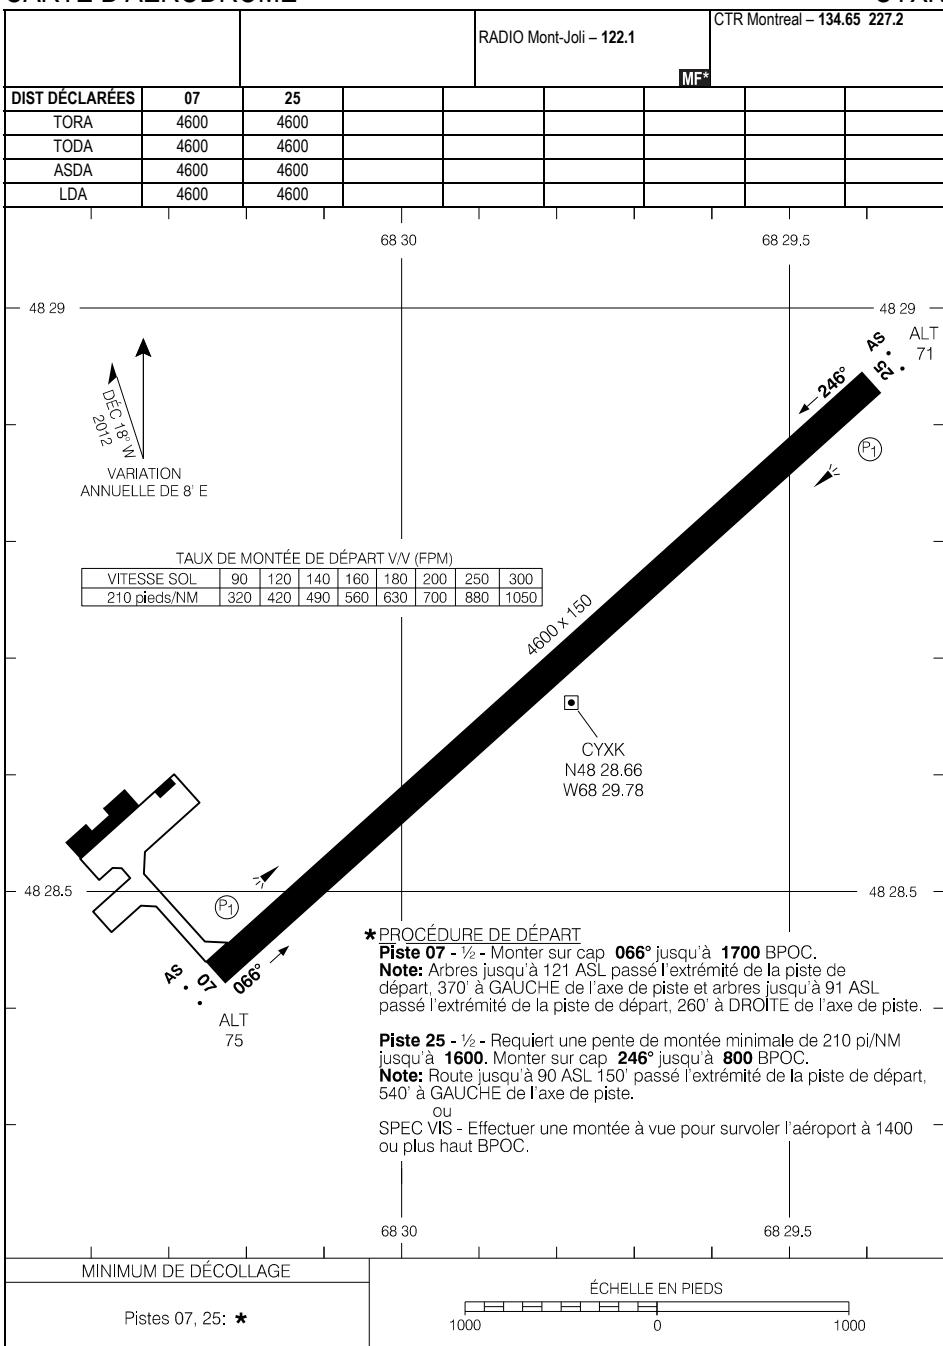RIMOUSKI, QC
CYXK

Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

CARTE D'AÉRODROME

EFF 7 AOÛT 25

CYXK


CYXK-AD

CYRI-AD

RIVIÈRE-DU-Loup, QC

CYRI

AERODROME CHART

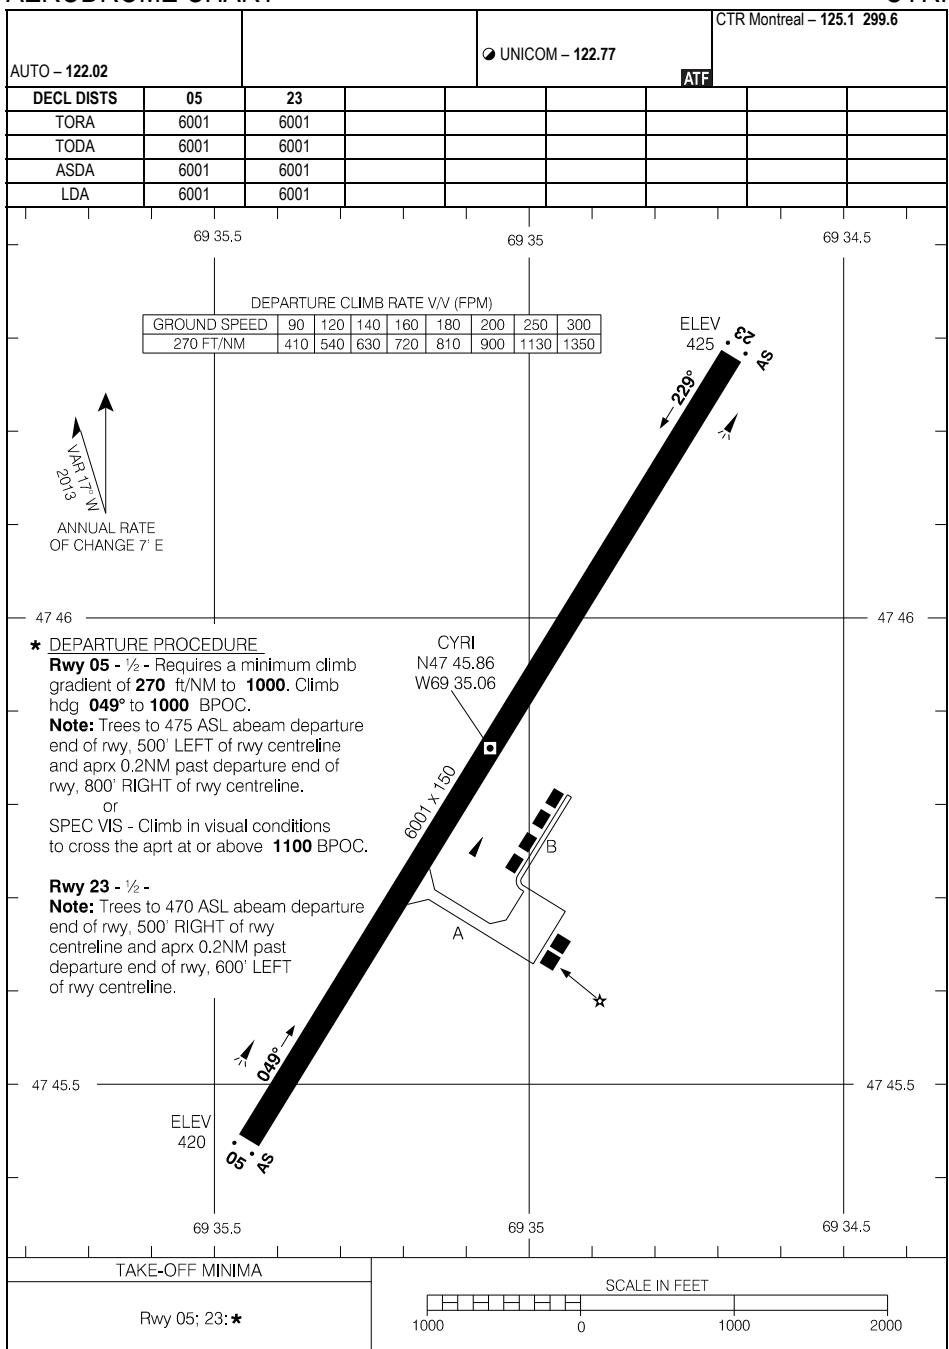


AERODROME CHART

EFF 11 JUL 24

CYRI

CYRI-AD

CARTE D'AÉRODROME

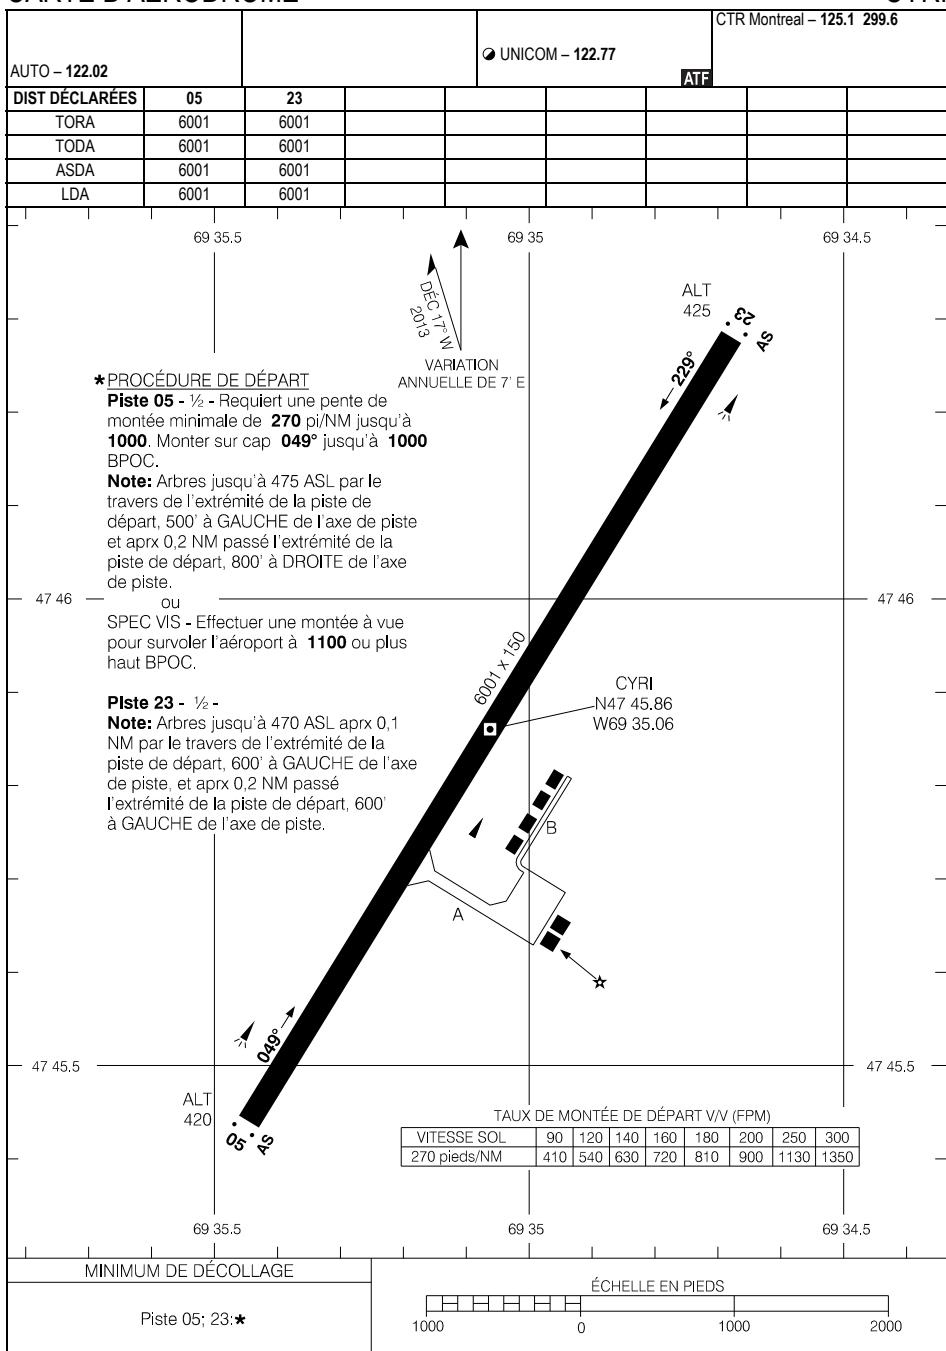

CARTE D'AÉRODROME


EFF 11 JUIL 24

CYRI

CYRJ-AD

ROBERVAL, QC
CYRJ

AERODROME CHART

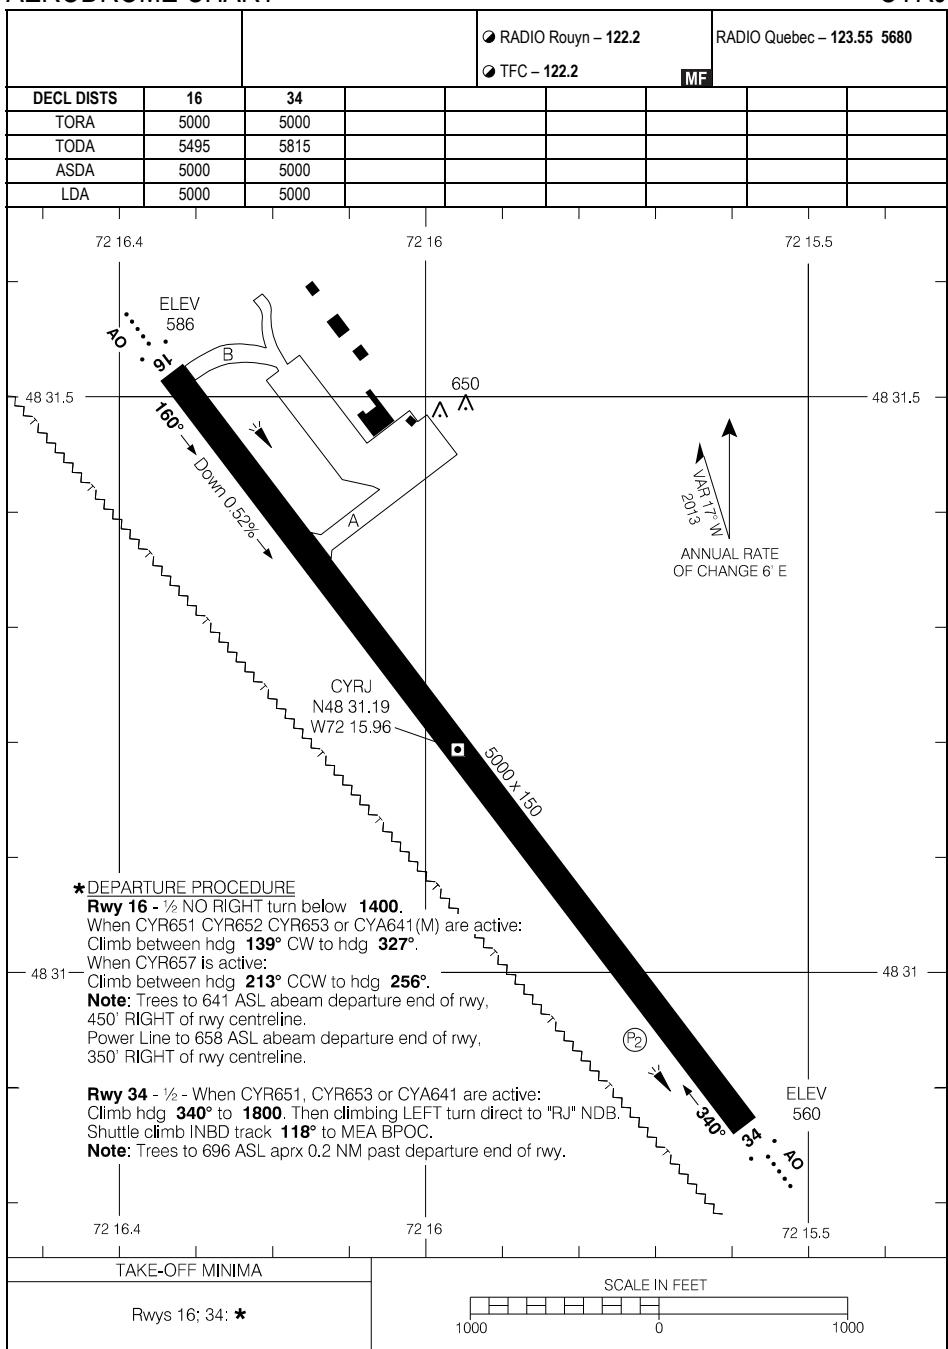


AERODROME CHART

EFF 26 DEC 24

CYRJ-AD

CYRJ

CARTE D'AÉRODROME

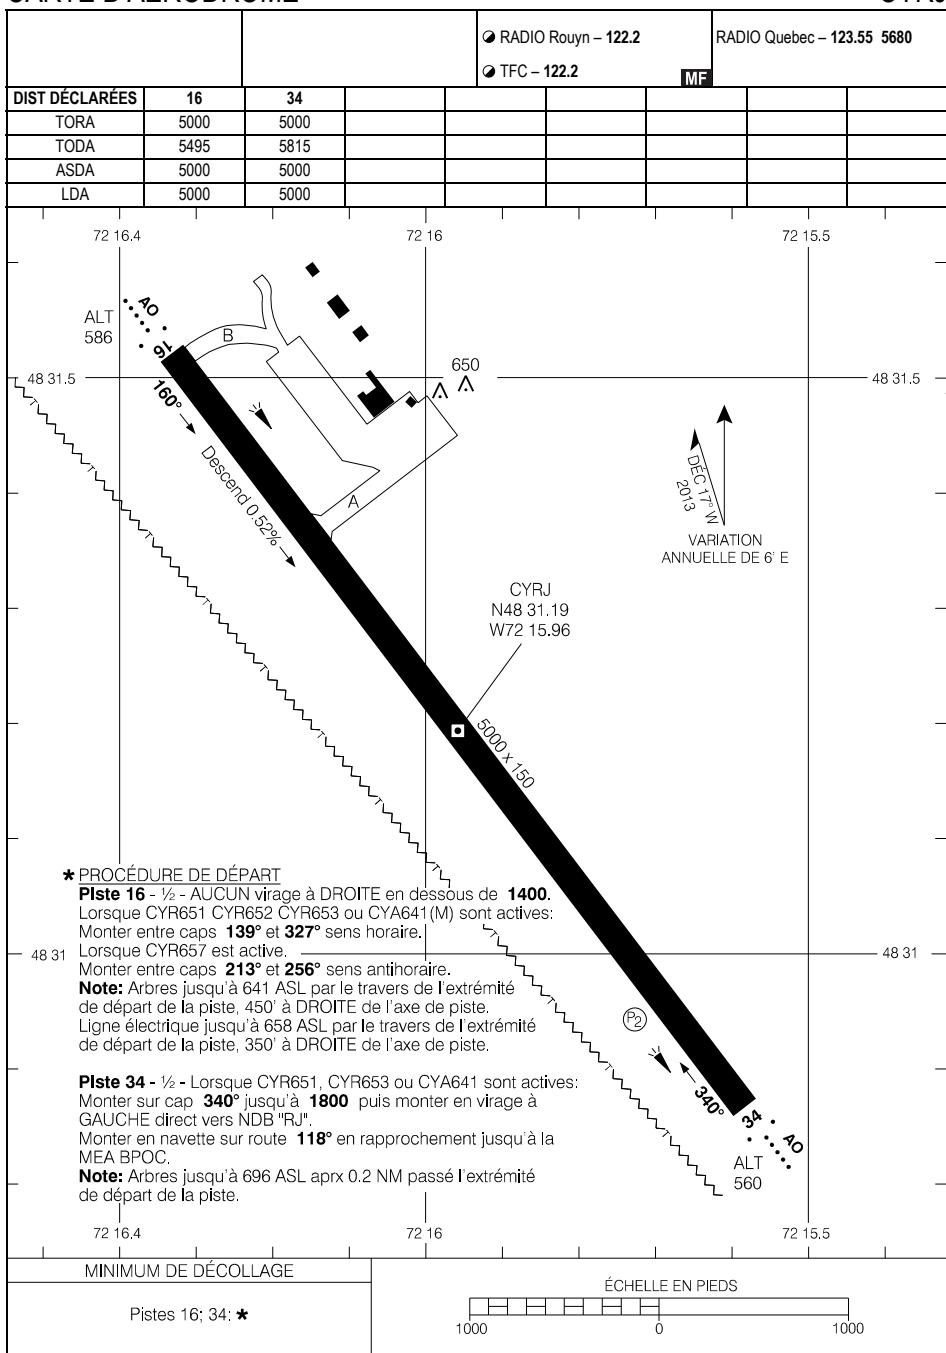

CARTE D'AÉRODROME


EFF 26 DÉC 24

CYRJ

CYUY-AD

ROUYN-NORANDA, QC
CYUY

AERODROME CHART

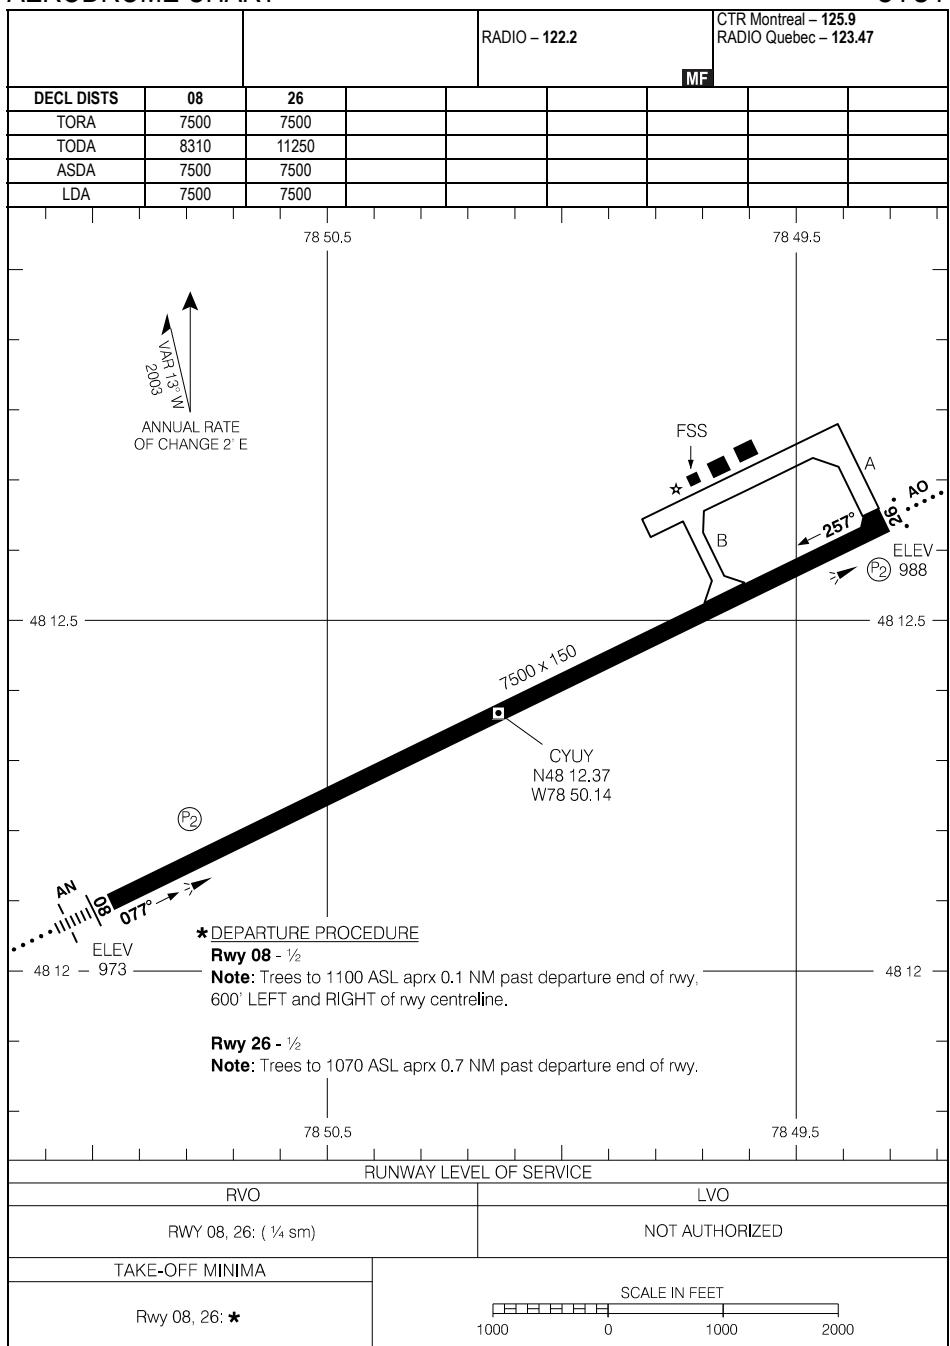

AERODROME CHART

EFF 1 FEB 18


CYUY-AD

CYUY

CYUY-AD

ROUYN-NORANDA, QC
CYUY

CARTE D'AÉRODROME

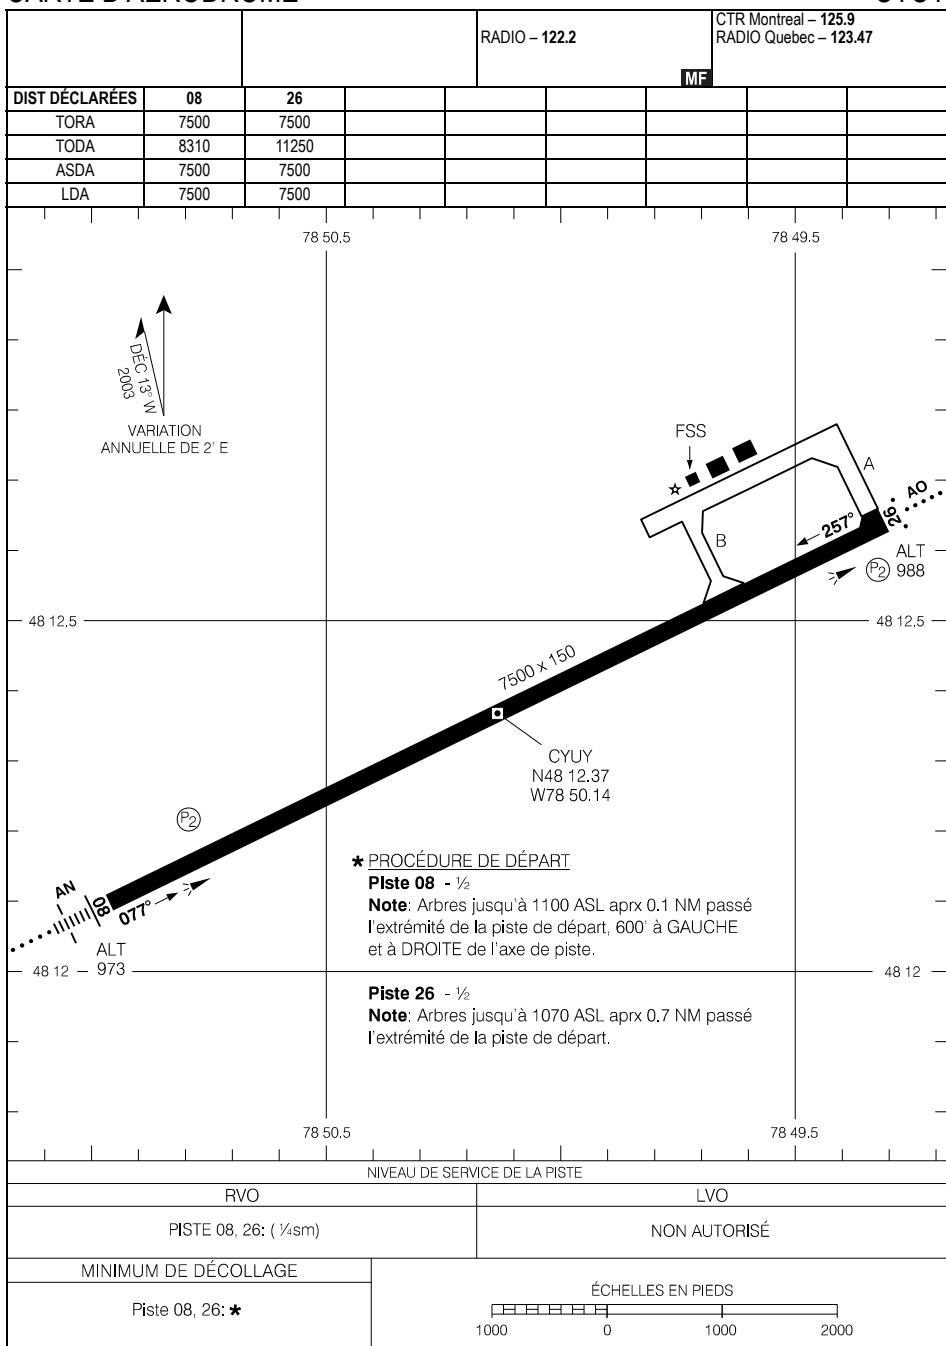

CARTE D'AÉRODROME

EFF 1 FÉV 18


CYUY

CYUY-AD

CSG9-HP

SAGARD, QC
CSG9

HELIPORT CHART

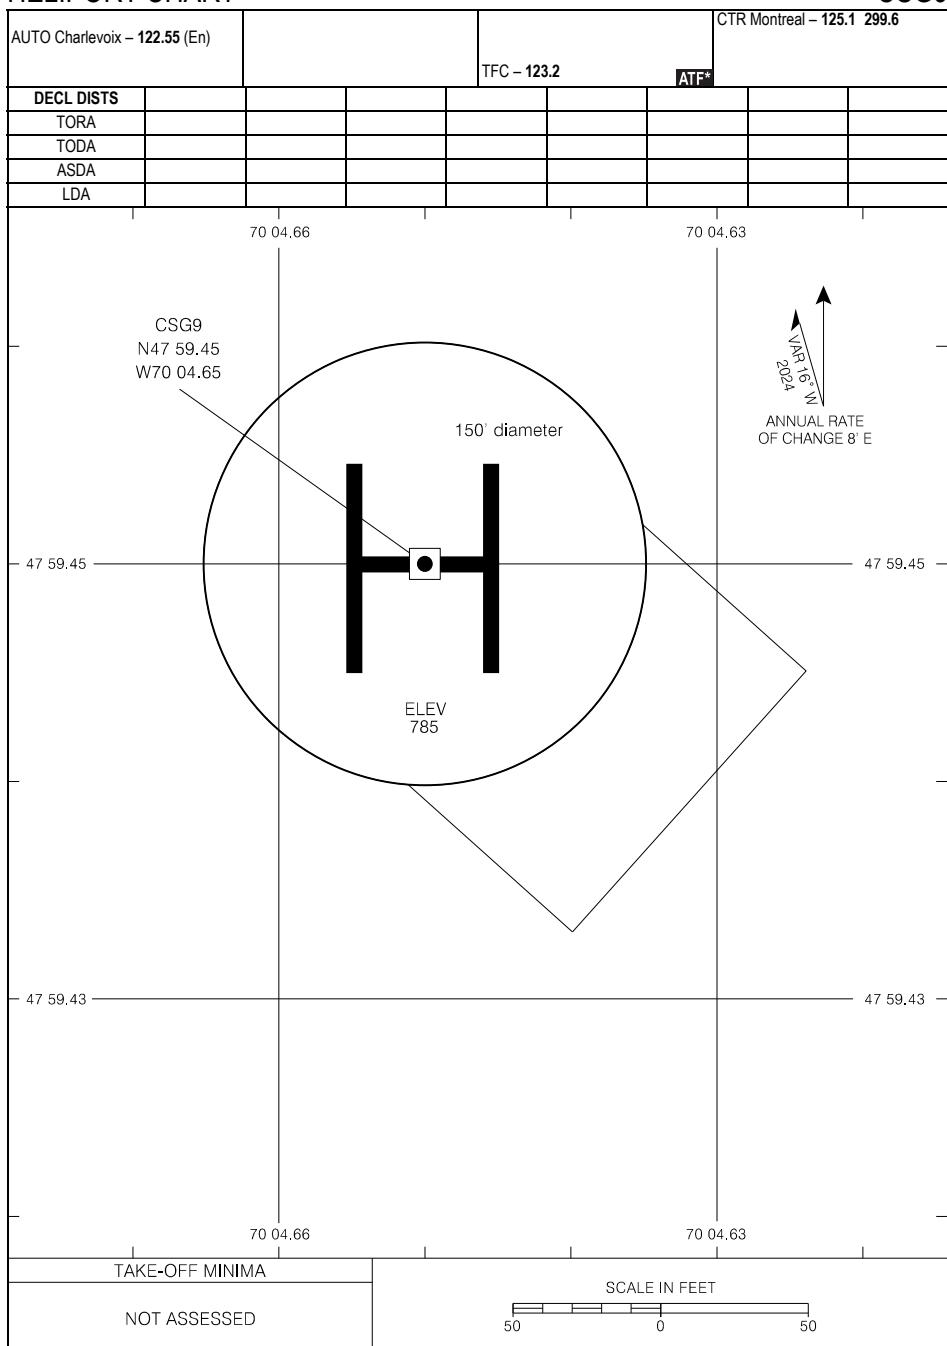

HELIPORT CHART

EFF 31 OCT 24


CSG9

CSG9-HP

CSG9-HP

SAGARD, QC
CSG9

CARTE D'HÉLIPORT

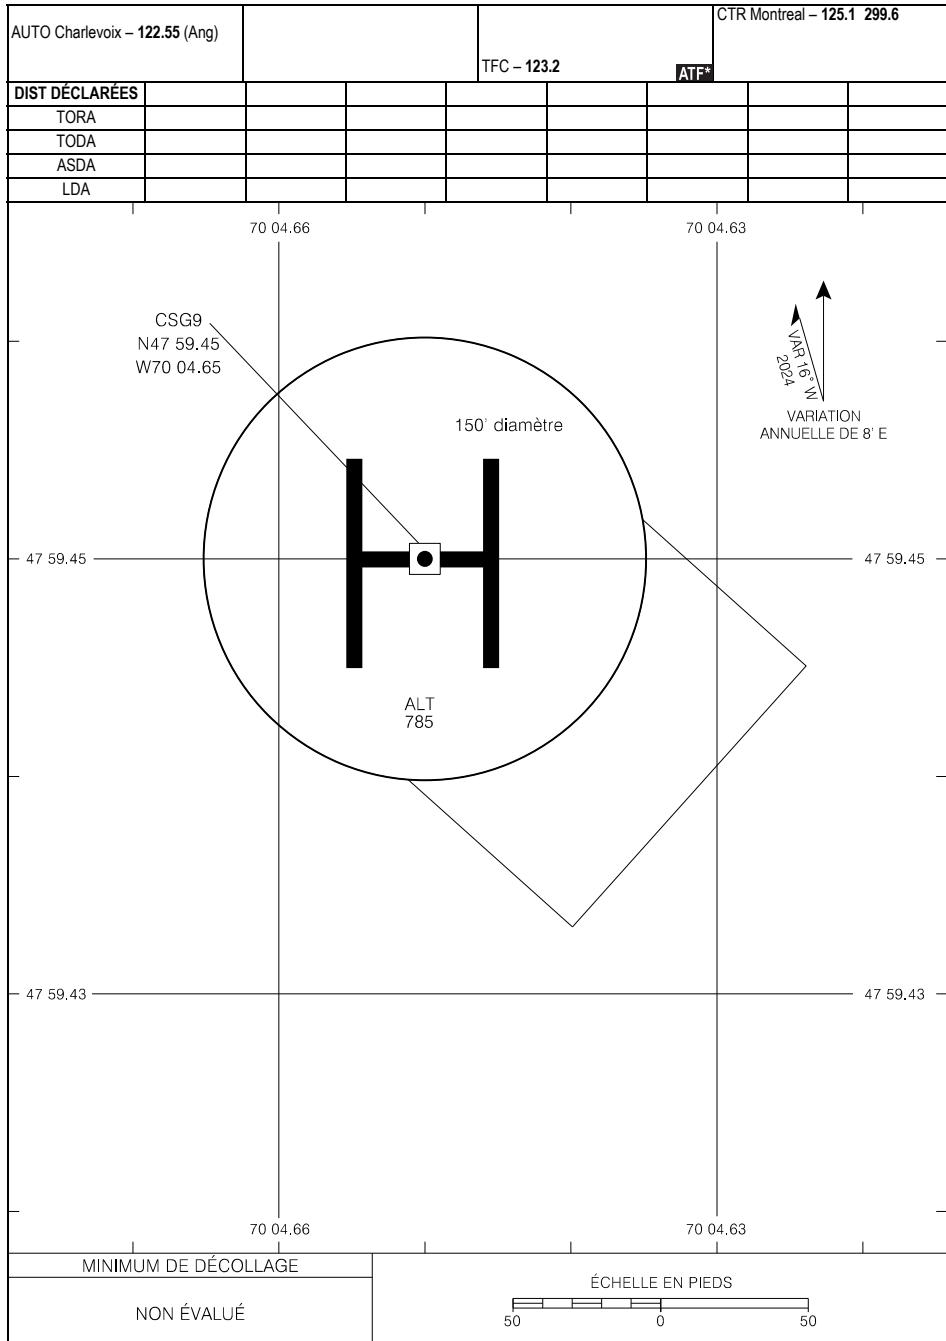

CARTE D'HÉLIPORT

EFF 31 OCT 24


CSG9

CSG9-HP

CYZG-AD

SALLUIT, QC
CYZG

AERODROME CHART

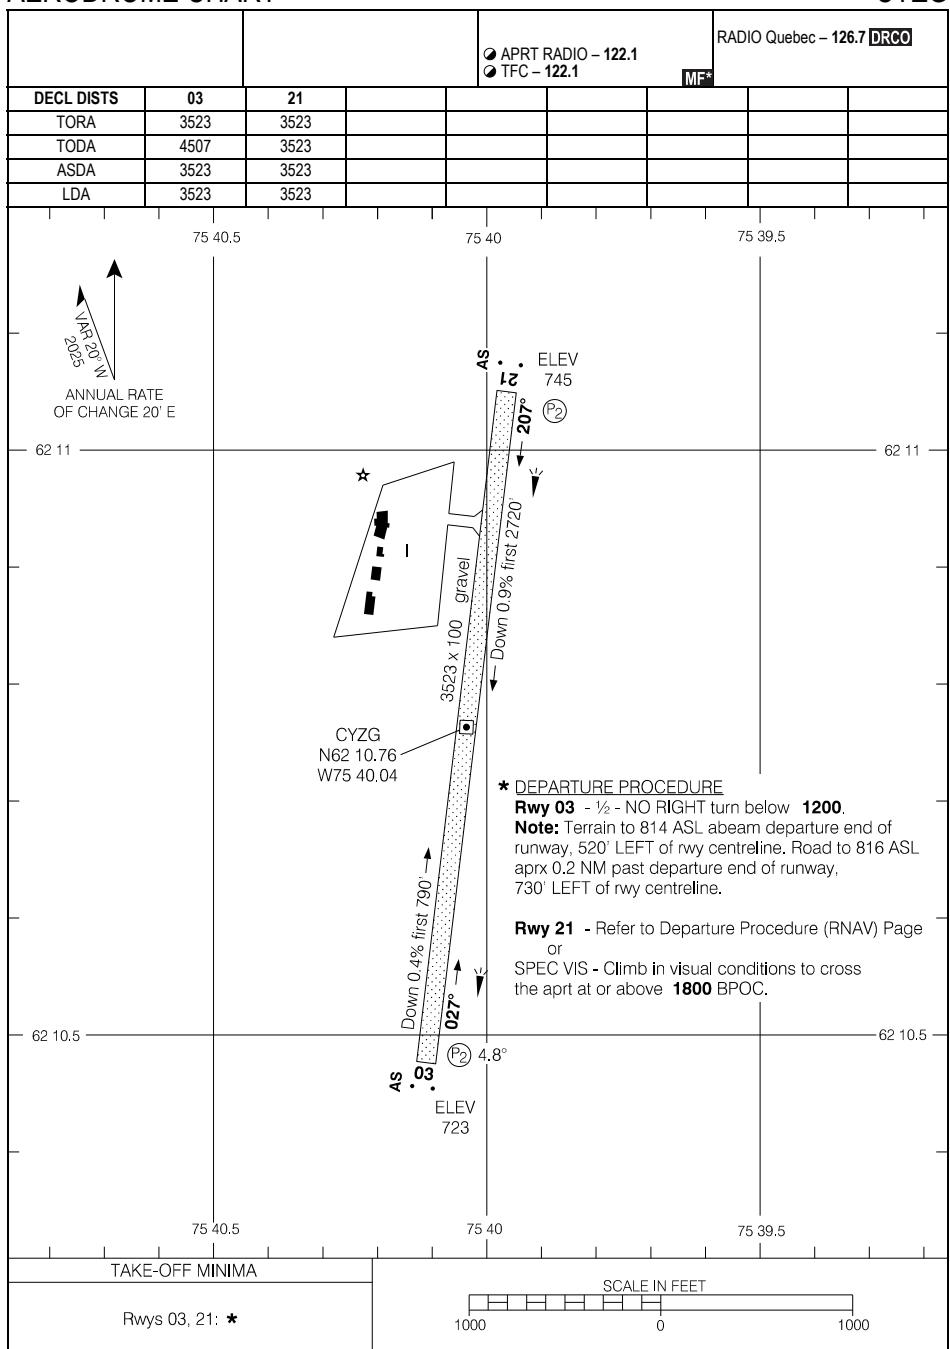

AERODROME CHART

EFF 20 FEB 25


CYZG-AD

CYZG

CYZG-AD

SALLUIT, QC
CYZG

CARTE D'AÉRODROME

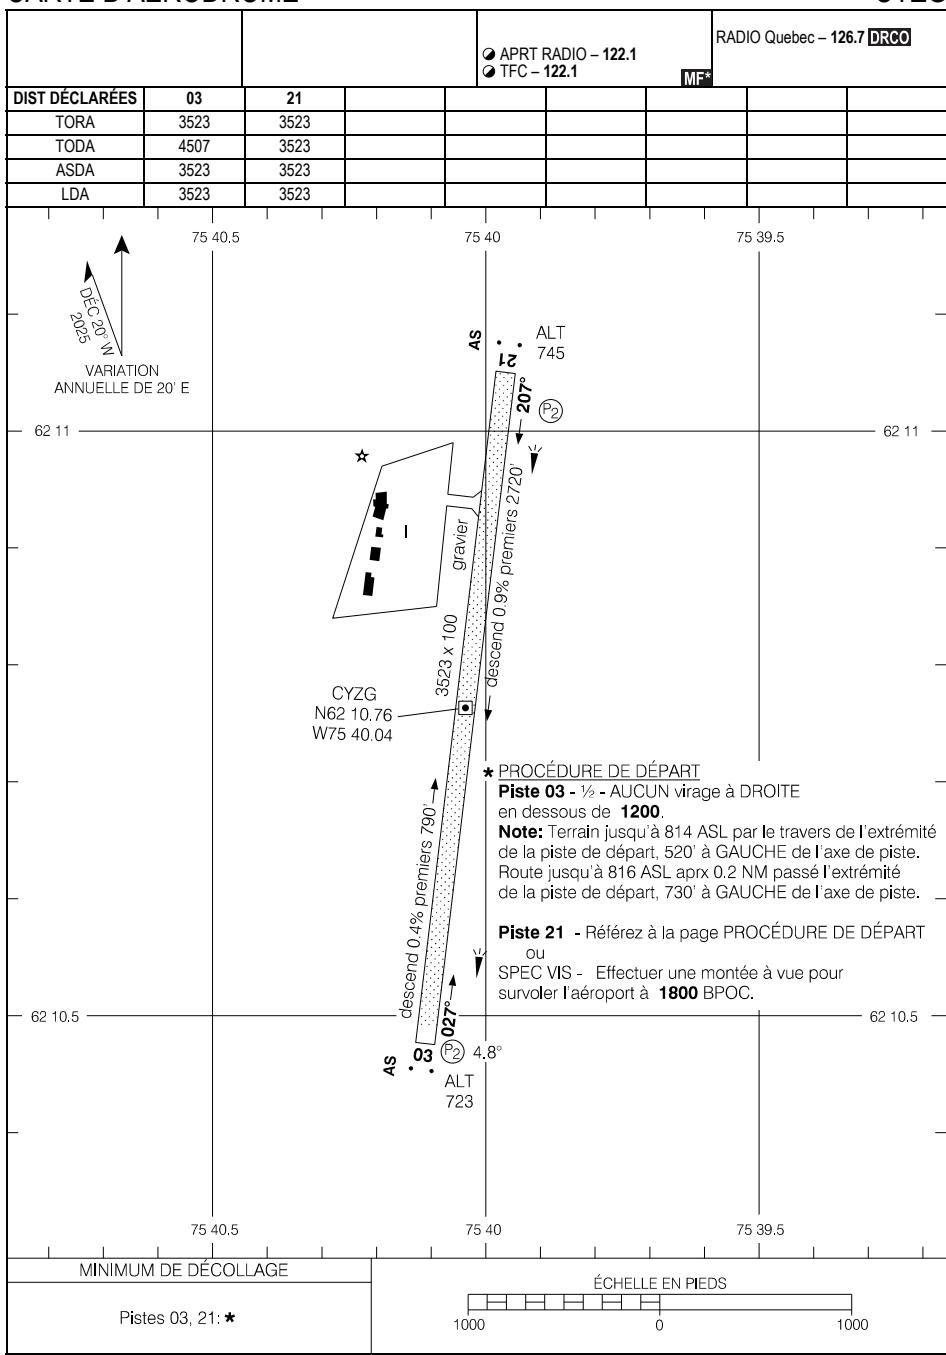

CARTE D'AÉRODROME

EFF 20 FÉV 25


CYZG

CYZG-AD

CYKL-AD

SCHEFFERVILLE, QC
CYKL

AERODROME CHART

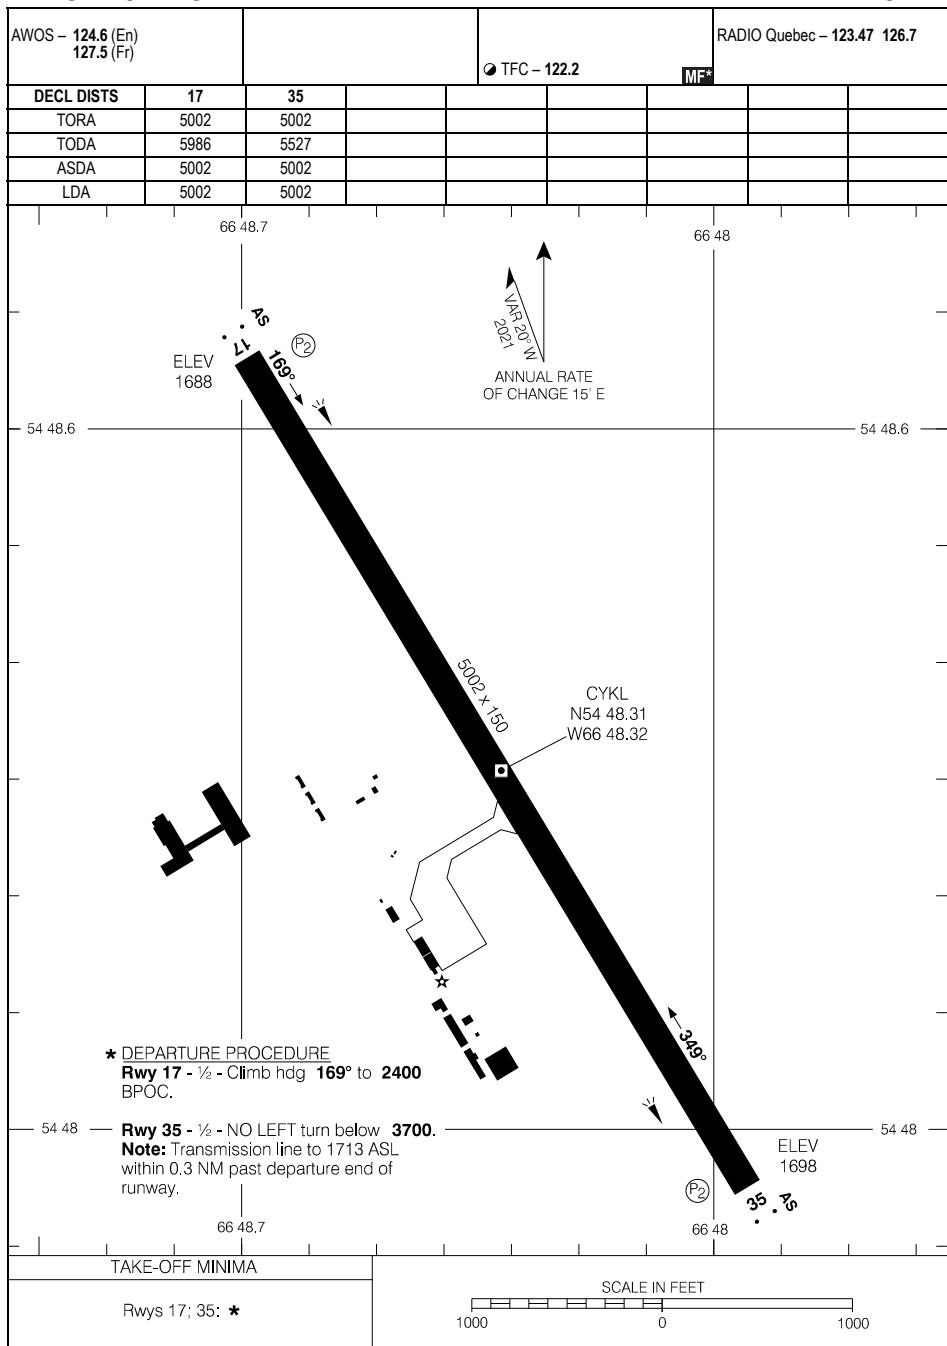

AERODROME CHART

EFF 27 JAN 22


CYKL-AD

CYKL

CYKL-AD

SCHEFFERVILLE, QC
CYKL

CARTE D'AÉRODROME

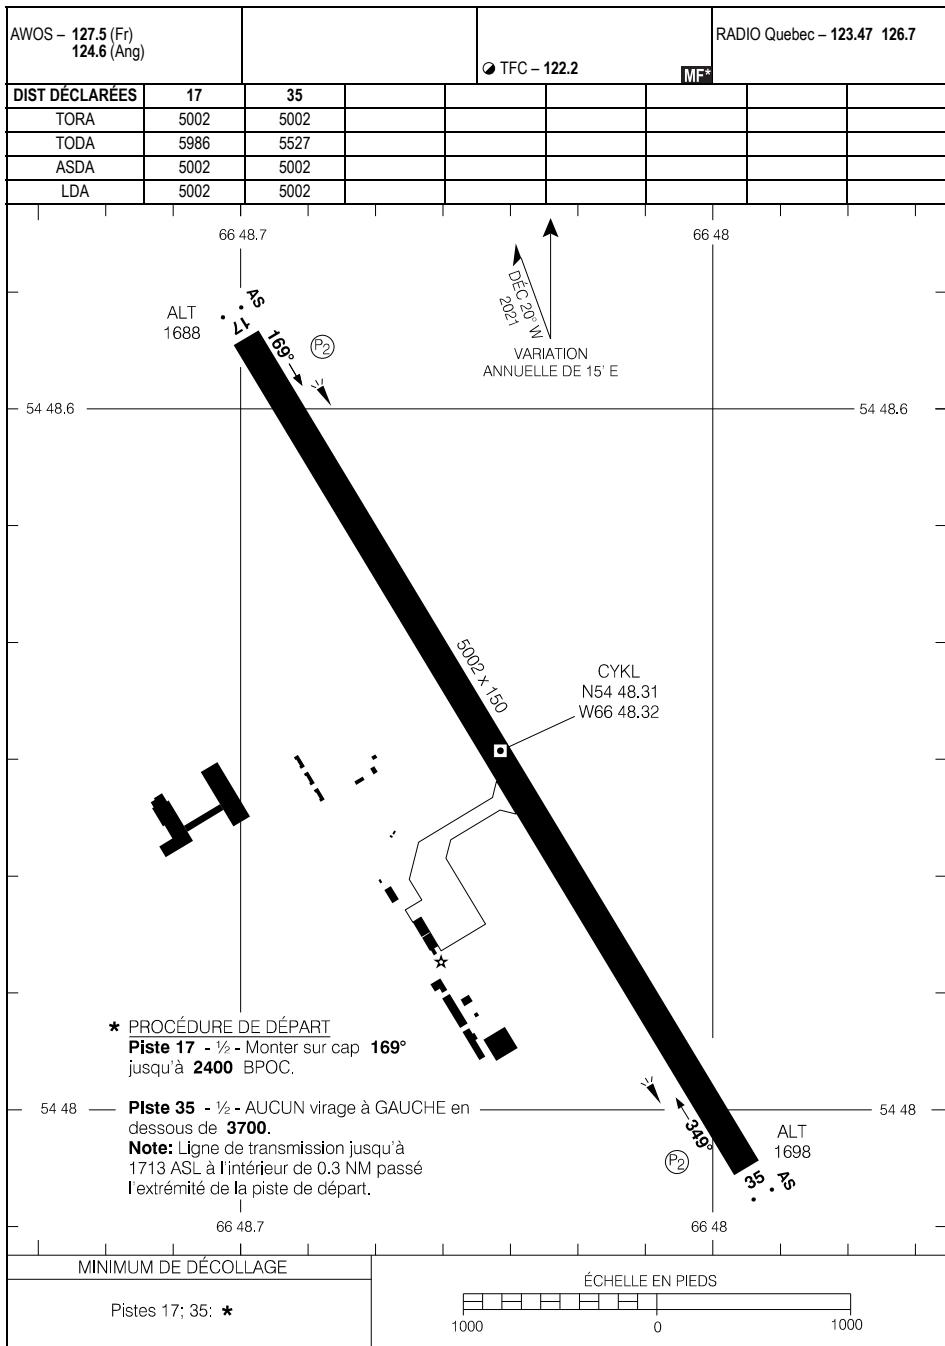

CARTE D'AÉRODROME

EFF 27 JAN 22


CYKL

CYKL-AD

CYZV-AD

SEPT-ÎLES, QC
CYZV

AERODROME CHART

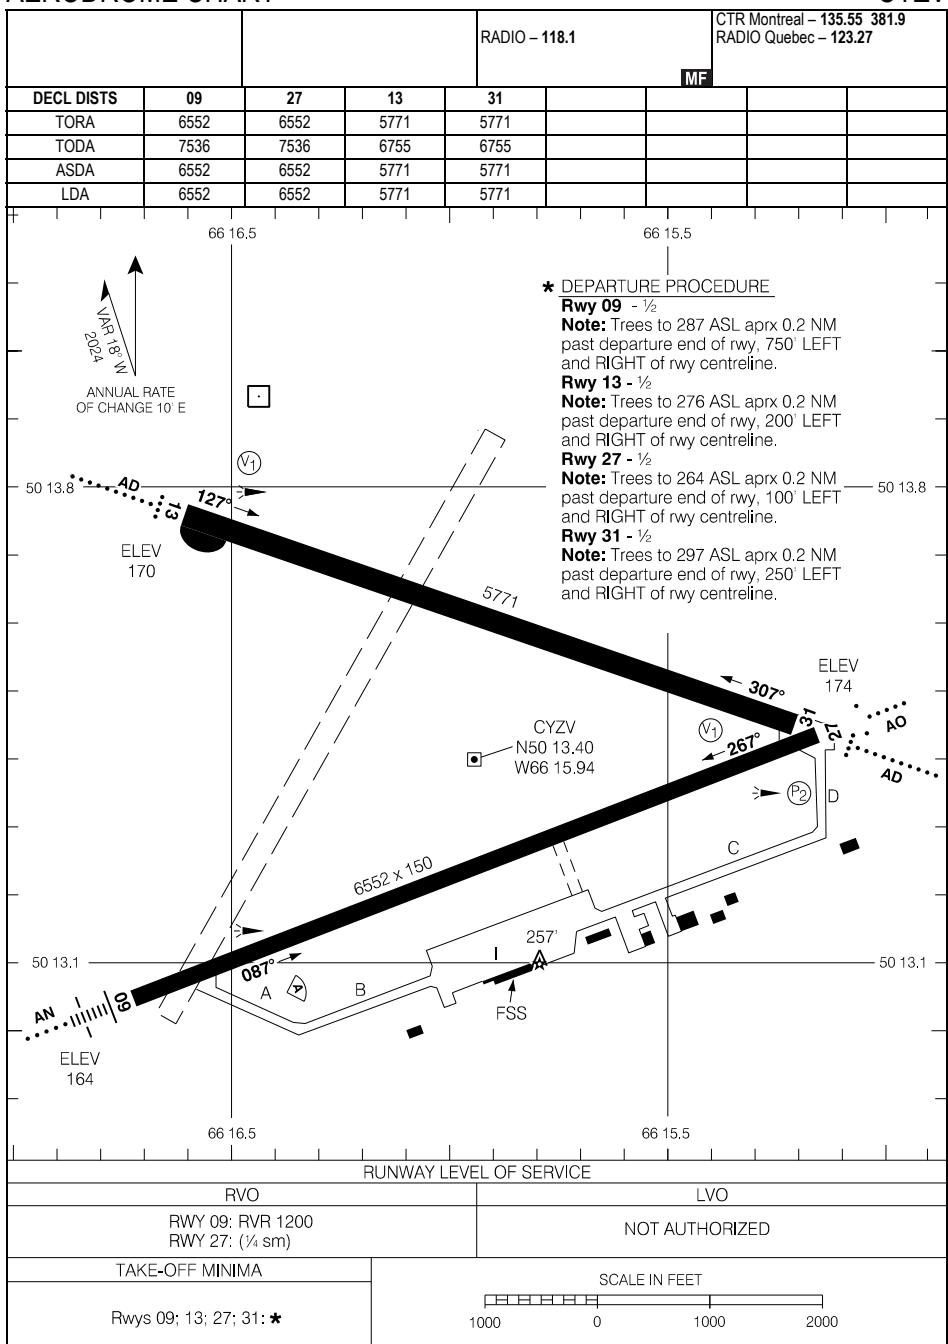

AERODROME CHART

EFF 26 DEC 24


CYZV-AD

CYZV

CYZV-AD

SEPT-ÎLES, QC
CYZV

CARTE D'AÉRODROME

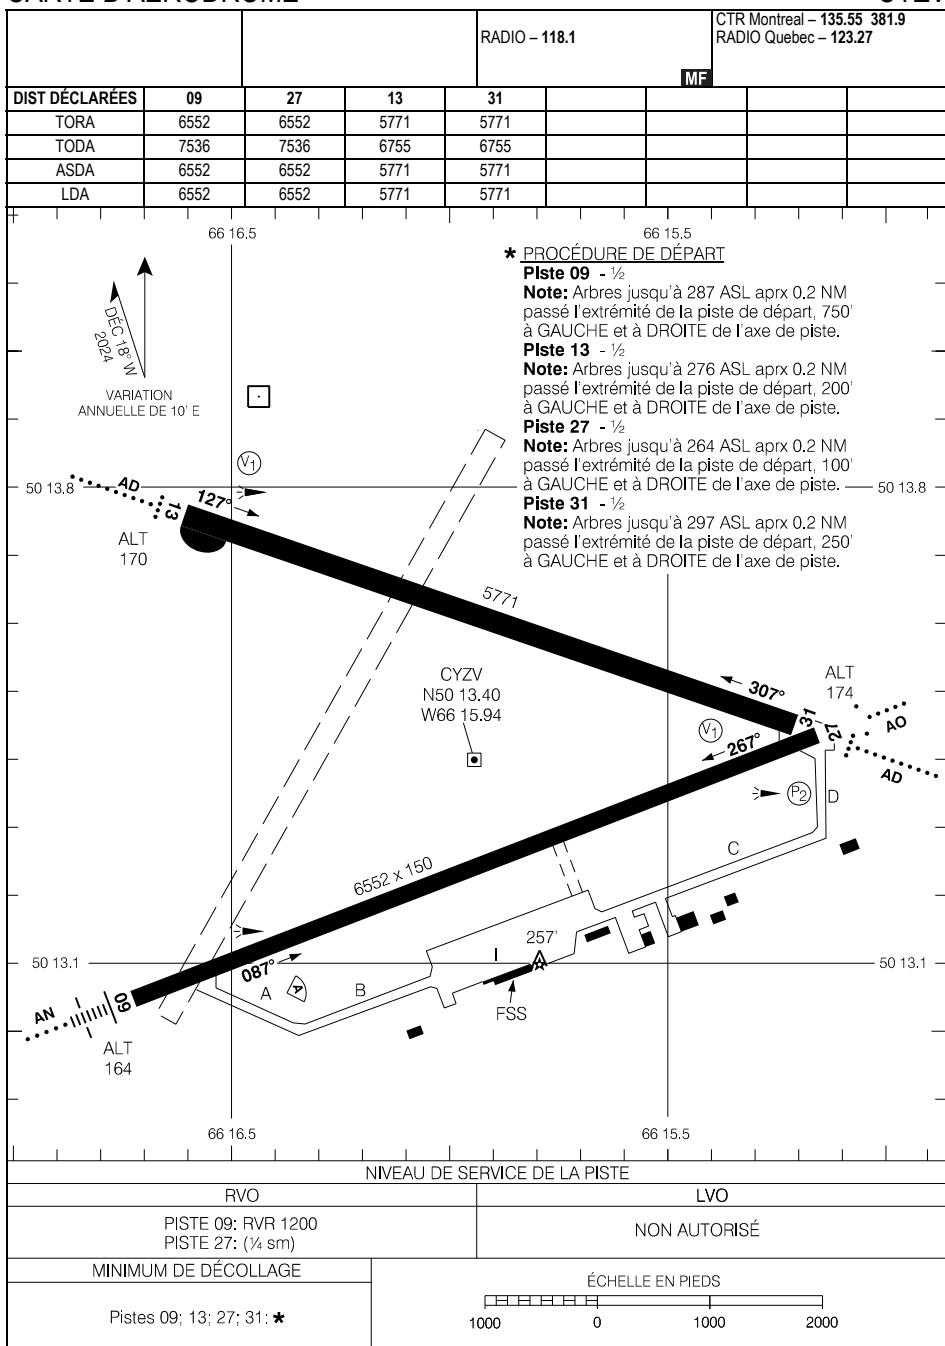

CARTE D'AÉRODROME

EFF 26 DÉC 24

CYZV

CYZV-AD

PARKING AREAS (PROCEDURES)

Parking spaces	Maximum wingspan (metres)	Maximum length (metres)	Restrictions	Largest aircraft allowed	Other aircraft allowed
RESERVED GATES					
1, 2, 3, 4	28.4	32.8	<ul style="list-style-type: none"> Nose southwest Mandatory pushback Screened passengers primarily at parking spaces 1, 2 and 3 Screened or unscreened passengers at parking space 4 If aircraft at parking space 2, then parking space 1B is closed 	DHC-8-Q400	DHC-8-300 Saab 340 B1900C B1900D
5	17.7	17.7	<ul style="list-style-type: none"> Nose southwest Mandatory pushback Screened or unscreened passengers 	B1900	B1900C B1900D
1A	35.8	39.5	<ul style="list-style-type: none"> Screened passengers only Arrival by twy A and B Mandatory pushback 	B737-800	All B737
1B	35.8	39.5	<ul style="list-style-type: none"> No aircraft allowed at aircraft parking space 2 Screened passengers only Arrival by twy C and D Mandatory pushback 	B737-800	All B737
EAST PARKING - General Aviation CTC OPR 418-962-8211					
6, 8	17.7	17.7	<ul style="list-style-type: none"> Nose to east or west with a preference facing west to facilitate pedestrian walking path 	B1900D	King Air B200 B1900C C550
7	27.5	25.7	<ul style="list-style-type: none"> Nose to east or west with a preference facing west to facilitate pedestrian walking path 	DHC-8-300	
9	27.5	25.7	<ul style="list-style-type: none"> Nose to east or west with a preference facing west to facilitate pedestrian walking path Priority for Medevac at parking space 	DHC-8-300	DHC-8-200 B1900D Challenger 605
10	17	18	<ul style="list-style-type: none"> Nose to east or west with a preference facing west to facilitate pedestrian walking path 	B1900C	King Air B200
12	17	18	<ul style="list-style-type: none"> Nose to west 	B1900C	King Air B200

PARKING AREAS (PROCEDURES)

PARKING AREAS (PROCEDURES)

Parking spaces	Maximum wingspan (metres)	Maximum length (metres)	Restrictions	Largest aircraft allowed	Other aircraft allowed
WEST PARKING					
W1	40.4	34.4	<ul style="list-style-type: none"> Power out is permitted for 737 only when parking spaces W2, 1, 1A and 1B are unoccupied Power out is permitted for propeller when parking space W2 is unoccupied 	B737-300	DHC-8-Q400 B1900
W2	40.4	34.4	<ul style="list-style-type: none"> Reserved to C130 Hercules Power out is permitted when parking space W1 is unoccupied 	B737-800	C130 Hercules DHC-8-Q400
NORTH PARKING - General Aviation CTC OPR 418-962-8211					
Other parking spaces available in self-service Possible up to DHC-8-300 when parked at a 45° angle				DHC-8-300	

Notes:

- The movement guide line on the main apron is restricted to aircraft with wingspan of 36 m or less;
- The Hercules is not permitted on twy C and D; after landing on rwy 09, backtrack to twy A;
- If impossible to park according to marking, because operational constraints (wind etc.), use the NORTH parking (GENERAL AVIATION);
- North parking (GENERAL AVIATION) limited to the aircraft whose tail does not exceed:
 - 17 m when the tail is on the edge of the traffic area, or
 - 12 m when the tail is parked along the edge of the apron.

ATTENTION: Parking inside the perimeter only (white full lines) in order not to infringe the zoning of the runway, the taxiway or the parking spaces.

PARKING AREAS (PROCEDURES)


EFF 26 MAR 20

CYZV

CYZV-APD-3

SEPT-ÎLES, QC
CYZV

PARKING AREAS

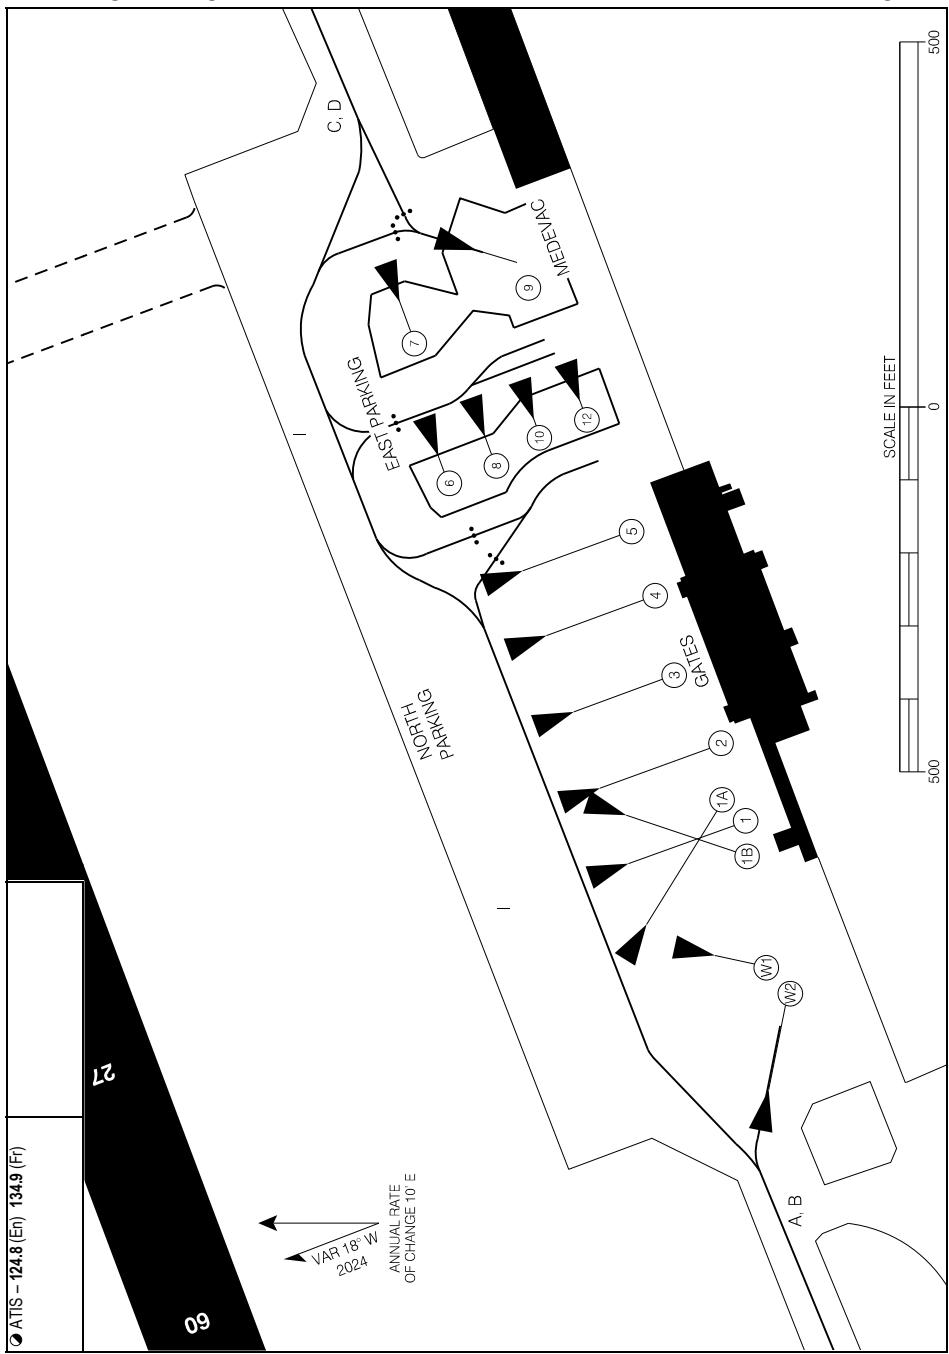

PARKING AREAS

EFF 26 DEC 24

CYZV-APD-3

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AIRES DE STATIONNEMENT (PROCÉDURES)

Postes de stationnement	Envergure maximale (mètre)	Longueur maximale (mètre)	Restrictions	Plus gros appareil permis	Autres appareils permis
BARRIÈRES RÉSERVÉES					
1, 2, 3, 4	28,4	32,8	<ul style="list-style-type: none"> Nez sud-ouest Refoulement obligatoire Passagers fouillés principalement aux postes 1, 2 et 3 Passagers fouillés ou non fouillés au poste 4 Si appareil au poste 2 alors poste 1B fermé 	DHC-8-Q400	DHC-8-300 Saab 340 B1900C B1900D
5	17,7	17,7	<ul style="list-style-type: none"> Nez sud-ouest Refoulement obligatoire Passagers fouillés ou non fouillés 	B1900	B1900C B1900D
1A	35,8	39,5	<ul style="list-style-type: none"> Passagers fouillés seulement Arrivée par twy A et B Refoulement obligatoire 	B737-800	Tous les B737
1B	35,8	39,5	<ul style="list-style-type: none"> Aucun appareil autorisé au poste de stationnement 2 Passagers fouillés seulement Arrivée par twy C et D Refoulement obligatoire 	B737-800	Tous les B737
STATIONNEMENT EST - Aviation Générale - Pour réservation appeler EXP 418-962-8211					
6, 8	17,7	17,7	<ul style="list-style-type: none"> Nez à l'est ou à l'ouest Préférentiel nez à l'ouest pour le cheminement piétonnier 	B1900D	King Air B200 B1900C C550
7	27,5	25,7	<ul style="list-style-type: none"> Nez à l'est ou à l'ouest Préférentiel nez à l'ouest pour le cheminement piétonnier 	DHC-8-300	
9	27,5	25,7	<ul style="list-style-type: none"> Nez à l'est ou à l'ouest Préférentiel nez à l'ouest pour le cheminement piétonnier Priorité au Medevac 	DHC-8-300	DHC-8-200 B1900D Challenger 605
10	17	18	<ul style="list-style-type: none"> Nez à l'est ou à l'ouest Préférentiel nez à l'ouest pour le cheminement piétonnier 	B1900C	King Air B200
12	17	18	<ul style="list-style-type: none"> Nez à l'ouest 	B1900C	King Air B200

AIRES DE STATIONNEMENT (PROCÉDURES)

EFF 5 DÉC 19

CYZV

AIRES DE STATIONNEMENT (PROCÉDURES)

Postes de stationnement	Envergure maximale (mètre)	Longueur maximale (mètre)	Restrictions	Plus gros appareil permis	Autres appareils permis
STATIONNEMENT OUEST					
W1	40,4	34,4	<ul style="list-style-type: none"> Sortie sur pouvoir autorisé (power out) pour les B737 seulement si les postes W2, 1, 1A et 1B sont inoccupés Sortie sur pouvoir autorisé (power out) pour les aéronefs à hélices si le poste W2 est inoccupé 	B737-300	DHC-8-Q400 B1900
W2	40,4	34,4	<ul style="list-style-type: none"> Réservé à C130 Hercules Sortie sur pouvoir autorisé (power out) si le poste W1 est inoccupé 	B737-800	C130 Hercules DHC-8-Q400
STATIONNEMENT NORD - Aviation Générale CTC EXP 418-962-8211					
Autres espaces disponibles en libre-service Possible jusqu'à DHC-8-300 lorsque stationné à angle 45°				DHC-8-300	

Notes :

- La ligne de guidage sur l'aire de trafic principale est restreinte aux appareils de 36 m ou moins d'envergure;
- Le Hercule n'est pas autorisé sur twy C et D; après atterrissage piste 09, circulation à rebours jusqu'au twy A;
- Si impossible de stationner selon le marquage, à cause de contraintes opérationnelles (vent etc.), utiliser le stationnement nord (AVIATION GÉNÉRALE);
- Stationnement nord (AVIATION GÉNÉRALE) restreint aux aéronefs dont l'empennage ne dépasse pas :
 - 17 m lorsque la queue est en bordure de l'aire de trafic, ou
 - 12 m lorsque la queue est stationnée en bordure nord du tablier.


ATTENTION : Stationnement à l'intérieur du périmètre (lignes blanches) seulement afin de ne pas enfreindre le zonage de la piste, de la voie de circulation ou les postes de stationnement.

AIRES DE STATIONNEMENT (PROCÉDURES)

CYZV-APD-3

SEPT-ÎLES, QC
CYZV

AIRES DE STATIONNEMENT

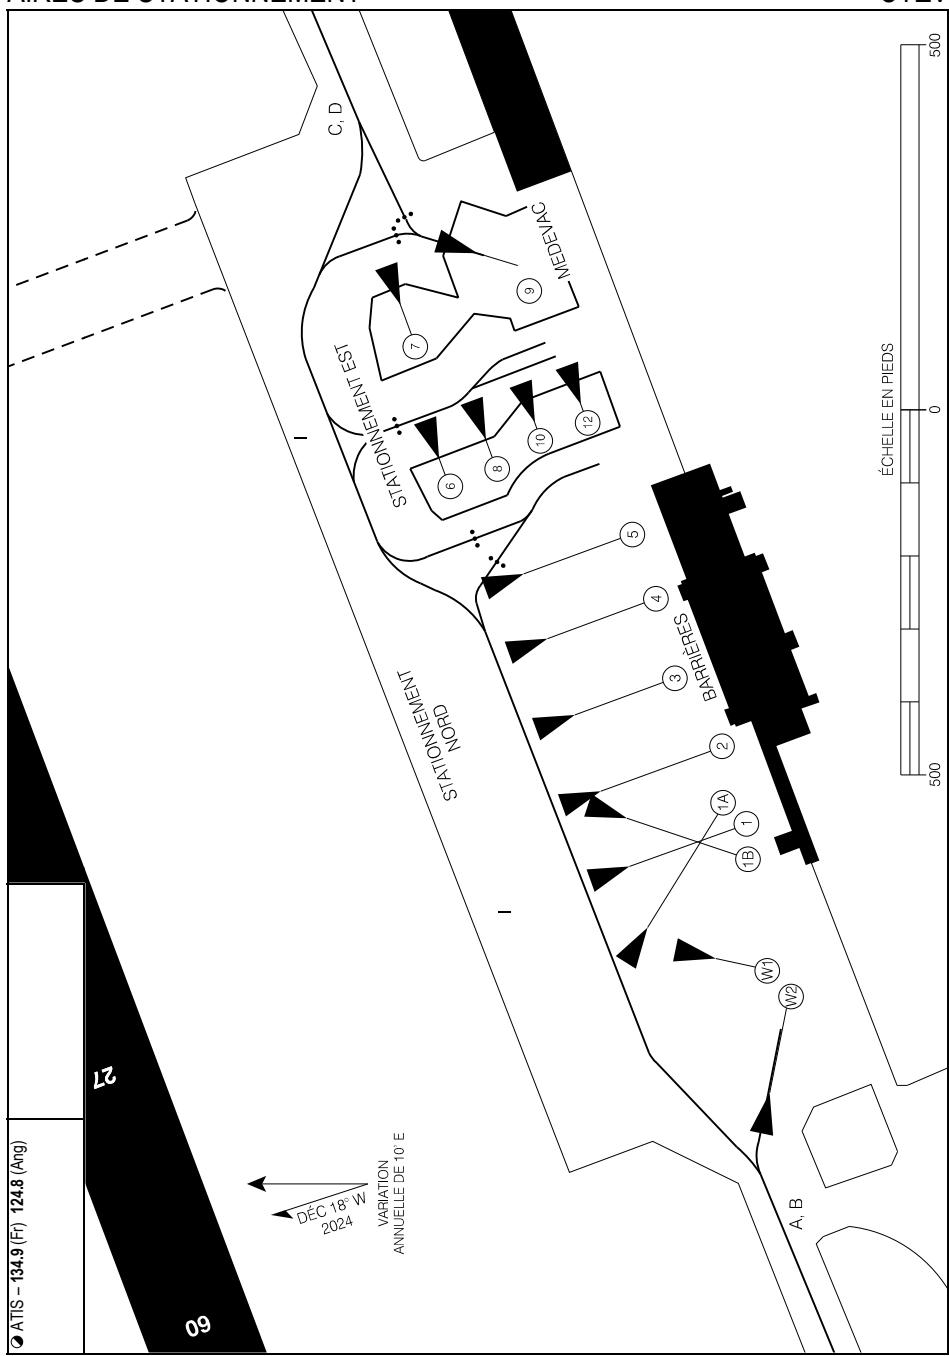


CYZV-APD-3

CYSC-AD

SHERBROOKE, QC
CYSC

AERODROME CHART

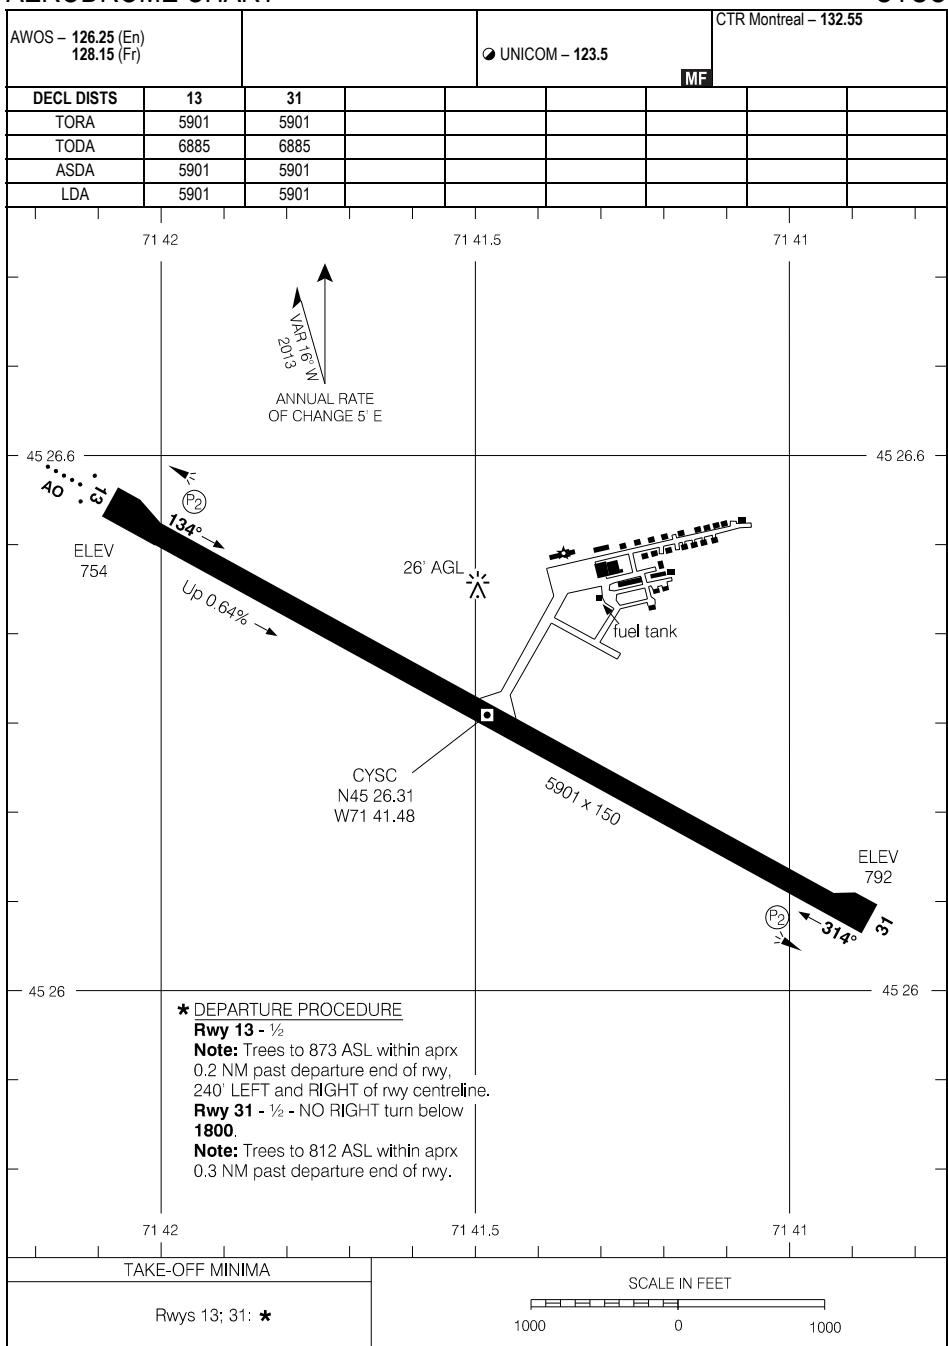

AERODROME CHART

EFF 21 MAR 24


CYSC

CYSC-AD

CYSC-AD

SHERBROOKE, QC
CYSC

CARTE D'AÉRODROME

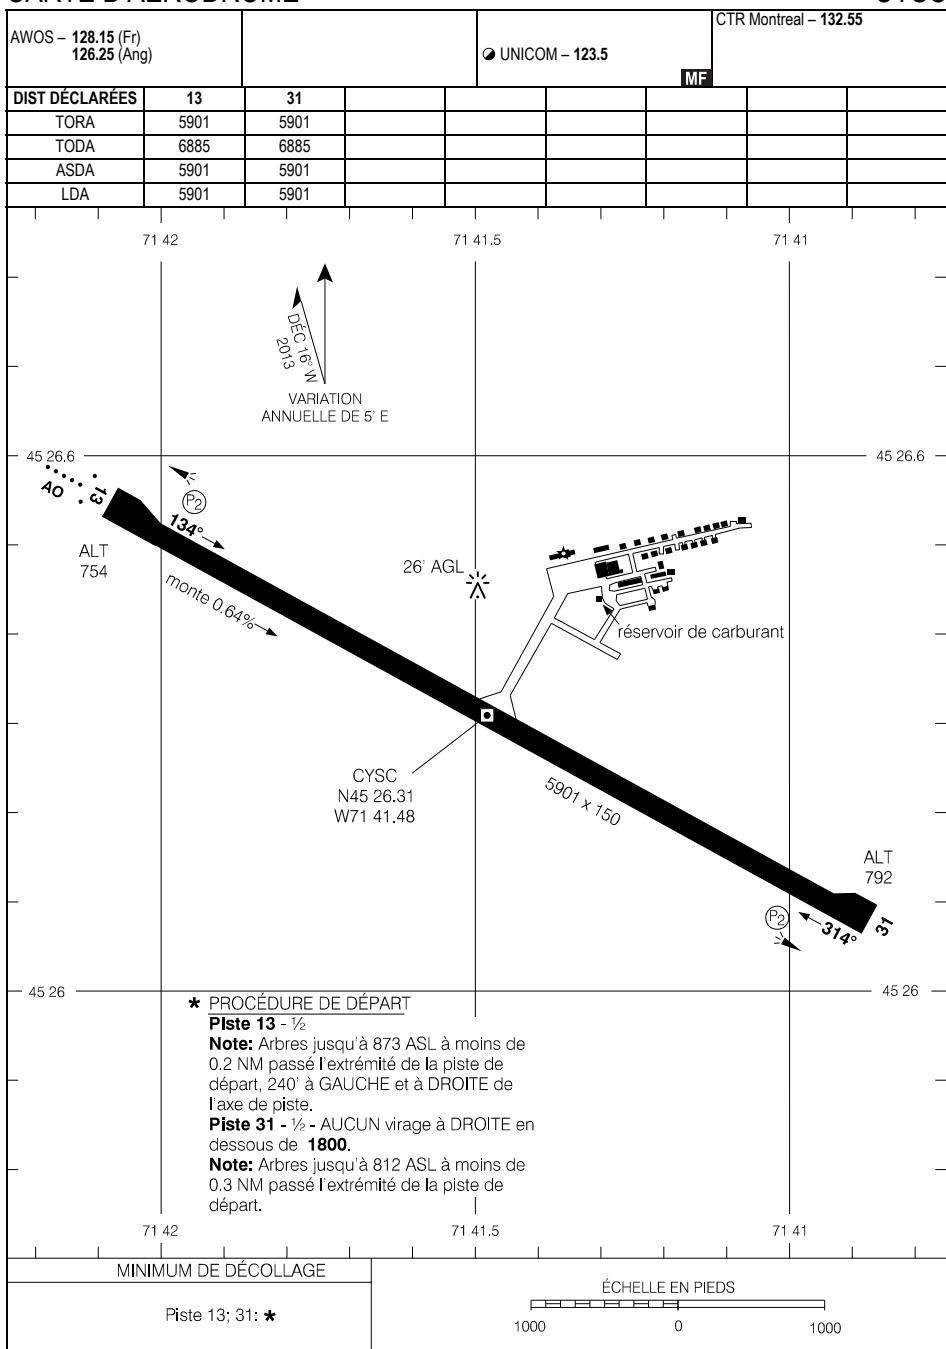

CARTE D'AÉRODROME

EFF 21 MAR 24


CYSC

CYSC-AD

CYIF-AD

ST-AUGUSTIN, QC
CYIF

AERODROME CHART

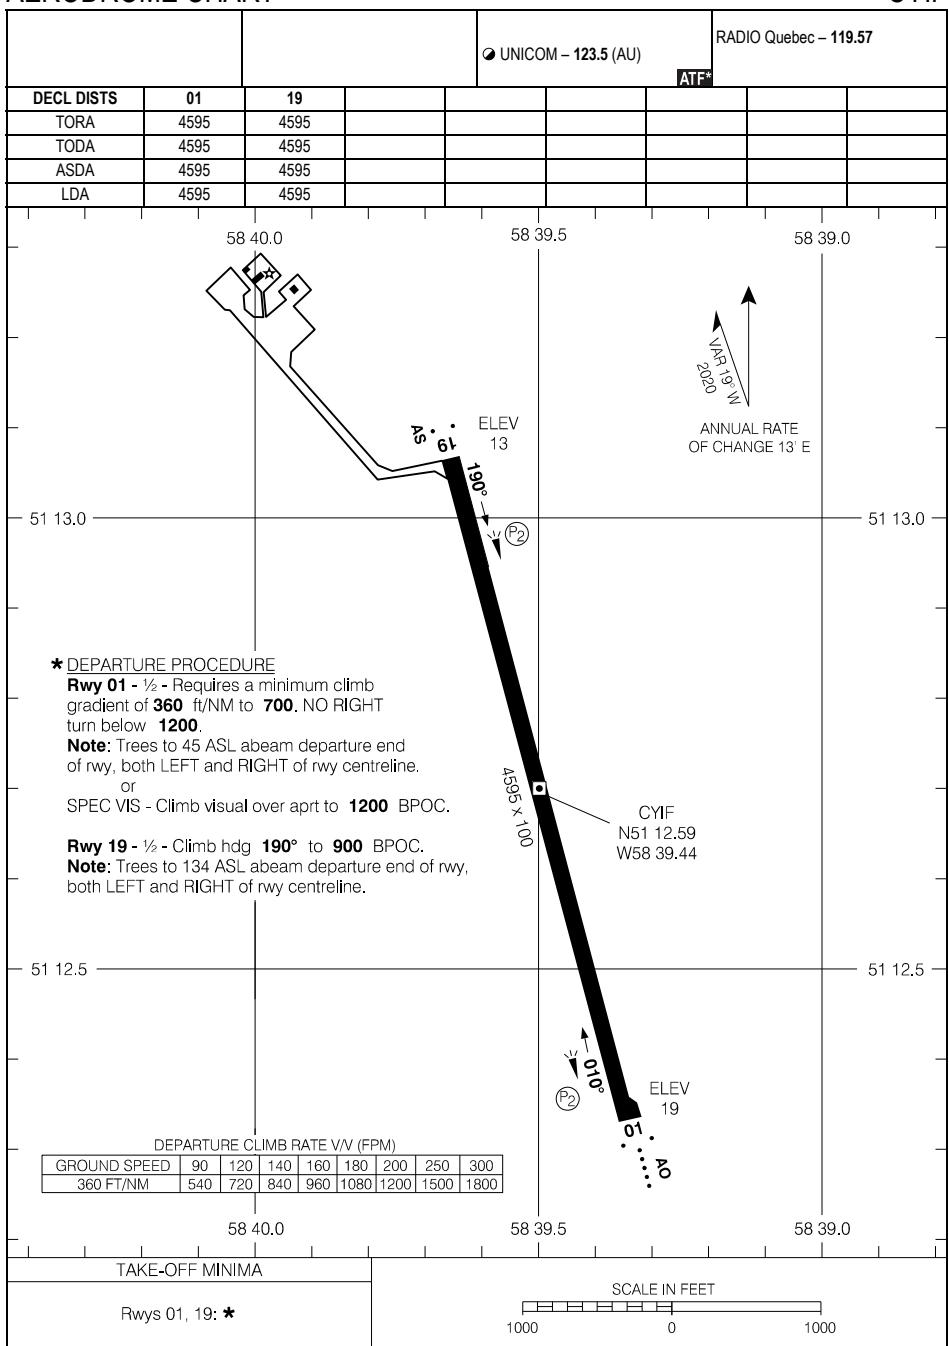


AERODROME CHART

EFF 10 SEP 20

CYIF

CYIF-AD

CARTE D'AÉRODROME

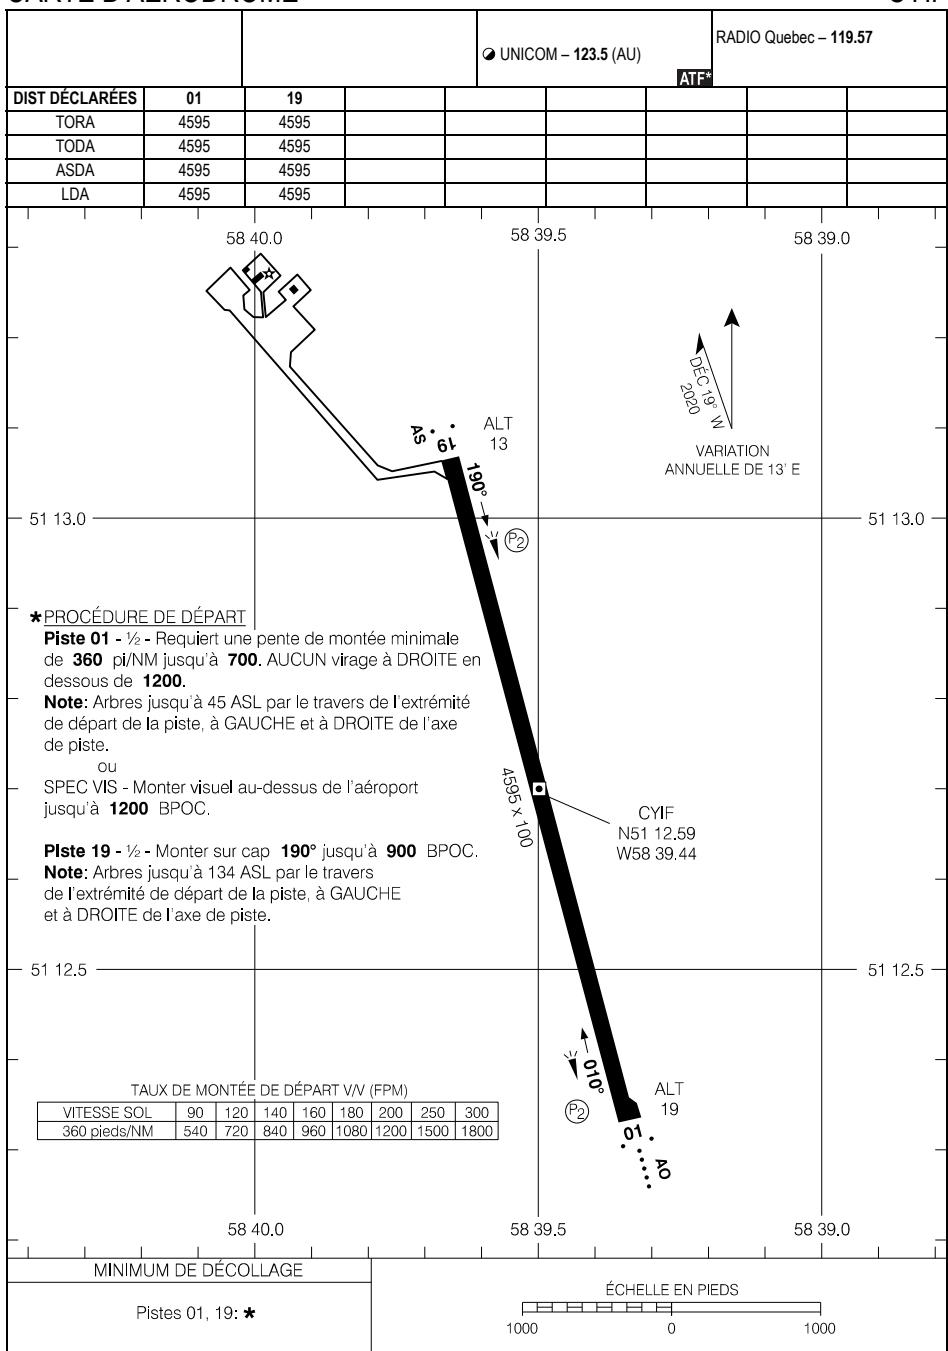

CARTE D'AÉRODROME


EFF 10 SEP 20

CYIF

CTA4-AD

ST-BRUNO-DE-GUIGUES, QC
CTA4

AERODROME CHART

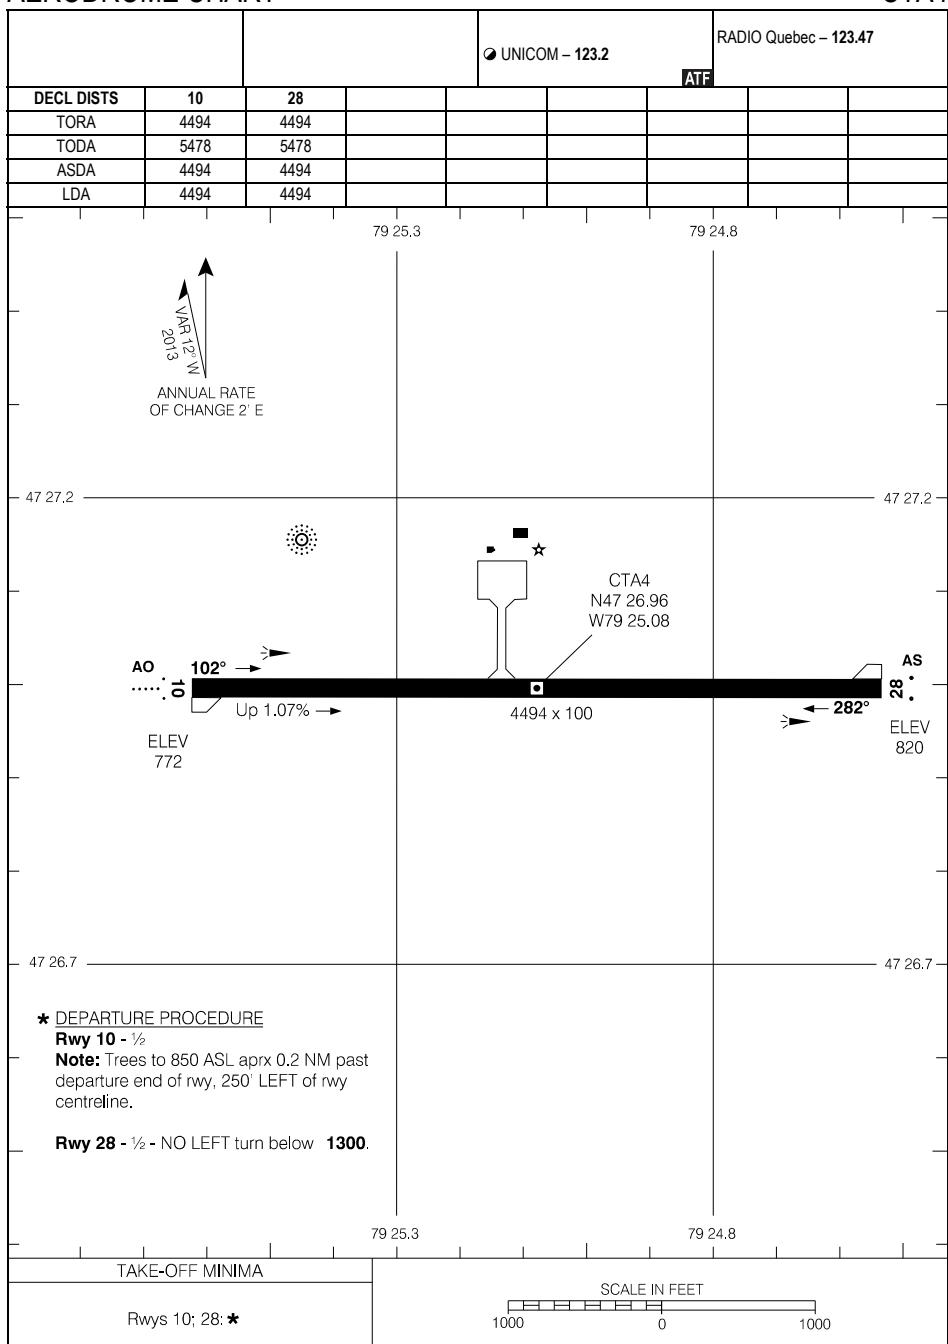

AERODROME CHART

EFF 23 FEB 23

CTA4


CTA4-AD

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CTA4-AD

ST-BRUNO-DE-GUIGUES, QC
CTA4

CARTE D'AÉRODROME

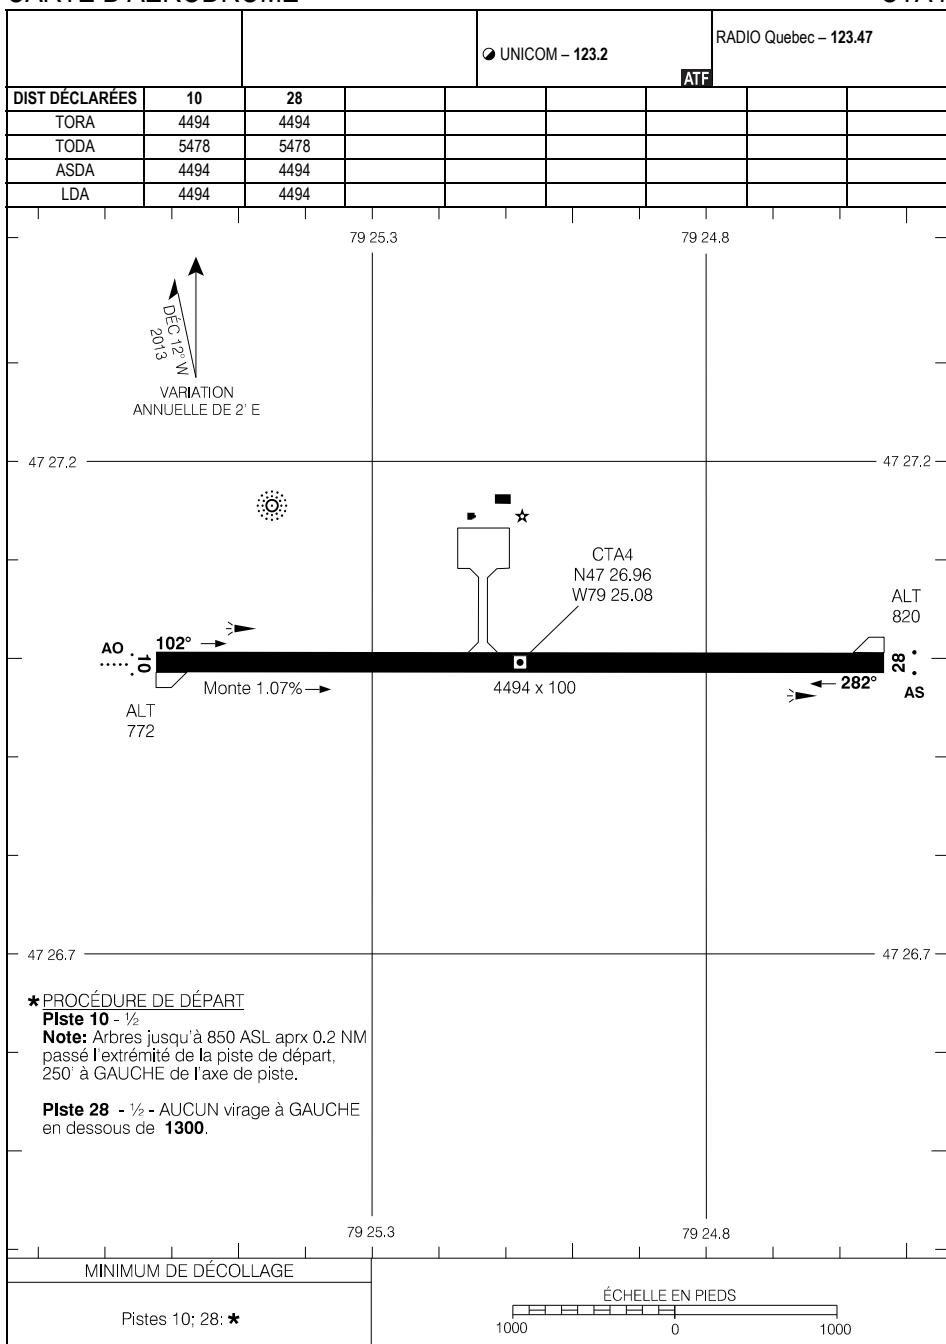CARTE D'AÉRODROME
EFF 23 FÉV 23


CTA4

CTA4-AD

CYSZ-AD

STE-ANNE-DES-MONTS, QC
CYSZ

CARTE D'AÉRODROME

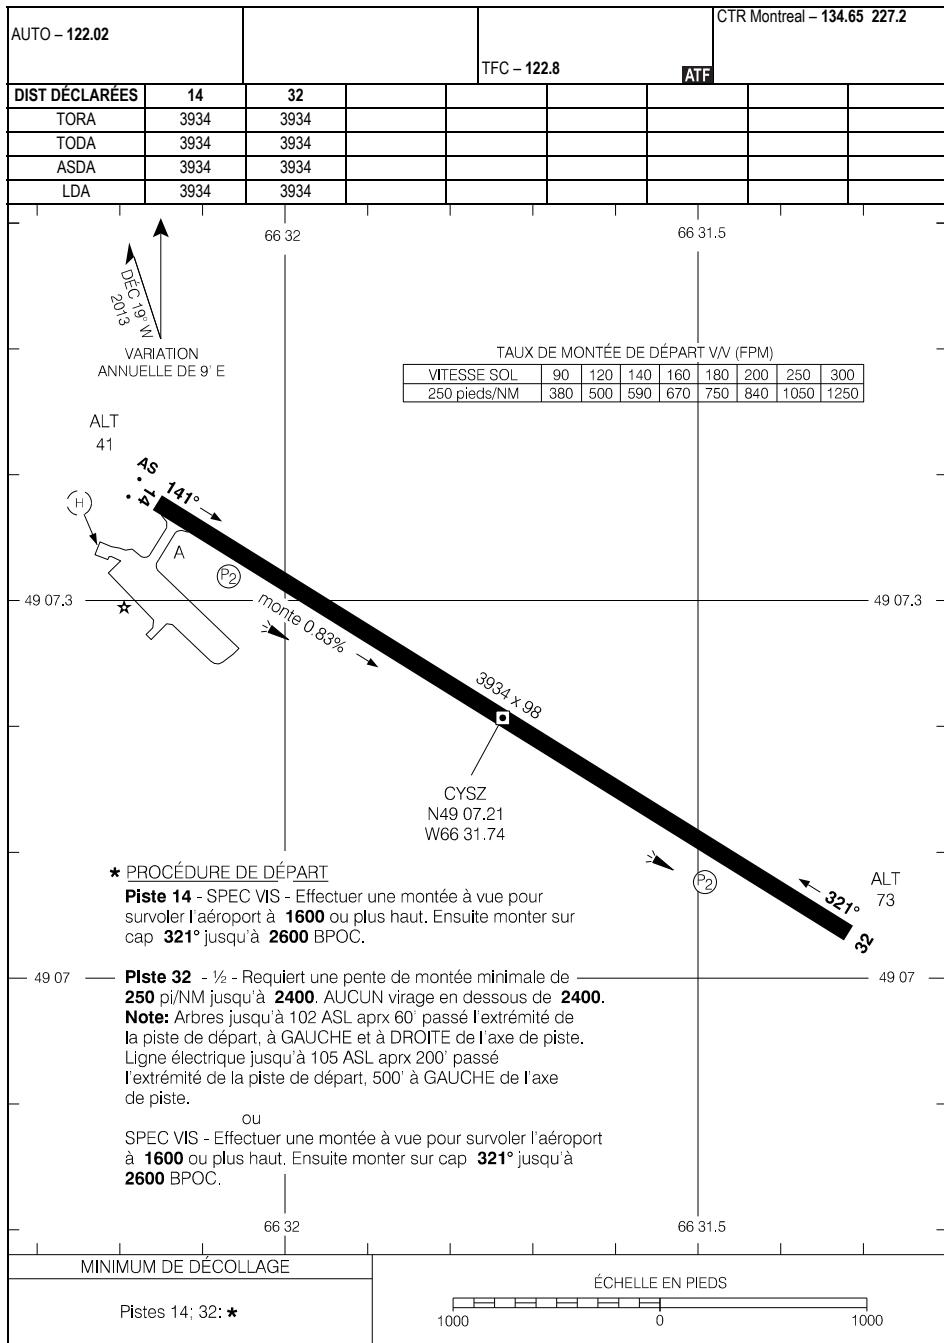

CARTE D'AÉRODROME

EFF 11 JUIL 24


CYSZ

CYSZ-AD

CYSG-AD

ST-GEORGES, QC
CYSG

AERODROME CHART

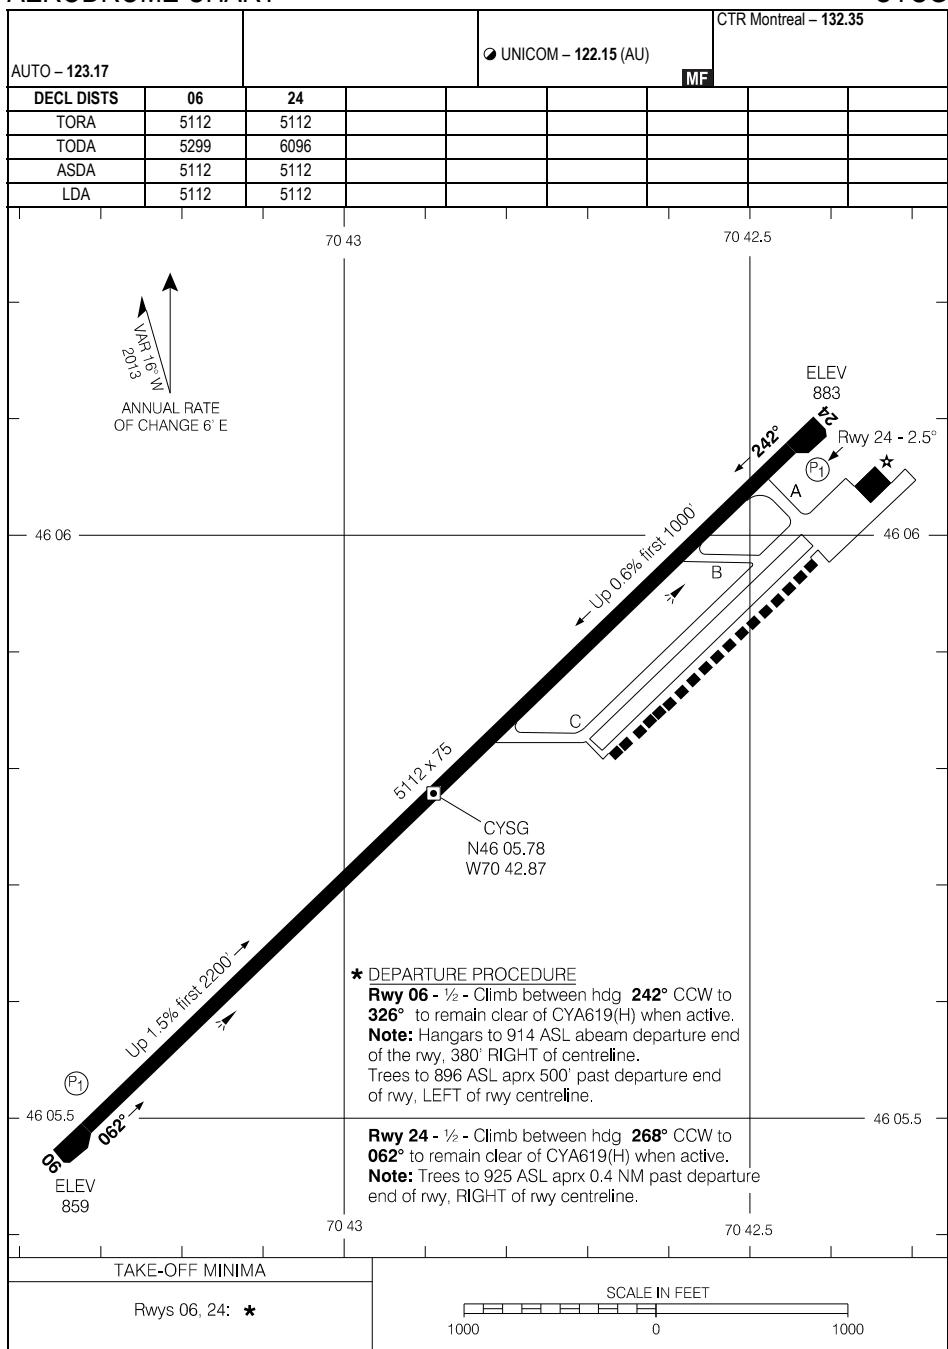


AERODROME CHART

EFF 15 JUN 23

CYSG-AD

CYSG


CARTE D'AÉRODROME

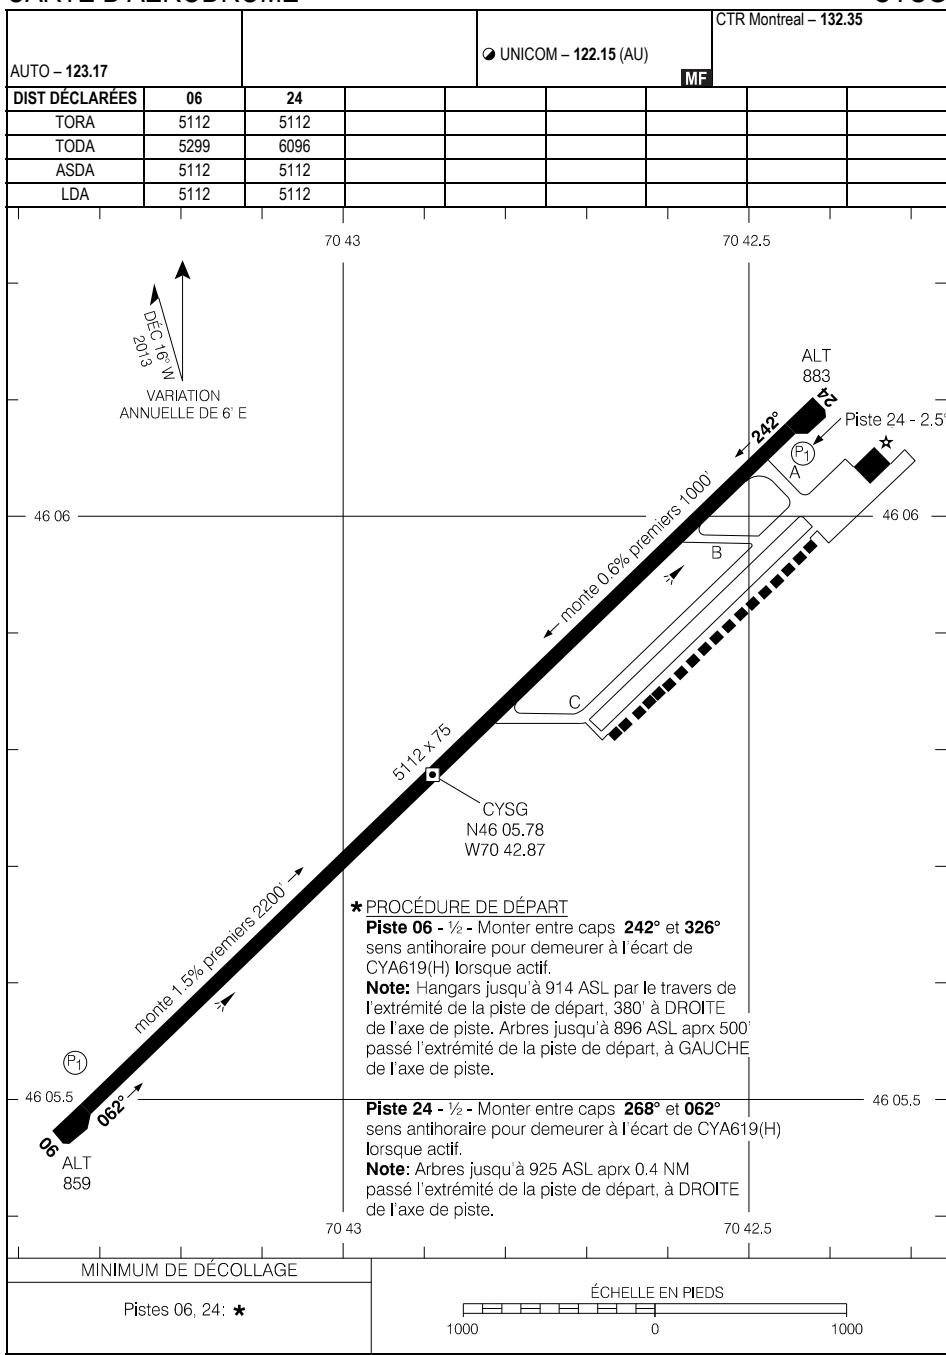

CSU3-AD

ST-HYACINTHE, QC
CSU3

AERODROME CHART

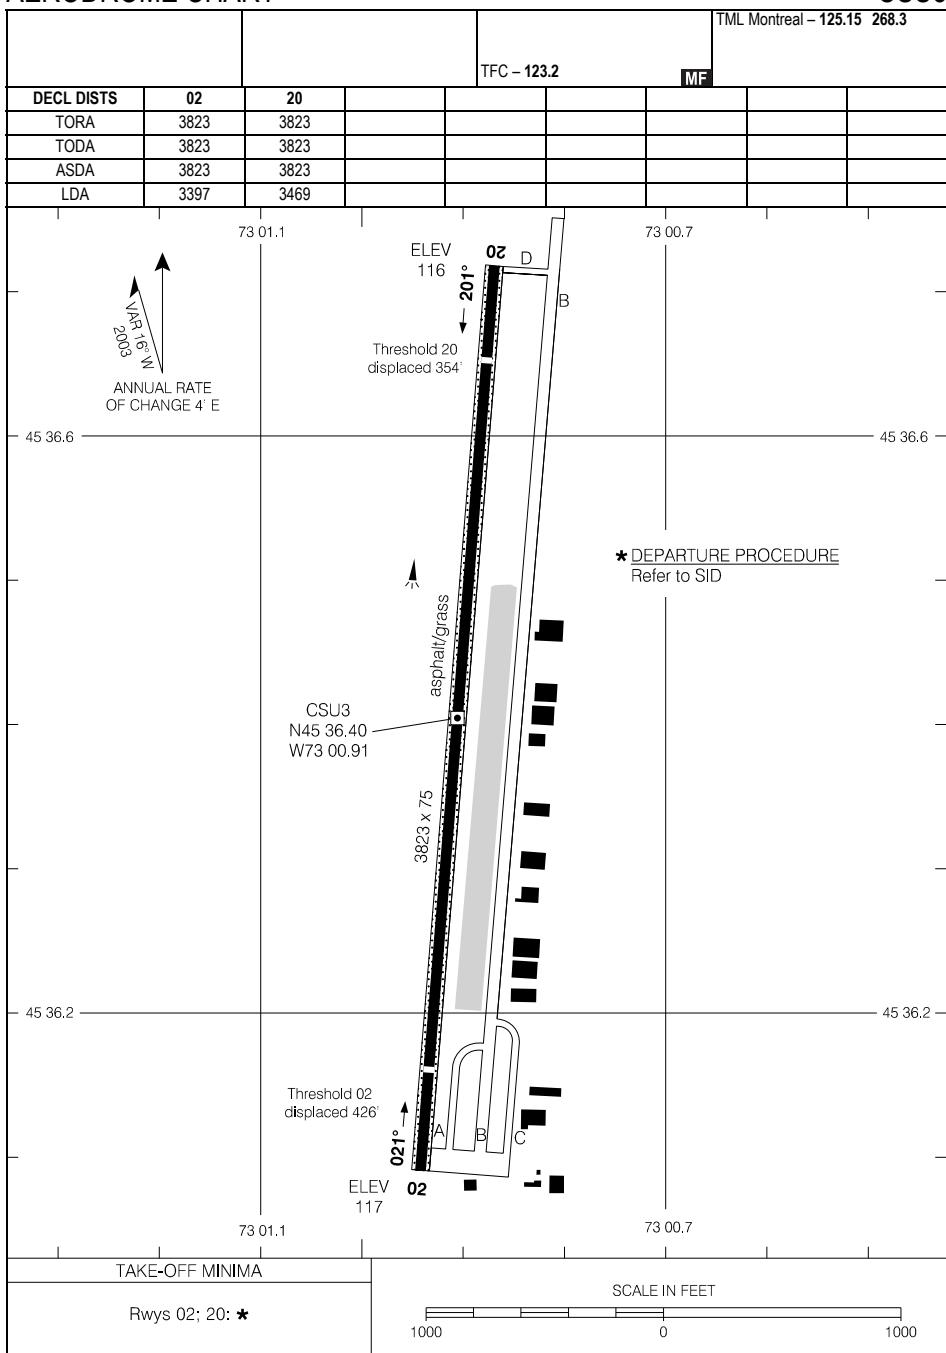

AERODROME CHART

EFF 12 JUN 25


CSU3

CSU3-AD

CSU3-AD

ST-HYACINTHE, QC
CSU3

CARTE D'AÉRODROME

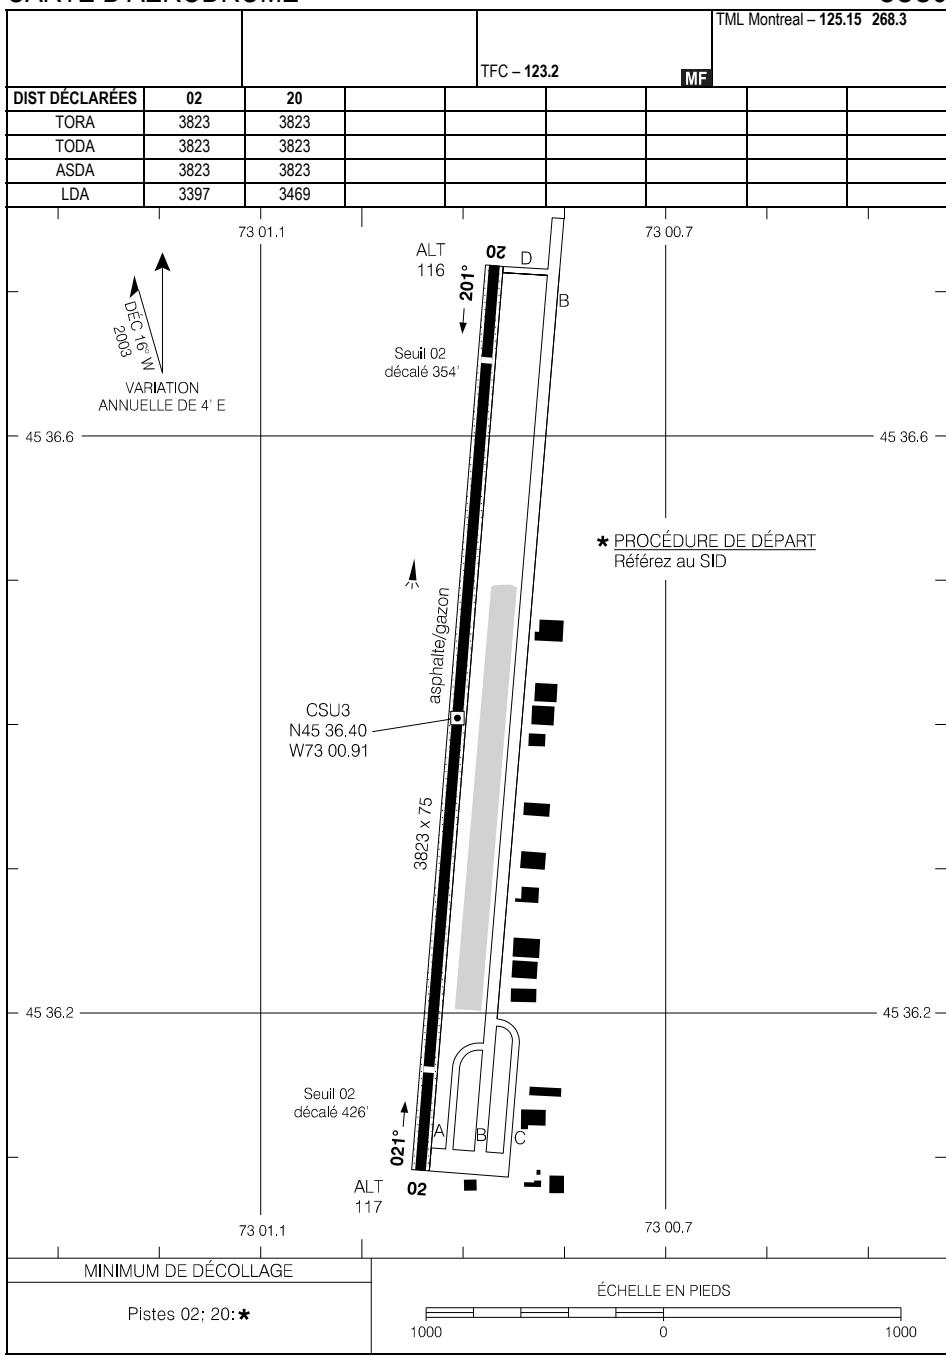

CARTE D'AÉRODROME

EFF 12 JUIN 25

CSU3

CSU3-AD


CYJN-AD

ST-JEAN, QC
CYJN

AERODROME CHART

		● GND – 121.7			● TWR – 118.2			TML Montreal – 125.15 268.3		
			● TFC – 118.2			● ATF				
DECL DISTS	02	20	06	24	11	29				
TORA	2438	2438	2349	2349	4012	4012				
TODA	3088	3422	3333	3333	4262	4287				
ASDA	2438	2438	2349	2349	4012	4012				
LDA	2438	2438	2349	2349	3412	4012				

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

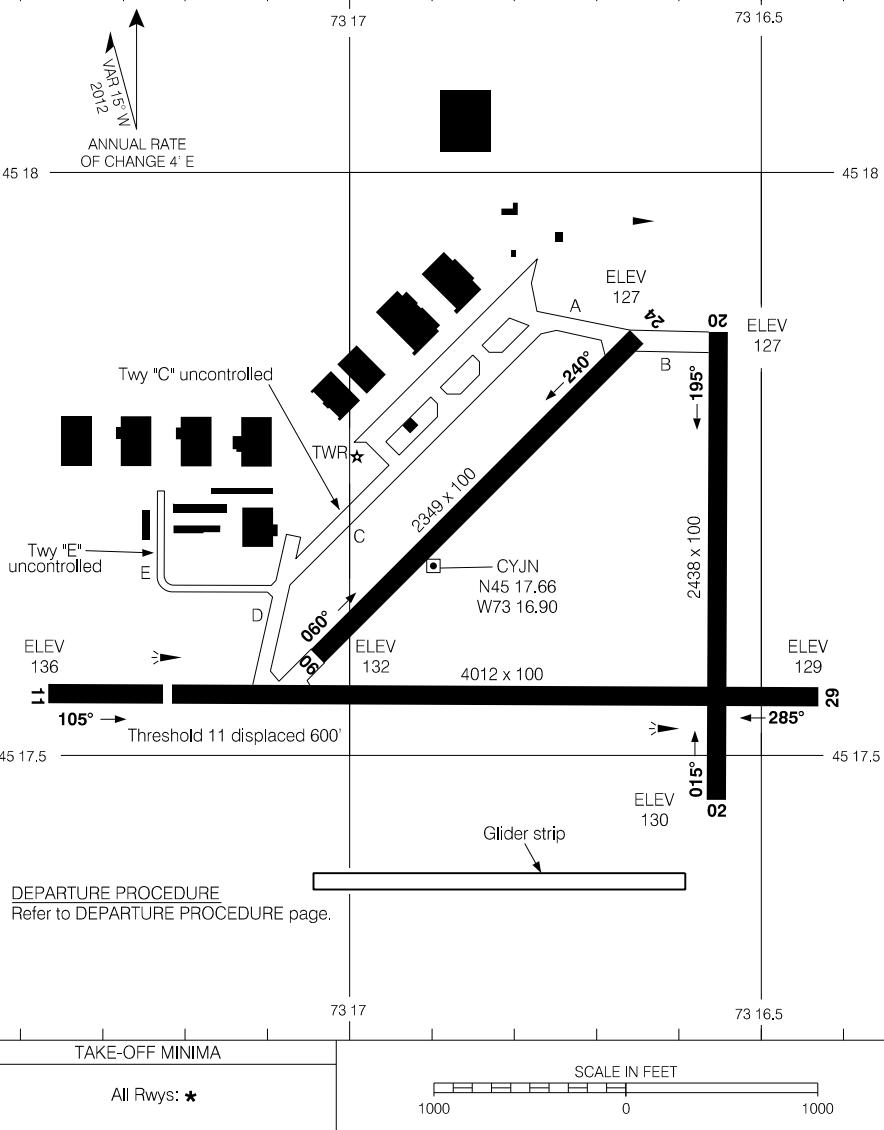


AERODROME CHART

EFF 31 OCT 24

CYJN

CYJN-AD

CARTE D'AÉRODROME

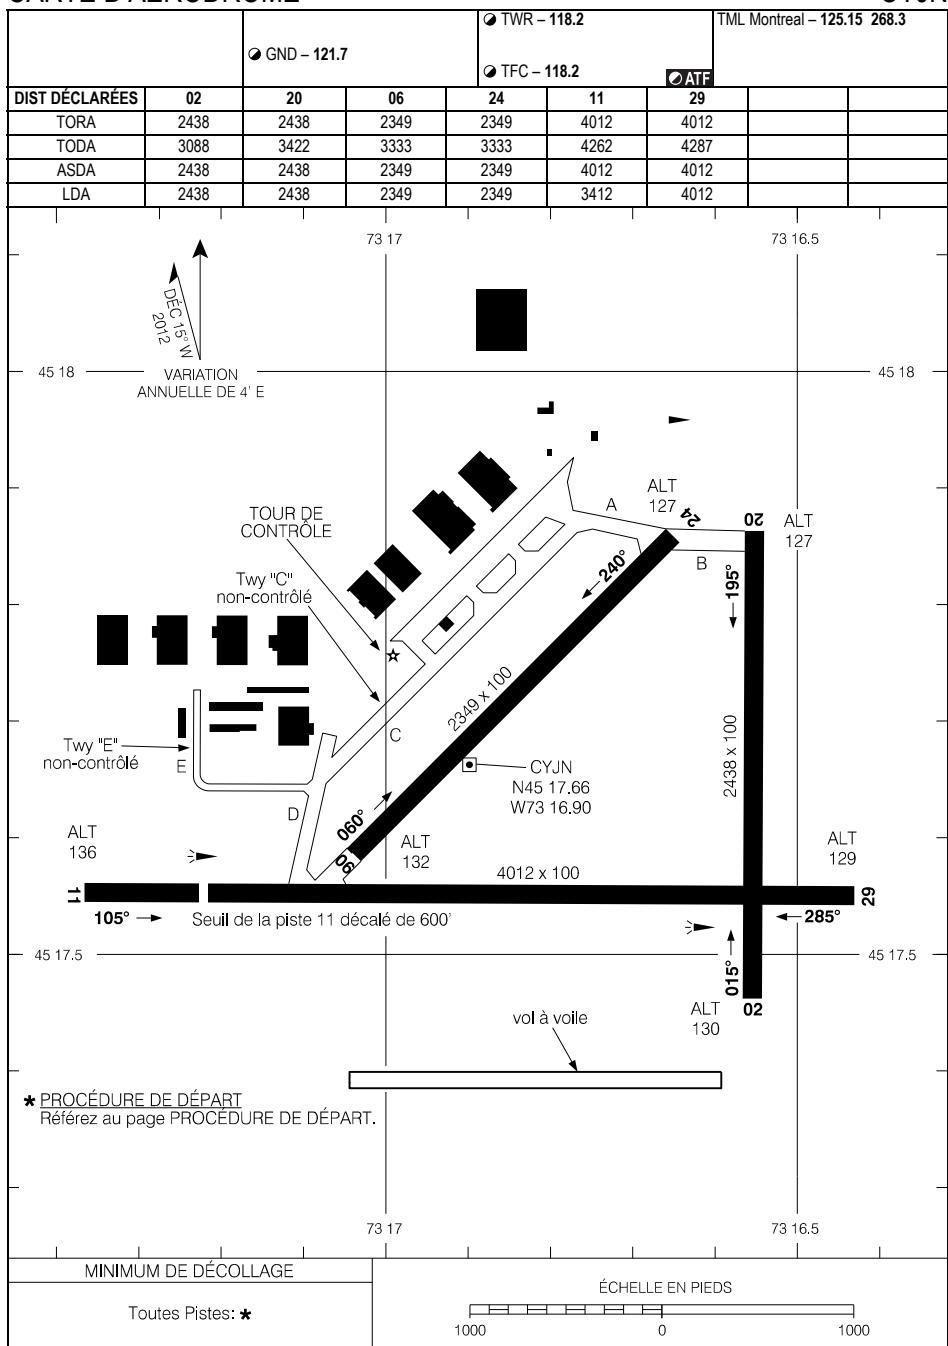

CARTE D'AÉRODROME


EFF 31 OCT 24

CYJN

CYTQ-AD

TASIUJAQ, QC
CYTQ

AERODROME CHART

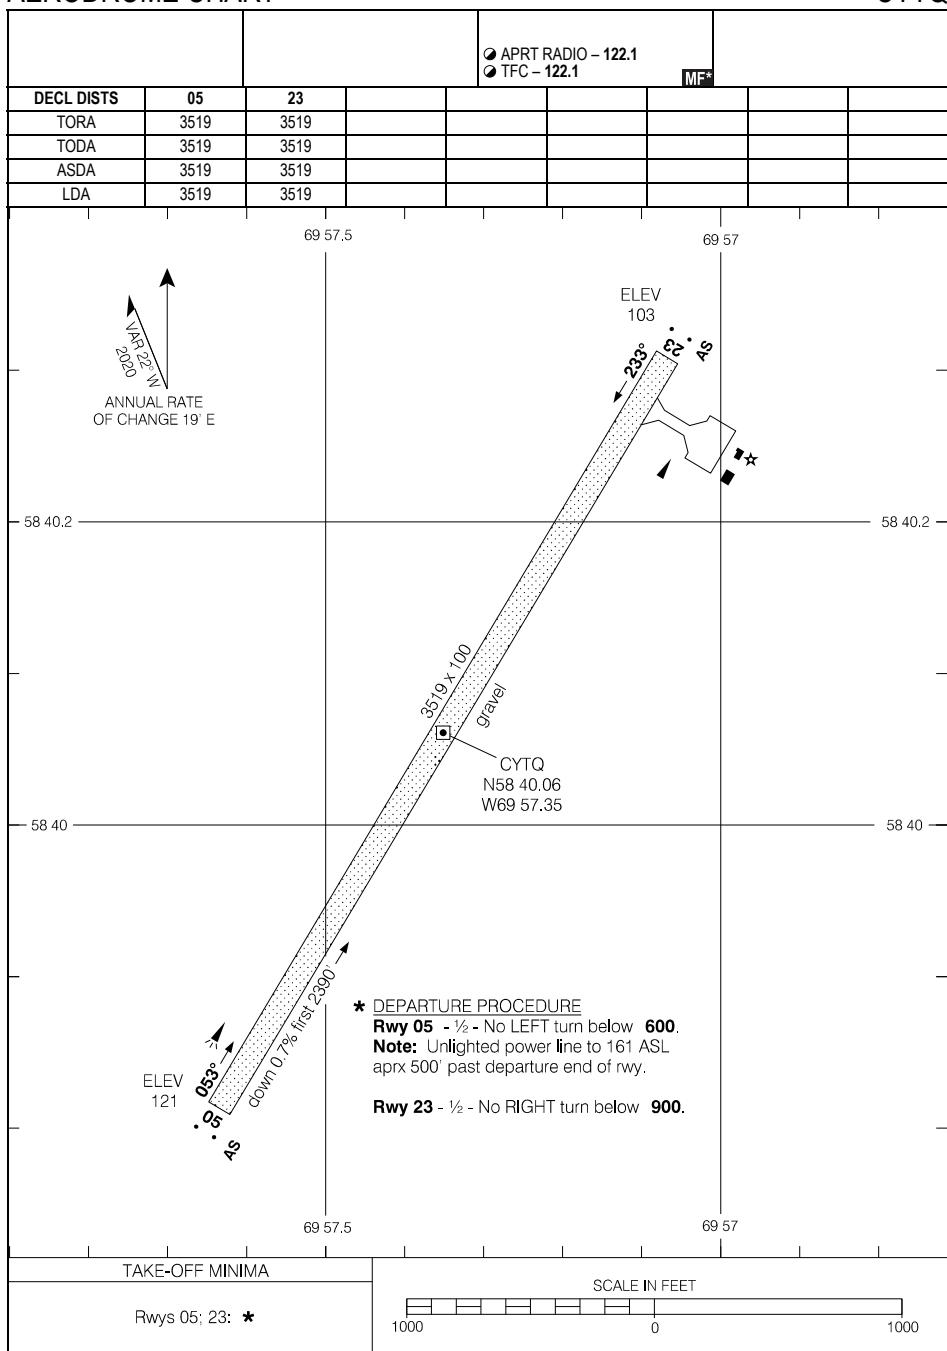

AERODROME CHART

EFF 27 JAN 22


CYTQ

CYTQ-AD

CYTQ-AD

TASIUJAQ, QC
CYTQ

CARTE D'AÉRODROME

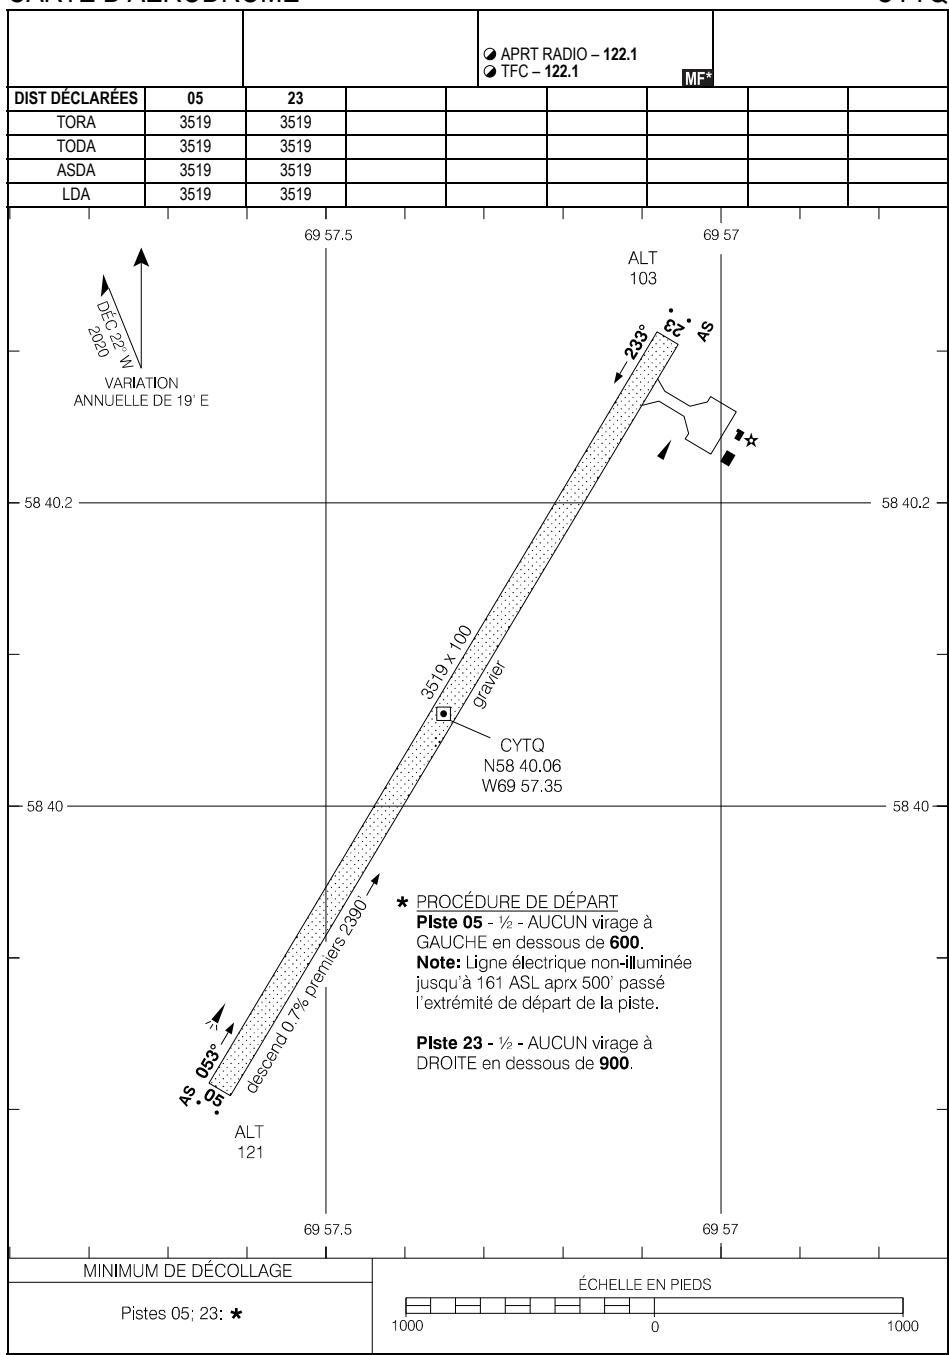


CARTE D'AÉRODROME

EFF 27 JAN 22

CYTQ

CYTQ-AD

AERODROME CHART

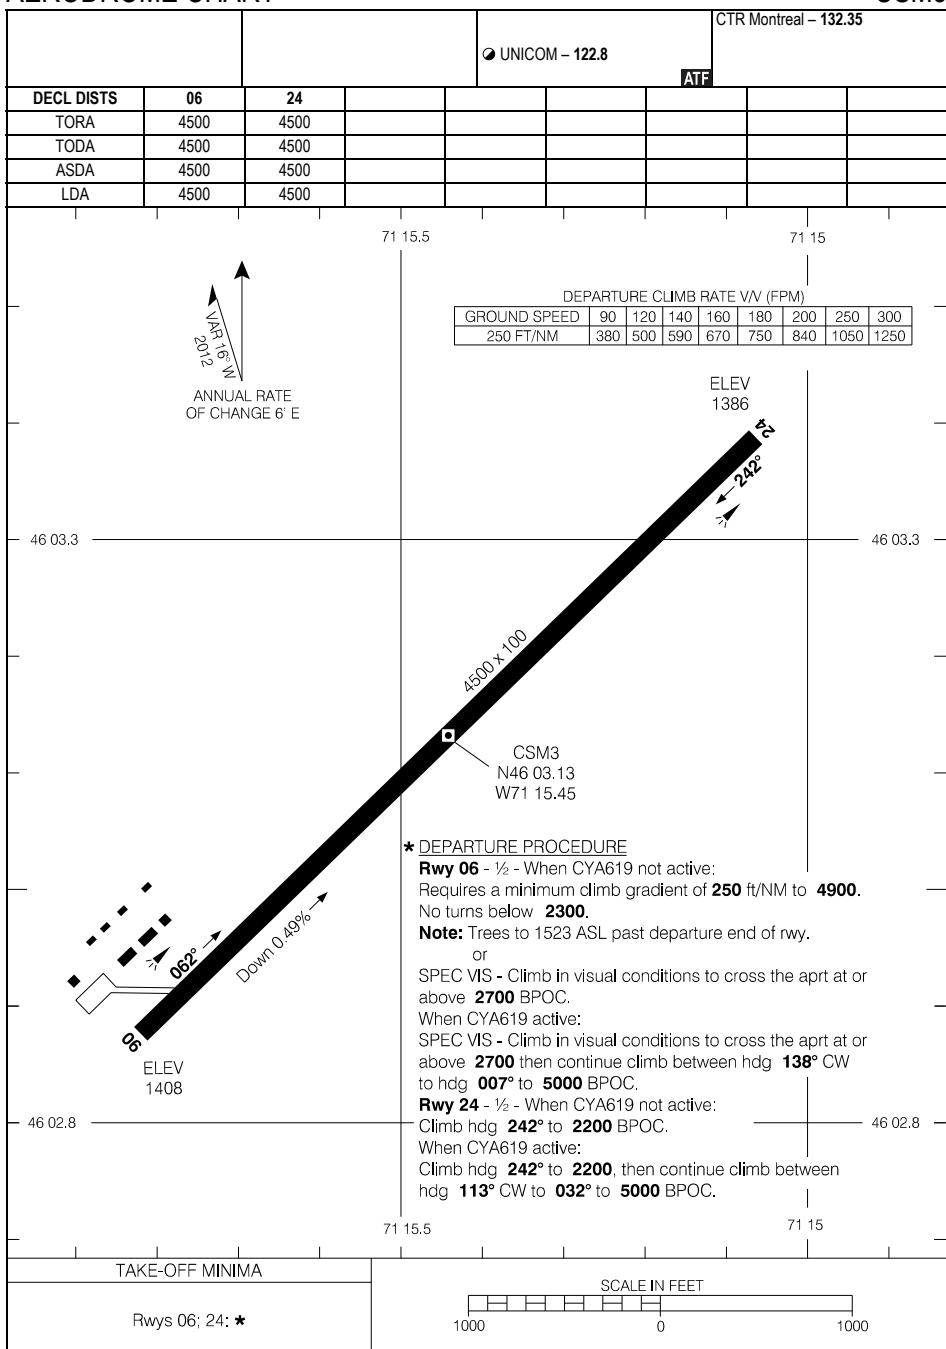

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 16 MAY 24

CSM3

CARTE D'AÉRODROME

			● UNICOM - 122.8	CTR Montreal - 132.5
DIST DÉCLARÉES	06	24		ATF
TORA	4500	4500		
TODA	4500	4500		
ASDA	4500	4500		
LDA	4500	4500		

*** PROCÉDURE DE DÉPART**

Piste 06 - ½ - Lorsque CYA619 n'est pas active: Requiert une pente de montée minimale de **250 pieds/NM** jusqu'à **4900**. AUCUN virage en dessous de **2300**.

Note: Arbres jusqu'à 1523 ASL passé l'extrémité de la piste de départ.

ou

SPEC VIS - Effectuer une montée à vue pour survoler l'aéroport à **2700** BPOC. Lorsque CYA619 est active:

SPEC VIS - Effectuer une montée à vue pour survoler l'aéroport à **2700** ensuite, continuer à monter entre cap **138°** et **007°** sens horaire jusqu'à **5000** BPOC.


Piste 24 - ½ - Lorsque CYA619 n'est pas active:

Monter sur cap **242°** jusqu'à **2200** BPOC.

Lorsque CYA619 est active:

Monter sur cap **242°** jusqu'à **2200**, ensuite, continuer à monter entre cap **113°** et **032°** sens horaire jusqu'à **5000** BPOC.

46 03.3 —————— 46 03.3

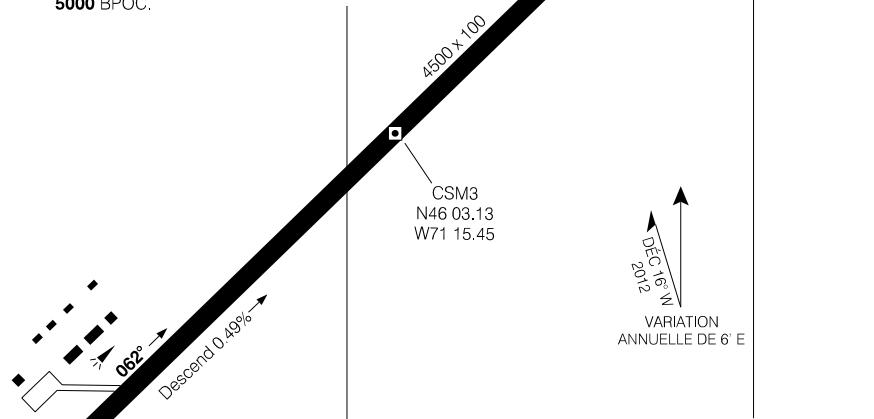

TAUX DE MONTÉE DE DÉPART V/V (FPM)

VITESSE SOL	90	120	140	160	180	200	250	300
250 pieds/NM	380	500	590	670	750	840	1050	1250

46 02.8 —————— 46 02.8


71 15.5

71 15

MINIMUM DE DÉCOLLAGE

Pistes 06; 24: *

ÉCHELLE EN PIEDS



CARTE D'AÉRODROME


EFF 16 MAI 24

CSM3

CYRQ-AD

TROIS-RIVIÈRES, QC
CYRQ

AERODROME CHART

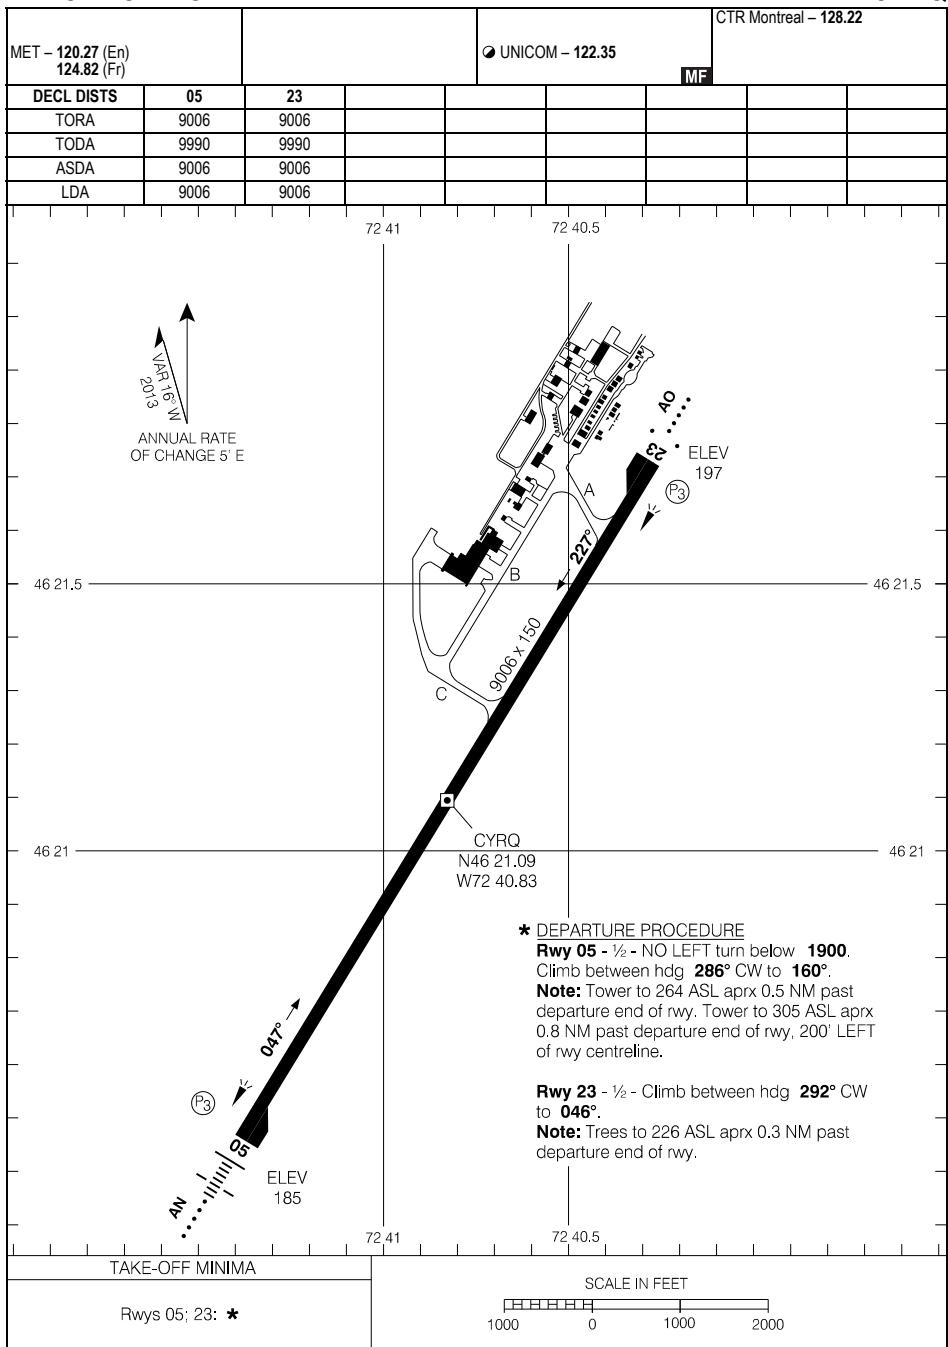

AERODROME CHART

EFF 16 MAY 24

CYRQ-AD


CYRQ

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CYRQ-AD

TROIS-RIVIÈRES, QC
CYRQ

CARTE D'AÉRODROME

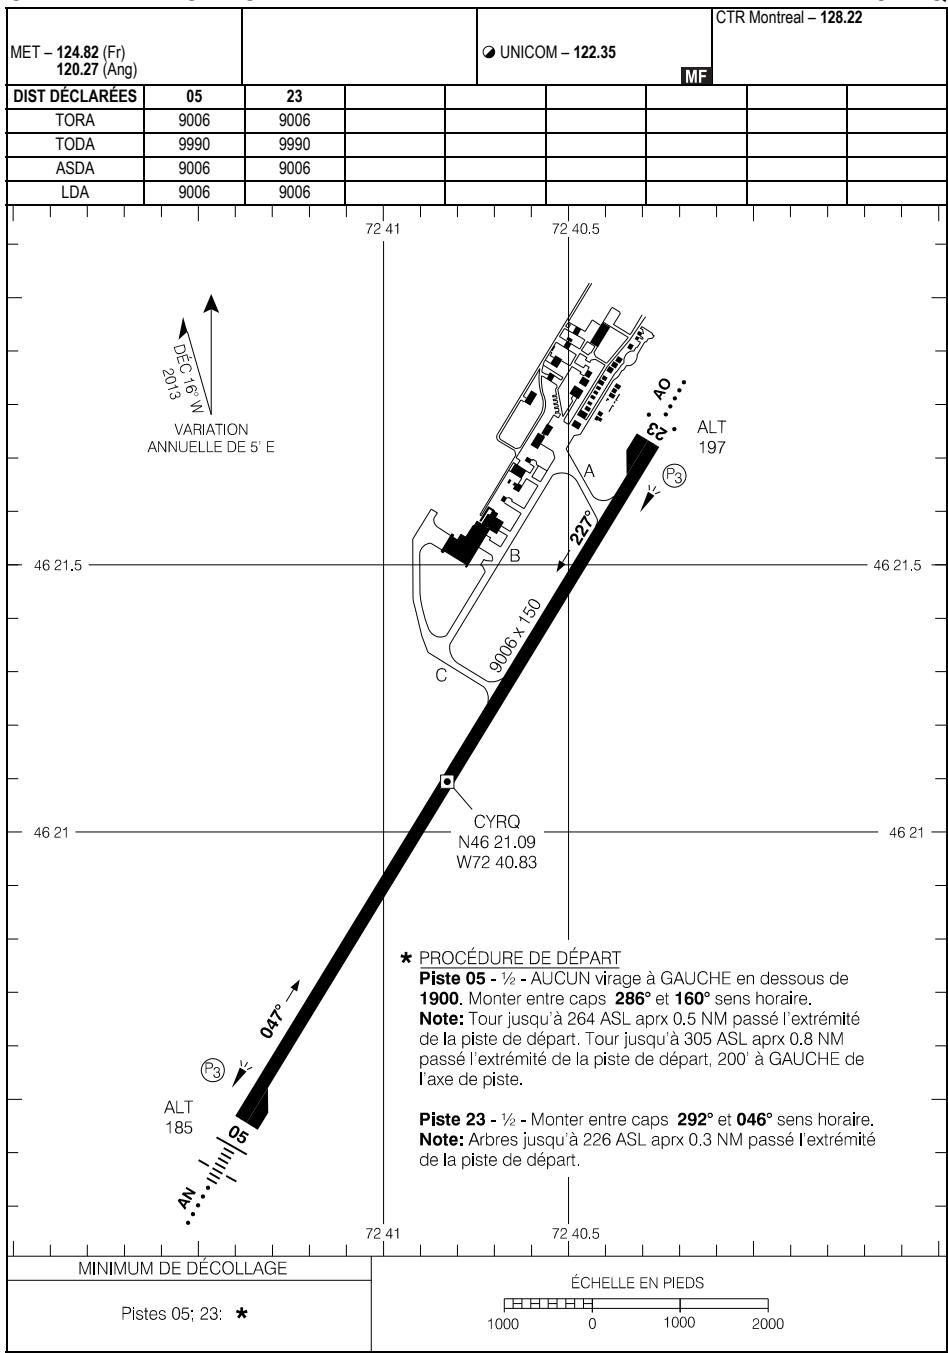

CARTE D'AÉRODROME

EFF 16 MAI 24


CYRQ

CYRQ-AD

CYMU-AD

UMIUAQ, QC
CYMU

AERODROME CHART

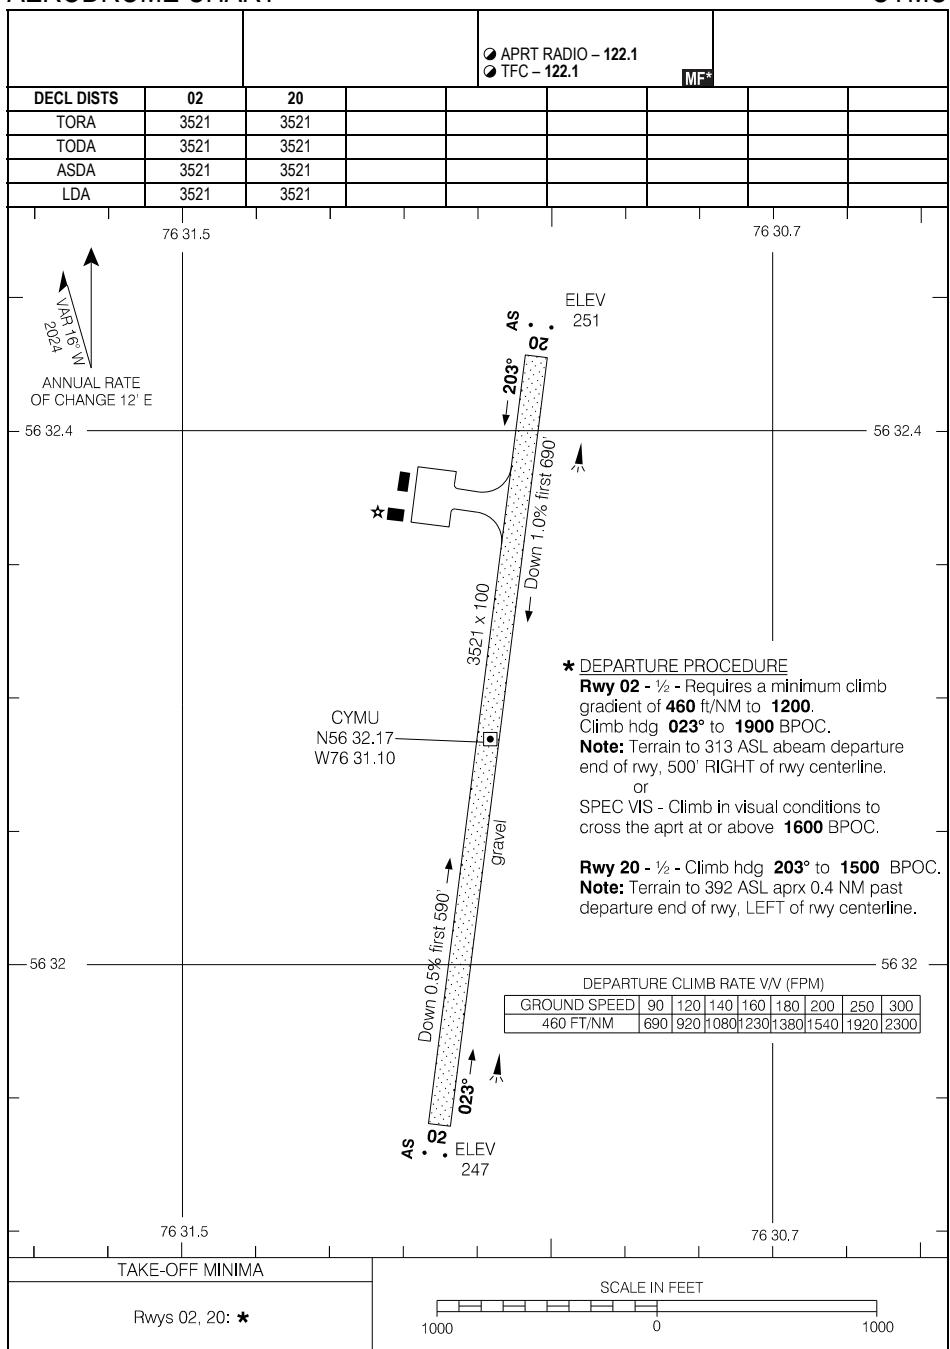

AERODROME CHART

EFF 21 MAR 24


CYMU

CYMU-AD

CYMU-AD

UMIUAQ, QC
CYMU

CARTE D'AÉRODROME

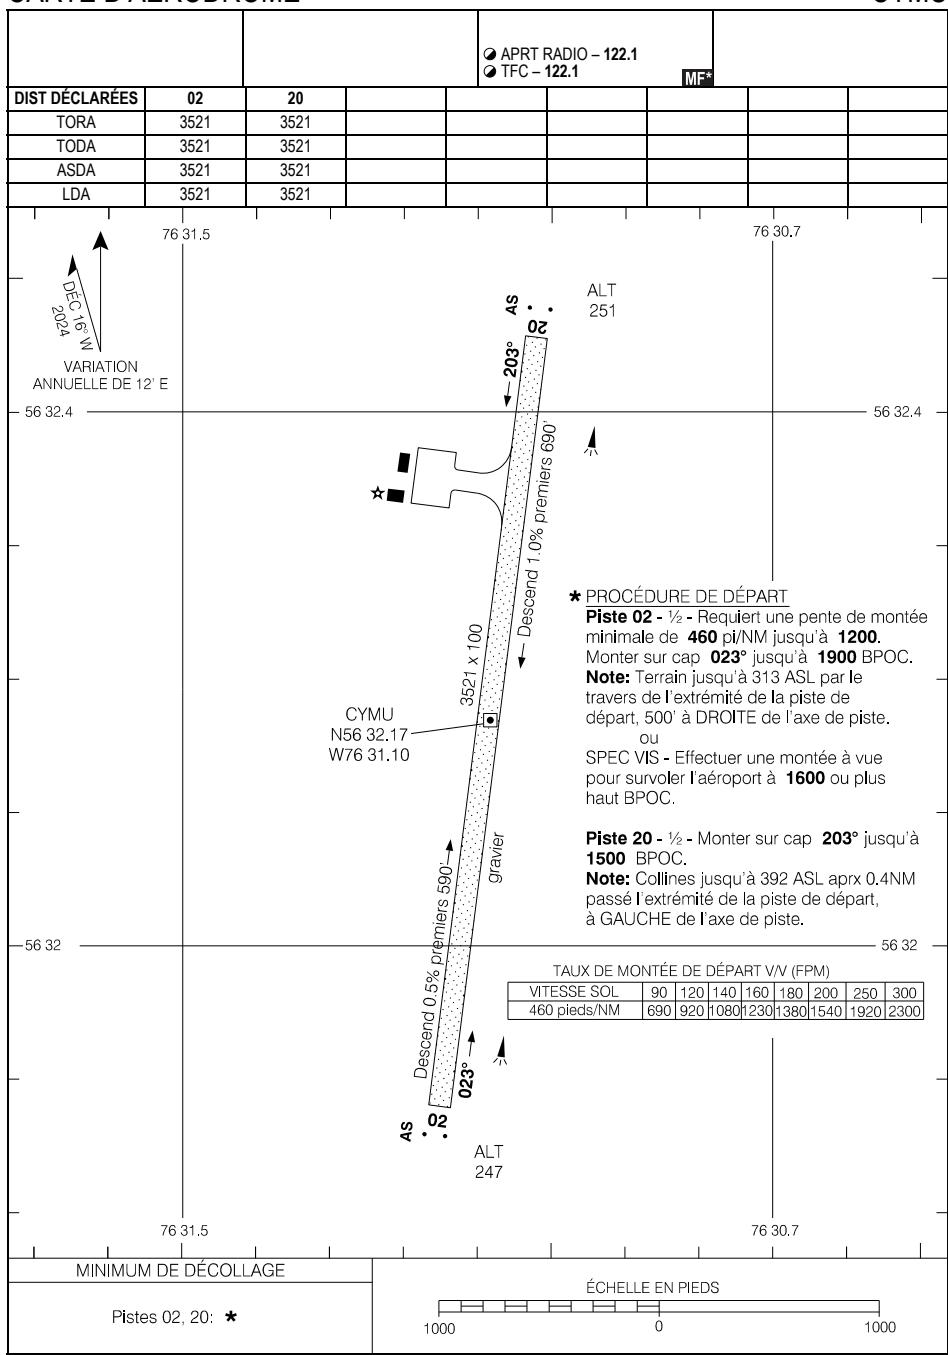

CARTE D'AÉRODROME

EFF 21 MAR 24


CYMU

CYMU-AD

CYVO-AD

VAL-D'OR, QC
CYVO

AERODROME CHART

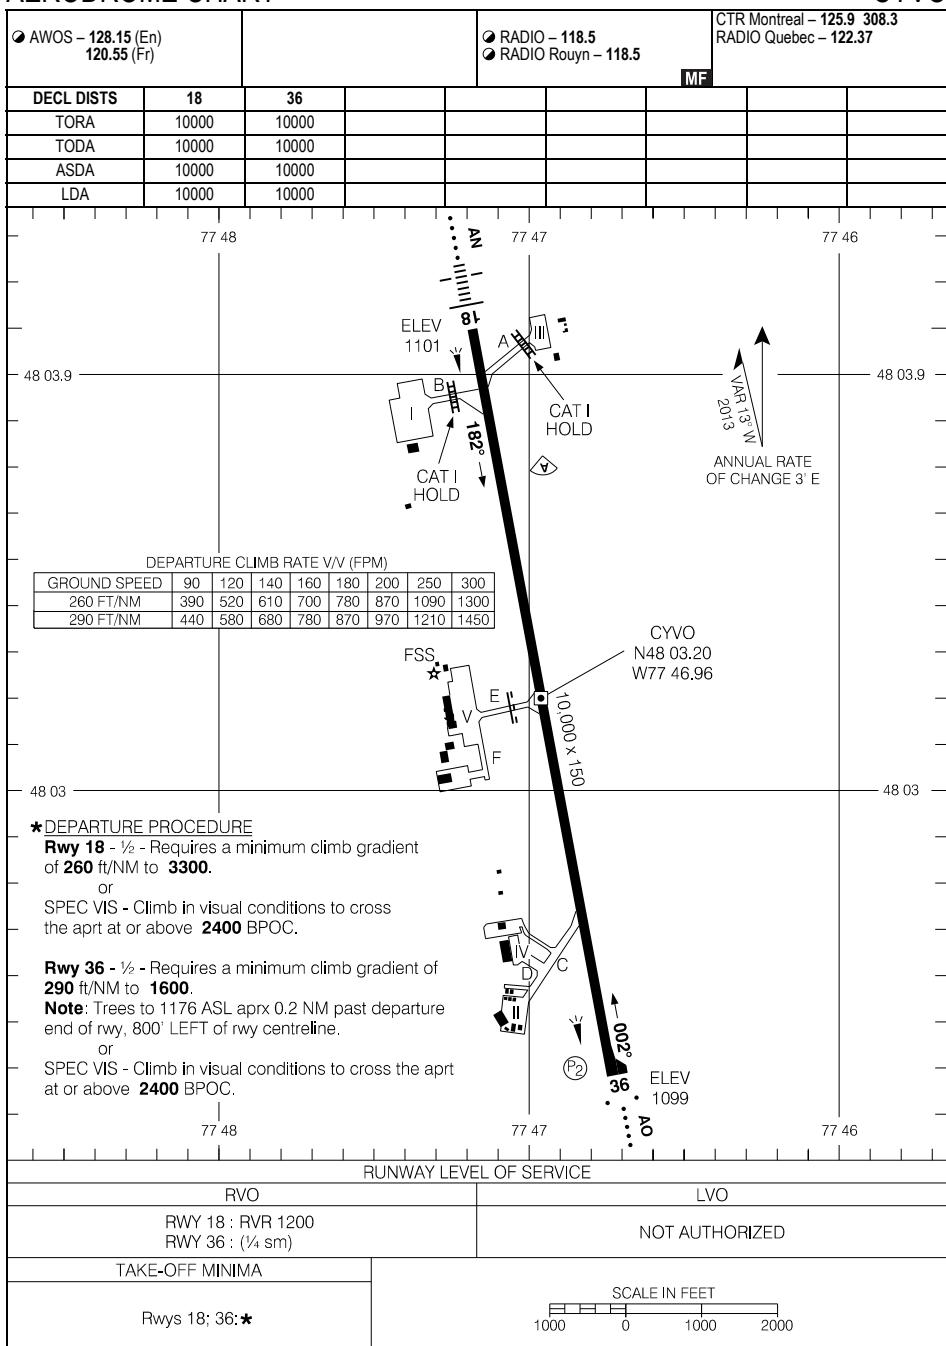

AERODROME CHART

EFF 7 AUG 25


CYVO-AD

CYVO

CYVO-AD

VAL-D'OR, QC
CYVO

CARTE D'AÉRODROME

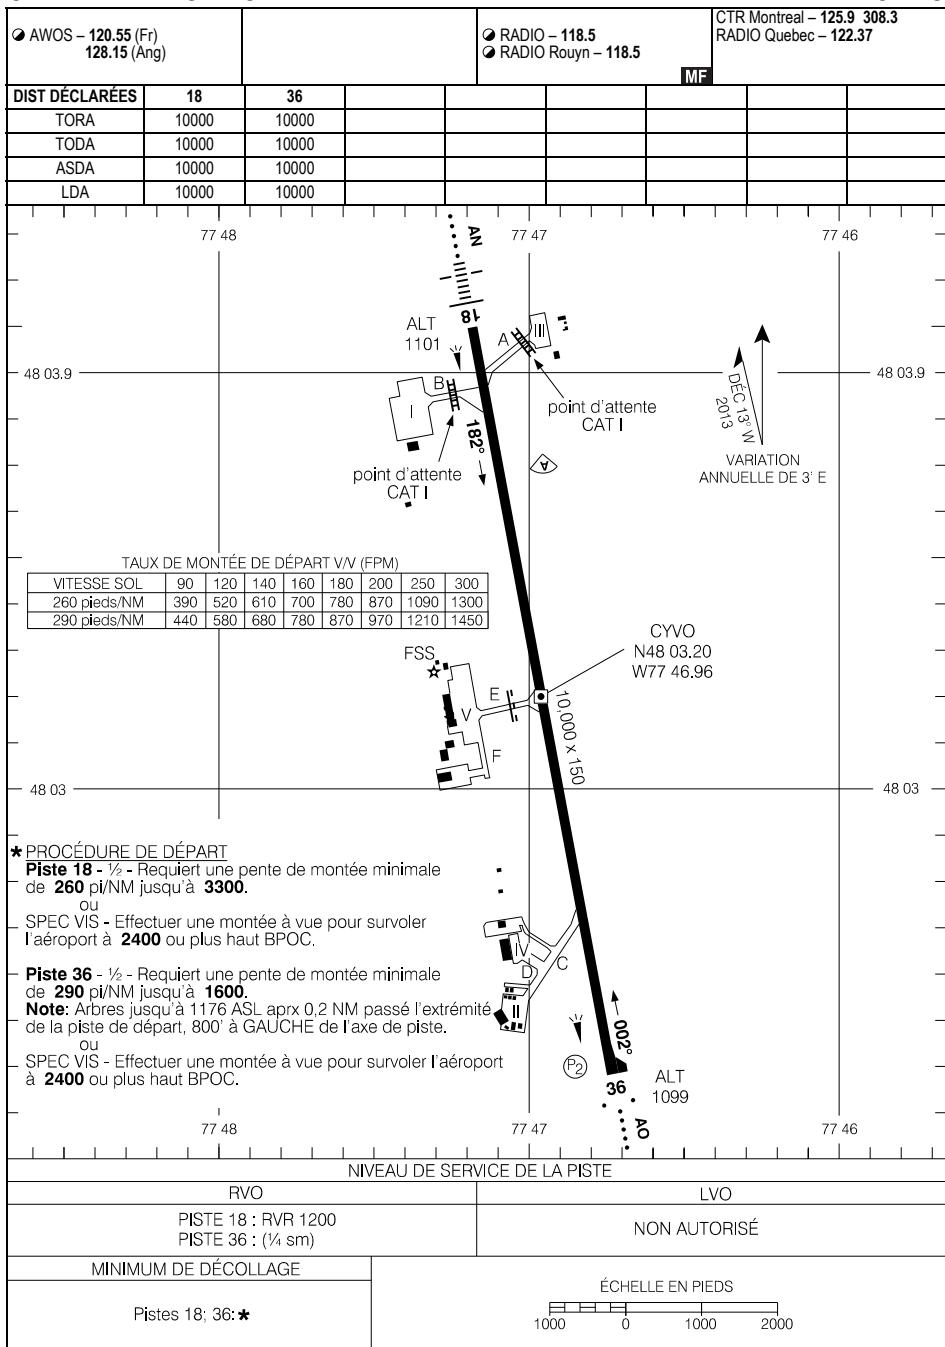CARTE D'AÉRODROME
EFF 7 AOÛT 25

CYVO

CYVO-AD

PARKING AREAS (PROCEDURES)

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA. All rights reserved

Parking spaces	Maximum wingspan (metres)	Maximum length (metres)	Restrictions	Largest aircraft allowed	Other aircraft allowed
1	38.1	47.3	• Medevac priority	B757-200	Other D code aircraft
1A	25.9	22.3	• Medevac priority	DHC-8-100	B1900D B200 B100
2	35.8	39.5	• Medevac priority	B737-800	B737-200 DHC-8-400 DHC-8-300 DHC-8-100 CV580 JS32
2A	17.6	17.6	• Medevac priority	B1900D	B100 B200
2B	35.8	39.5	• Regular flights only • Charters flights authorized to drop or pick passengers only. • Use 1,1A, 2, 2A,R1, R2, R3, R4 for longer parking duration.	B737-800	DHC-8-400 DHC-8-300 DHC-8-100 CV580 JS32 B1900D B200 B100
3	35.8	39.5	• Regular flights only • Charters flights authorized to drop or pick passengers only. • Use 1,1A, 2, 2A,R1, R2, R3, R4 for longer parking duration.	B737-800	B737-200 DHC-8-400 DHC-8-300 DHC-8-100 CV580 JS32 B1900D B200 B100
3A	25.9	22.3	• Regular flights only • Charters flights authorized to drop or pick passengers only. • Use 1,1A, 2, 2A,R1, R2, R3, R4 for longer parking duration.	DHC-8-100	JS32 B1900D B200 B100
4	28.4	30.5	• Cargo or mining charters flight priority	B737-200	DHC-8-400 DHC-8-300 DHC-8-100 CV580 JS32 B1900D B200 B100

PARKING AREAS (PROCEDURES)

EFF 5 SEP 24

CYVO


PARKING AREAS (PROCEDURES)

Parking spaces	Maximum wingspan (metres)	Maximum length (metres)	Restrictions	Largest aircraft allowed	Other aircraft allowed
5	28.4	30.5	• Cargo or mining charters flight priority	B737-200	DHC-8-400 DHC-8-300 DHC-8-100 CV580 JS32 B1900D B200 B100
5A	17.6	17.6	• Cargo or mining charters flight priority	B1900D	B100 B200
5B	17.6	17.6		B1900D	B100 B200
R1	14.0	12.0		B100	smaller
R2	14.0	12.0		B100	smaller
R3	14.0	12.0		B100	smaller
R4	14.0	12.0		B100	smaller

Note: If parking impossible along markings due operational constraints (wind, etc.), use parking areas 1, 1A, 2, 2A.

PARKING AREAS (PROCEDURES)

PARKING AREAS

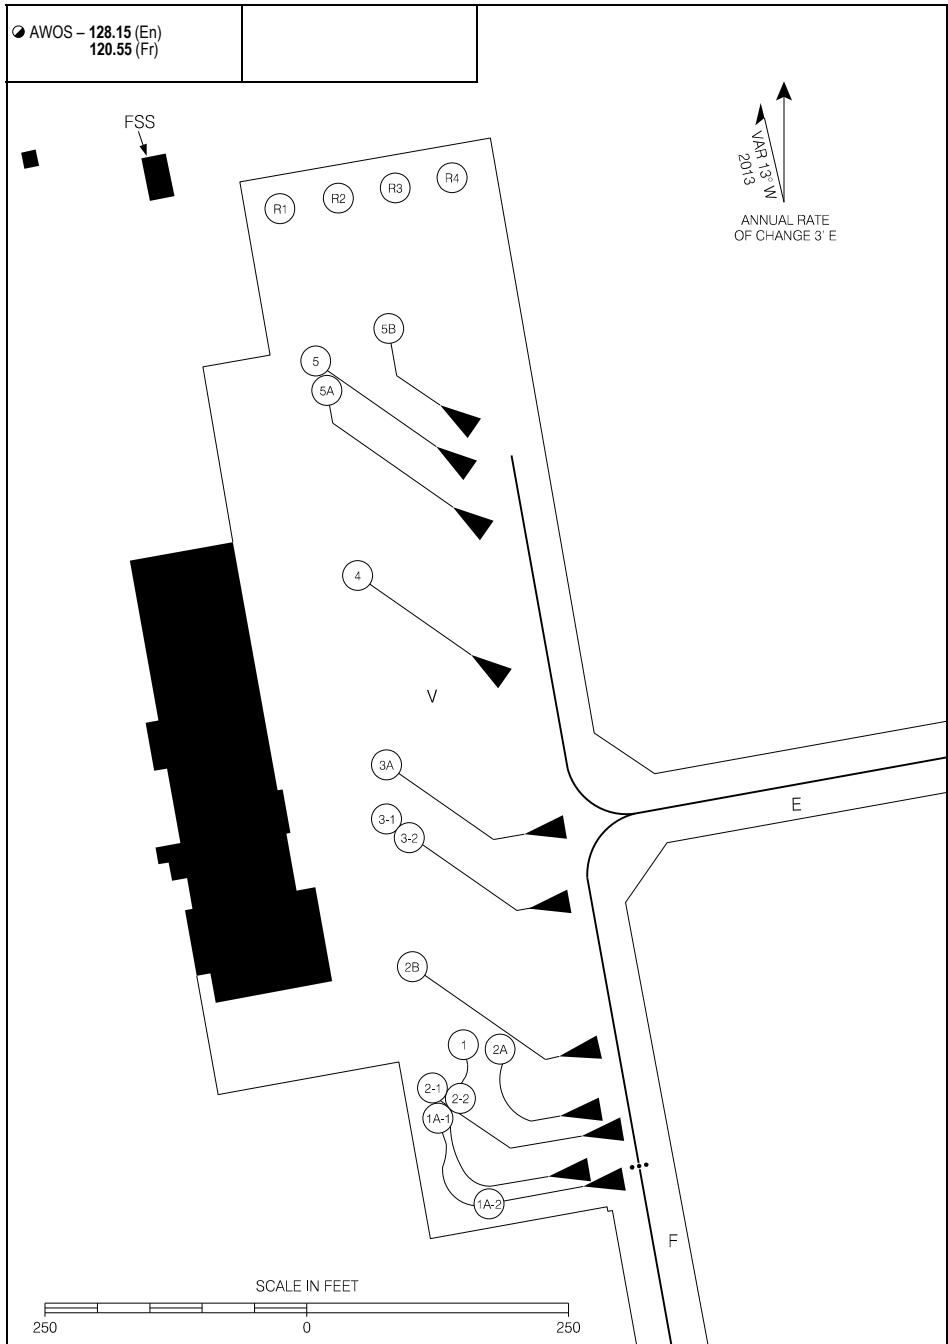

PARKING AREAS

Aircraft Parking Position

Position	Coordinates	Position	Coordinates
1	480308.23N 0774710.98W	3A	480310.86N 0774712.12W
1A-1	480307.64N 0774711.31W	4	480312.63N 0774712.54W
1A-2	480306.77N 0774710.62W	5	480314.60N 0774713.11W
2-1	480307.75N 0774711.37W	5A	480314.52N 0774713.04W
2-2	480307.68N 0774711.21W	5B	480314.96N 0774712.15W
2A	480308.20N 0774710.46W	R1	480315.91N 0774713.64W
2B	480308.97N 0774711.72W	R2	480316.01N 0774712.84W
3-1	480310.35N 0774712.12W	R3	480316.12N 0774712.03W
3-2	480310.23N 0774711.85W	R4	480316.22N 0774711.23W

PARKING AREAS

EFF 23 FEB 23

CYVO

AIRES DE STATIONNEMENT (PROCÉDURES)

Source des données aéronautiques civiles pour le Canada : © 2025 NAV CANADA Tous droits réservés

Postes de stationnement	Envergure maximale (mètre)	Longueur maximale (mètre)	Restrictions	Plus gros avions permis	Autres avions permis
1	38.1	47.3	• Priorité Medevac	B757-200	Other D code aircraft
1A	25.9	22.3	• Priorité Medevac	DHC-8-100	B1900D B200 B100
2	35.8	39.5	• Priorité Medevac	B737-800	B737-200 DHC-8-400 DHC-8-300 DHC-8-100 CV580 JS32
2A	17.6	17.6	• Priorité Medevac	B1900D	B100 B200
2B	35.8	39.5	• Vols réguliers uniquement • Vols nolisés autorisés à déposer ou à prendre des passagers uniquement. • Utilisez 1, 1A, 2, 2A, R1, R2, R3, R4 pour une durée de stationnement prolongée.	B737-800	DHC-8-400 DHC-8-300 DHC-8-100 CV580 JS32 B1900D B200 B100
3	35.8	39.5	• Vols réguliers uniquement • Vols nolisés autorisés à déposer ou à prendre des passagers uniquement. • Utilisez 1, 1A, 2, 2A, R1, R2, R3, R4 pour une durée de stationnement prolongée.	B737-800	B737-200 DHC-8-400 DHC-8-300 DHC-8-100 CV580 JS32 B1900D B200 B100
3A	25.9	22.3	• Vols réguliers uniquement • Vols nolisés autorisés à déposer ou à prendre des passagers uniquement. • Utilisez 1, 1A, 2, 2A, R1, R2, R3, R4 pour une durée de stationnement prolongée.	DHC-8-100	JS32 B1900D B200 B100
4	28.4	30.5	• Priorité aux vols nolisés cargo ou miniers	B737-200	DHC-8-400 DHC-8-300 DHC-8-100 CV580 JS32 B1900D B200 B100

AIRES DE STATIONNEMENT (PROCÉDURES)

EFF 5 SEP 24

CYVO


AIRES DE STATIONNEMENT (PROCÉDURES)

Postes de stationnement	Envergure maximale (mètre)	Longueur maximale (mètre)	Restrictions	Plus gros avions permis	Autres avions permis
5	28.4	30.5	• Priorité aux vols nolisés cargo ou miniers	B737-200	DHC-8-400 DHC-8-300 DHC-8-100 CV580 JS32 B1900D B200 B100
5A	17.6	17.6	• Priorité aux vols nolisés cargo ou miniers	B1900D	B100 B200
5B	17.6	17.6		B1900D	B100 B200
R1	14.0	12.0		B100	smaller
R2	14.0	12.0		B100	smaller
R3	14.0	12.0		B100	smaller
R4	14.0	12.0		B100	smaller

Note : Si impossible de stationner selon le marquage, à cause de contraintes opérationnelles (vent etc.), utiliser les postes de stationnement 1, 1A, 2, 2A.

AIRES DE STATIONNEMENT (PROCÉDURES)

AIRES DE STATIONNEMENT

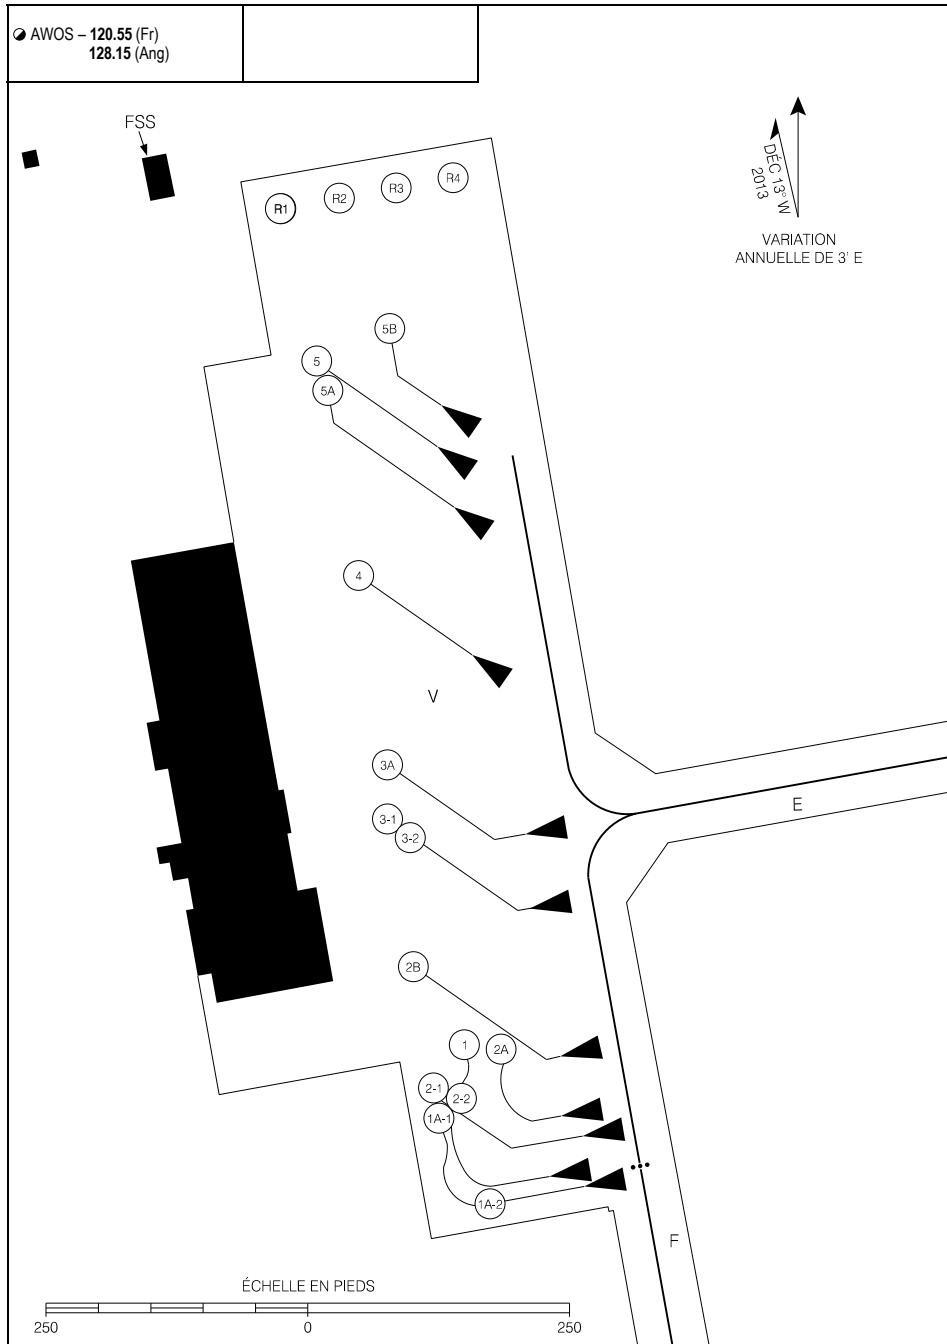

AIRES DE STATIONNEMENT

EFF 23 FÉV 23

AIRES DE STATIONNEMENT

Poste de stationnement d'aéronef

Position	Coordonnées	Position	Coordonnées
1	480308.23N 0774710.98W	3A	480310.86N 0774712.12W
1A-1	480307.64N 0774711.31W	4	480312.63N 0774712.54W
1A-2	480306.77N 0774710.62W	5	480314.60N 0774713.11W
2-1	480307.75N 0774711.37W	5A	480314.52N 0774713.04W
2-2	480307.68N 0774711.21W	5B	480314.96N 0774712.15W
2A	480308.20N 0774710.46W	R1	480315.91N 0774713.64W
2B	480308.97N 0774711.72W	R2	480316.01N 0774712.84W
3-1	480310.35N 0774712.12W	R3	480316.12N 0774712.03W
3-2	480310.23N 0774711.85W	R4	480316.22N 0774711.23W

AIRES DE STATIONNEMENT


EFF 23 FÉV 23

CYVO

CSR3-AD

VICTORIAVILLE (ANDRÉ-FORTIN), QC
CSR3

AERODROME CHART

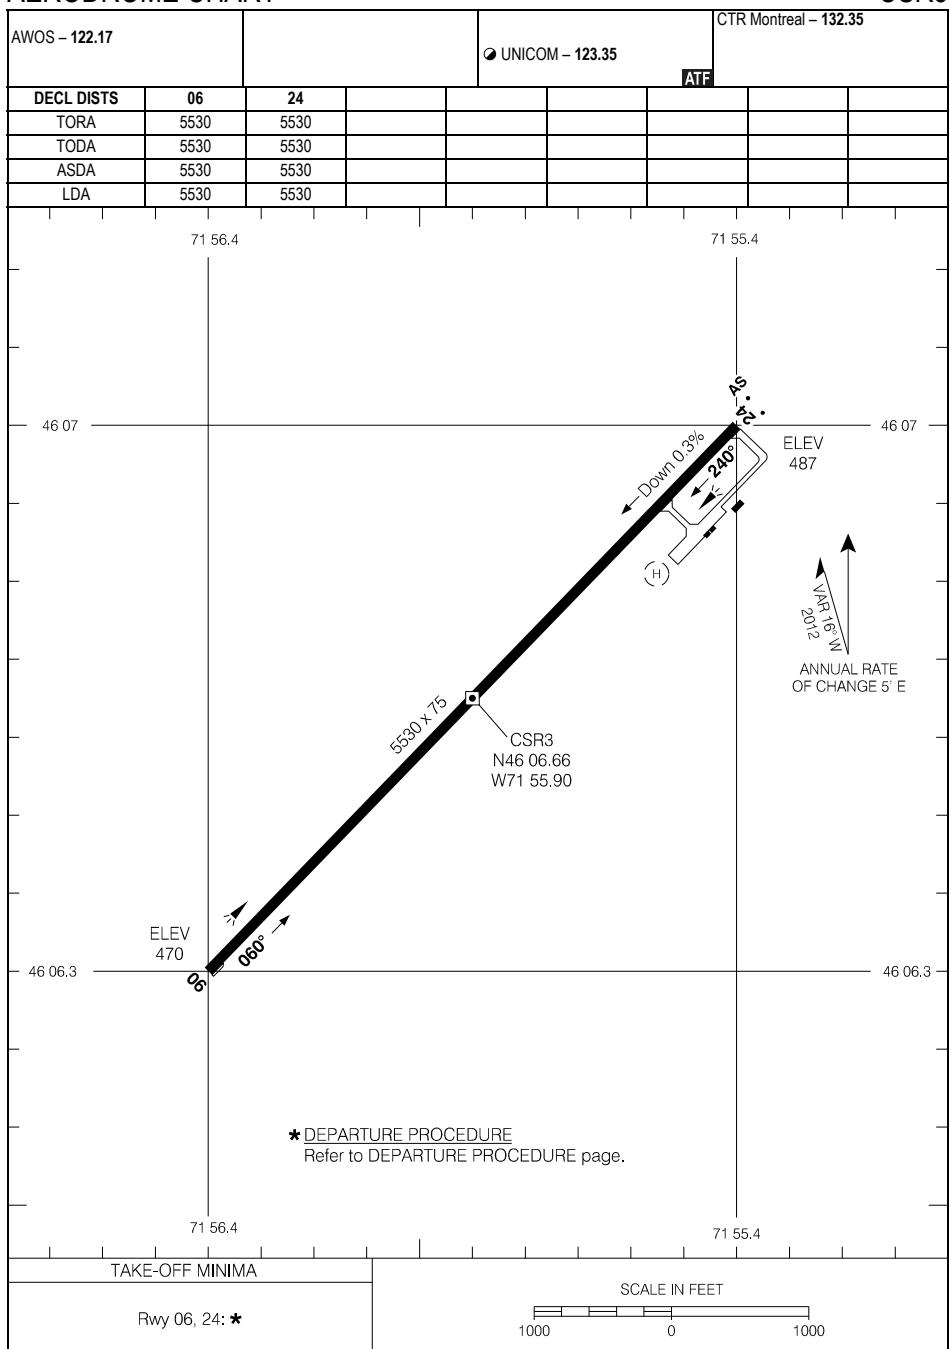

AERODROME CHART

EFF 12 JUN 25


CSR3

CSR3-AD

CSR3-AD

VICTORIAVILLE (ANDRÉ-FORTIN), QC
CSR3

CARTE D'AÉRODROME

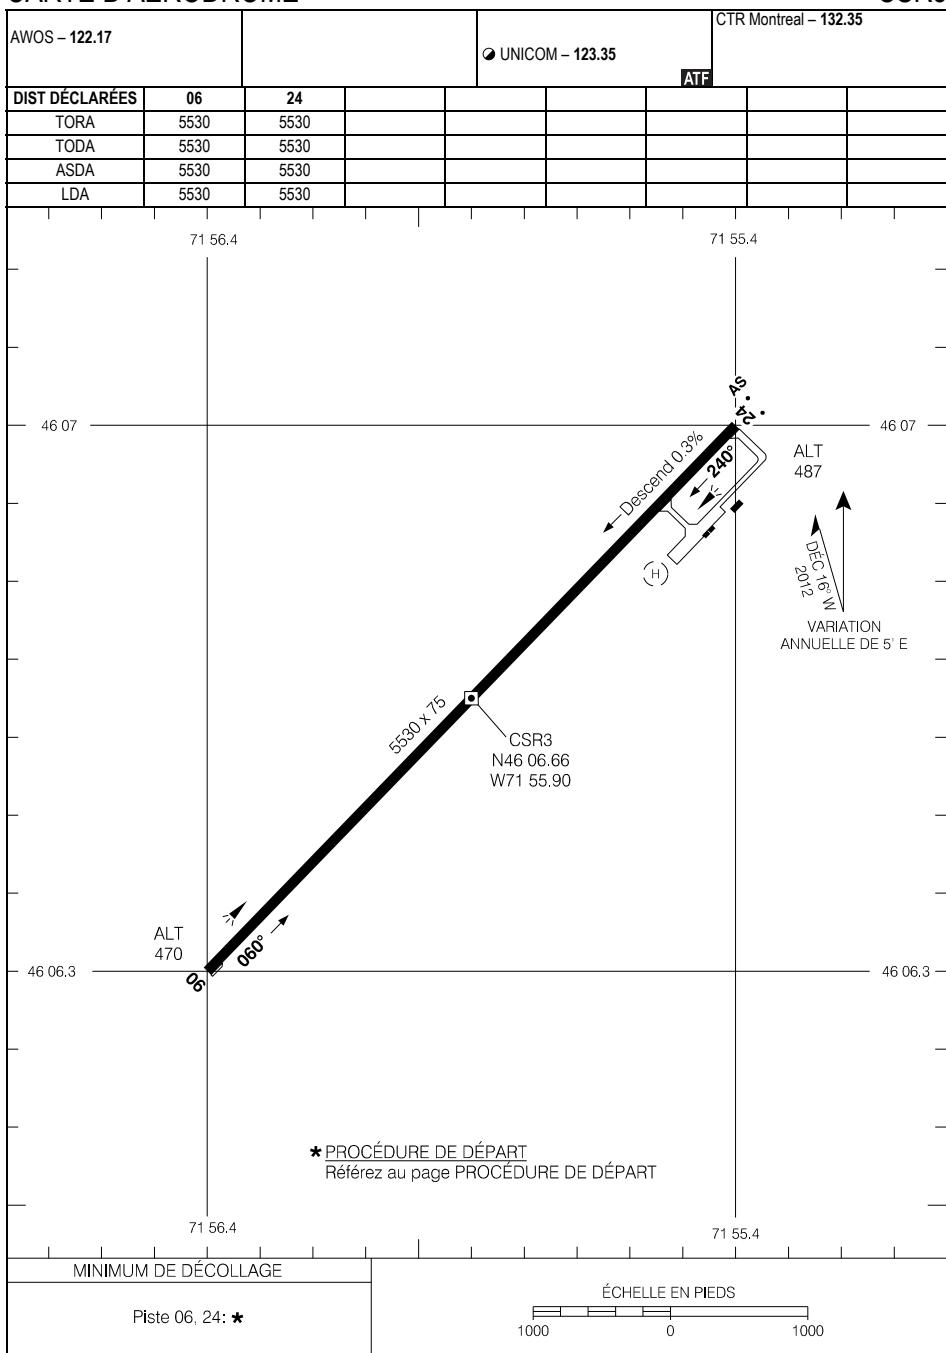

CARTE D'AÉRODROME

EFF 12 JUIN 25

CSR3

CSR3-AD

CYKQ-AD

WASKAGANISH, QC
CYKQ

AERODROME CHART

				<input checked="" type="radio"/> APRT RADIO – 122.1			
		<input checked="" type="radio"/> TFC – 122.1				MF*	
DECL DISTS	06	24					
TORA	3511	3511					
TODA	3511	3511					
ASDA	3511	3511					
LDA	3511	3511					

78 45.9

78 45.2

51 28.7

51 28.7

A graphic showing two arrows pointing upwards from a horizontal baseline. The left arrow is labeled 'VAR 14% W' and the right arrow is labeled '5% E'. The text 'ANNUAL RATE OF CHANGE' is written below the arrows.

ANNUAL RATE
OF CHANGE 5% E

CYKQ
N51 28.40
W78 45 50

ELEV
77

11

ELEV
78

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

51 28.1

51 28.1

* DEPARTURE PROCEDURE

Rwy 06 - 1/2

Note: Trees to 145 ASL past departure end of rwy.

Rwy 24 - 1/2

Note: Trees to 129 ASL past departure end of rwy.

TAKE-OFF MINIMA

SCALE IN FEET

Rwys 06, 24: *

A horizontal bar chart representing a distribution. The x-axis is labeled with values -1000, 0, and 1000. The bars are black and white, forming a symmetric pattern centered at zero.

AERODROME CHART

CYKQ


EFF 25 APR 19

CYKQ-AD

CYKQ-AD

WASKAGANISH, QC
CYKQ

CARTE D'AÉRODROME

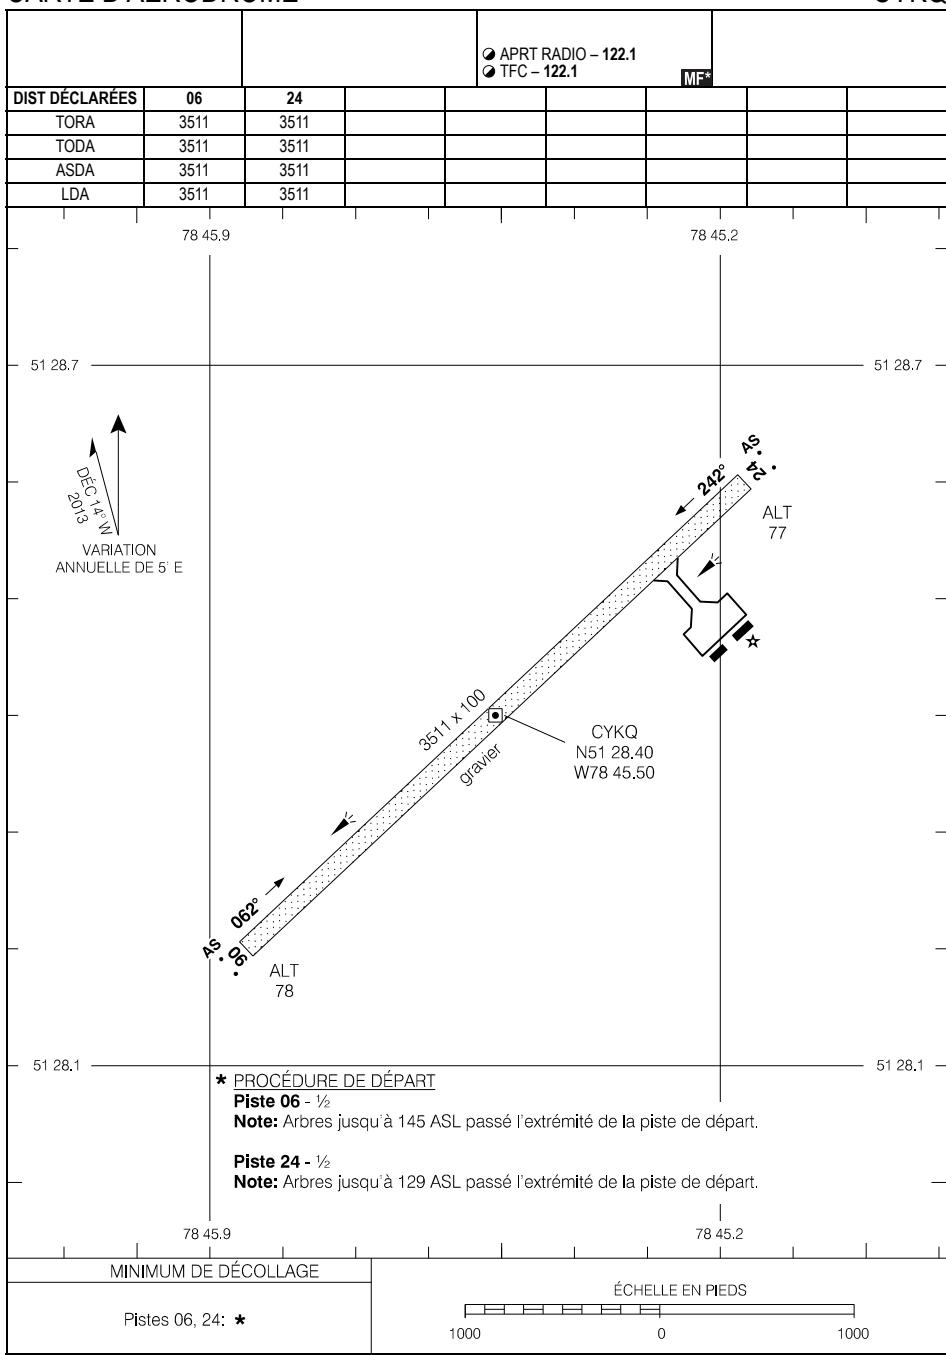

CARTE D'AÉRODROME

EFF 25 AVR 19

CYKQ


CYKQ-AD

CYNC-AD

WEMINDJI ,QC
CYNC

AERODROME CHART

				<input checked="" type="radio"/> APRT RADIO – 122.1			
		<input checked="" type="radio"/> TFC – 122.1				MF*	
DECL DISTS	10	28					
TORA	3511	3511					
TODA	3511	3511					
ASDA	3511	3511					
LDA	3511	3511					

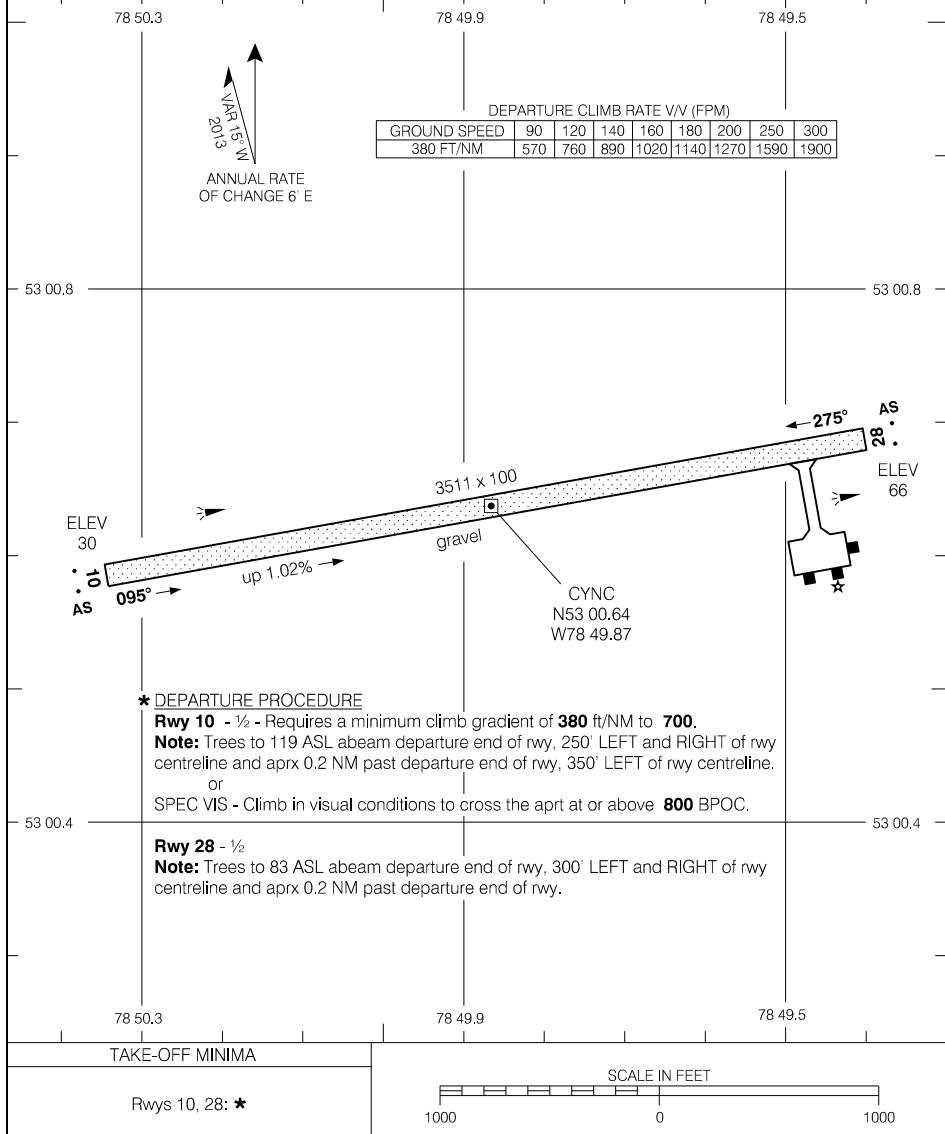

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART


EFF 14 JUL 22

CYNC-AD

CYNC-AD

WEMINDJI, QC
CYNC

CARTE D'AÉRODROME

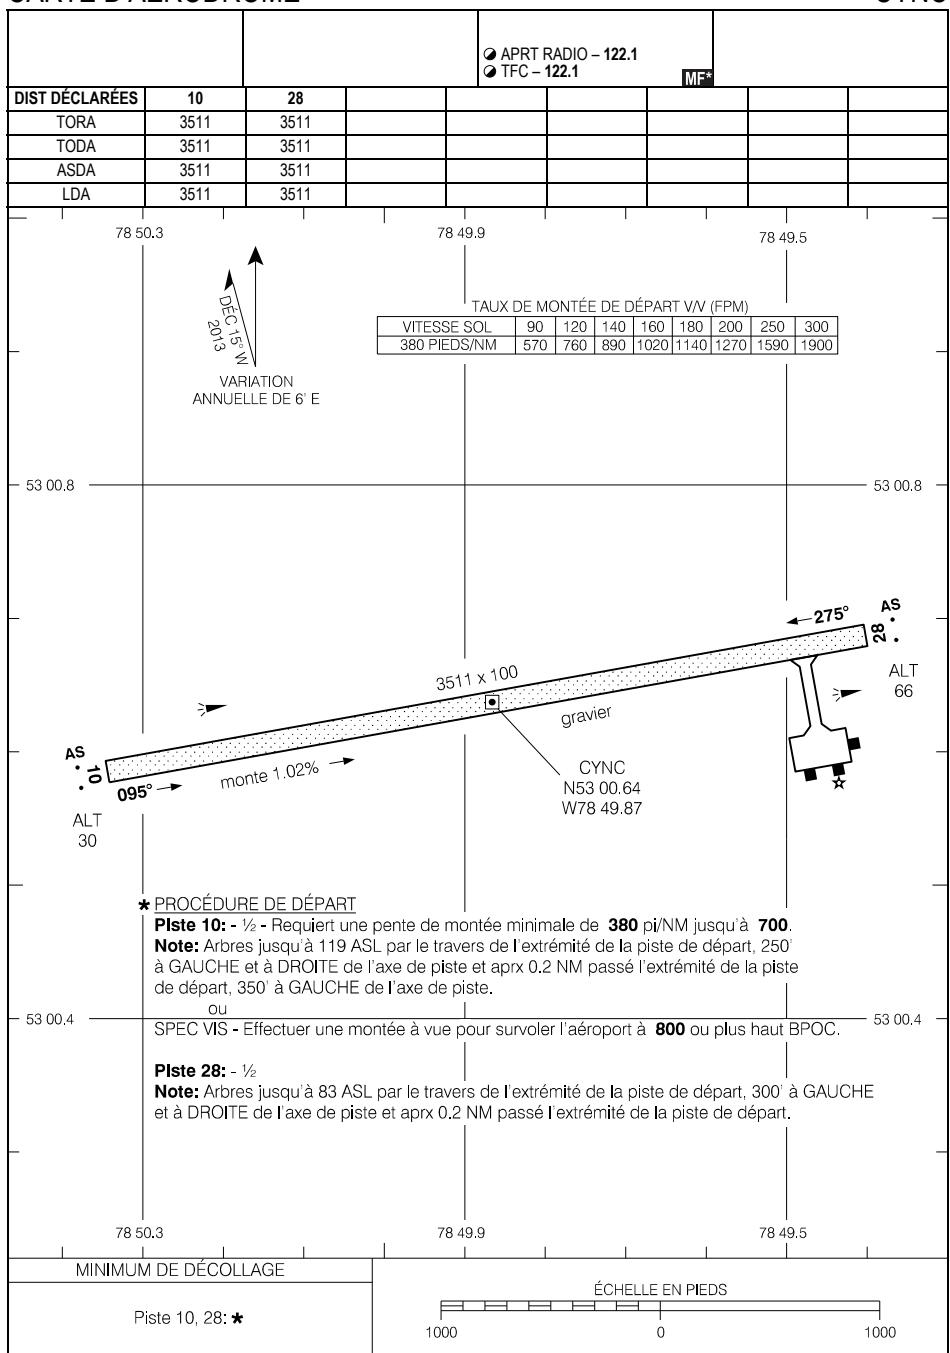

CARTE D'AÉRODROME

EFF 14 JUIL 22


CYNC

CYNC-AD

CZBF-AD

BATHURST, NB
CZBF

AERODROME CHART

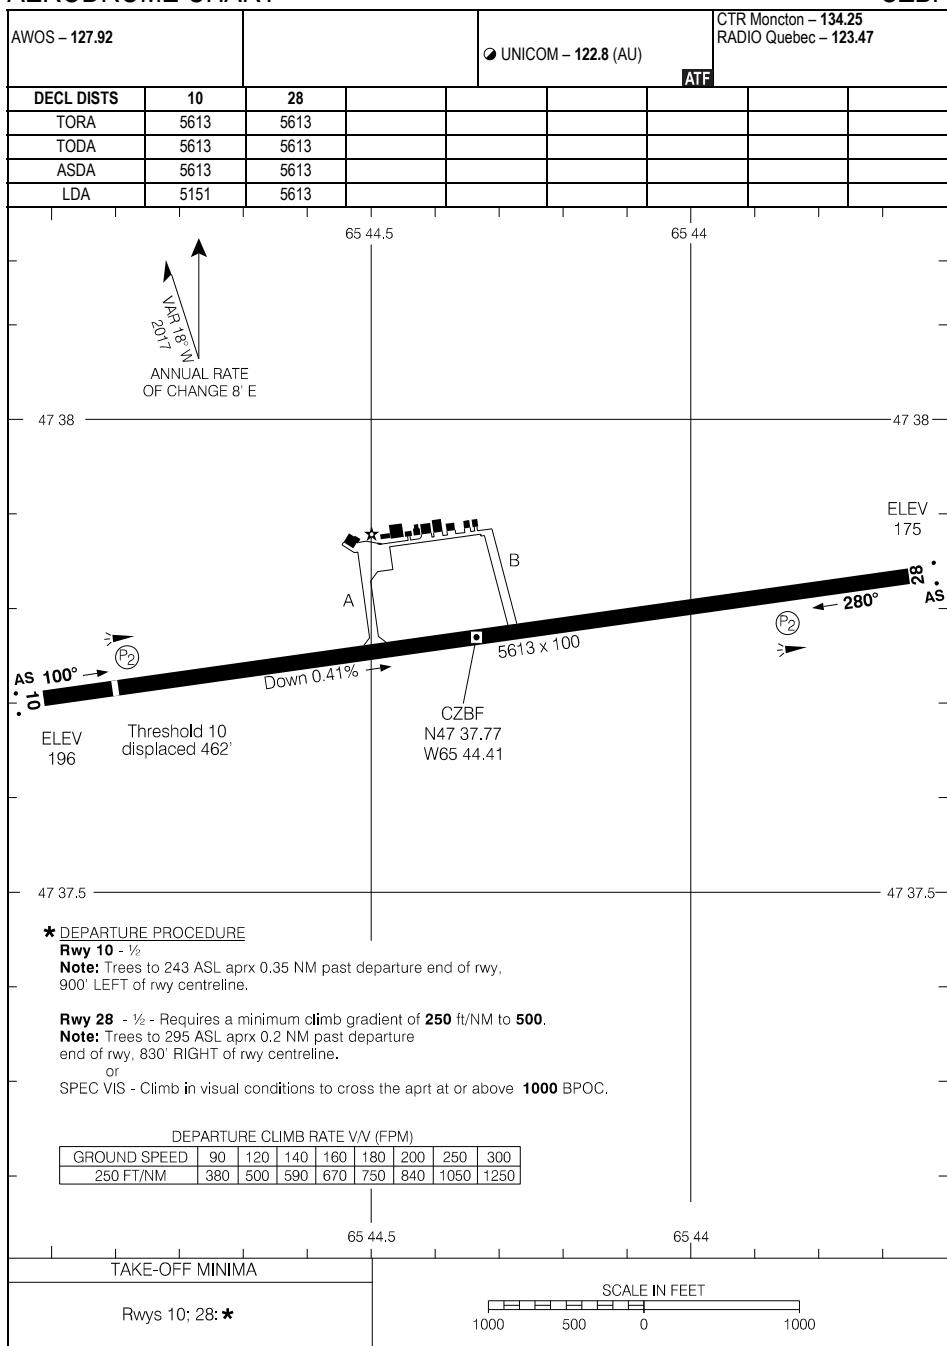


AERODROME CHART

EFF 5 OCT 23

CZBF

CZBF-AD

AERODROME CHART

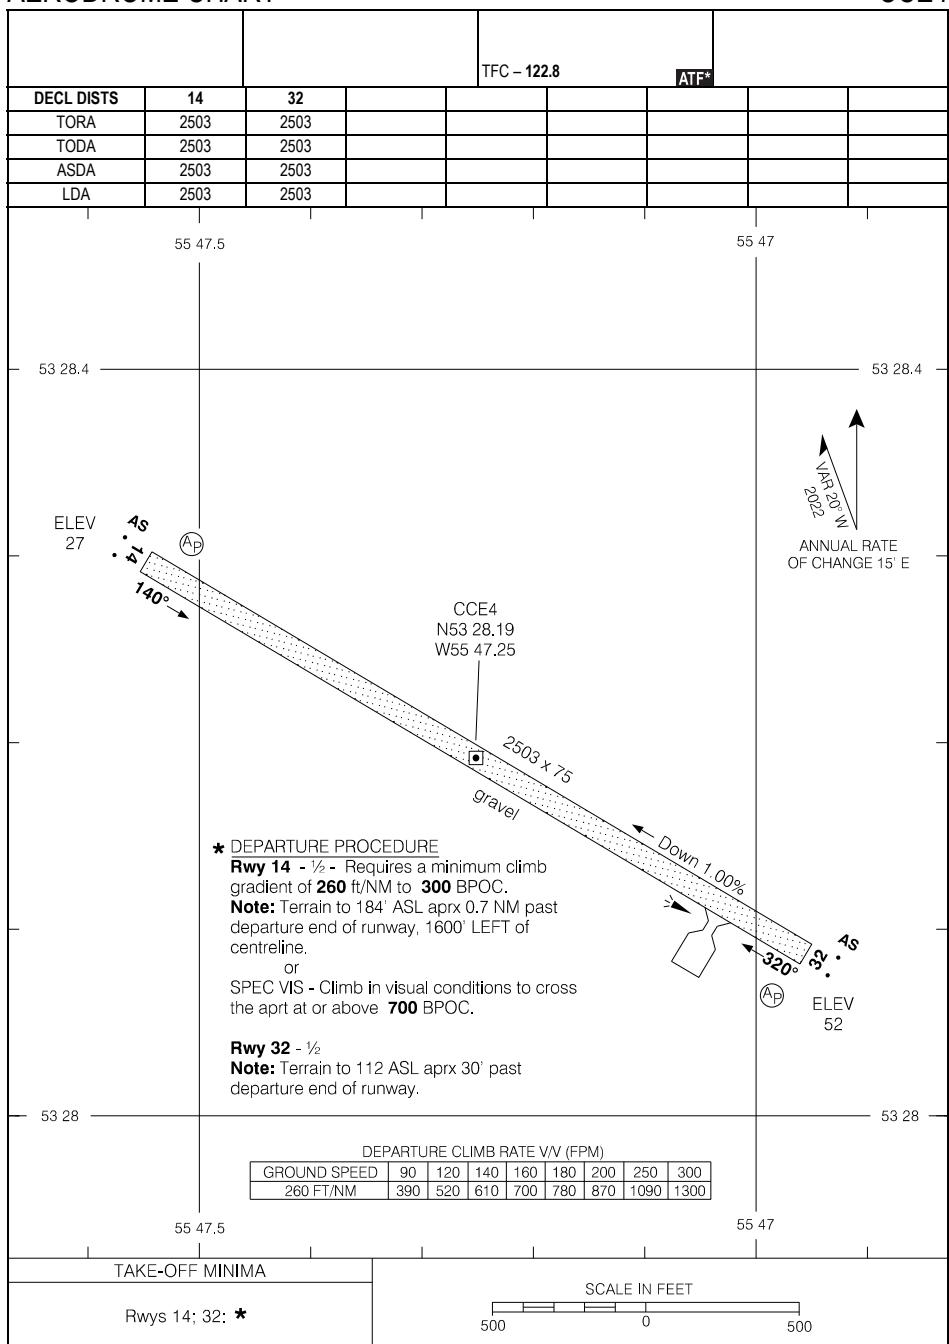

AERODROME CHART

EFF 14 JUL 22

CCE4

CYCA-AD

CARTWRIGHT, NL
CYCA

AERODROME CHART

MET - 128.75				TFC - 122.8		ATF*	
DECL DISTS	08	26					
TORA	3937	3937					
TODA	3937	3937					
ASDA	3937	3937					
LDA	3937	3937					

* DEPARTURE PROCEDURE


Rwy 08 - SPEC VIS - CAT A/B/C Climb in visual conditions to cross apart at or above **1100** BPOC, CAT D Climb in visual conditions to cross apart at or above **1200** BPOC.

Note: Trees to 102 ASL within 300' of departure end of rwy.

Rwy 26 - SPEC VIS - CAT A/B/C Climb in visual conditions to cross apt at or above **1100** BPOC. CAT D Climb in visual conditions to cross apt at or above **1200** BPOC.

Note: Trees to 312 ASL aprx 0.7 NM past departure end of rwy, 1300' LEFT of centreline.

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

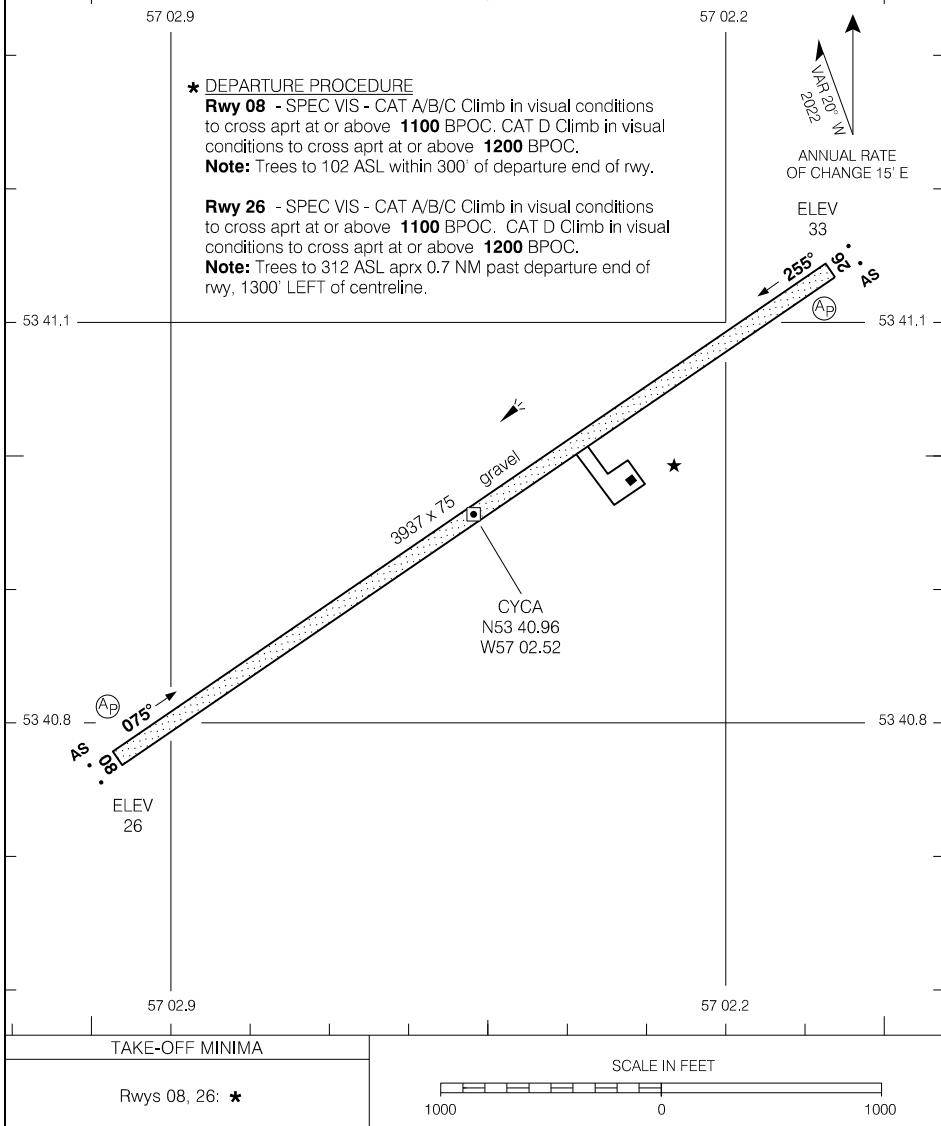

AERODROME CHART

EFF 3 NOV 22


CYCA

CYCA-AD

CYCL-AD

CHARLO, NB
CYCL

AERODROME CHART

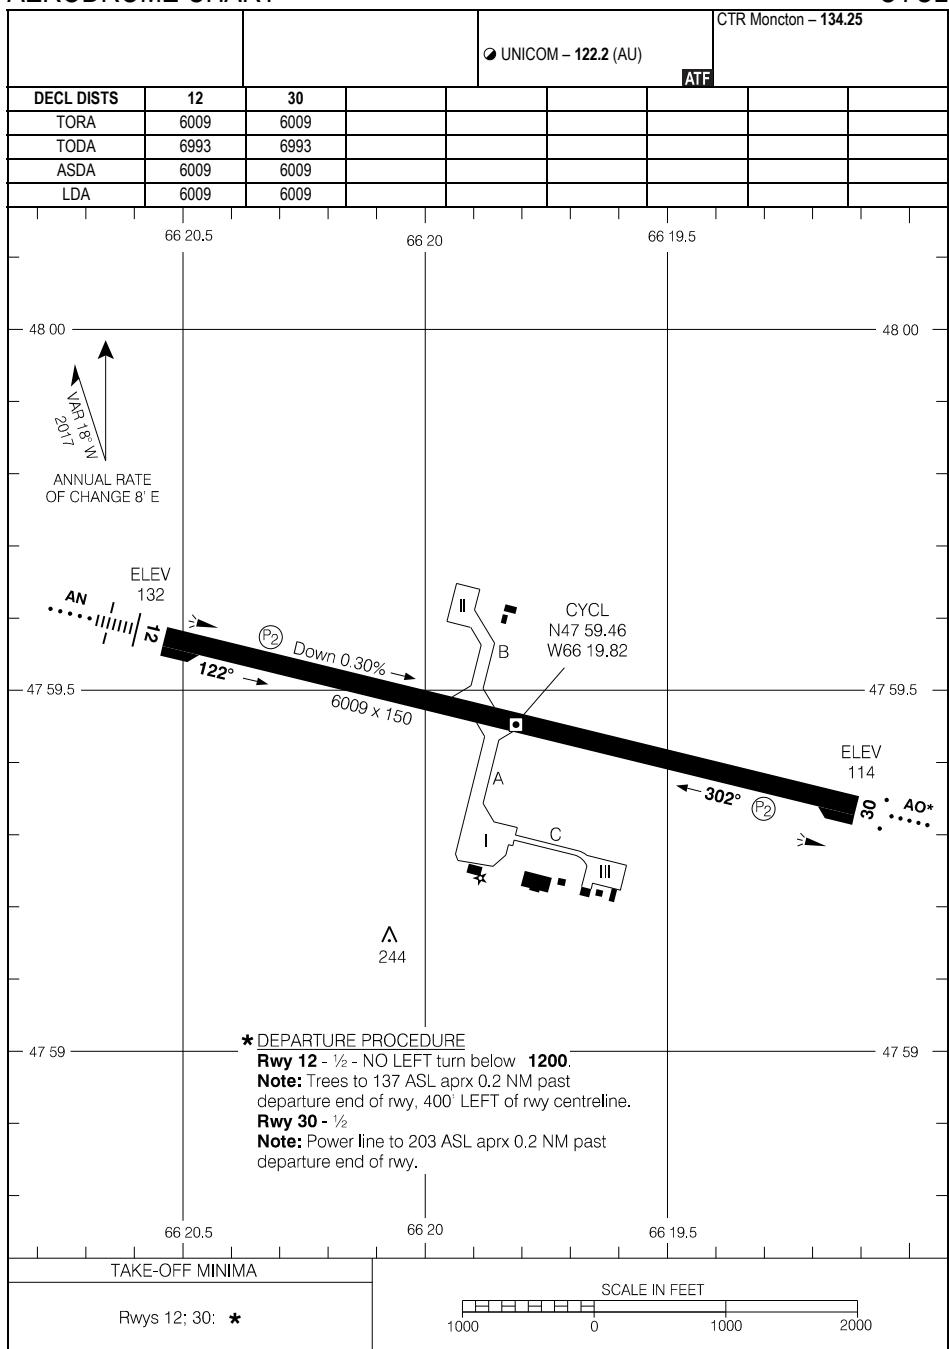


AERODROME CHART

EFF 20 FEB 25

CYCL

CYCL-AD

AERODROME CHART

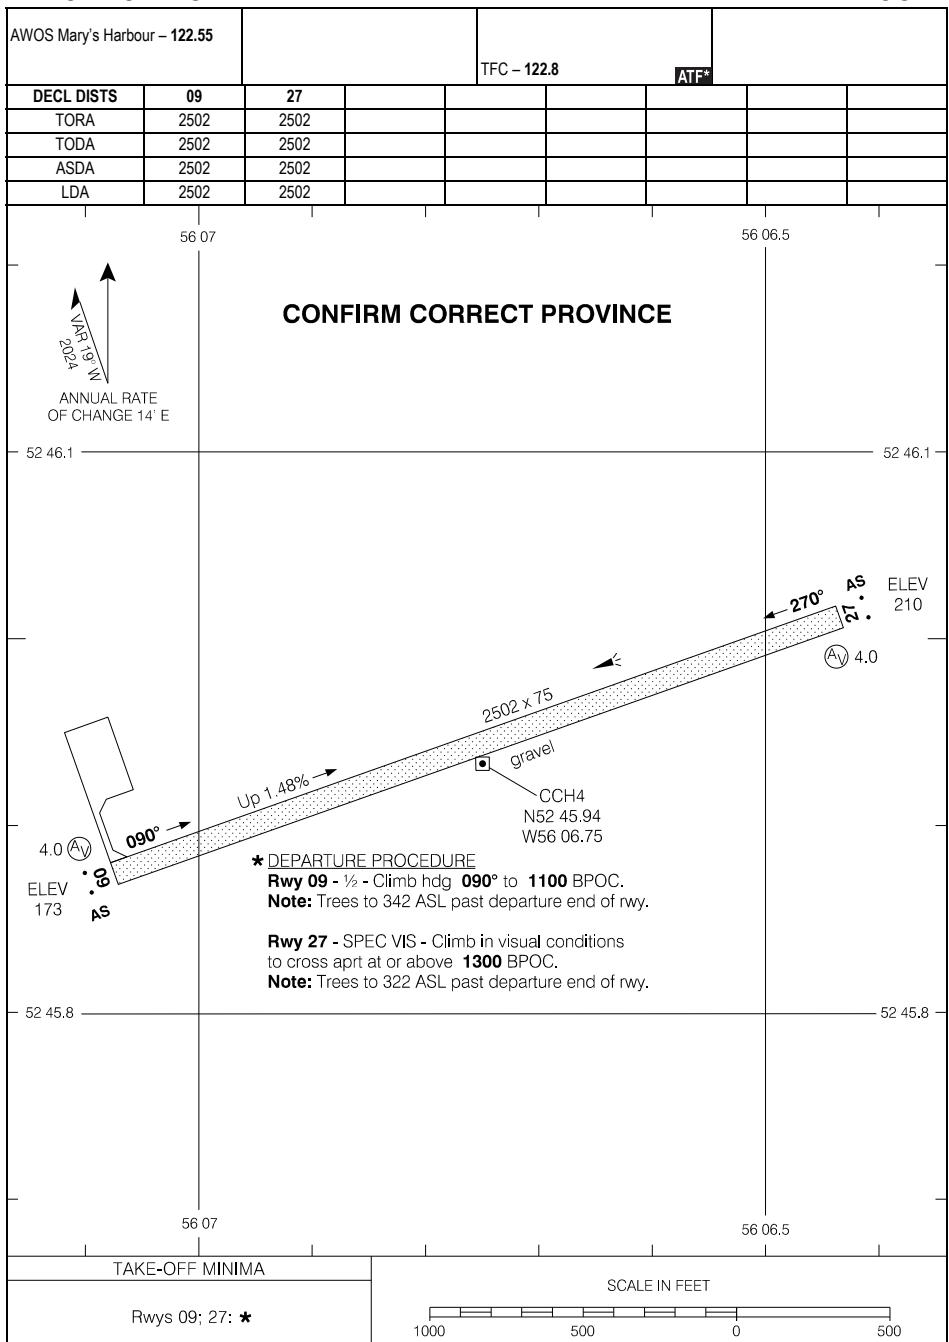

AERODROME CHART


EFF 21 MAR 24

CCH4

CYYG-AD

CHARLOTTETOWN, PE
CYYG

AERODROME CHART

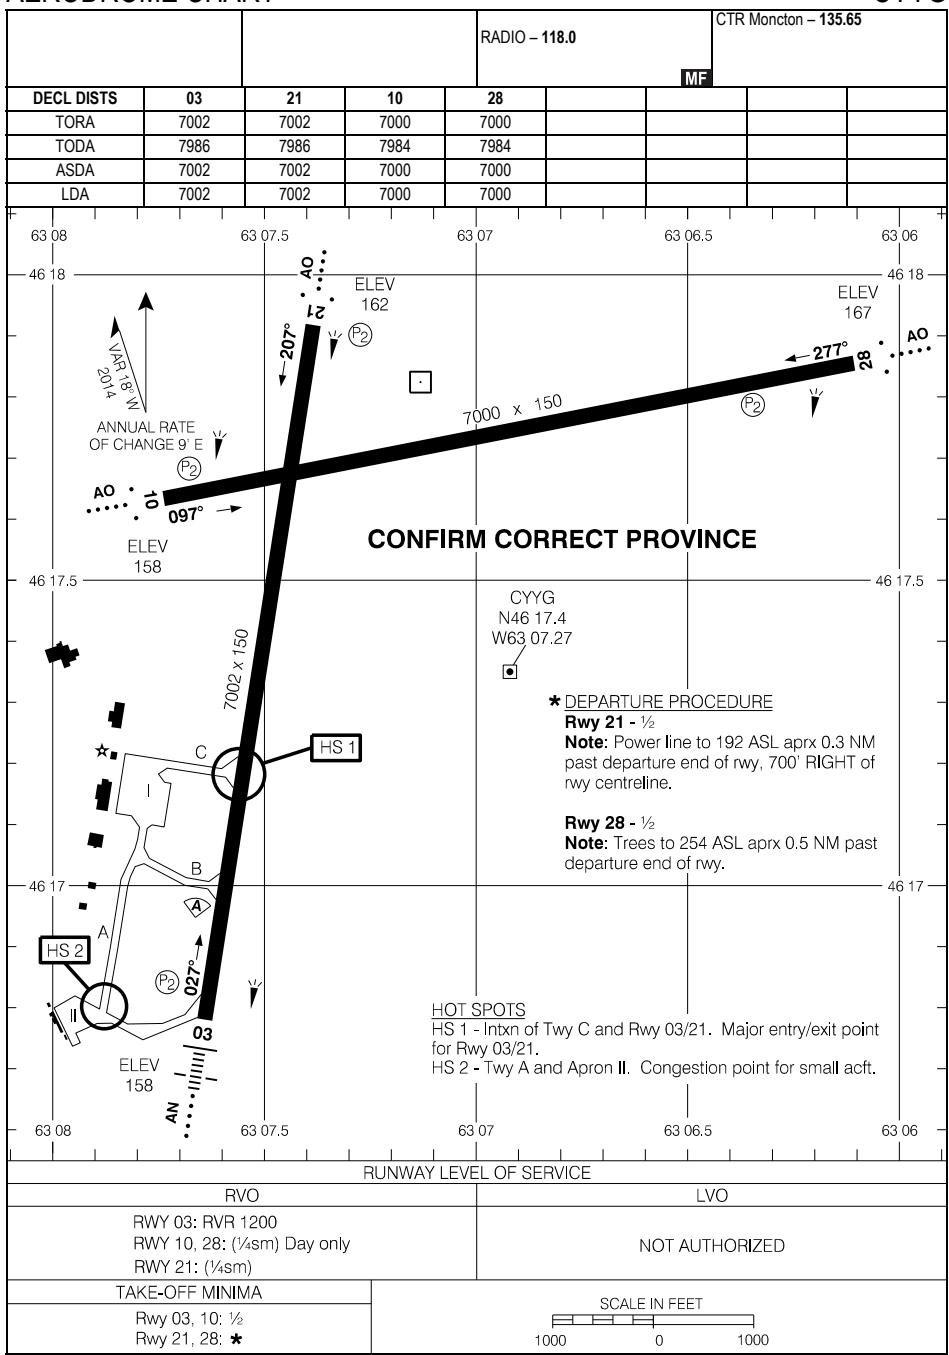


AERODROME CHART

EFF 20 FEB 25

CYYG

CYYG-AD

AERODROME CHART

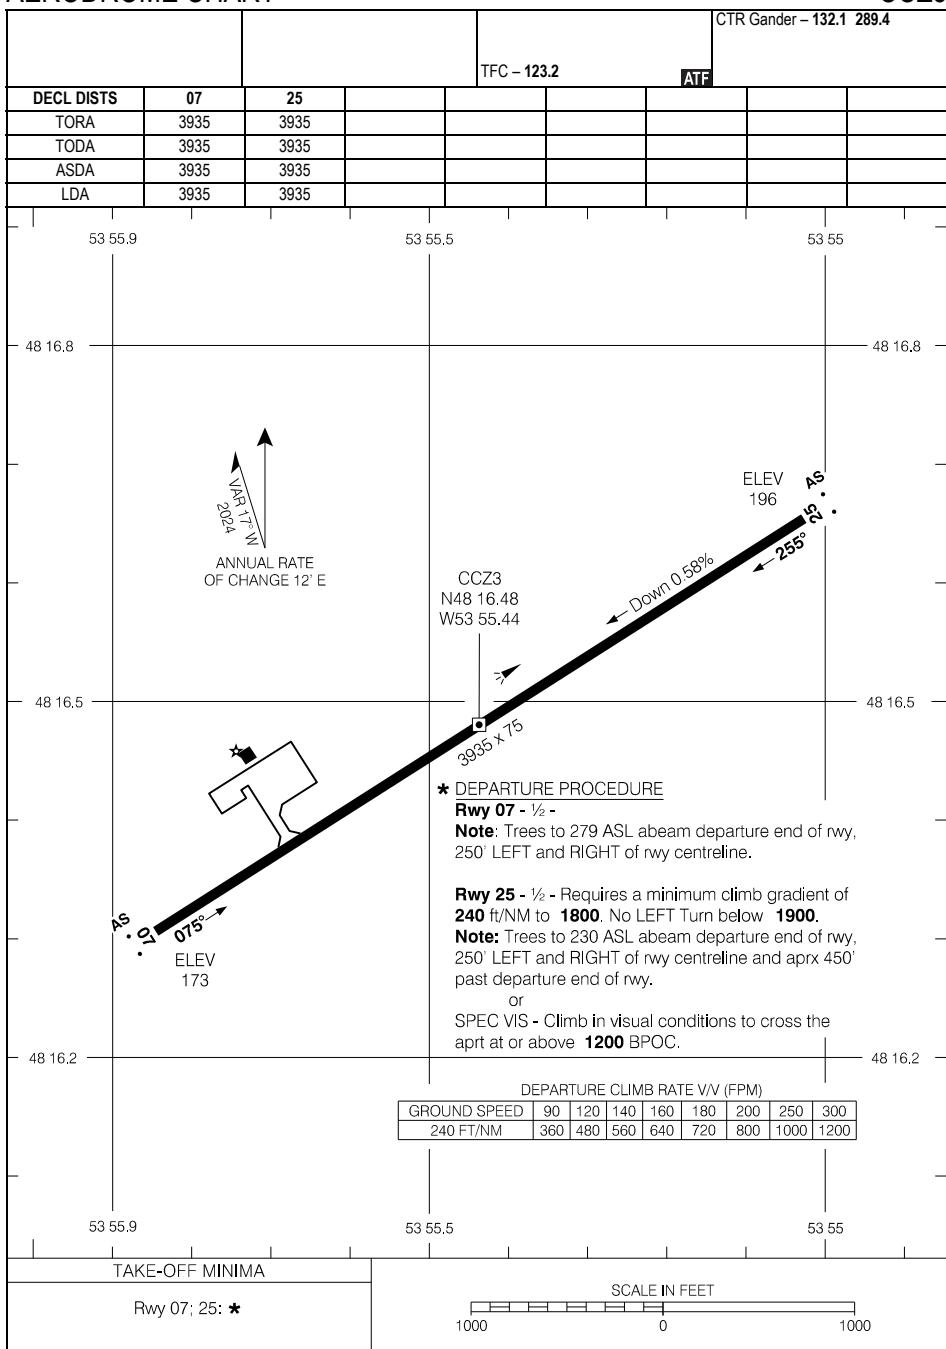


AERODROME CHART

EFF 26 DEC 24

CCZ3

AERODROME CHART

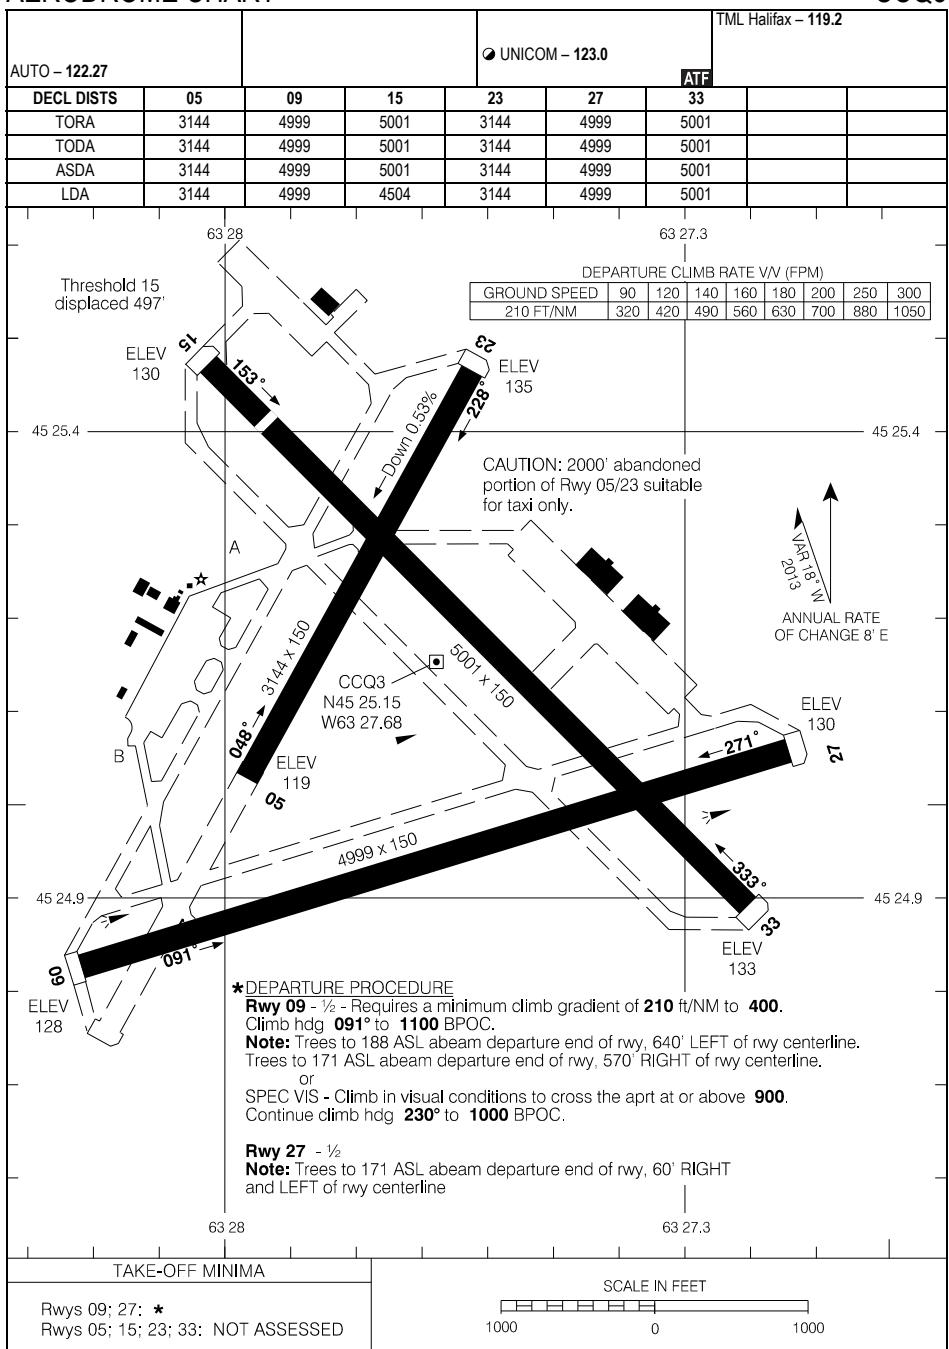

AERODROME CHART


EFF 17 APR 25

CCQ3

CYDF-AD

DEER LAKE, NL
CYDF

AERODROME CHART

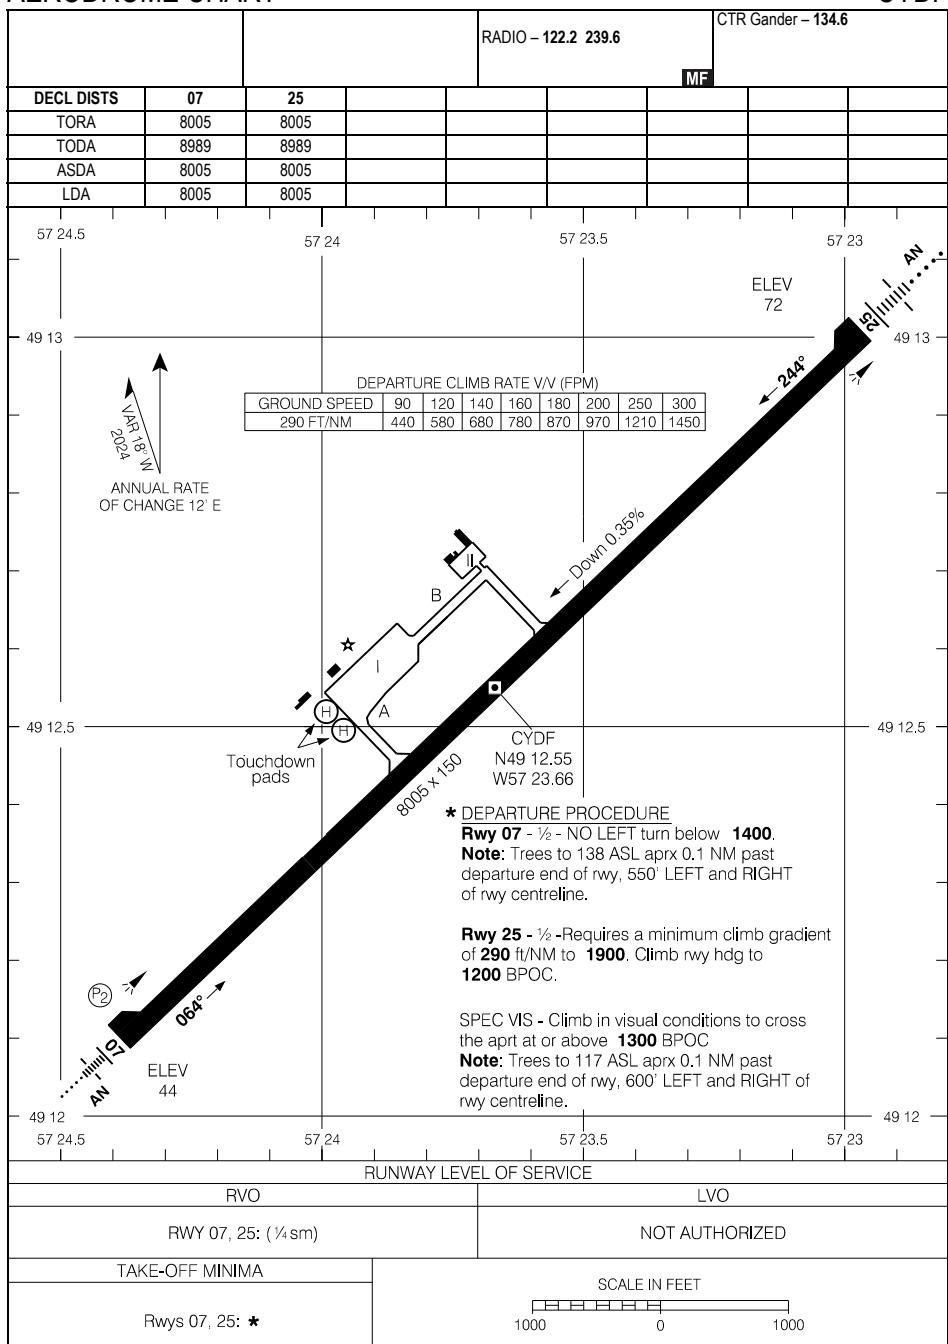

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 5 SEP 24


CYDF

CYDF-AD

CYID-AD

DIGBY MUNICIPAL AIRPORT, NS
CYID

AERODROME CHART

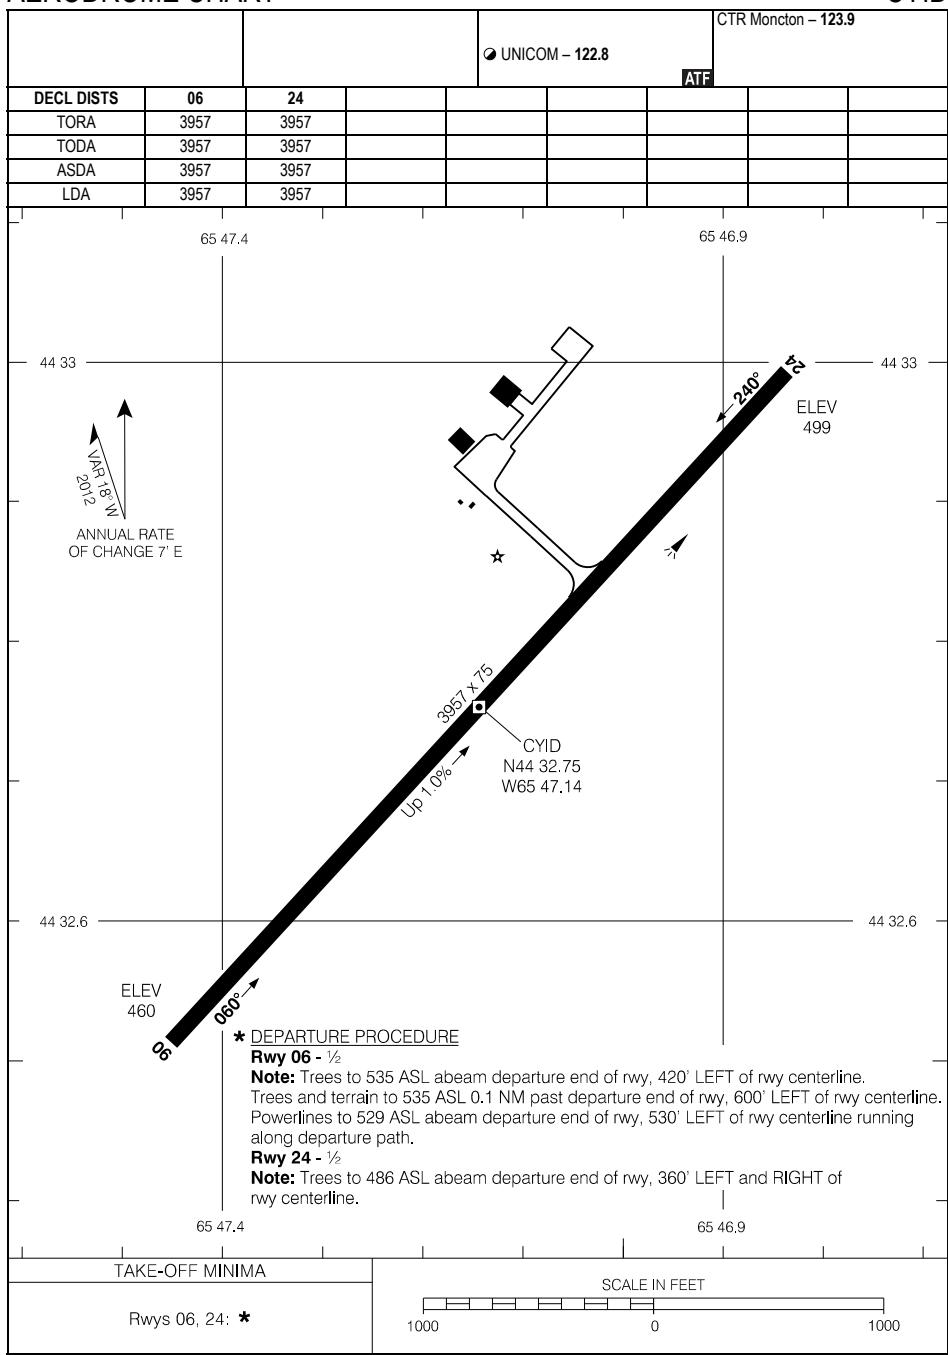

AERODROME CHART

EFF 27 JAN 22


CYID

CYID-AD

CYES-AD

EDMUNDSTON, NB
CYES

AERODROME CHART

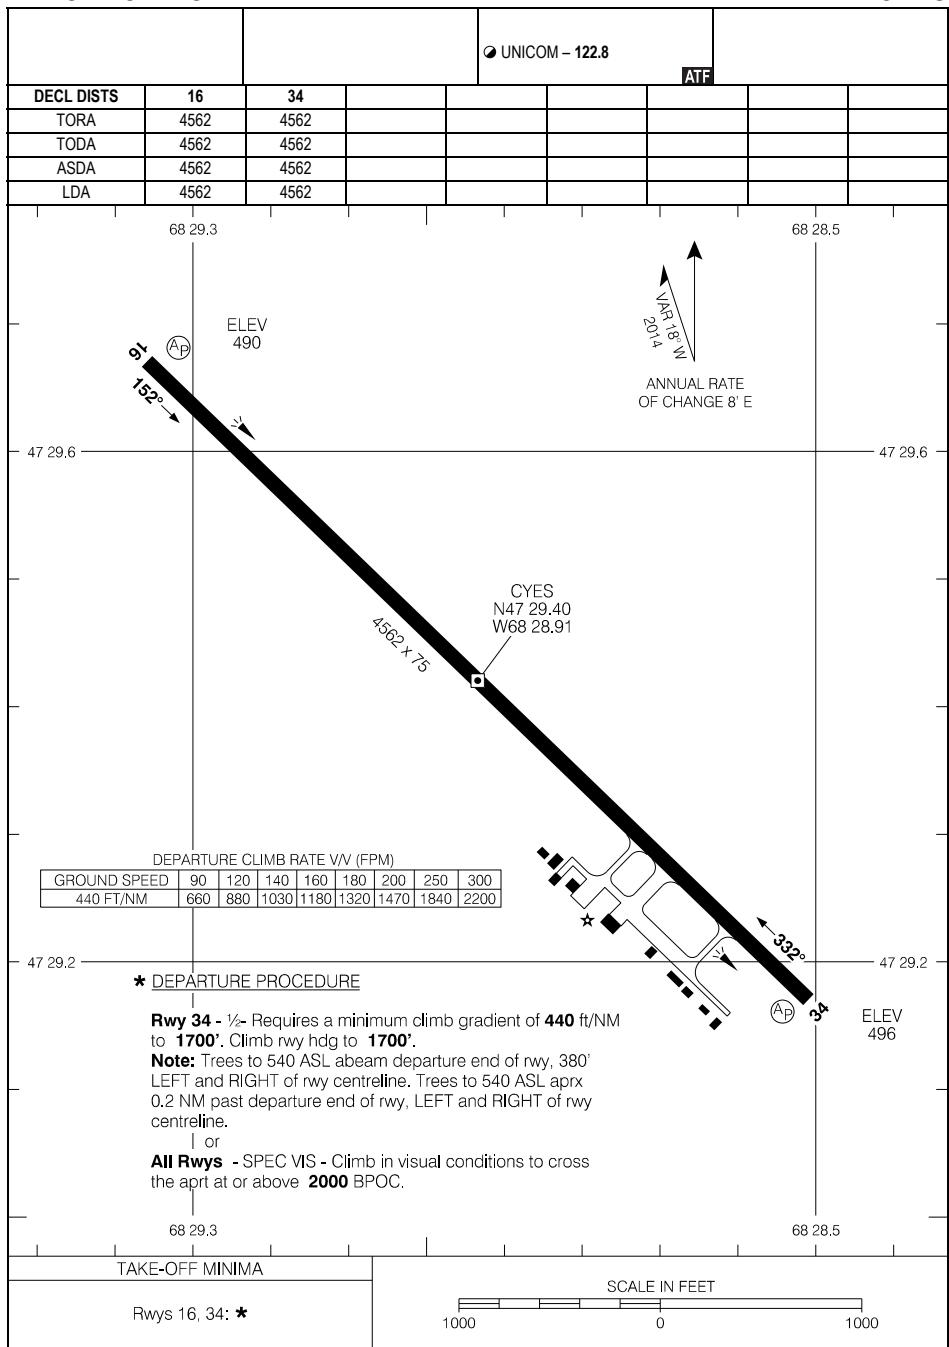

AERODROME CHART

EFF 20 APR 23


CYES

CYES-AD

CCP2-AD

EXPLOITS VALLEY (BOTWOOD), NL
CCP2

AERODROME CHART

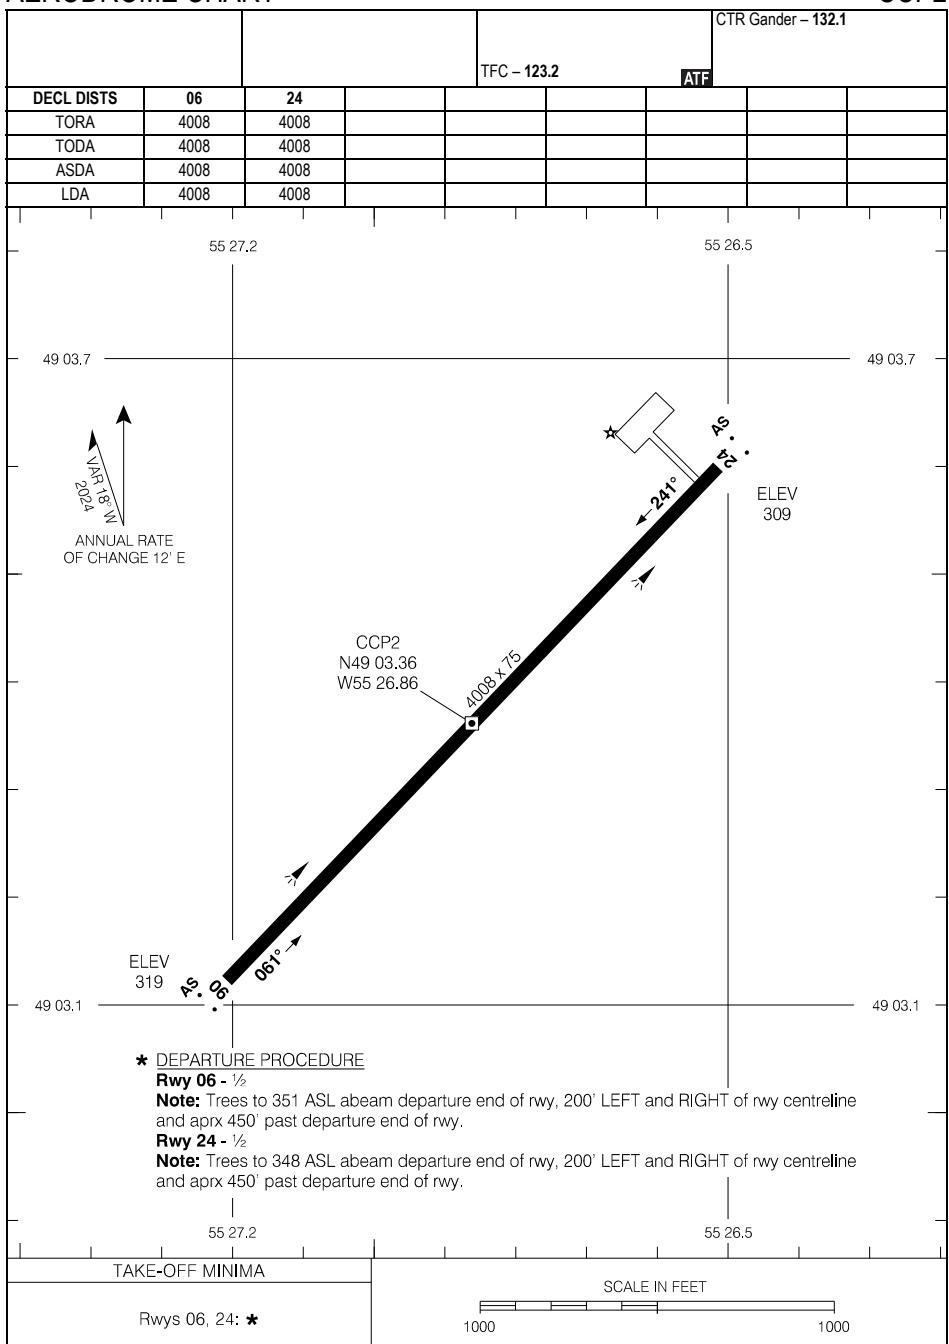

AERODROME CHART

EFF 31 OCT 24


CCP2

CCP2-AD

AERODROME CHART

CTR Gander – 132.1 289.4

ATF

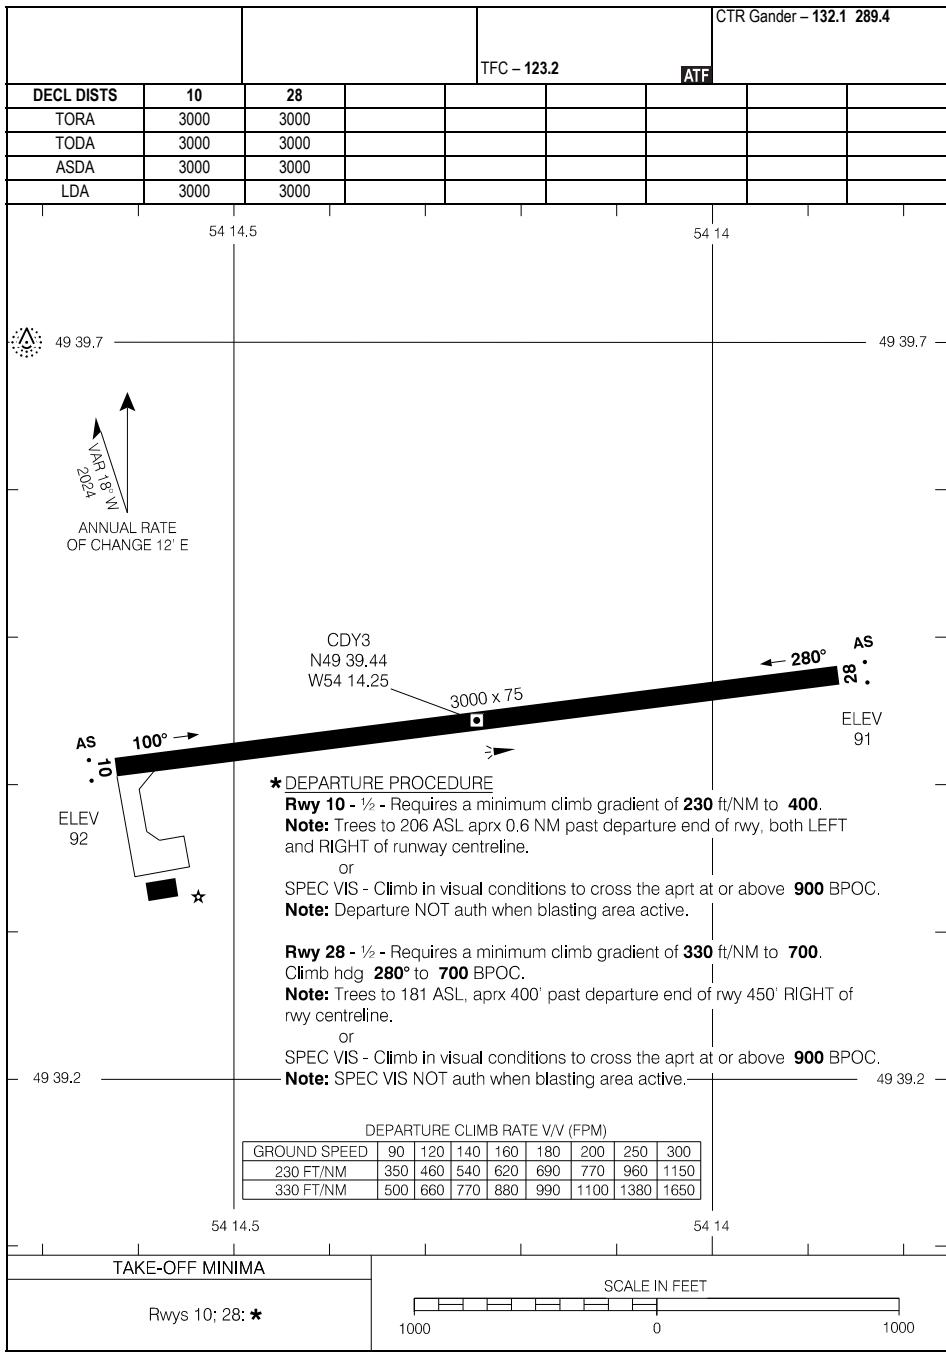


AERODROME CHART

EFF 26 DEC 24

CDY3

AERODROME CHART

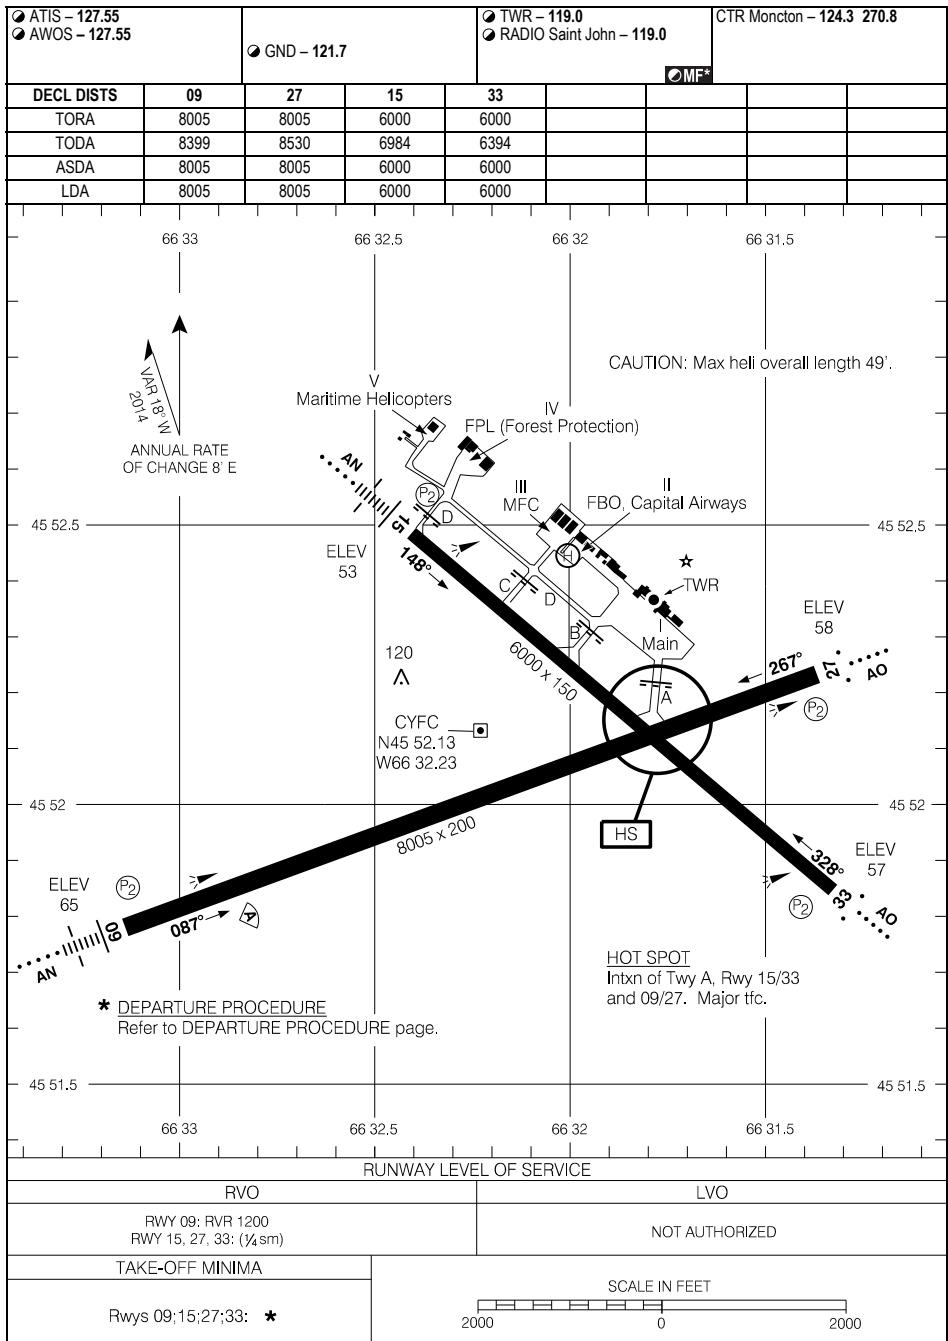

AERODROME CHART


EFF 25 JAN 24

CYFC

CYQX-AD

GANDER INTL, NL
CYQX

AERODROME CHART

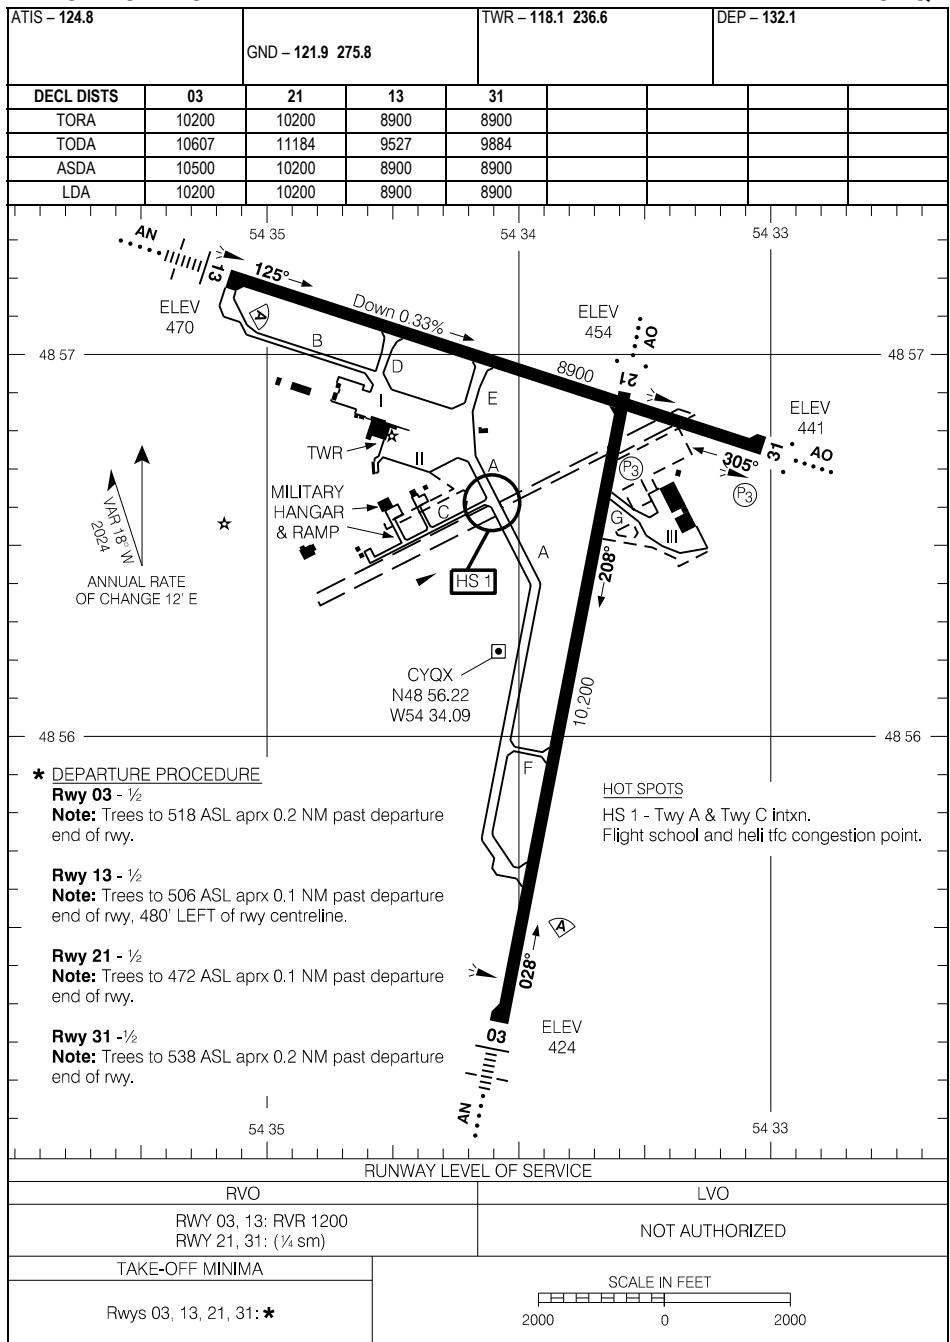

AERODROME CHART

EFF 26 DEC 24

CYQX


CYQX-AD

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CYQX-APD

GANDER INTL, NL
CYQX

PARKING AREAS

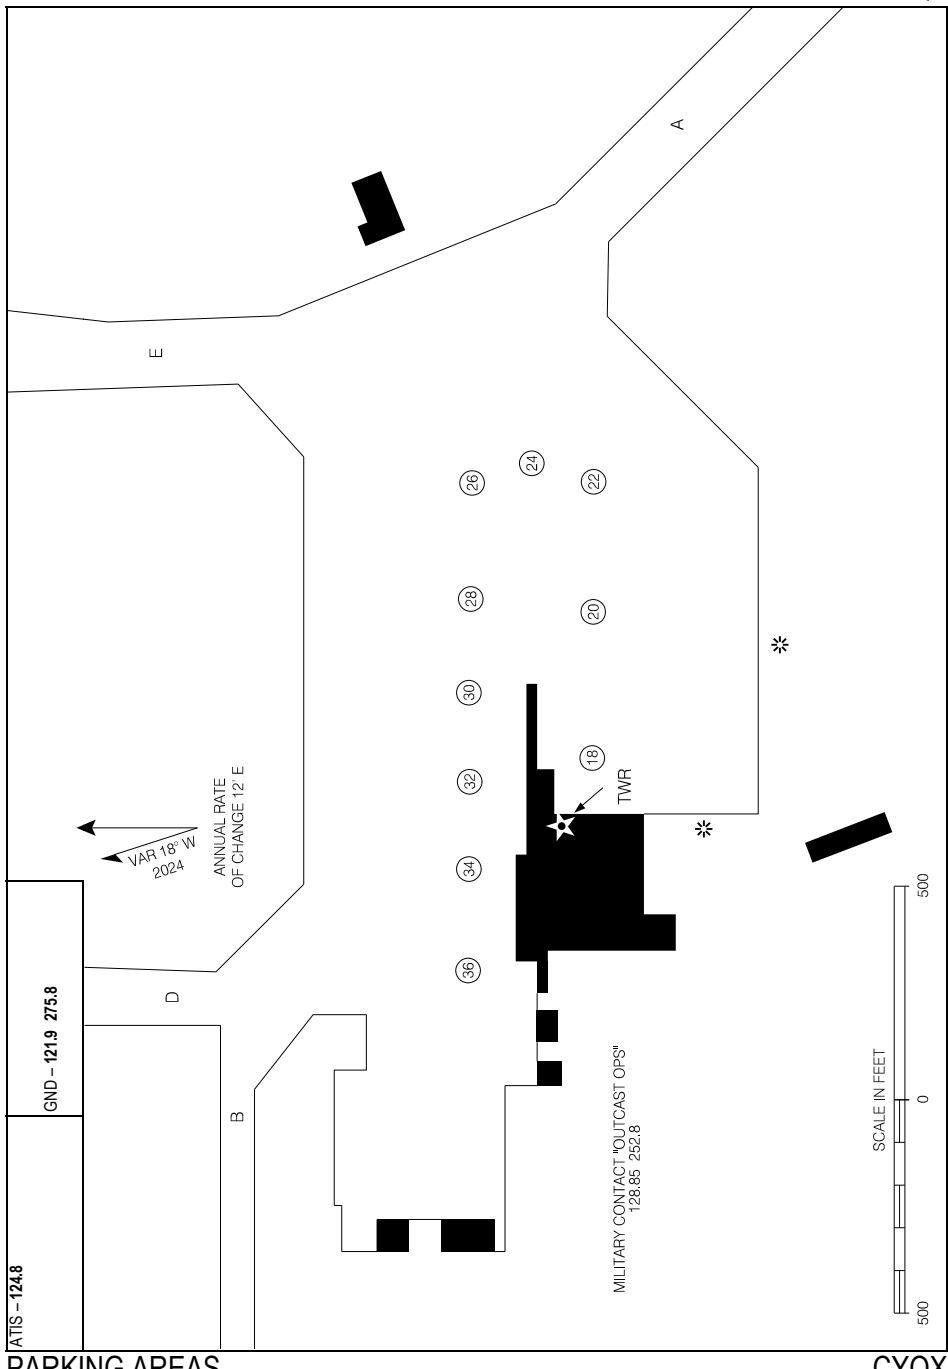


Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CYQX-APD

CYRR-AD

GOOSE BAY, NL
CYRR

AERODROME CHART (DND)

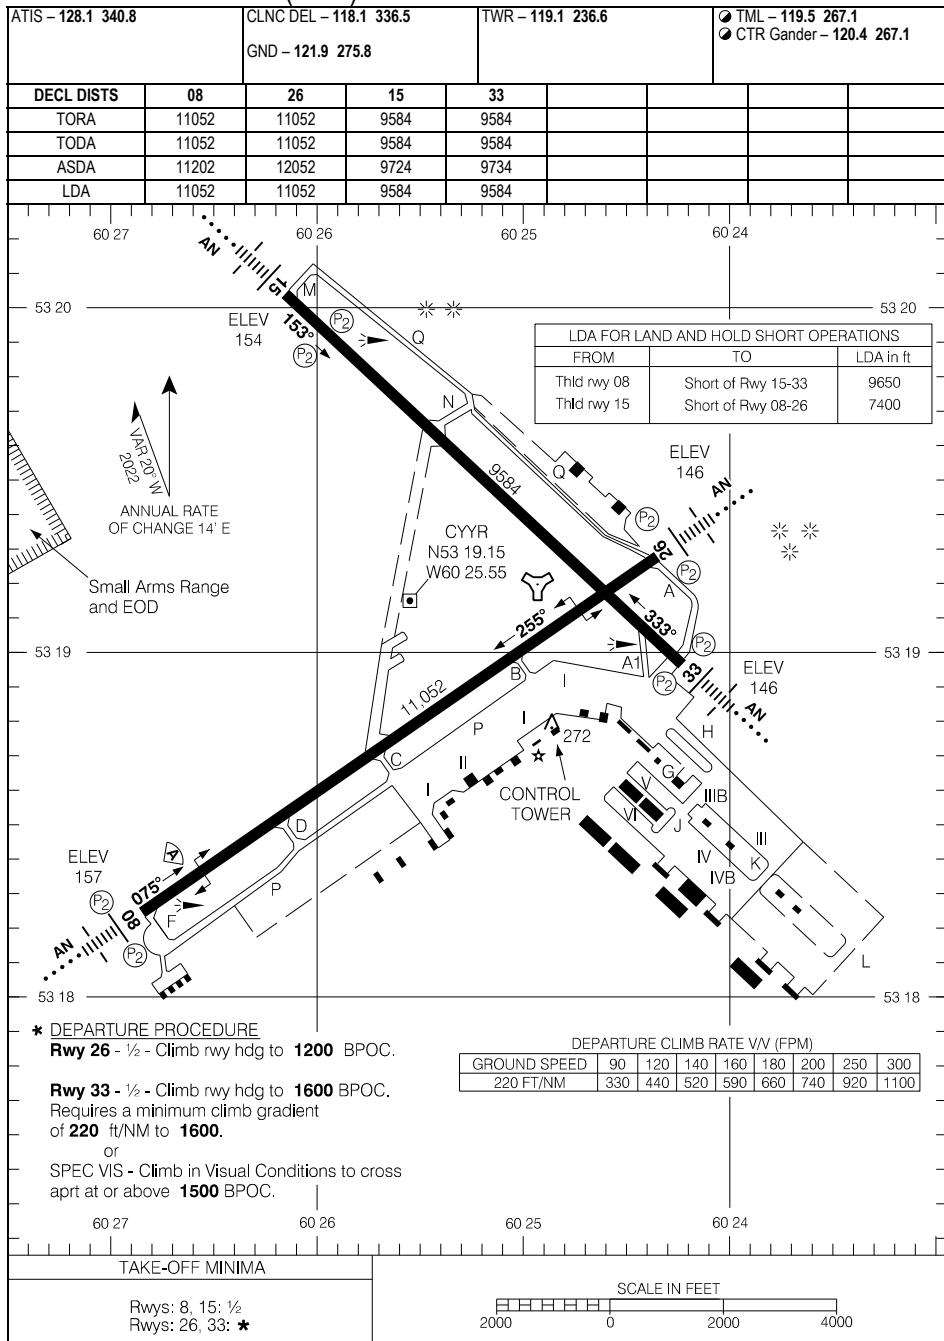

AERODROME CHART (DND)


EFF 5 OCT 23

CYRR-AD

CCN2-AD

GRAND MANAN, NB
CCN2

AERODROME CHART

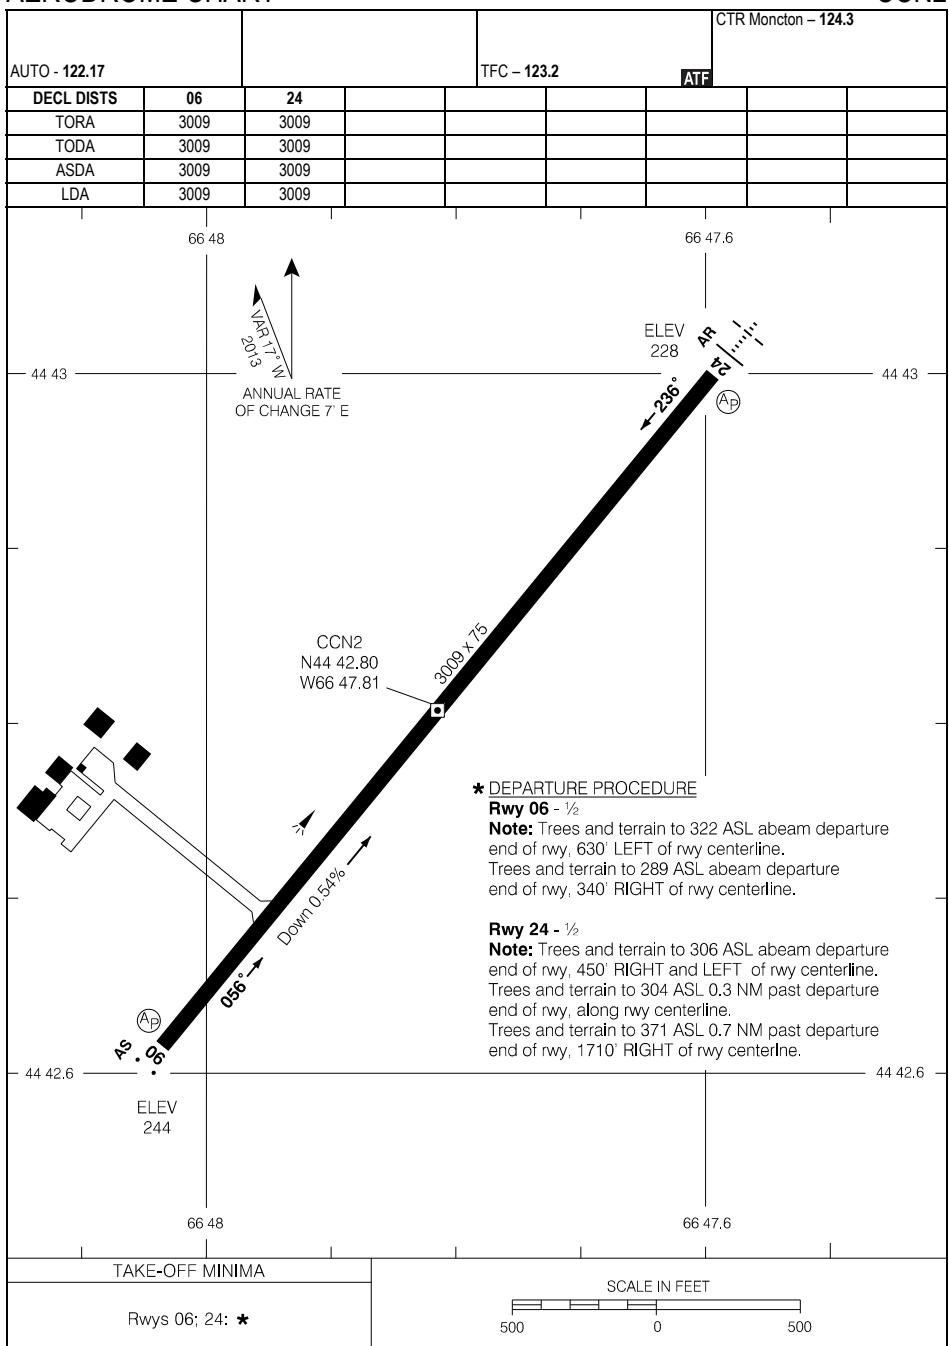

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved


AERODROME CHART

EFF 3 NOV 22

CCN2

CCN2-AD

AERODROME CHART (DND)


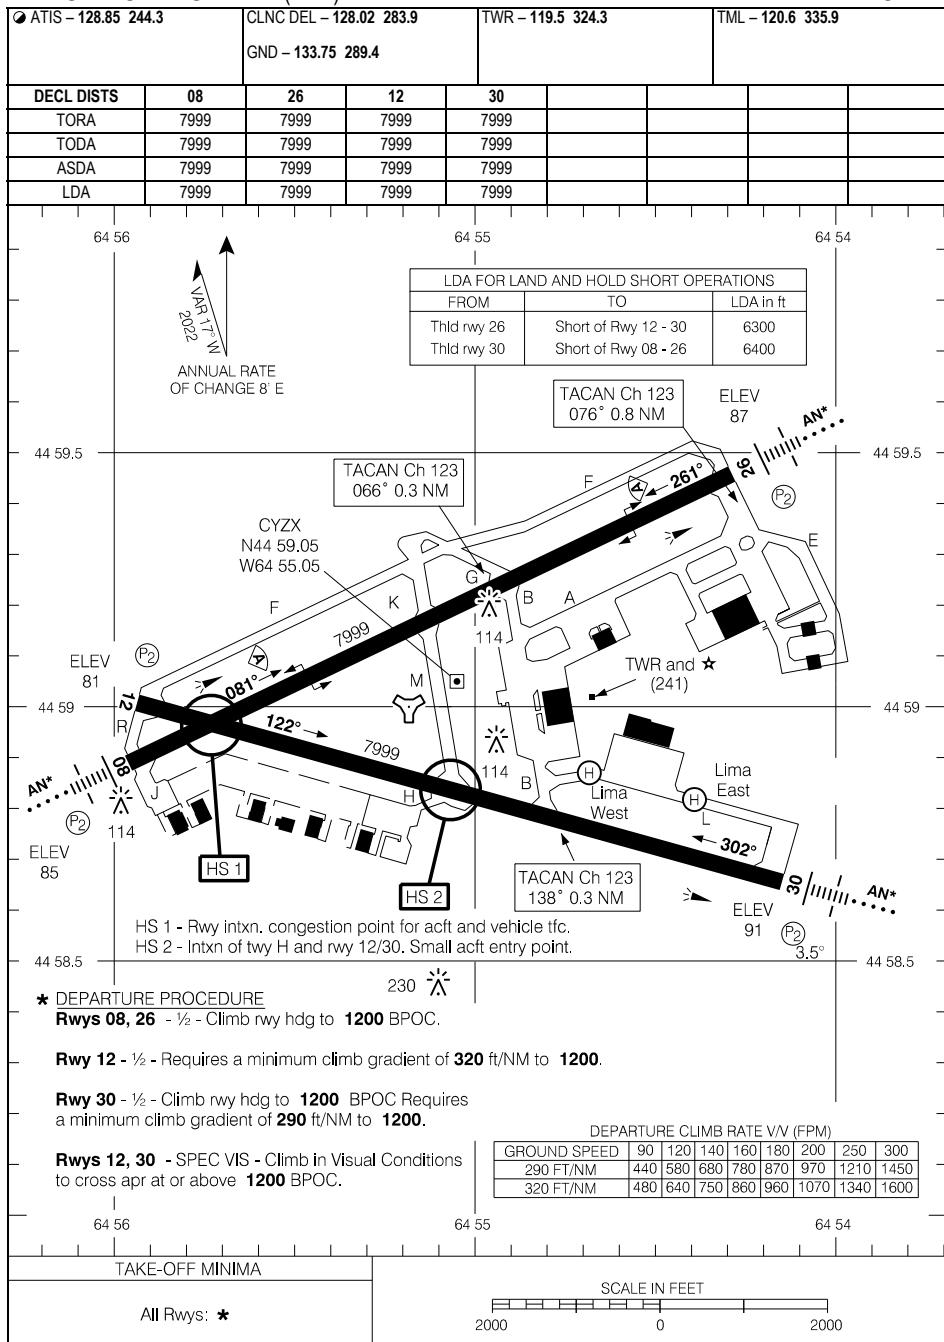


AERODROME CHART (DND)

EFF 21 MAR 24

CYZX


PARKING AREAS (DND)

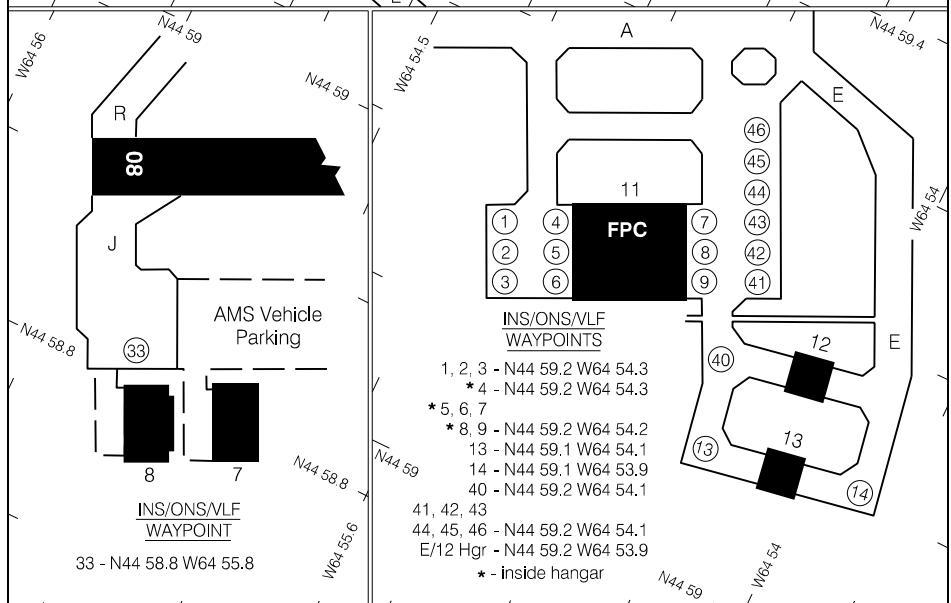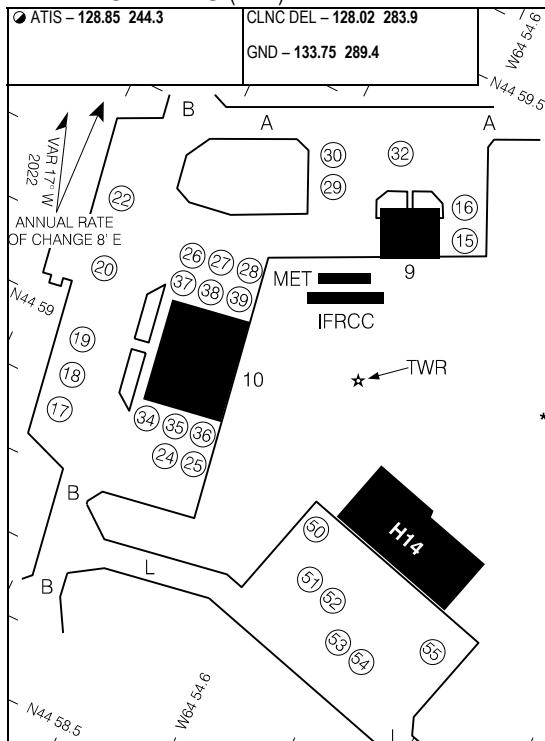

CHQE-HP

HALIFAX (QE II HEALTH SCIENCES CENTRE), NS
CHQE

HELIPORT CHART

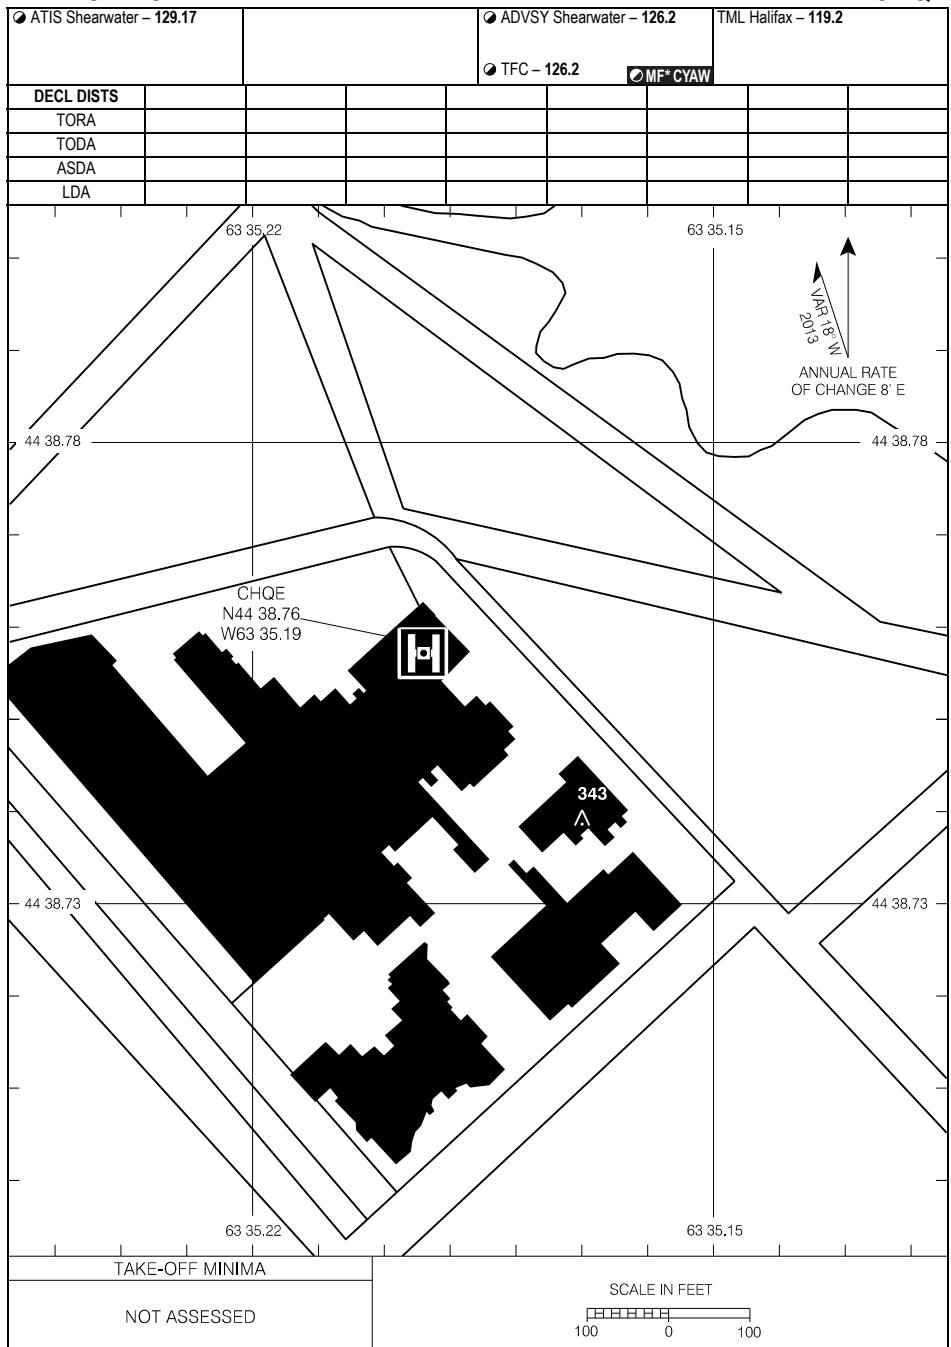

HELIPORT CHART

EFF 7 AUG 25


CHQE

CHQE-HP

CYHZ-AD

HALIFAX/STANFIELD INTL, NS
CYHZ

AERODROME CHART

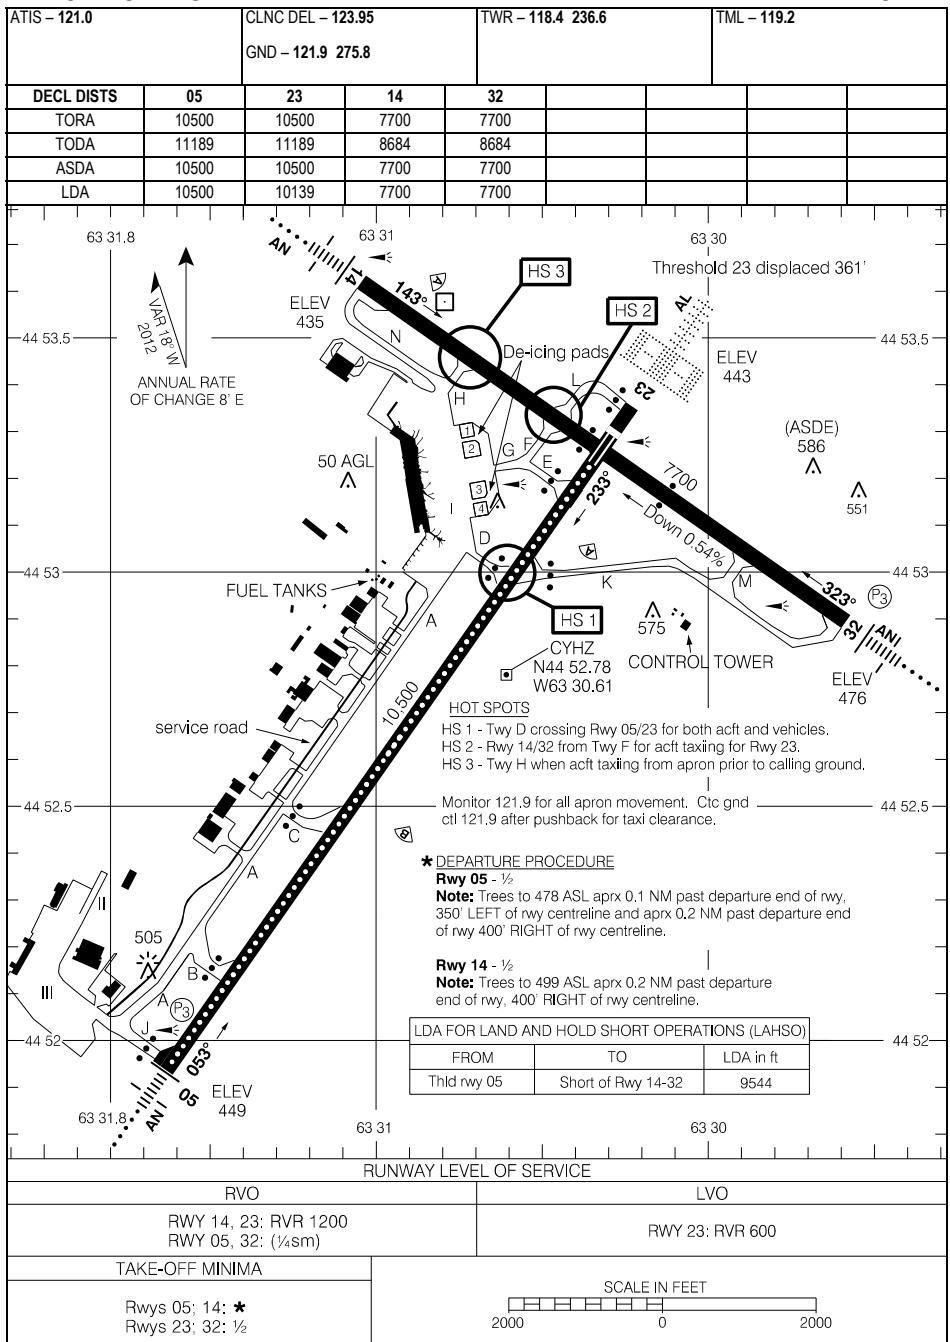

AERODROME CHART

EFF 30 NOV 23

CYHZ-AD

CYHZ

LOW VISIBILITY PROCEDURES

Low Visibility Procedures (RVR less than 1200 ft to 600 ft)

Application

These procedures apply to ground movements of aircraft arriving and departing under low visibility conditions. Arrivals and departures below RVR 600 are not authorized. When weather conditions indicate visibility below RVR 1200 is imminent, procedures will be implemented restricting aircraft and vehicle operations on the manoeuvring area. The following message will be added to the ATIS broadcast: "LOW VISIBILITY PROCEDURES IN EFFECT".

General

The approved taxi route from the Apron is shown on the Low Visibility Taxi Chart. Taxiway centreline lights will be illuminated in taxiway A, G, F, across Rwy 14, taxiway L to the stop bar.

Departures

When low visibility procedures are in effect, Rwy 23 is the only runway certified for low visibility operations.

Take-off roll cannot commence prior to the displaced threshold location, where the runway is served by high intensity white runway edge lights.

Sequencing of Aircraft Ground Movements for Take-off

Pilots must follow instructions on Sequencing of Ground Movements for Take-Off as described in CAP GEN Operating Minima.

Do not call for taxi clearance until the reported RVR is a minimum of 600.

Runway Level of Service	
Rwy	Certification
23	RVR 600

Stop Bar/Guard Light System

Each taxiway/runway entrances onto Rwy 05/23 is equipped with a stop bar consisting of red inset lights. Also, installed on either side of the stop bars located at the taxiway entrances onto Rwy 05/23 there are yellow flashing runway guard lights (Wig Wags). When the red stop bar lights are illuminated, green lead on lights beyond the stop bar are extinguished. When ATC issues a clearance to proceed onto the runway, the red stop bar lights will be extinguished and the green lead on lights beyond the stop bar will be illuminated. The stop bar is reset automatically as the aircraft moves onto the runway.

AT NO TIME SHALL A PILOT CROSS AN ILLUMINATED RED STOP BAR

Arrivals

Arrivals are permitted on Rwy 23 for approved operators down to RVR 600. Twy J and Twy B are the approved exit routes. Landing aircraft traversing to Aprons I, II or III must exit Rwy 23 on Twy B or Twy J.

LOW VISIBILITY PROCEDURES

CYHZ


EFF 2 DEC 21

CYHZ-GM-3B

LOW VISIBILITY TAXI CHART
(RVR LESS THAN 1200 TO 600 FT)

HALIFAX/STANFIELD INTL, NS
CYHZ

ATIS - 121.0	CLNC DEL - 123.95	TWR - 118.4 236.6
	GND - 121.9 275.8	

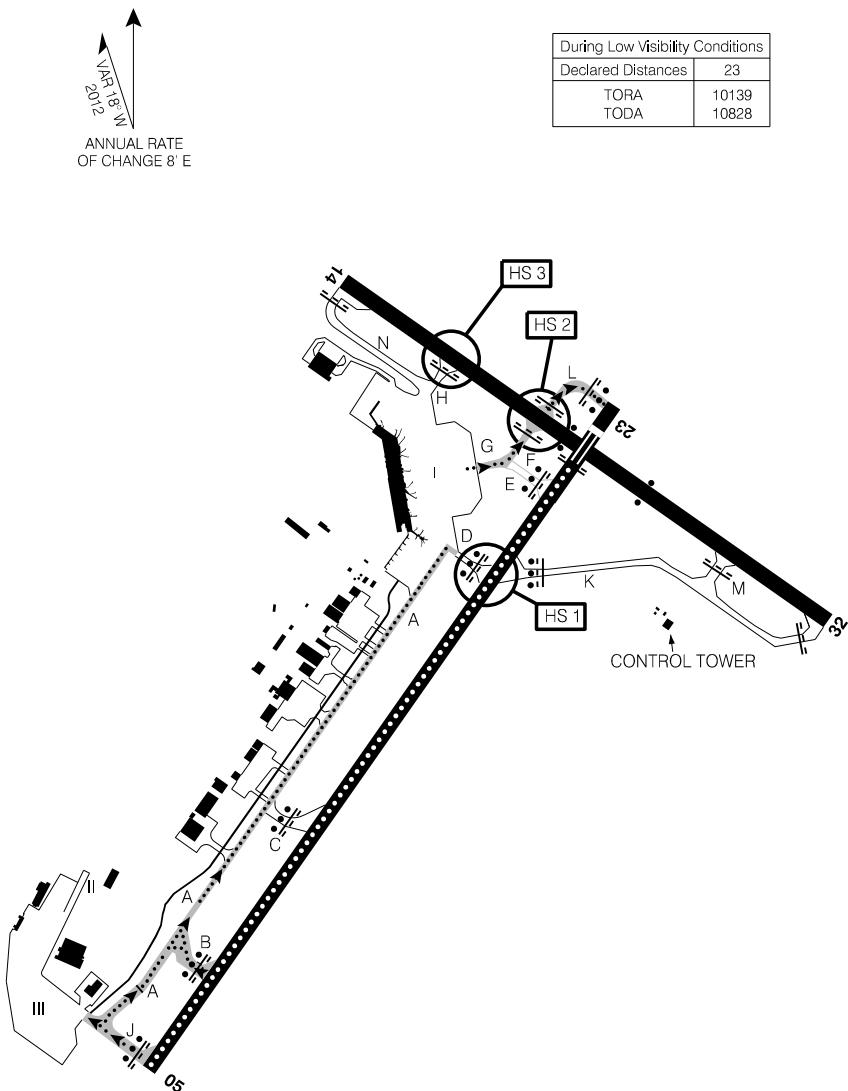

(RVR LESS THAN 1200 TO 600 FT)
LOW VISIBILITY TAXI CHART

CYHZ
EFF 7 AUG 25

CYHZ-GM-3B

DE-ICING OPERATIONS

De-icing Operations

1. Ctc de-icing provider 30 min prior to dep if de-icing is rqrd. Notify de-icing provider of parking location, planned runway for dep and any special treatments prior to pushback: ICEMAN 122.950 OR 902-410-7748.
2. De-icing provider will assign de-ice pad and advise when ready.
3. DO NOT PUSH prior to assigned de-ice pad being ready.
4. To mitigate congestion on the APN, QUEUING for de-icing is NOT ACCEPTABLE.
5. Monitor Halifax GND 121.9 for all APN movement.
6. Follow instructions to designated de-ice pad.
7. Advise ICEMAN immediately once brakes set, aircraft configured and engines at idle.
8. After de-icing, configure aircraft for taxi, however, DO NOT MOVE AIRCRAFT.
9. Once instructed, contact Halifax GND 121.9 for taxi.

DE-ICING OPERATIONS

EFF 31 OCT 24

CYHZ

CYHZ-APD-1


HALIFAX/STANFIELD INTL, NS
CYHZ

PARKING AREAS (APRON I)

ATIS - 121.0

CLNC DEL - 123.95

GND - 121.9 275.8

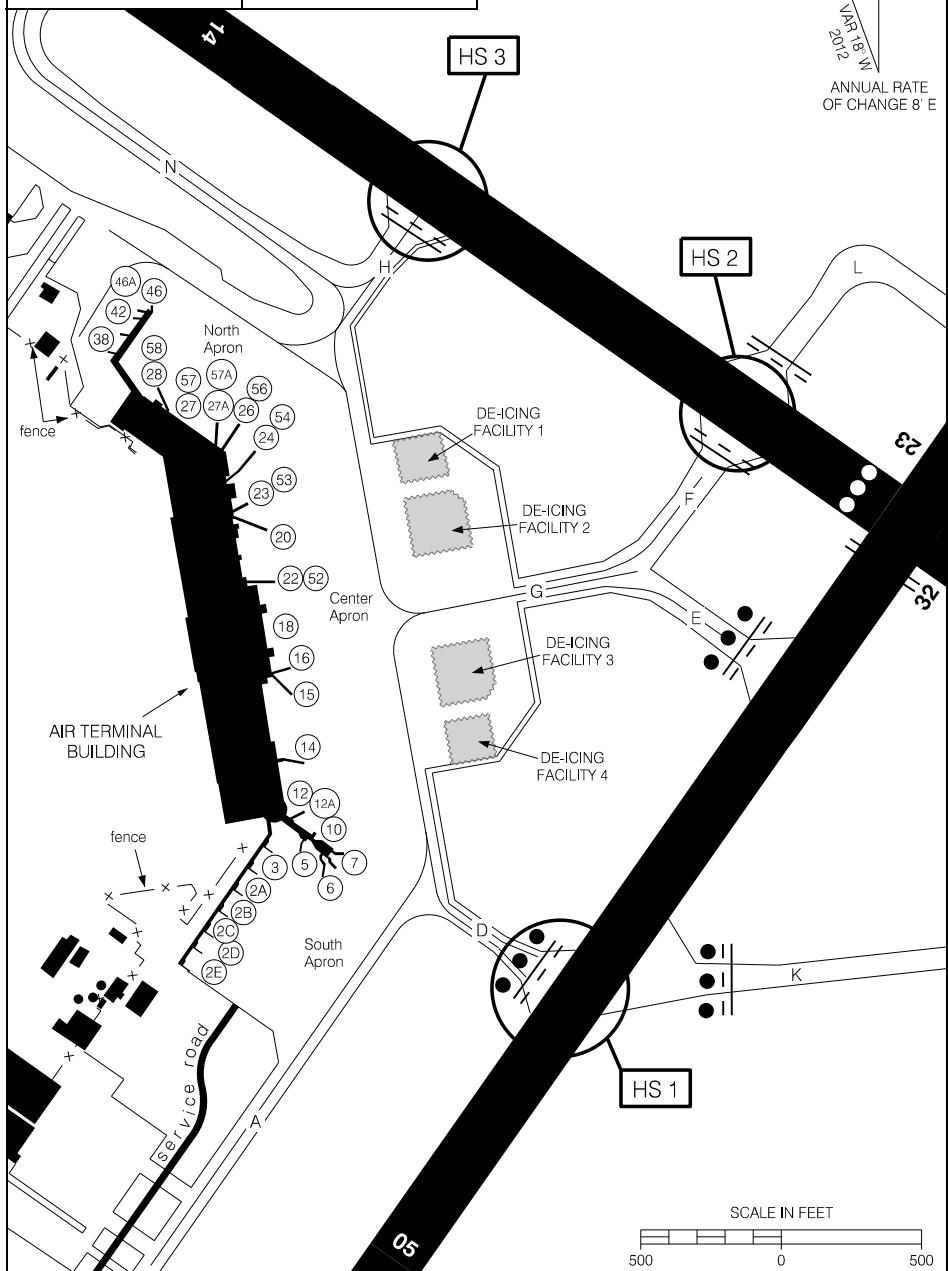VAR 18° N
2012ANNUAL RATE
OF CHANGE 8° E

PARKING AREAS (APRON I)


EFF 7 AUG 25

CYHZ

CYHZ-APD-1

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

PARKING AREAS (APRON III)

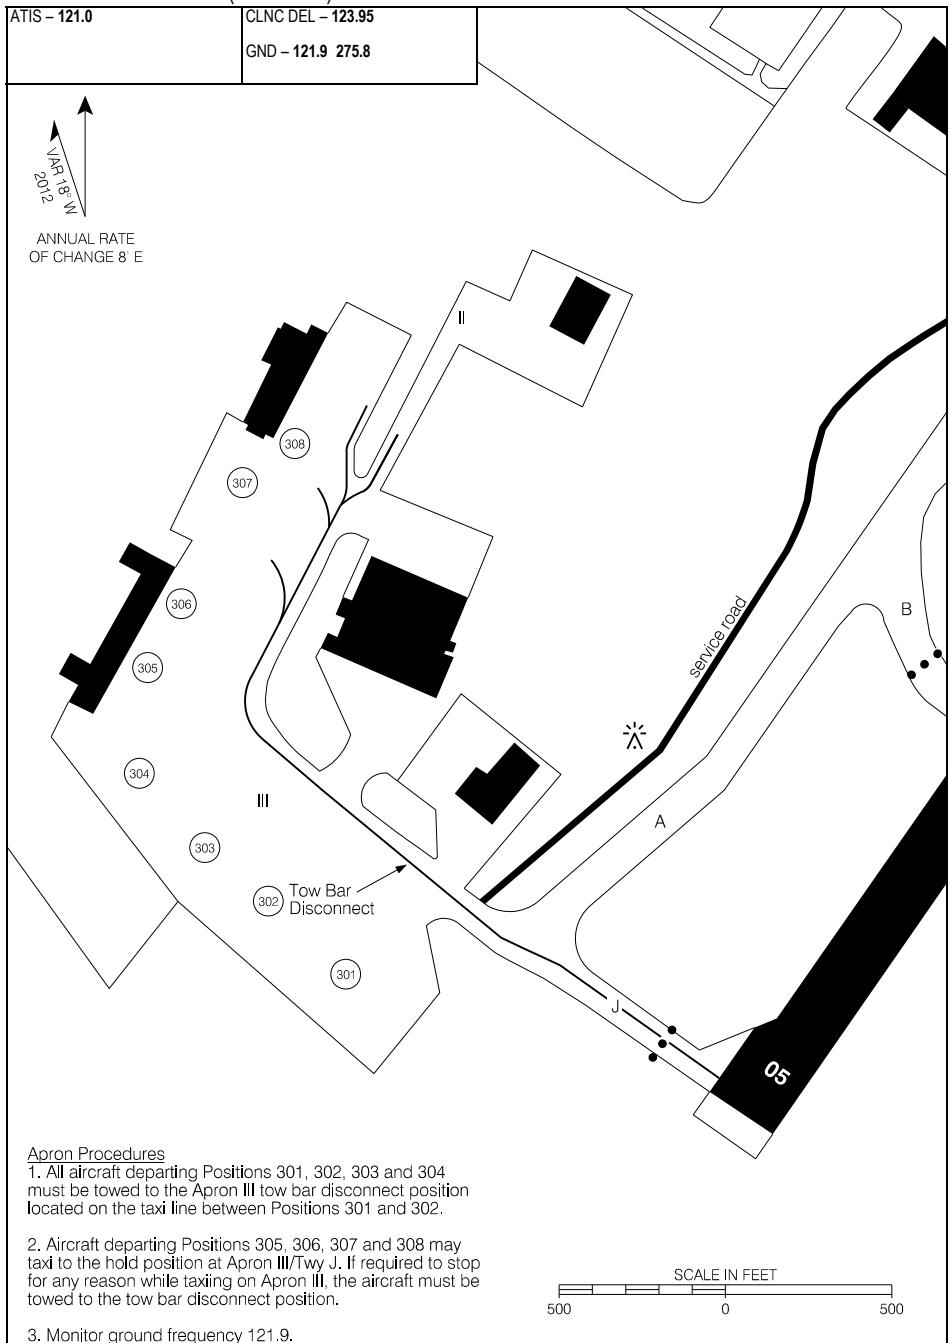

PARKING AREAS (APRON III)

EFF 7 AUG 25

PARKING AREAS

Aircraft Parking Positions (APRON I and APRON III)


Position	Coordinates	Position	Coordinates
2A	445302.98N 0633052.10W	27A	445319.47N 0633053.96W
2B	445302.13N 0633052.82W	28	445320.86N 0633056.99W
2C	445301.48N 0633053.58W	38	445322.05N 0633059.23W
2D	445300.69N 0633053.64W	42	445323.13N 0633058.20W
2E	445300.44N 0633054.46W	46	445323.78N 0633057.09W
3	445304.04N 0633051.05W	46A	445324.28N 0633058.02W
5	445304.27N 0633049.25W	52	445313.84N 0633050.79W
6	445303.29N 0633048.01W	53	445316.87N 0633051.96W
7	445304.04N 0633047.06W	54	445318.43N 0633051.97W
10	445305.23N 0633047.89W	56	445319.62N 0633052.85W
12	445306.13N 0633049.44W	57	445319.79N 0633054.31W
12A	445305.77N 0633049.37W	57A	445319.47N 0633053.96W
14	445307.77N 0633049.44W	58	445320.86N 0633056.99W
15	445310.18N 0633049.62W	301	445200.49N 0633155.58W
16	445311.01N 0633049.87W	302	445202.77N 0633158.95W
18	445312.29N 0633050.58W	303	445204.43N 0633201.74W
20	445315.81N 0633051.21W	304	445206.75N 0633204.61W
22	445313.84N 0633050.79W	305	445210.05N 0633204.26W
23	445316.87N 0633051.96W	306	445212.05N 0633202.77W
24	445318.43N 0633051.97W	307	445215.83N 0633200.10W
26	445319.62N 0633052.85W	308	445217.05N 0633157.79W
27	445319.79N 0633054.31W		

PARKING AREAS

CYHO-AD

HOPEDALE, NL
CYHO

AERODROME CHART

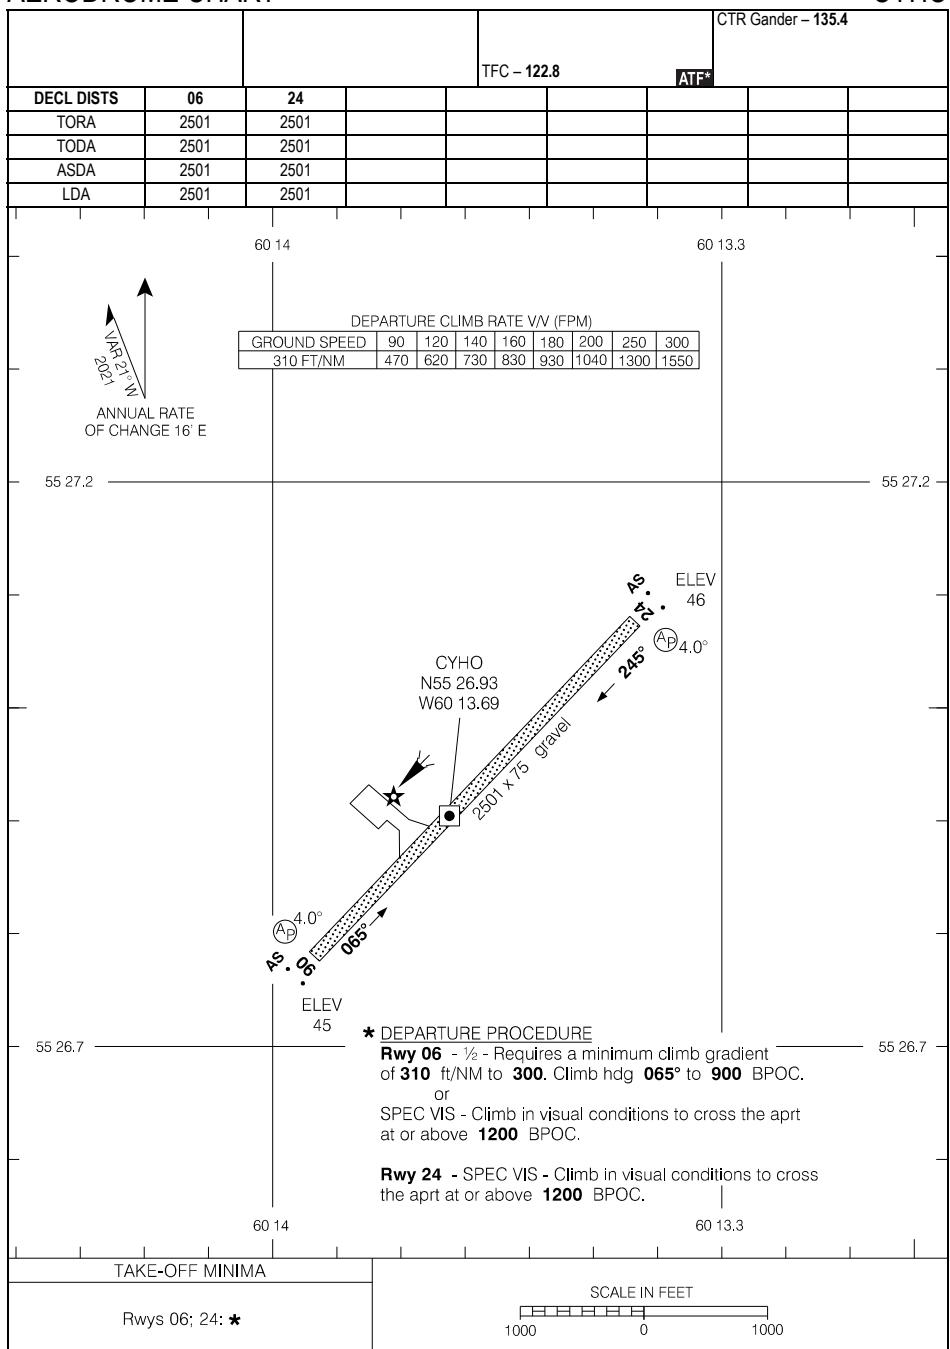

AERODROME CHART

EFF 7 OCT 21


CYHO-AD

CYHO

CLH7-HP

LONG HARBOUR RIVER, NL
CLH7

HELIPORT CHART

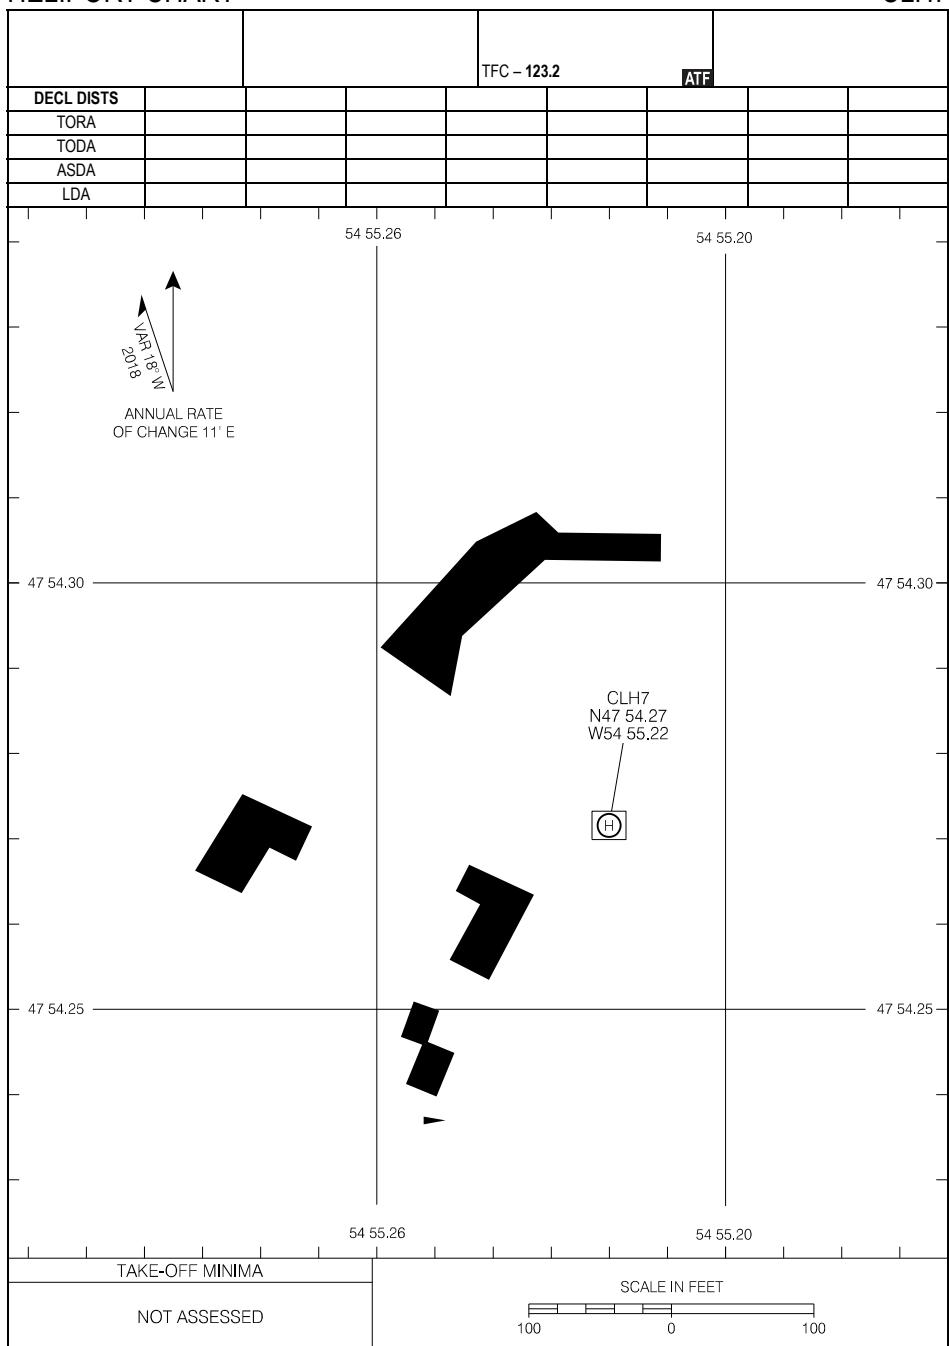

HELIPORT CHART

EFF 30 JAN 20


CLH7-HP

CLH7

CCX2-HP

LONG POND, NL
CCX2

HELIPORT CHART

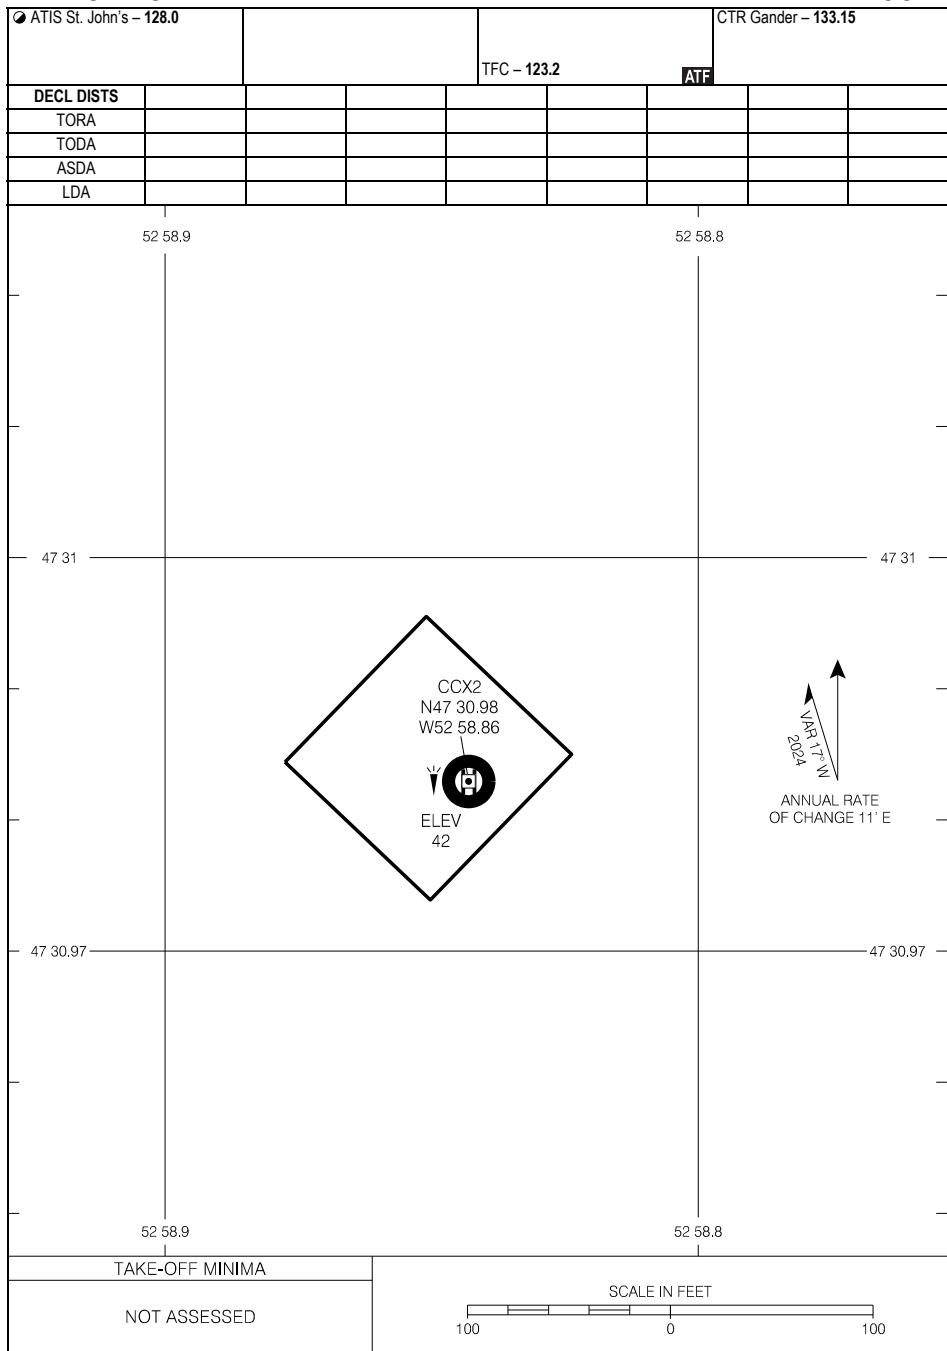


HELIPORT CHART

EFF 20 FEB 25

CCX2

CCX2-HP

AERODROME CHART

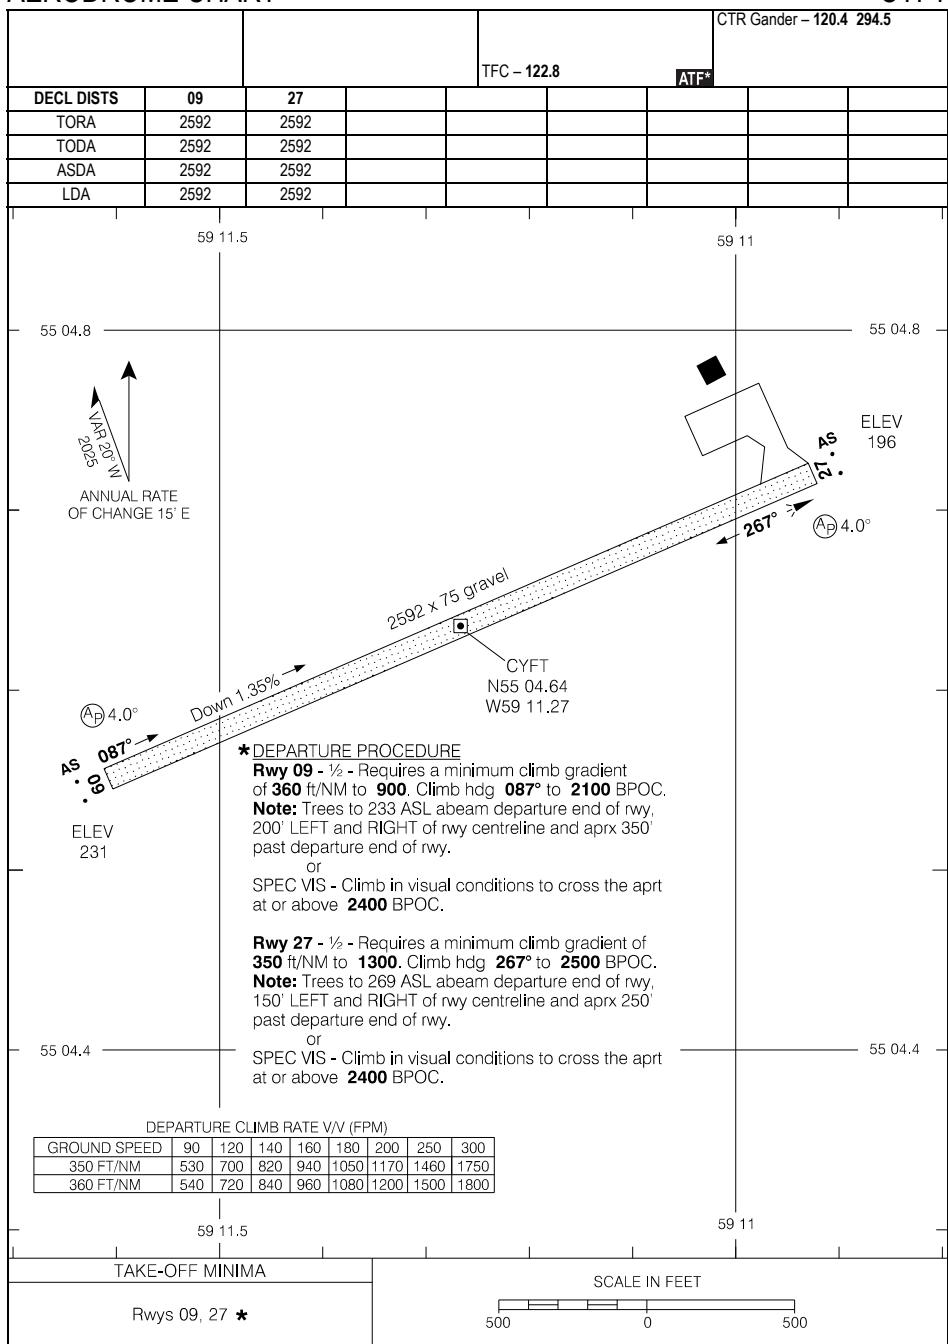

AERODROME CHART


EFF 20 FEB 25

CYFT

CYMH-AD

MARYS HARBOUR, NL
CYMH

AERODROME CHART

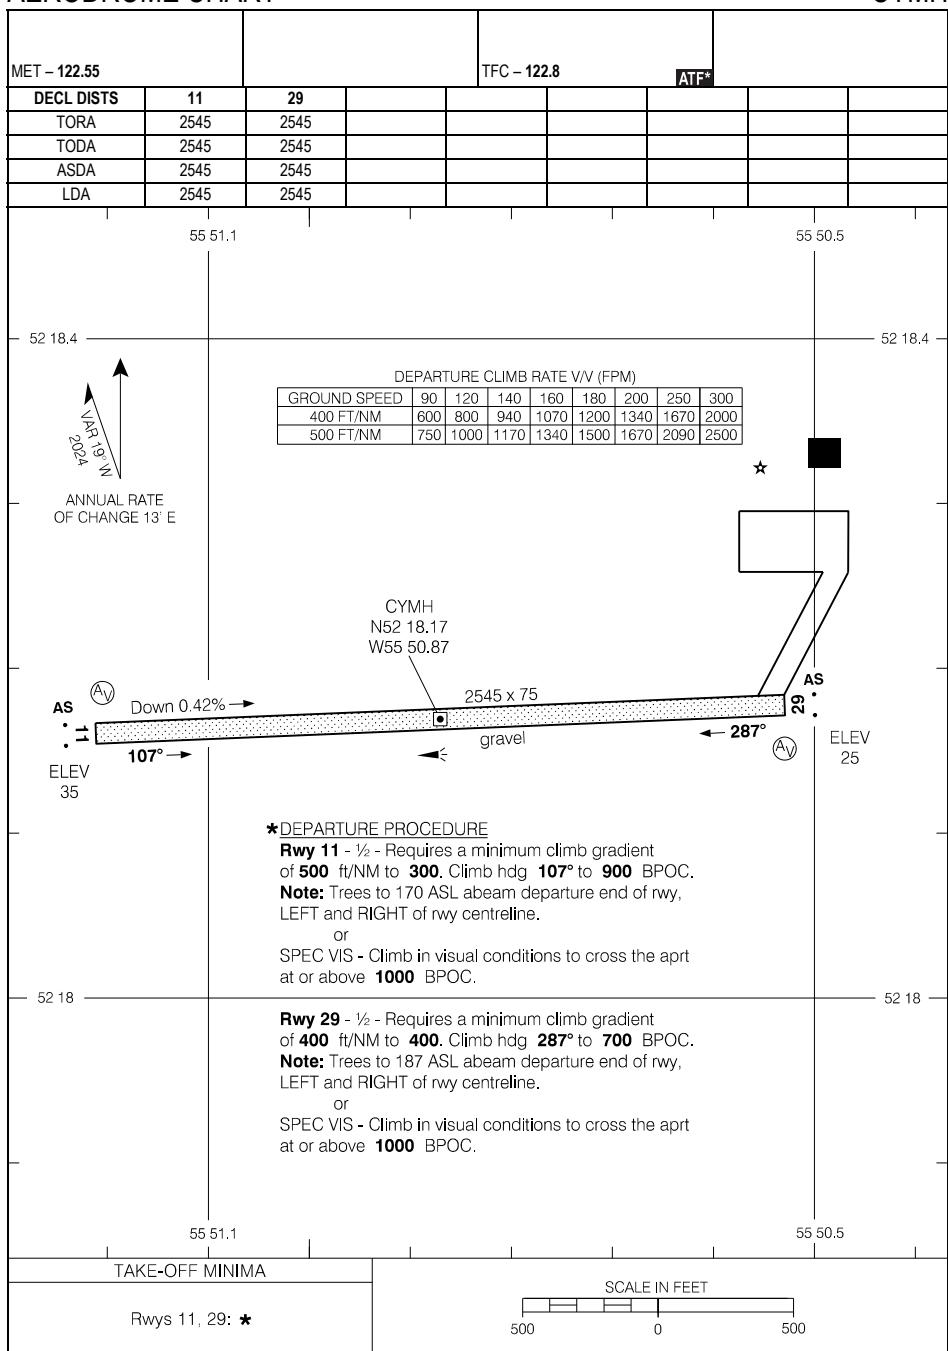

AERODROME CHART

EFF 26 DEC 24


CYMH-AD

CYMH

CYCH-AD

MIRAMICHI, NB
CYCH

AERODROME CHART

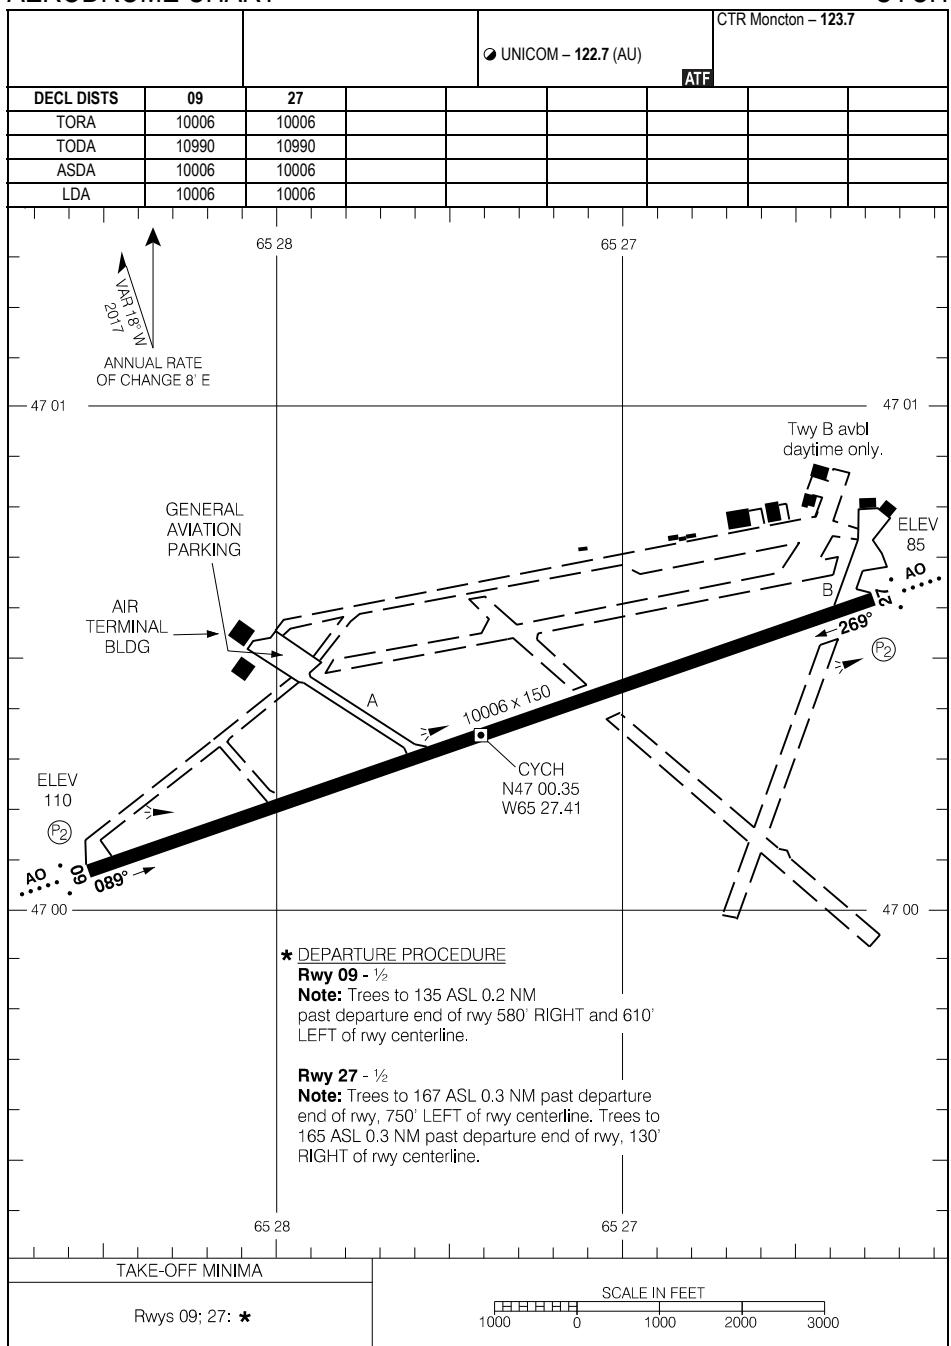

AERODROME CHART


EFF 20 APR 23

CYCH

CYCH-AD

AERODROME CHART

CYQM-AD
MONCTON/GREATER MONCTON ROMÉO LEBLANC INTL, NB
CYQM

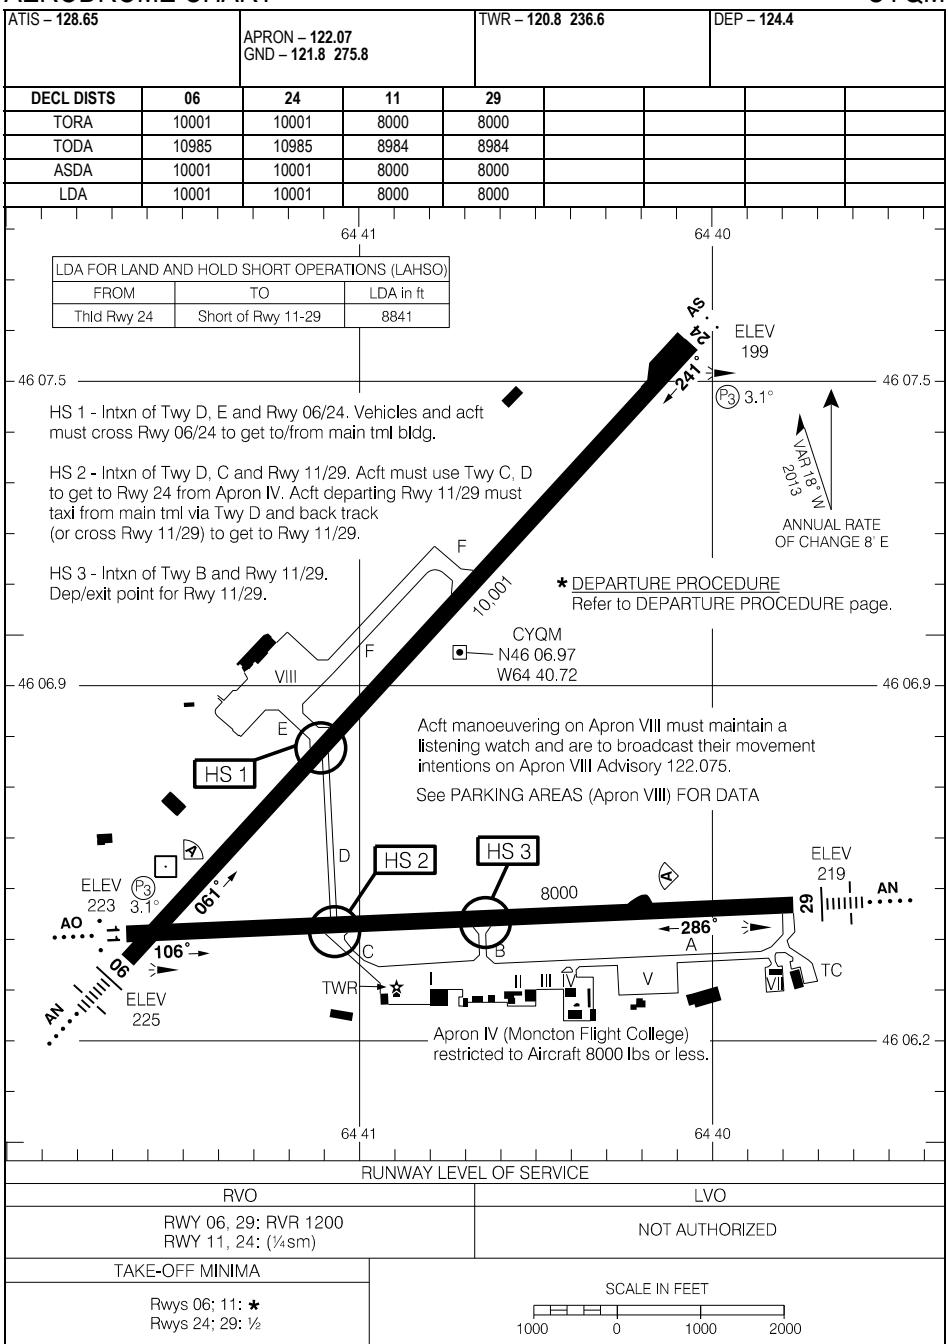

AERODROME CHART

EFF 16 MAY 24

CYQM

CYQM-AD

PARKING AREAS (Apron VIII)

ATIS - 128.65

APRON - 122.07
GND - 121.8 275.8


Note:

De-icing Apron VIII - Prior to pushback, broadcast intentions and monitor all movements on Apron Advisory 122.075.
Proceed to De-icing pad.

Itinerant Aircraft wishing to use Apron VIII ctc Airport Security
506-856-5429 - 2hr PNR.

VAR 20° NW
ANNUAL RATE OF CHANGE 8° E

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

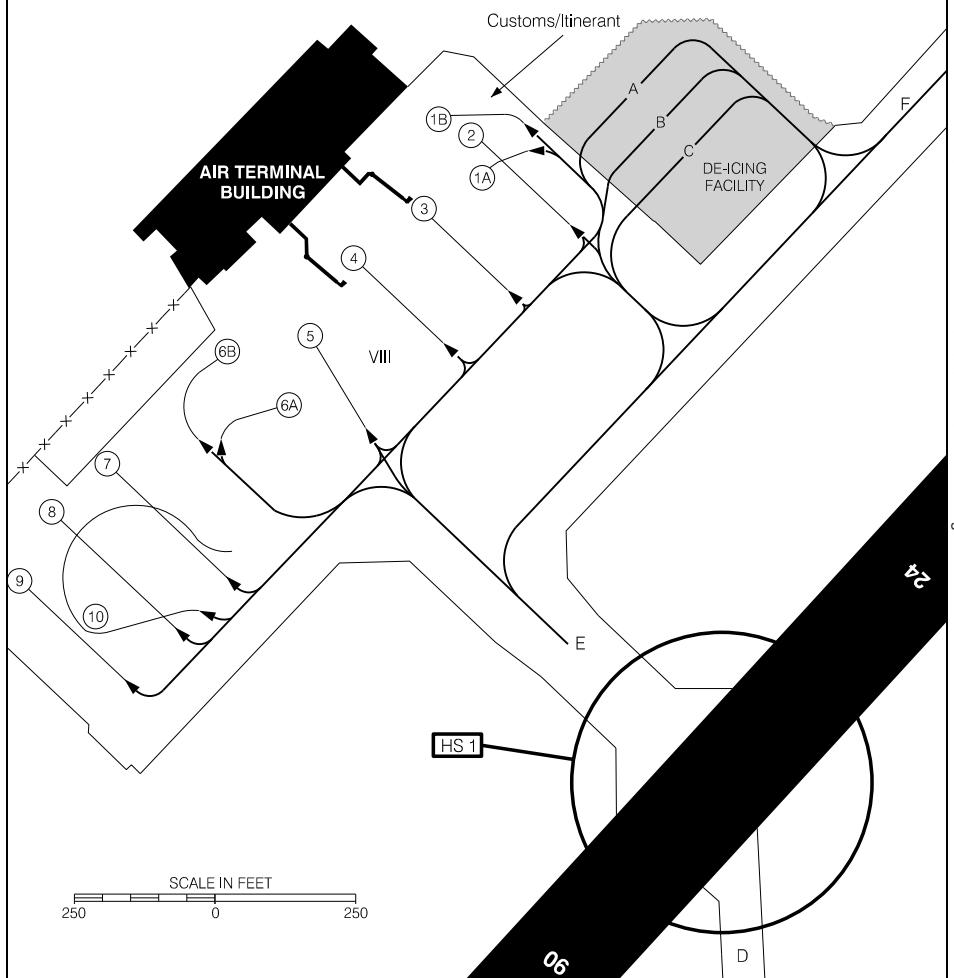


PARKING AREAS (Apron VIII)

EFF 16 MAY 24

CYDP-AD

NAIN, NL
CYDP

AERODROME CHART

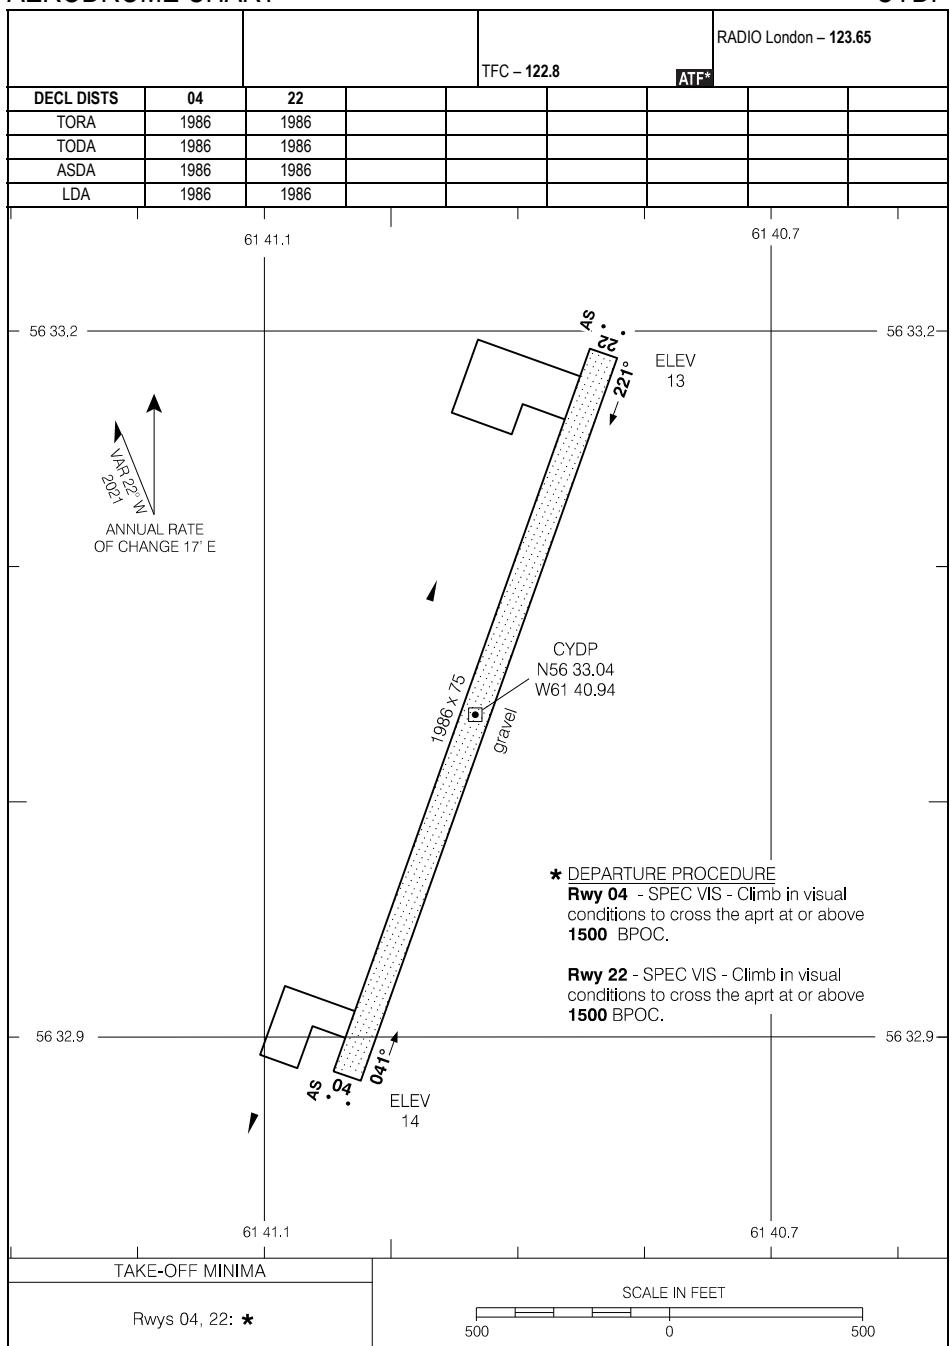

AERODROME CHART

EFF 7 OCT 21


CYDP

CYDP-AD

CNH2-AD

NATUASHISH, NL
CNH2

AERODROME CHART

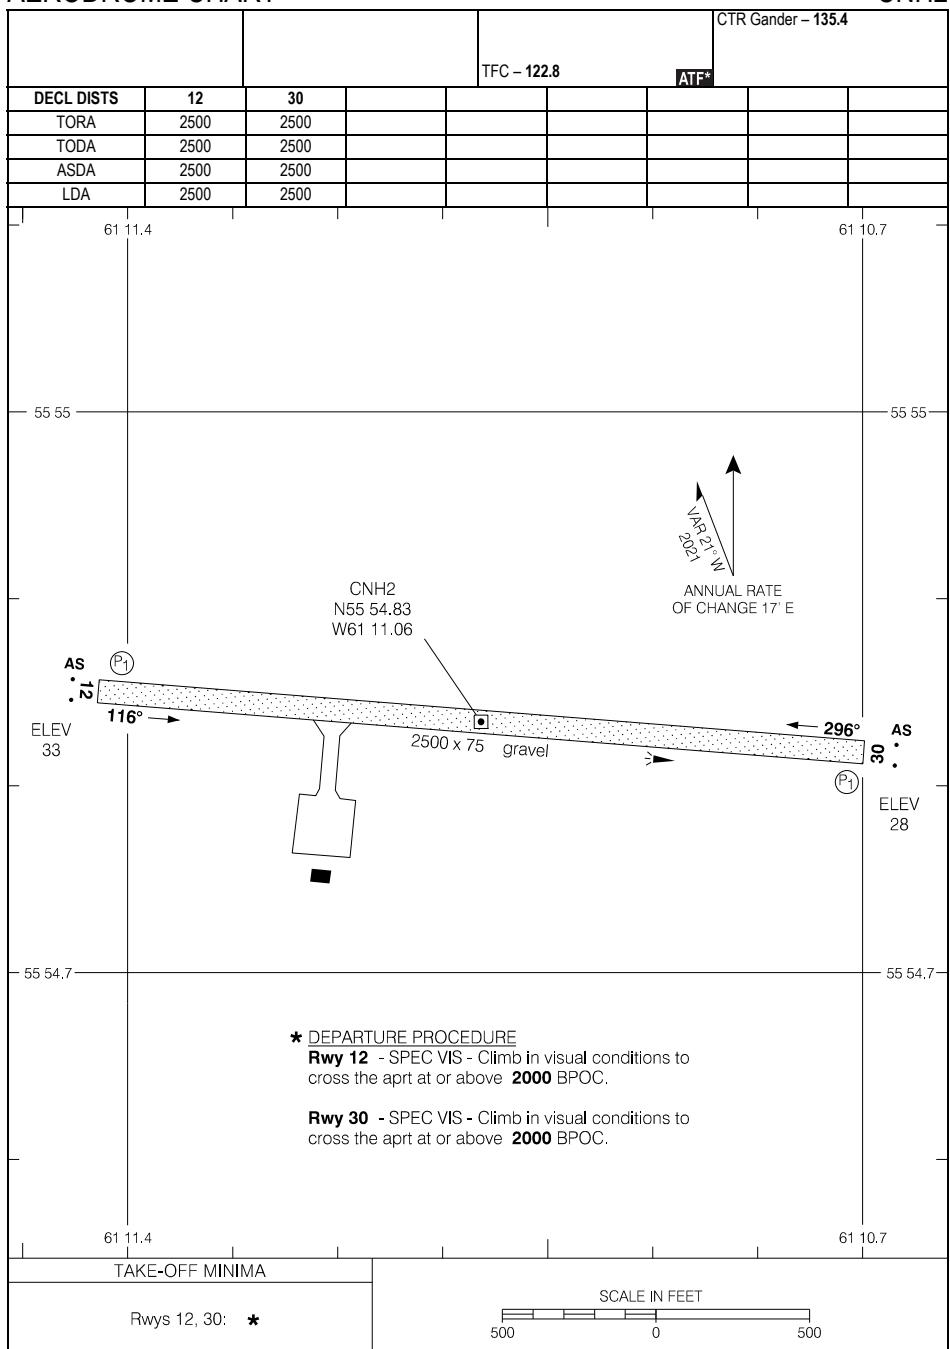


AERODROME CHART

EFF 12 JUN 25

CNH2

CNH2-AD

AERODROME CHART

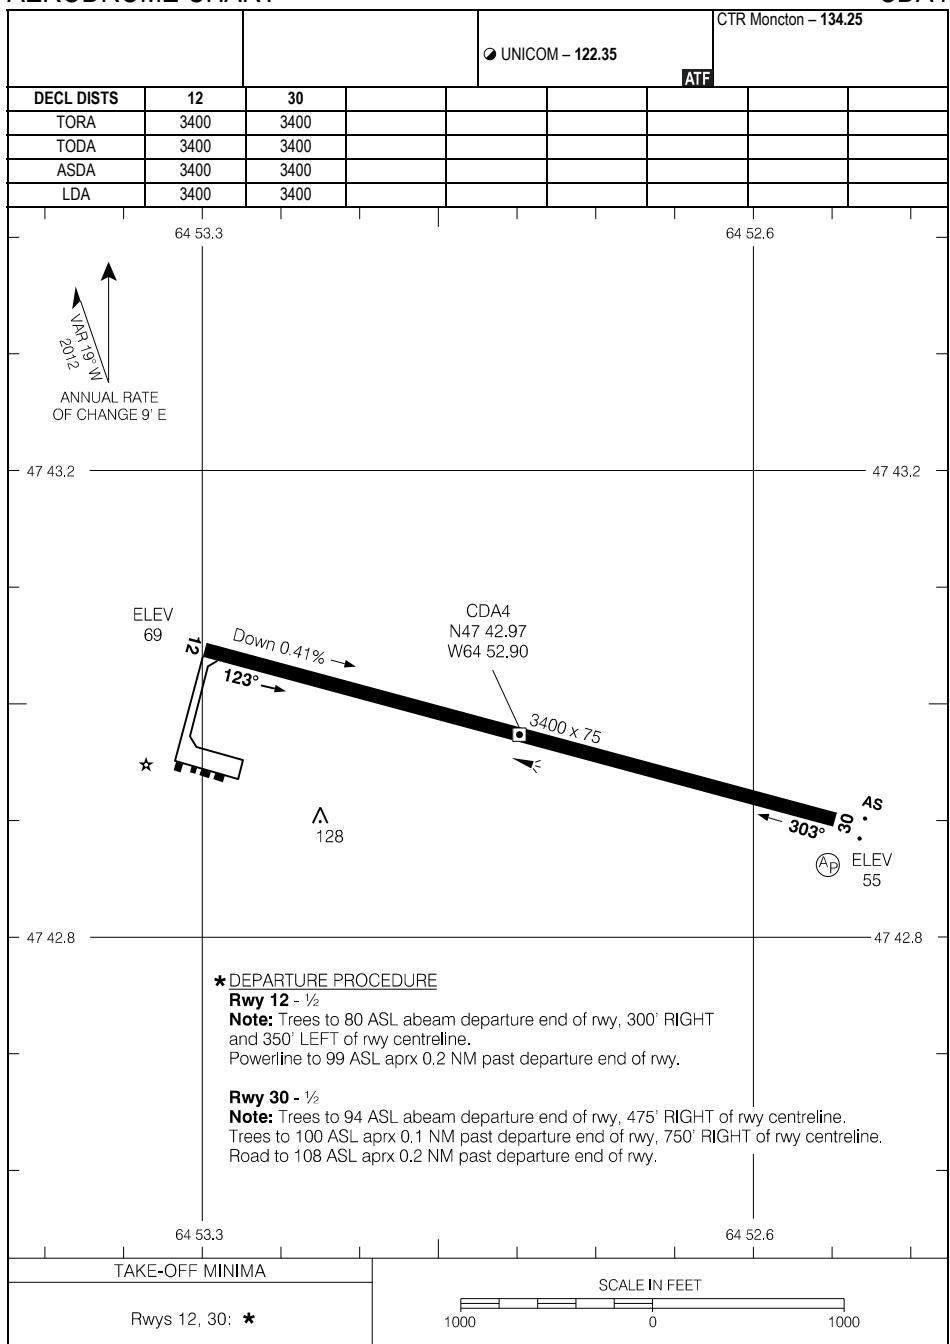

AERODROME CHART


EFF 7 AUG 25

CDA4

CYPD-AD

PORT HAWKESBURY, NS
CYPD

AERODROME CHART

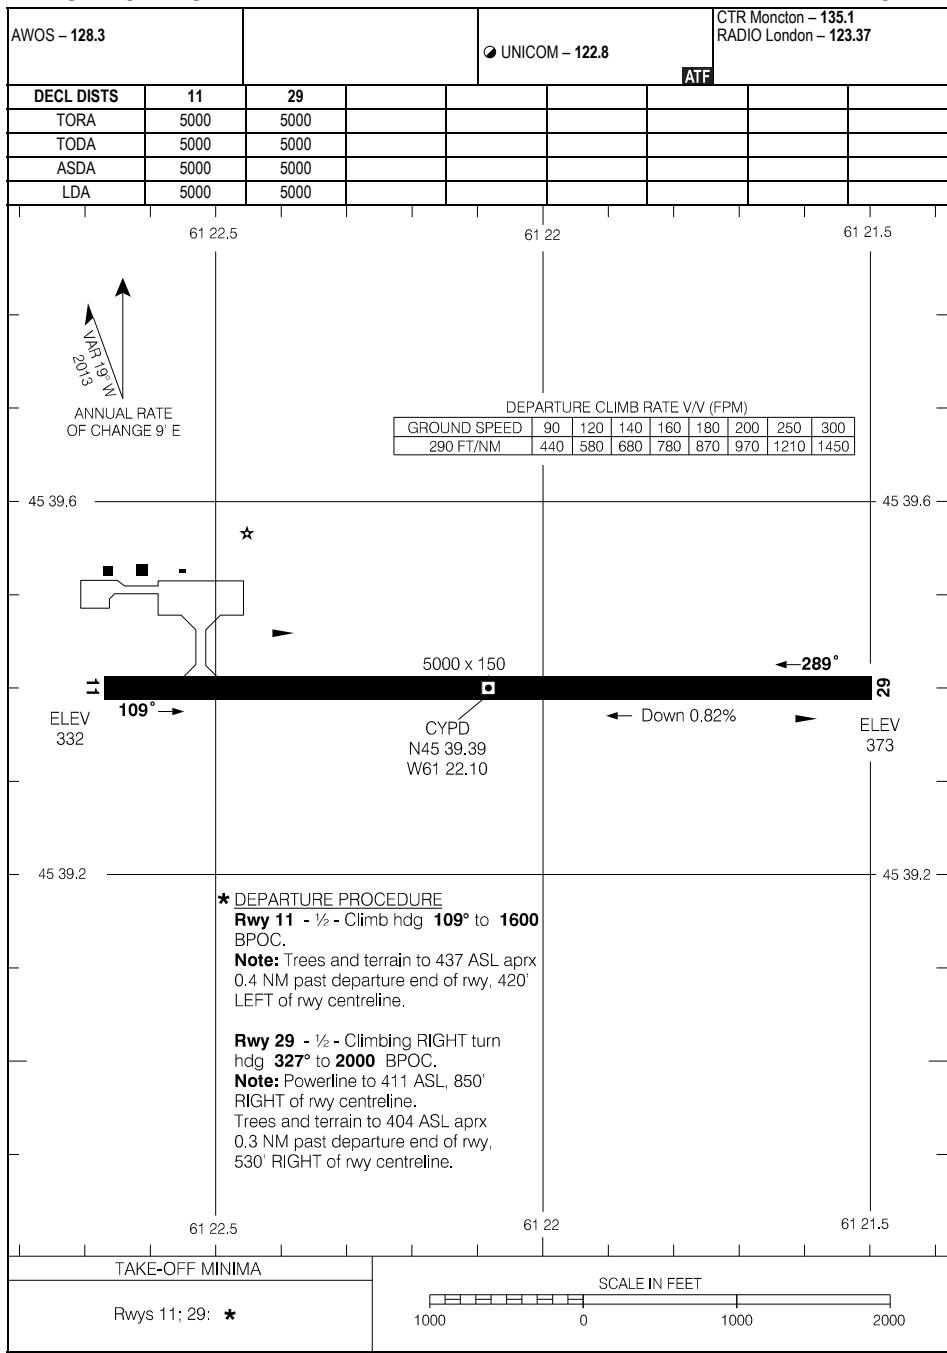

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved


AERODROME CHART

EFF 5 SEP 24

CYPD-AD

CYPD

AERODROME CHART

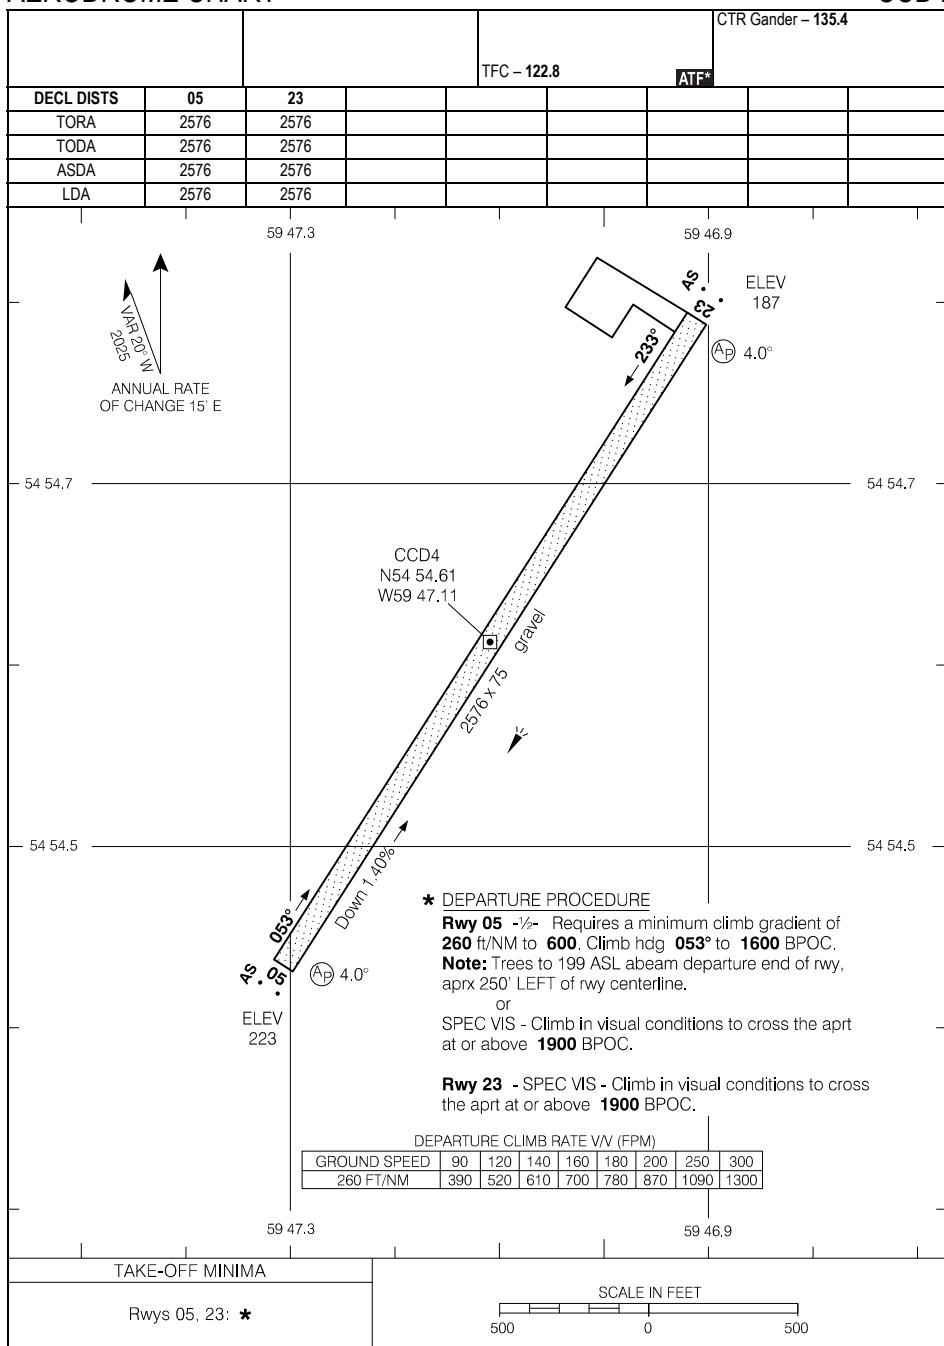


AERODROME CHART

EFF 20 FEB 25

CCD4

AERODROME CHART

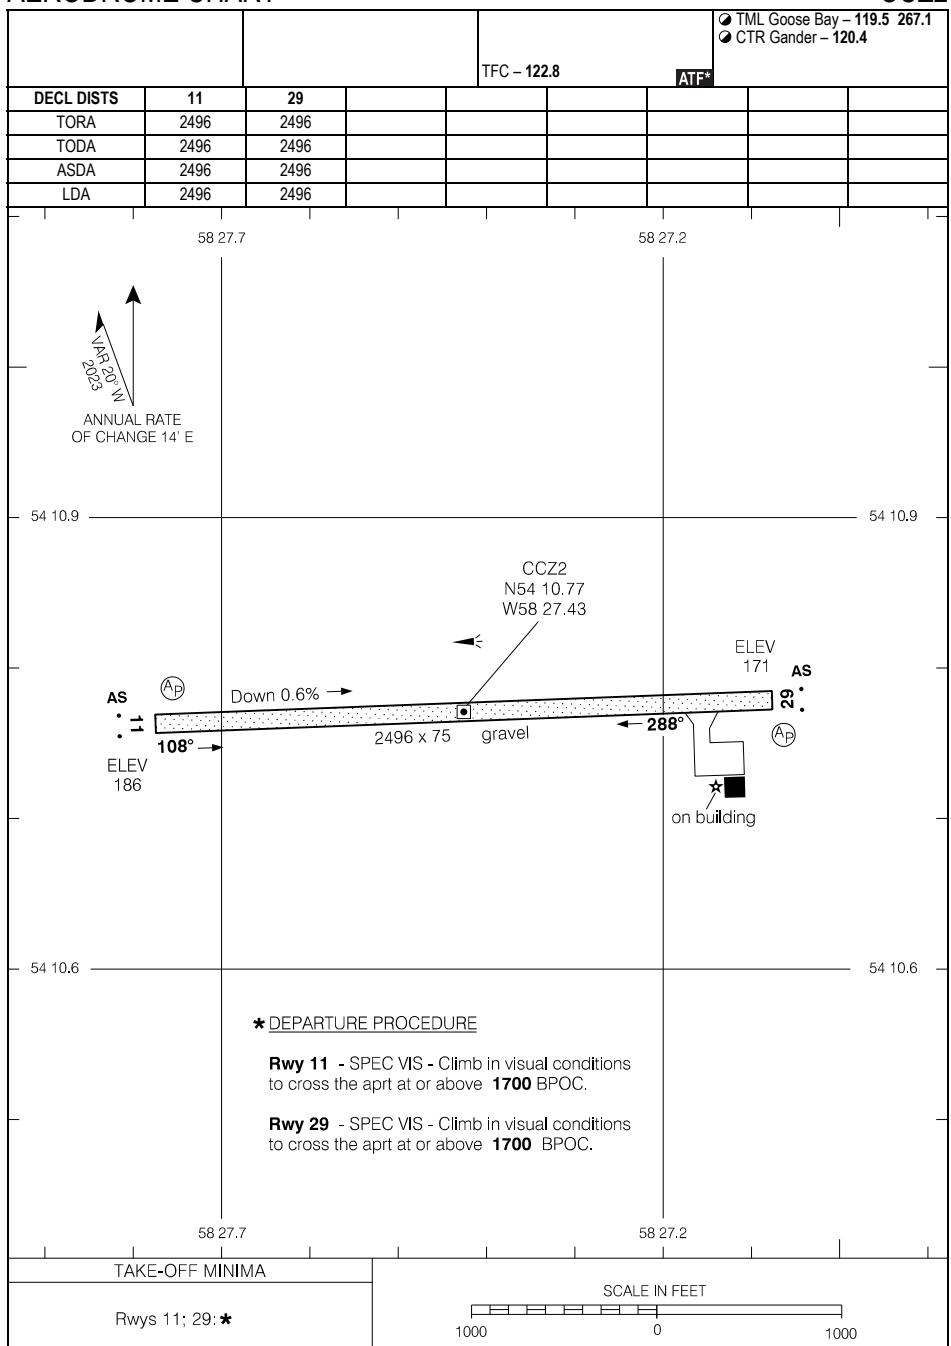

AERODROME CHART


EFF 20 APR 23

CCZ2

CSB2-AD

SABLE ISLAND, NS
CSB2

AERODROME CHART

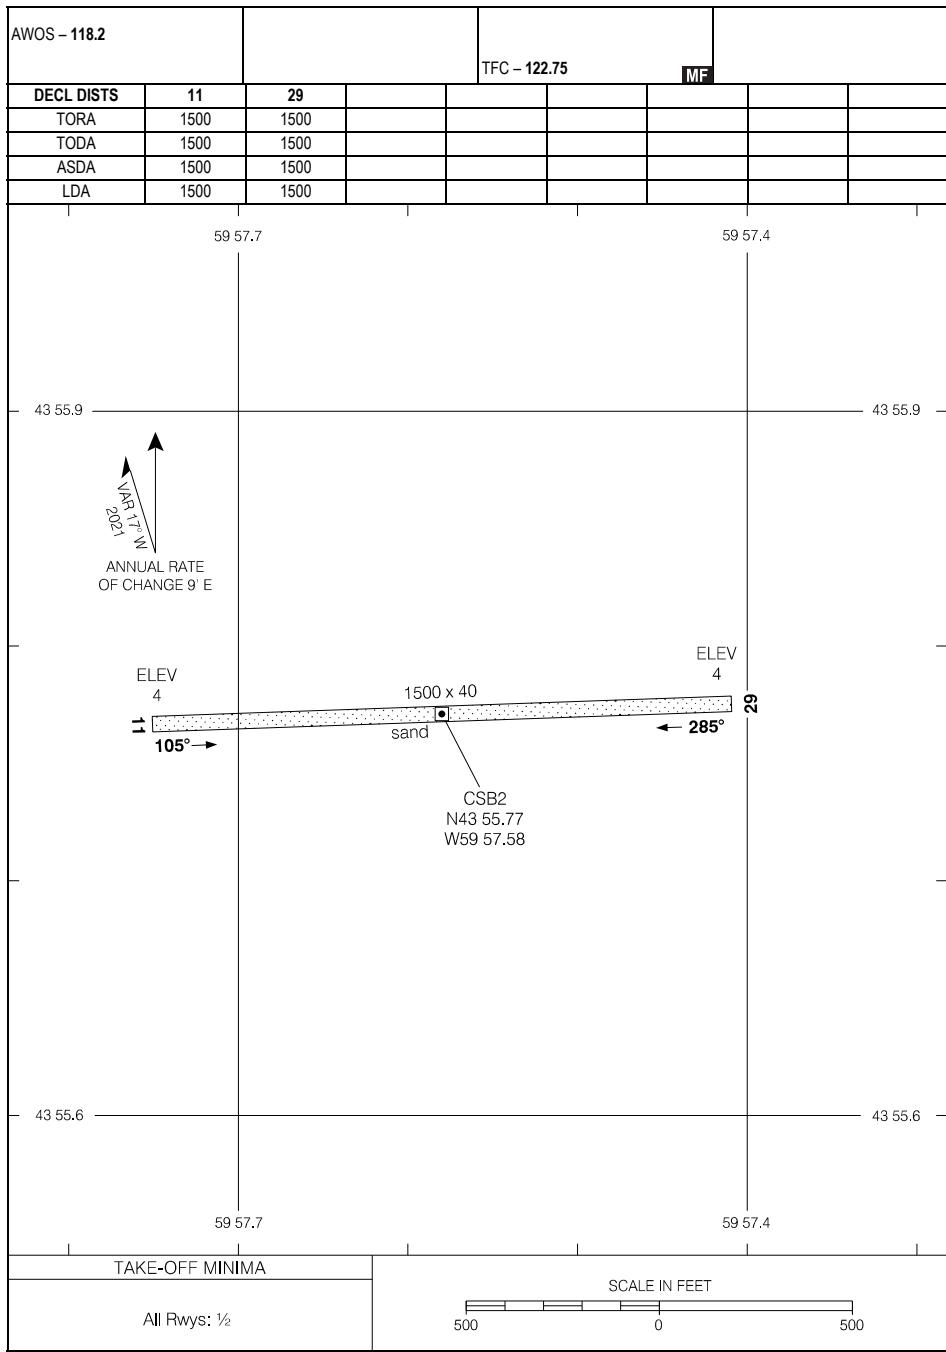

AERODROME CHART

EFF 17 APR 25


CSB2

CSB2-AD

CYSJ-AD

SAINT JOHN, NB
CYSJ

AERODROME CHART

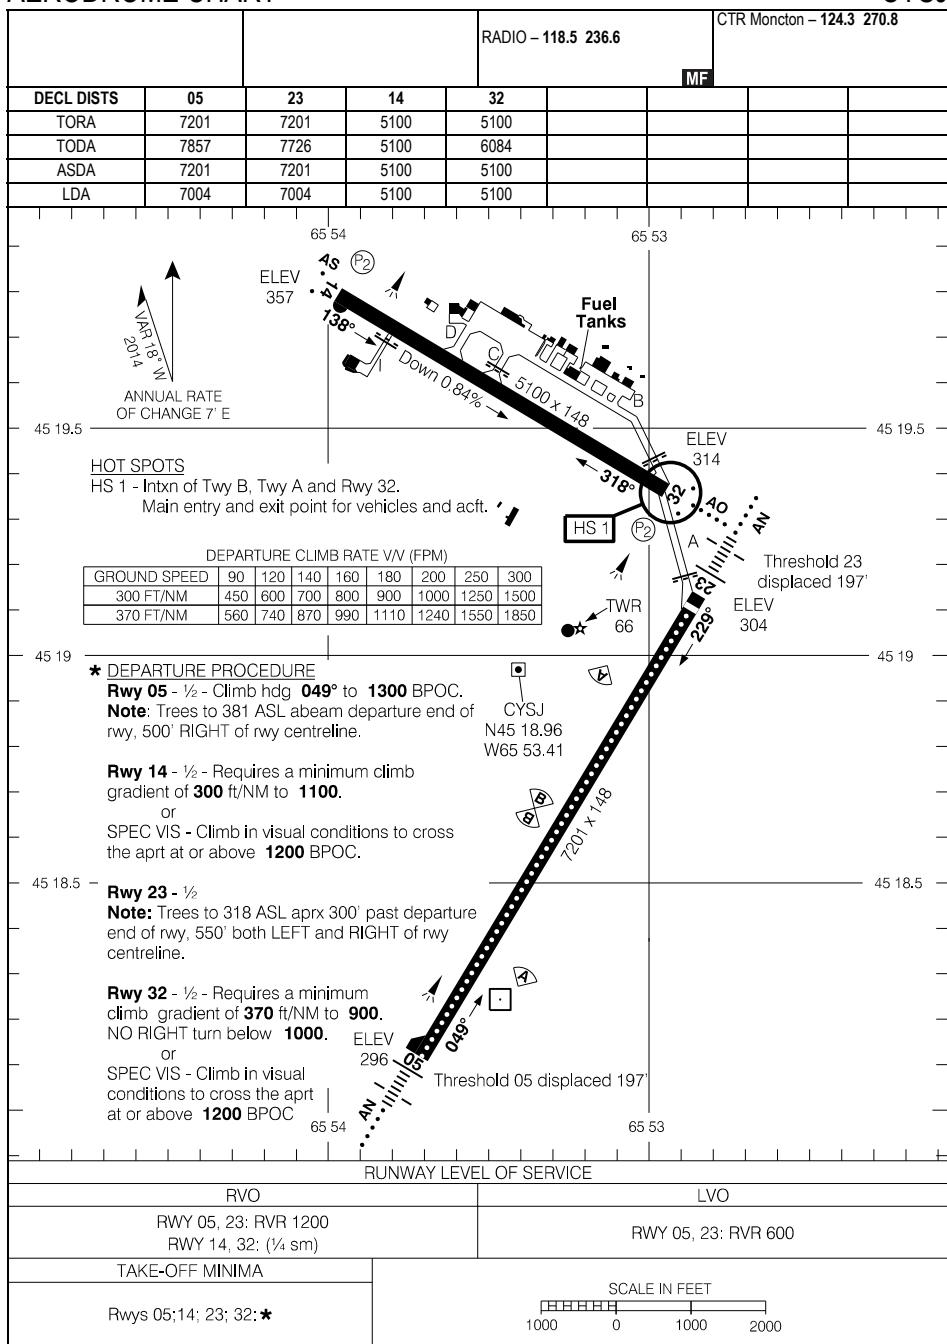

AERODROME CHART

EFF 21 MAR 24


CYSJ

CYSJ-AD

CDA5-AD

ST. ANDREWS (CODROY VALLEY), NL
CTR Gander - 120.32
CD45

AERODROME CHART

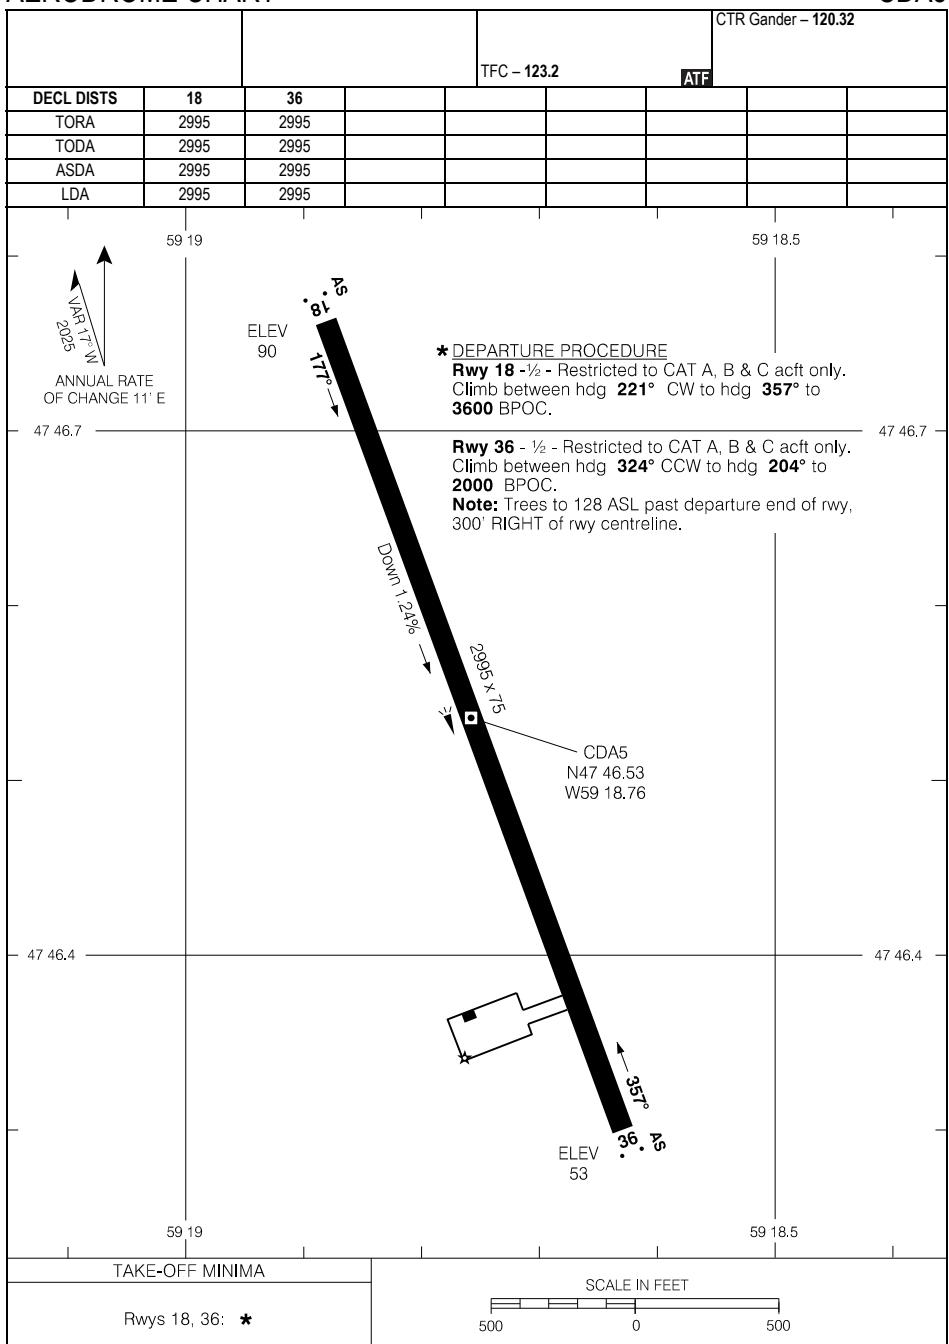

AERODROME CHART

EFF 17 APR 25

CDA5-AD

CDA5

REDUCED/LOW VISIBILITY PROCEDURES**REDUCED VISIBILITY PROCEDURES (RVR less than 2600 ft (1/2 sm) to 1200 ft (1/4 sm))
and LOW VISIBILITY PROCEDURES (RVR less than 1200 to 600 ft)****Application**

These procedures apply to ground movements of aircraft departing under reduced and low visibility conditions.

Departures below RVR 600 are not authorized.

When weather conditions indicate visibility below RVR 2600, procedures will be implemented restricting aircraft and vehicle operations on the movement area. The following message will be added to the advisory: "REDUCED VISIBILITY PROCEDURES IN EFFECT" or "LOW VISIBILITY PROCEDURES IN EFFECT"

General**REDUCED VISIBILITY TAXI ROUTES**

Taxi routes during reduced visibility operations are exclusive to the following routes:

1. Route 1 - Twy C, Rwy 14/32. For departure Rwy 05/23, continue Twy A to Rwy 05/23.
2. Route 2 - Twy I, Rwy 14/32. For departure Rwy 05/23, continue Twy A to Rwy 05/23.
3. Route 3 - Twy B, Rwy 14/32. For departure Rwy 05/23, continue Twy A to Rwy 05/23.

Aircraft restricted to one on the maneuvering area at any time during reduced visibility operations.

LOW VISIBILITY TAXI ROUTES

Taxi routes during low visibility operations are exclusive to the following routes:

1. Route 1 - Twy C, Rwy 14/32, Twy A - to Rwy 05/23.
2. Route 2 - Twy I, Rwy 14/32, Twy A - to Rwy 05/23.
3. Route 3 - Twy B, Rwy 14/32, Twy A - to Rwy 05/23.

Aircraft restricted to one on the maneuvering area at any time during low visibility operations.

When RVR falls below 600, movement of all aircraft ceases.

Rwy 14/32 will be used for taxiing purposes only during low visibility conditions.

DEPARTURES

Rwy 14/32 and Rwy 05/23 for departures in reduced visibility conditions.

Rwy 05/23 will be used for departures in low visibility conditions.

During RVOP/LVOP departure clearance or Pre-Taxi validation will not be given to any requesting aircraft if any other aircraft has been issued an approach or departure clearance until:

- either the arriving aircraft has landed and reported off the manoeuvring area or
- a departing aircraft is in contact with the Moncton Area Control Centre.

Take-Off roll cannot commence prior to the displaced threshold location where the runway is served by high intensity white runway edge lights.

Modified Declared Distances During RVOP/LVOP

RWY 05		RWY 23	
TORA	7004	TORA	7004
TODA	7660	TODA	7529
ASDA	7004	ASDA	7004

REDUCED/LOW VISIBILITY PROCEDURES

CYSJ

EFF 2 DEC 21

REDUCED/LOW VISIBILITY PROCEDURES**REDUCED VISIBILITY PROCEDURES (RVR less than 2600 ft (1/2 sm) to 1200 ft (1/4 sm))
and LOW VISIBILITY PROCEDURES (RVR less than 1200 to 600 ft)****Sequencing of Ground Movements for Take-off**

Pilots must follow instructions on Sequencing of Ground Movements for Take-Off as described in CAP GEN Operating Minima.

All aircraft are to obtain an IFR clearance or Pre-Taxi validation through the Saint John FSS prior to taxiing from any apron at Saint John Airport and are required to use the designated taxi routes.

Departing aircraft taxiing from a hangar along Twy B during RVOP or LVOP are required to taxi via Twy B to Rwy 14/32, Twy A to Rwy 05/23.

Do not request IFR clearance or Pre-Taxi validation until the RVR is greater than 600.

Guard Light System

Yellow flashing runway guard lights (Wig Wags) are installed at the Twy A entrance onto Rwy 05/23, Twy B onto Rwy 14/32, and Twy C and Twy I onto Rwy 14/32. When the twy edge lights are illuminated, the guard lights are turned on.

ARRIVALS

Arrivals are permitted on all runways for RVR 2600 ft (1/2 sm) to 1200 ft (1/4 sm). Twy A, Rwy 14/32, Twy B or Twy C and Twy A, Rwy 14/32, Twy I are the approved exit routes in RVOP.

Arrivals are not authorized in LVOP conditions.

RUNWAY LEVEL OF SERVICE

RWY	Certification	RWY	Certification
05	RVR 600	14	¼ sm
23	RVR 600	32	¼ sm

Note: Departing aircraft taxiing from a private hangar will be advised that RVOP or LVOP conditions are in effect. FSS will maintain one-in and one-out movements and will request aircraft access the designated taxi route.

REDUCED/LOW VISIBILITY PROCEDURES


EFF 2 DEC 21

CYSJ

CYAY-AD

ST. ANTHONY, NL
CYAY

AERODROME CHART

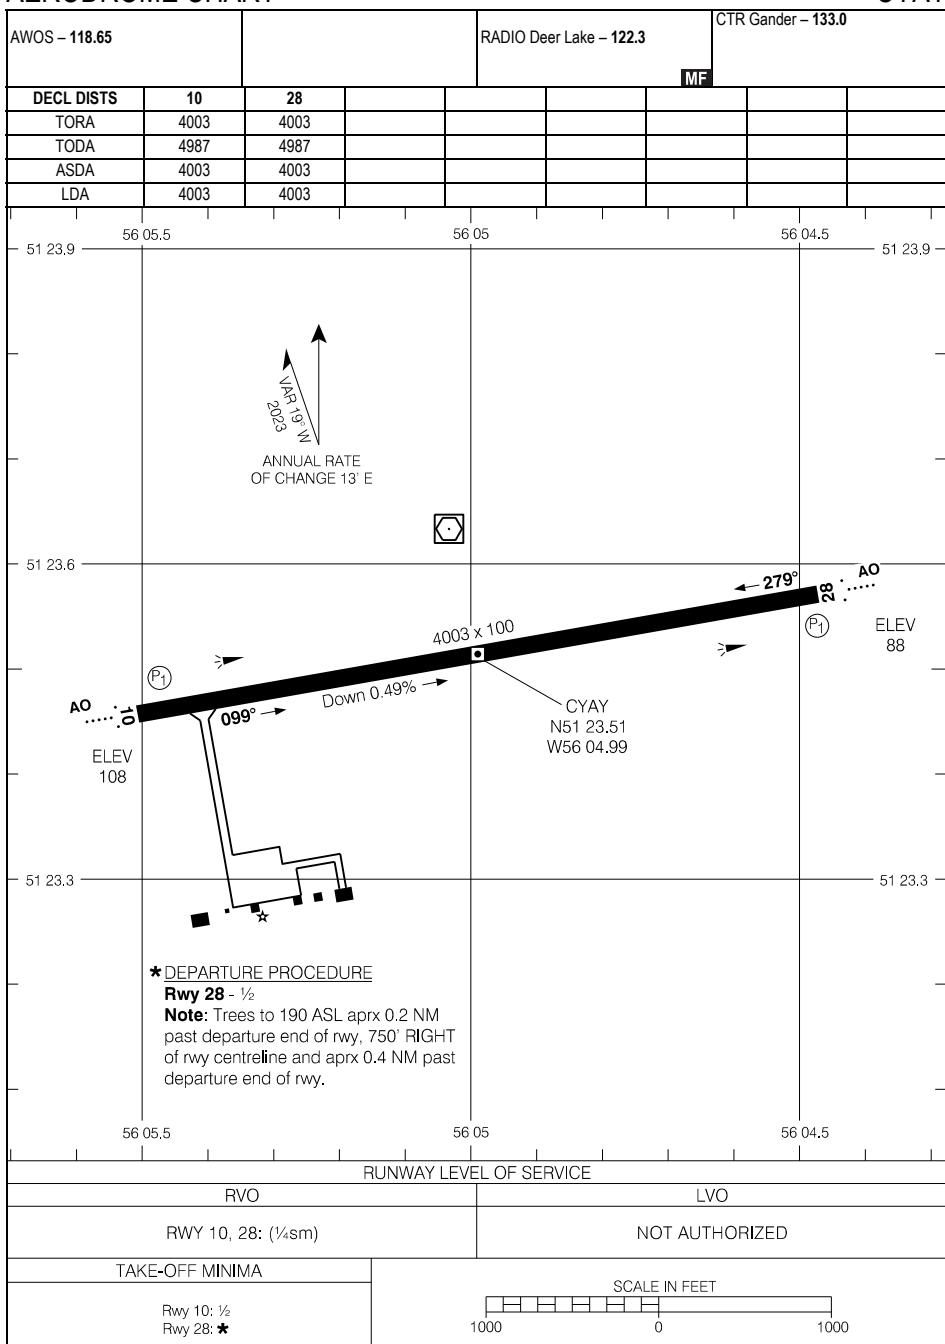

AERODROME CHART

EFF 15 JUN 23


CYAY

CYAY-AD

CYYT-AD

ST. JOHN'S INT'L, NL
CYYT

AERODROME CHART

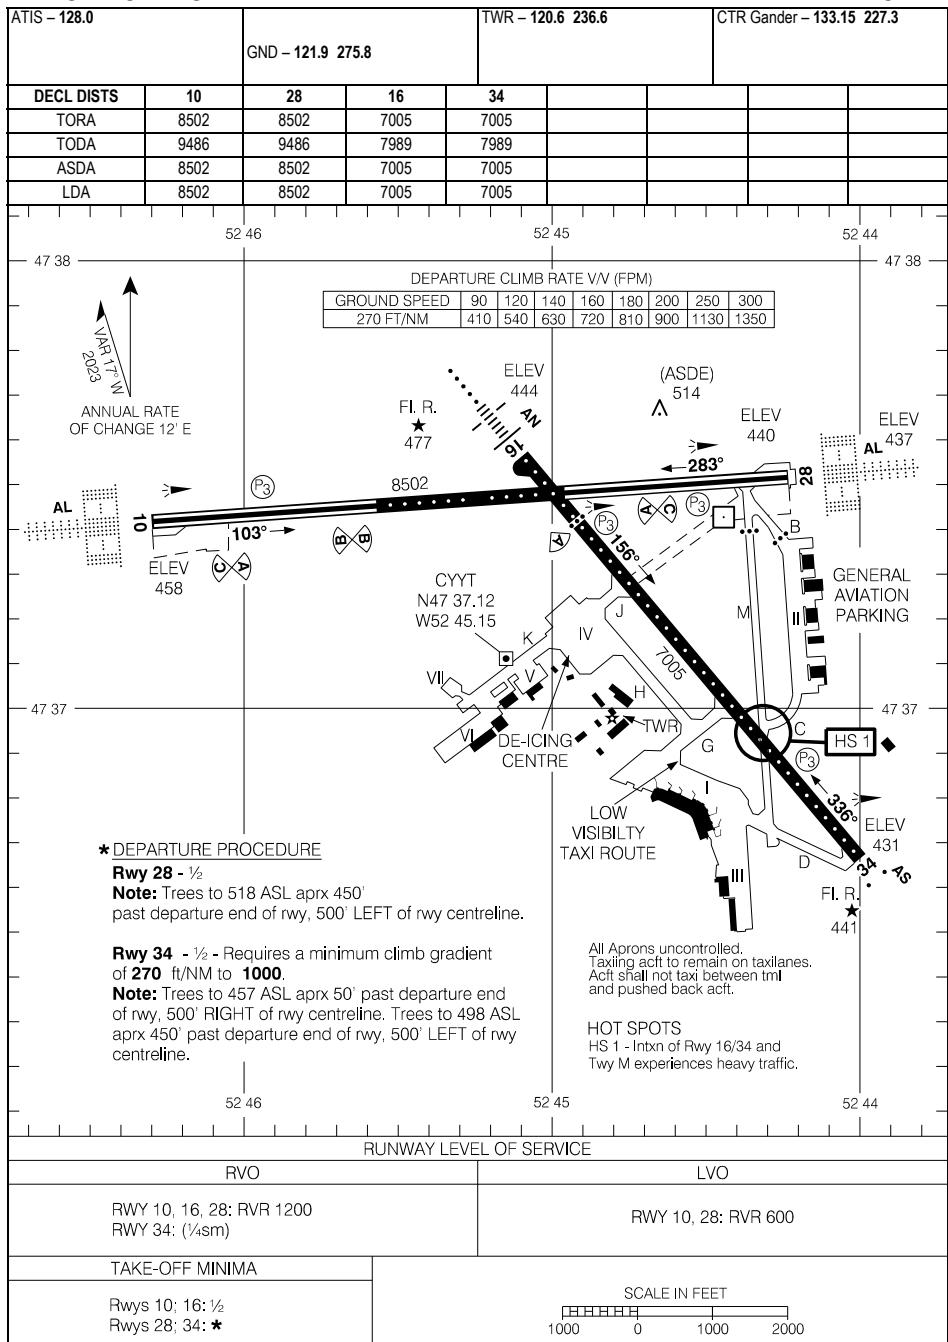

AERODROME CHART

EFF 5 OCT 23

CYYT-AD

CYYT

LOW VISIBILITY PROCEDURES

Low Visibility Procedures (RVR less than 1200 ft to 600 ft)

Application

These procedures apply to ground movements of aircraft departing under low visibility conditions. Arrivals and departures below RVR 600 are not authorized. When weather conditions indicate visibility below RVR 1200 is imminent, procedures will be implemented restricting aircraft and vehicle operations on the manoeuvring area.

General

Low Visibility Taxi Routes

Standard taxi routes are shown on the Low Visibility Taxi Chart, taxiway surfaces are painted with enhanced yellow and black centreline markings, in addition, taxiways B, C, G, H, J, M and Runway 16/34 are equipped with green centreline lights.

Airport Surface Detection Equipment (ASDE)

Ground radar is used to monitor the position of aircraft operating on the manoeuvring area, in the event of an ASDE failure, ATC will restrict low visibility operations to one aircraft on the manoeuvring area at a time.

Departures

When low visibility procedures are in effect, Runway 10/28 is the only runway certified for low visibility operations. Intersection takeoffs are not authorized.

Sequencing of Aircraft Ground Movements for Take-off

Do not request start, push-back or call for taxi clearance until the reported RVR is greater than:

Aircraft/Pilot Take-off minima	Minimum RVR for start
1200 RVR	1000 RVR
600 RVR	600 RVR

Stop Bar/Guard Light System

Each taxiway/runway entrance onto runway 10/28 is equipped with a stop bar consisting of red in-set lights and red elevated lights located at the taxi holding position. Yellow flashing runway guard lights (Wig Wags) are installed at each side of the stop bar location. When the red stop bar lights are illuminated, green lead on lights beyond the stop bar are extinguished. When ATC issues a clearance to proceed onto the runway, the red stop bar lights will be extinguished and the green lead on lights beyond the stop bar will be illuminated. The stop bar is reset automatically as the aircraft moves onto the runway. In the event of stop bar/guard light failure, ATC will restrict operations in low visibility operations to one aircraft on the maneuvering area at a time.

"AT NO TIME SHALL A PILOT CROSS AN ILLUMINATED RED STOP BAR"

"Follow me" service is available via Pilot request to ATC.

LOW VISIBILITY PROCEDURES

CYYT-GM-3B

LOW VISIBILITY TAXI CHART RWY 10/28
(RVR LESS THAN 1200 TO 600 FT)

ST. JOHN'S INTL, NL
CYYT

ATIS - 128.0	GND - 121.9 275.8	TWR - 120.6 236.6
--------------	-------------------	-------------------

LEGEND



TAXIWAY CENTRELINE LIGHTS




LOW VISIBILITY TAXI ROUTE



STOP BARS

VAR 17° N
2023
ANNUAL RATE
OF CHANGE 12' E

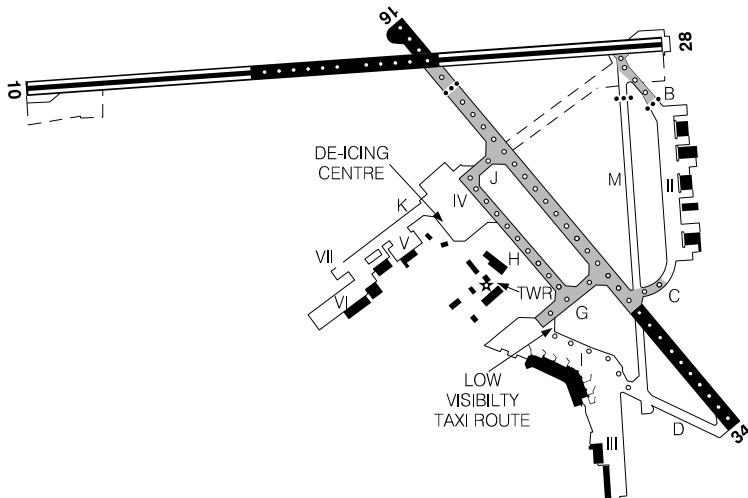

(RVR LESS THAN 1200 TO 600 FT)
LOW VISIBILITY TAXI CHART RWY 10/28

CYYT-GM-3B

CYYT
EFF 26 DEC 24

DE-ICING OPERATIONS

De-icing Procedures

1. Contact ICEMAN thirty minutes prior to push back on 129.2 MHz.
2. Contact ST JOHN'S GND after pushback for taxi to CDF.
3. Hold short of CDF on H.
4. ST JOHN'S GND will advise the flight crew to contact ICEMAN on 129.2 MHz when the aircraft has taxied to the proper entry point.
5. ICEMAN will then delegate bay assignment & entry instructions. Expect frequency change to de-icing bay frequencies.
6. De-icing bay frequencies;
 Bay 1 – Contact IDS on 122.950 MHz
 Bay 2 – Contact IDS on 130.125 MHz
 Bay 3/4 – Contact IDS on 128.950 MHz
7. Flight crews are advised to exercise discretion at all times while on the CDF. Directional signage and taxi lines on the CDF must be followed by flight crews at all times.
8. After de-icing is complete, return to 129.2 MHz for pad exit instructions. Flight crews must advise ICEMAN that all equipment and de-icing personnel are away from the aircraft and have returned to their designated safety zones.
9. ICEMAN will instruct the aircraft to hold its position on the CDF and contact ST JOHN'S GND on 121.9 MHz.
10. Aircraft to hold its position until ST JOHN'S GND issues further taxi instructions from the CDF.

Notes:

- Aircraft intending on returning to any apron after de-icing must drip dry for 25 minutes on CDF.
- Single engine taxi not permitted from CDF.
- Engine run-ups are not permitted on CDF.
- Contact 709-753-9742 for de-icing if Icehouse unavailable.

De-icing Bay Restrictions

1. BAY 1 – Maximum wingspan for de-icing operations 35.8m (117ft).
2. BAY 2 – Maximum wingspan for de-icing operations 35.8m (117ft).
Note: BAY 3 is closed/unusable when BAY 2 is occupied.
3. BAY 3 – Maximum wingspan for de-icing operations 79.75m (262ft).
Note: BAYS 2 and 4 are closed/unusable when BAY 3 is occupied.
4. BAY 4 – Maximum wingspan for de-icing operations 35.8m (117ft).
Note: BAY 3 is closed/unusable when BAY 4 is occupied.

Note: The above noted maximum wingspans are intended to protect adjacent de-icing bays, safety zones and the apron taxiway. Exceedances of these values are permitted but must be evaluated and approved by the airport authority to ensure special operating procedures are communicated and implemented.

DE-ICING OPERATIONS

EFF 21 MAR 24

CYYT

CYYT-GM-4B

ST. JOHN'S INTL, NL
CYYT

CENTRAL DE-ICING FACILITY

ATIS - 128.0

CND - 121.9 275.8
ICEMAN - 129.2

Note:

Twy K uncontrolled

16-34 CENTRELINE

VAR 17° W
2023

ANNUAL RATE
OF CHANGE 12' E

TAXI J

LEGEND

• • • • • INSET GUIDANCE LIGHTS

- - - HOLD LINE

1H

TAXI H

TAXI HOTEL HOLD LINE

BAY 1
BAY 2
BAY 3
BAY 4

TAXI K

V

VI

VII

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CENTRAL DE-ICING FACILITY

EFF 10 AUG 23


CYYT

CYYT-GM-4B

CYYT-APD-1

ST. JOHN'S INT'L, NL
CYYT

PARKING AREAS

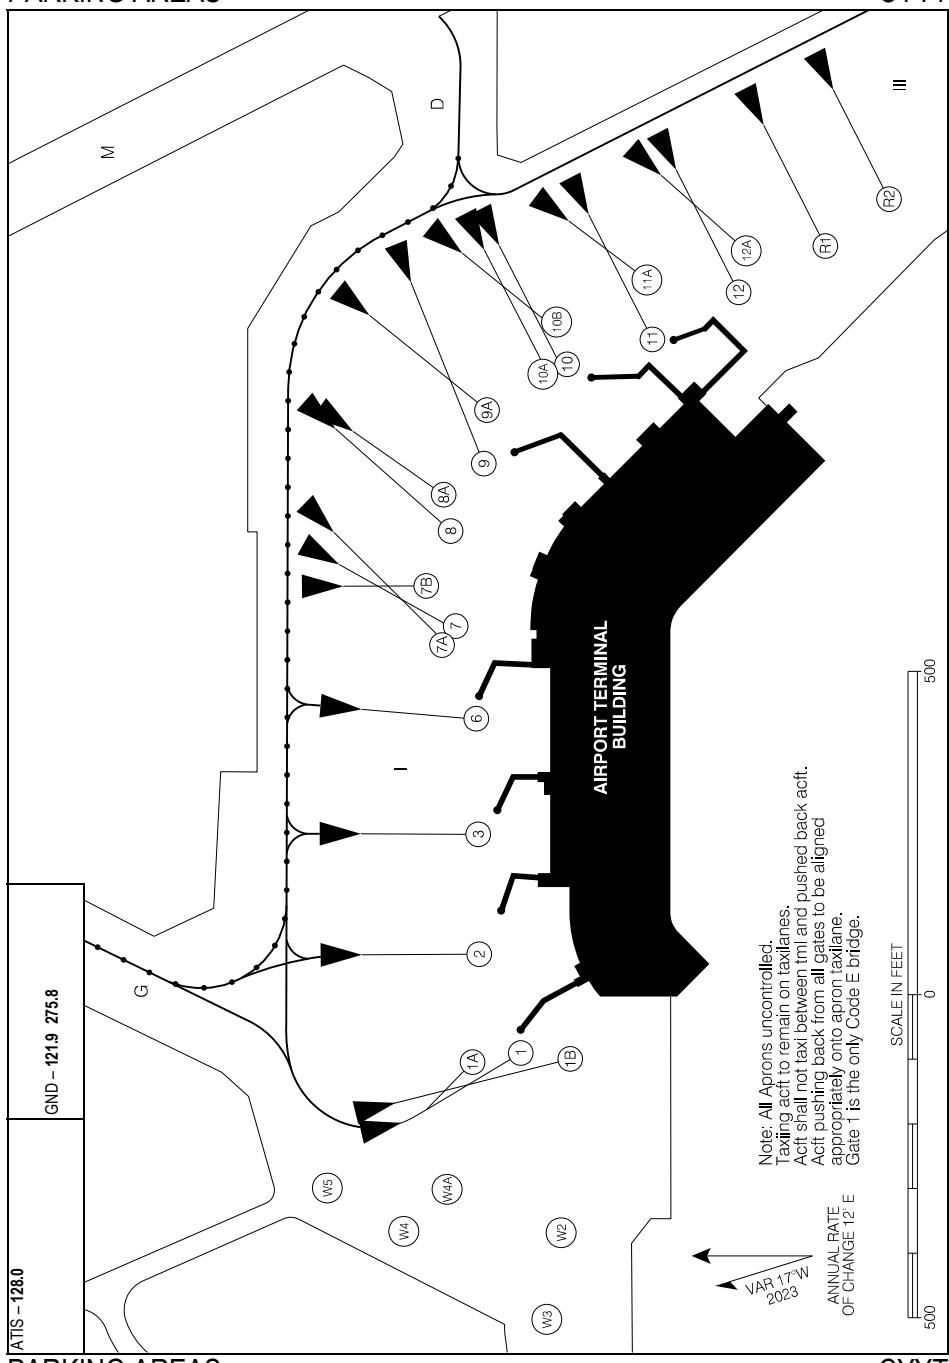

PARKING AREAS

EFF 10 AUG 23

CYYT-APD-1

PARKING AREAS

Aircraft Parking Position

Position	Coordinates	Position	Coordinates
1	473650.35N 0524440.68W	10A	473645.88N 0524426.85W
1A	473651.02N 0524441.44W	10B	473645.89N 0524426.33W
1B	473650.16N 0524441.21W	11	473644.25N 0524427.22W
2	473650.20N 0524438.40W	11A	473644.30N 0524426.35W
3	473649.46N 0524435.92W	12	473642.77N 0524426.95W
6	473648.80N 0524433.55W	12A	473642.79N 0524426.54W
7	473648.66N 0524431.53W	R1	473641.29N 0524426.75W
7A	473648.94N 0524431.61W	R2	473640.12N 0524426.35W
7B	473648.94N 0524430.84W	W2	473650.70N 0524444.16W
8	473648.17N 0524429.43W	W3	473651.43N 0524445.80W
8A	473648.38N 0524428.95W	W4	473652.63N 0524443.45W
9	473647.34N 0524427.81W	W4A	473652.57N 0524442.97W
9A	473647.29N 0524427.56W	W5	473653.57N 0524442.35W
10	473645.75N 0524427.23W		

PARKING AREAS


EFF 17 JUN 21

CYYT

CYSL-AD

ST. LEONARD, NB
CYSL

AERODROME CHART

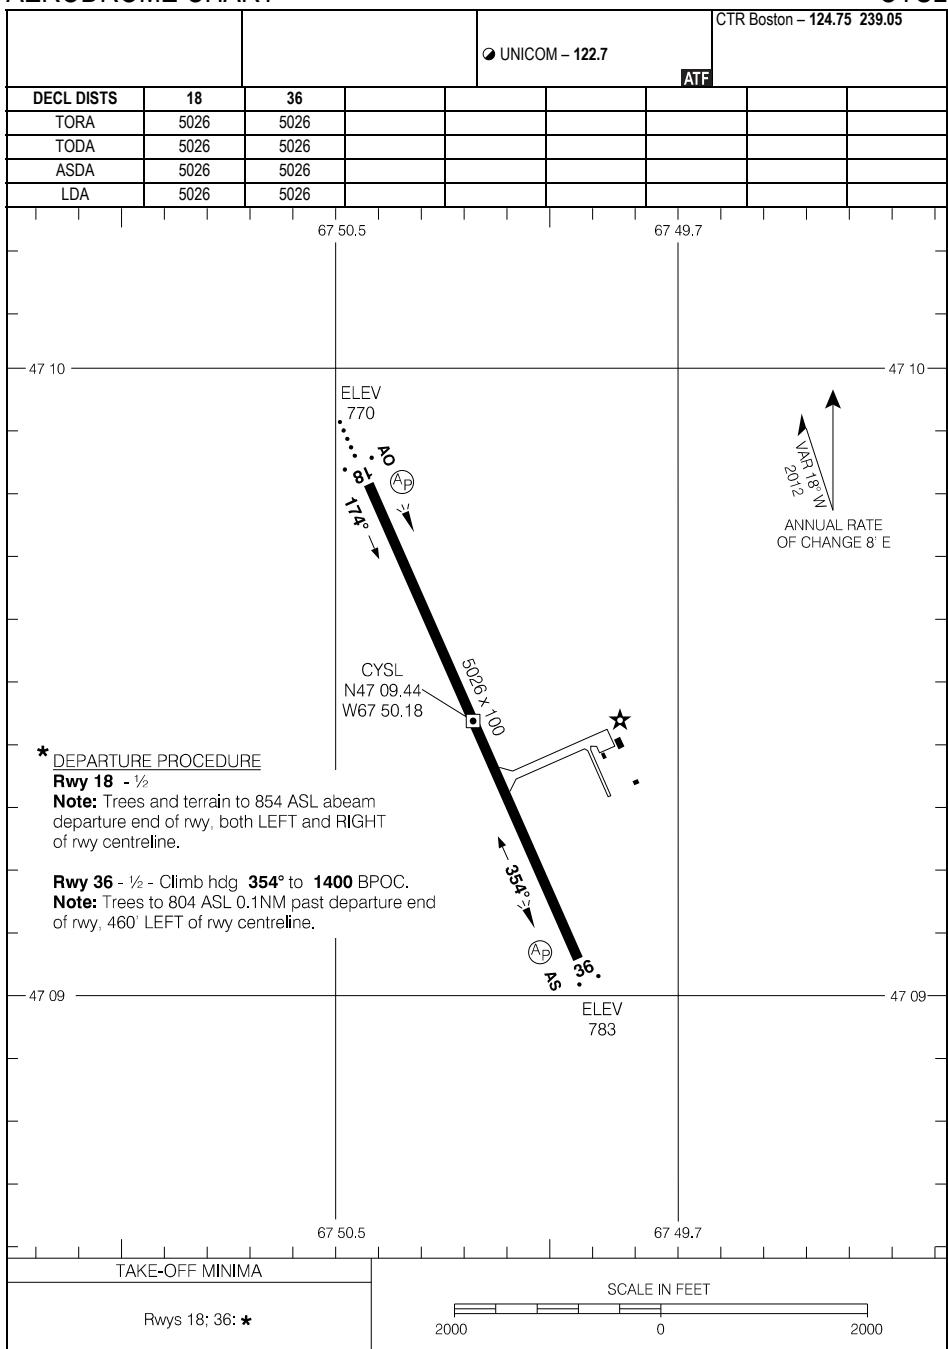

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 19 MAY 22


CYSL

CYSL-AD

AERODROME CHART

AWOS Mary's Harbour - 122.55				TFC - 122.8		ATF*	
DECL DISTS	05	23					
TORA	2208	2208					
TODA	2208	2208					
ASDA	2208	2208					
LDA	2208	2208					

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

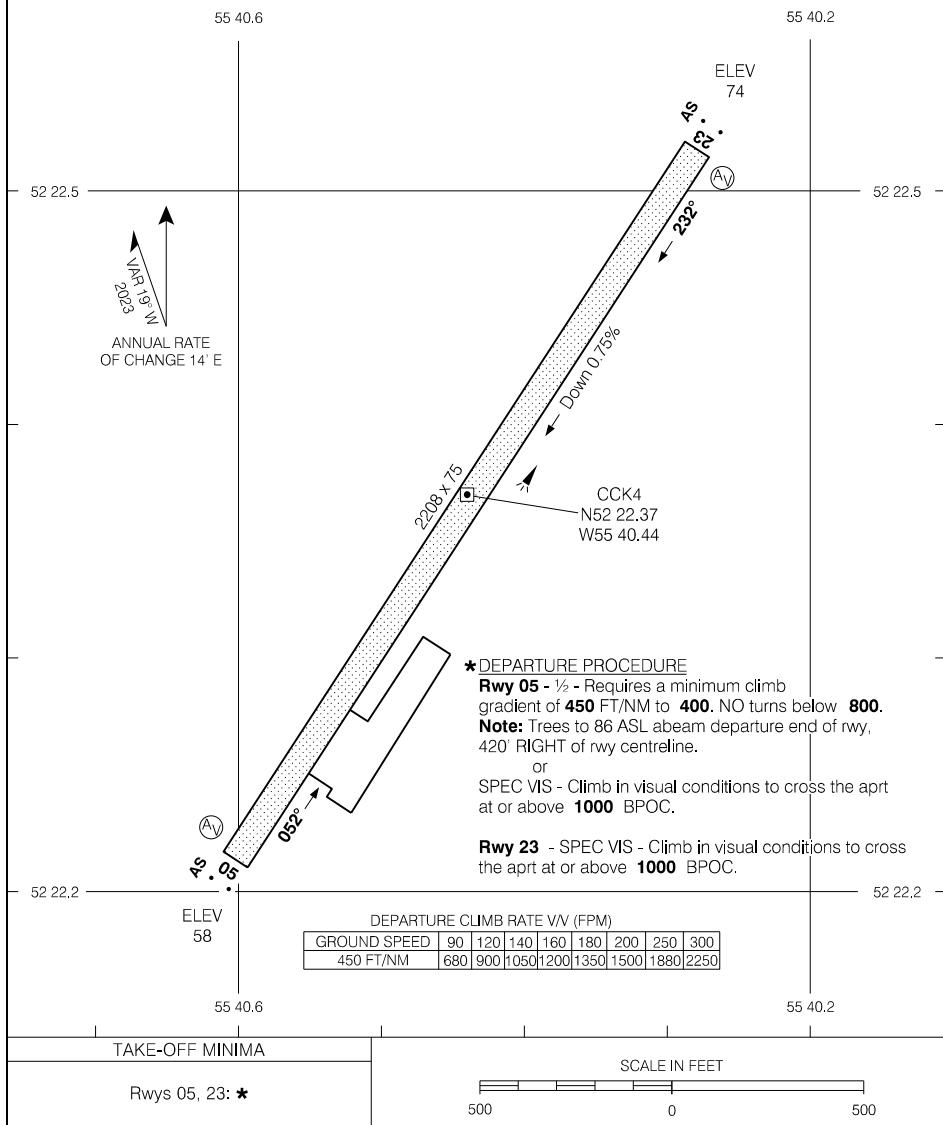


AERODROME CHART

EFF 20 APR 23

CCK4

AERODROME CHART

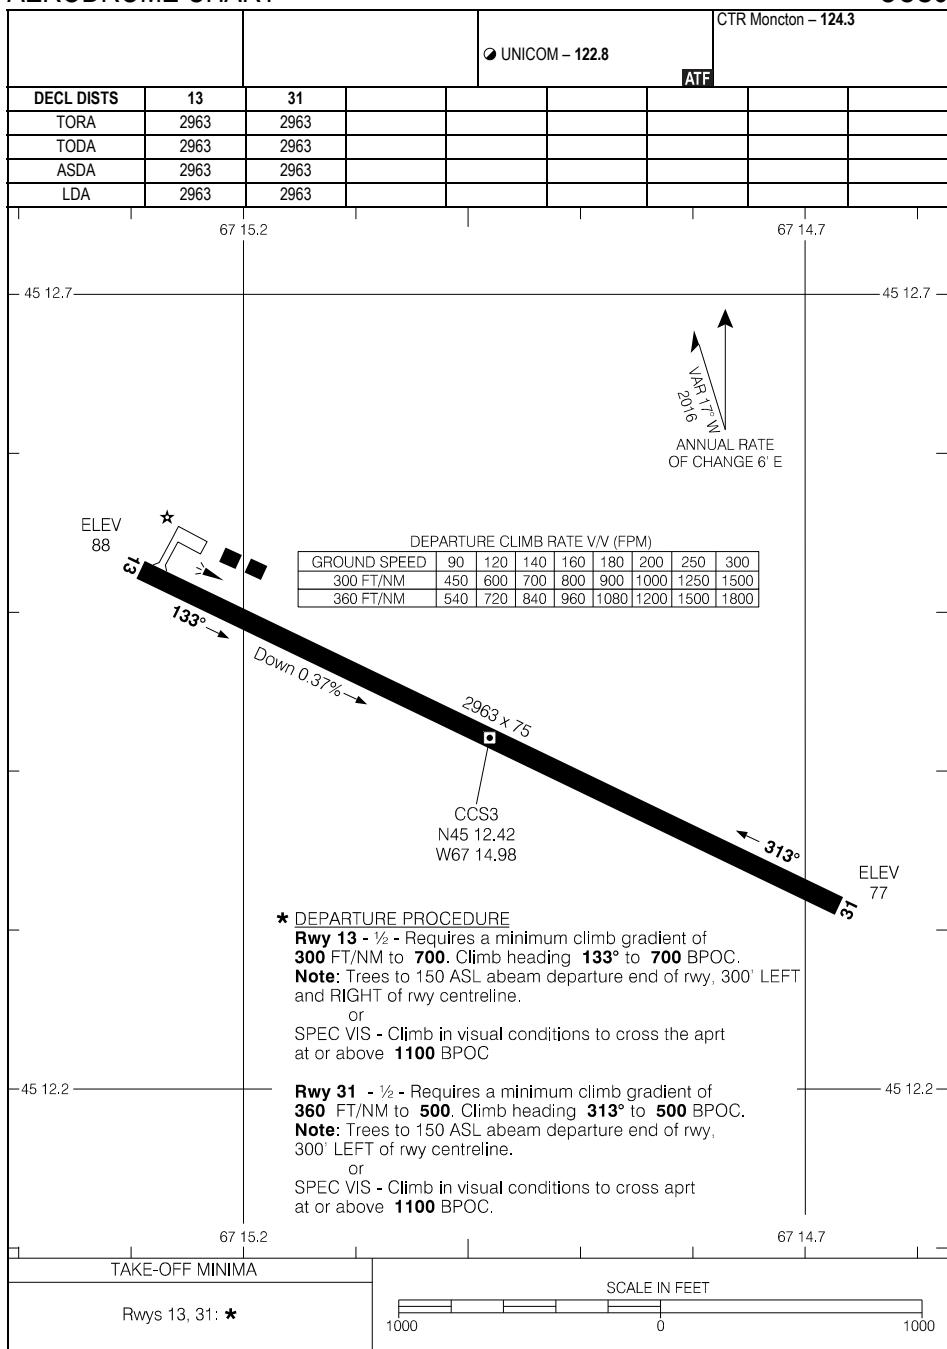


AERODROME CHART

EFF 5 SEP 24

CYJT-AD

STEPHENVILLE DYMOND AIRPORT, NL
CYJT

AERODROME CHART

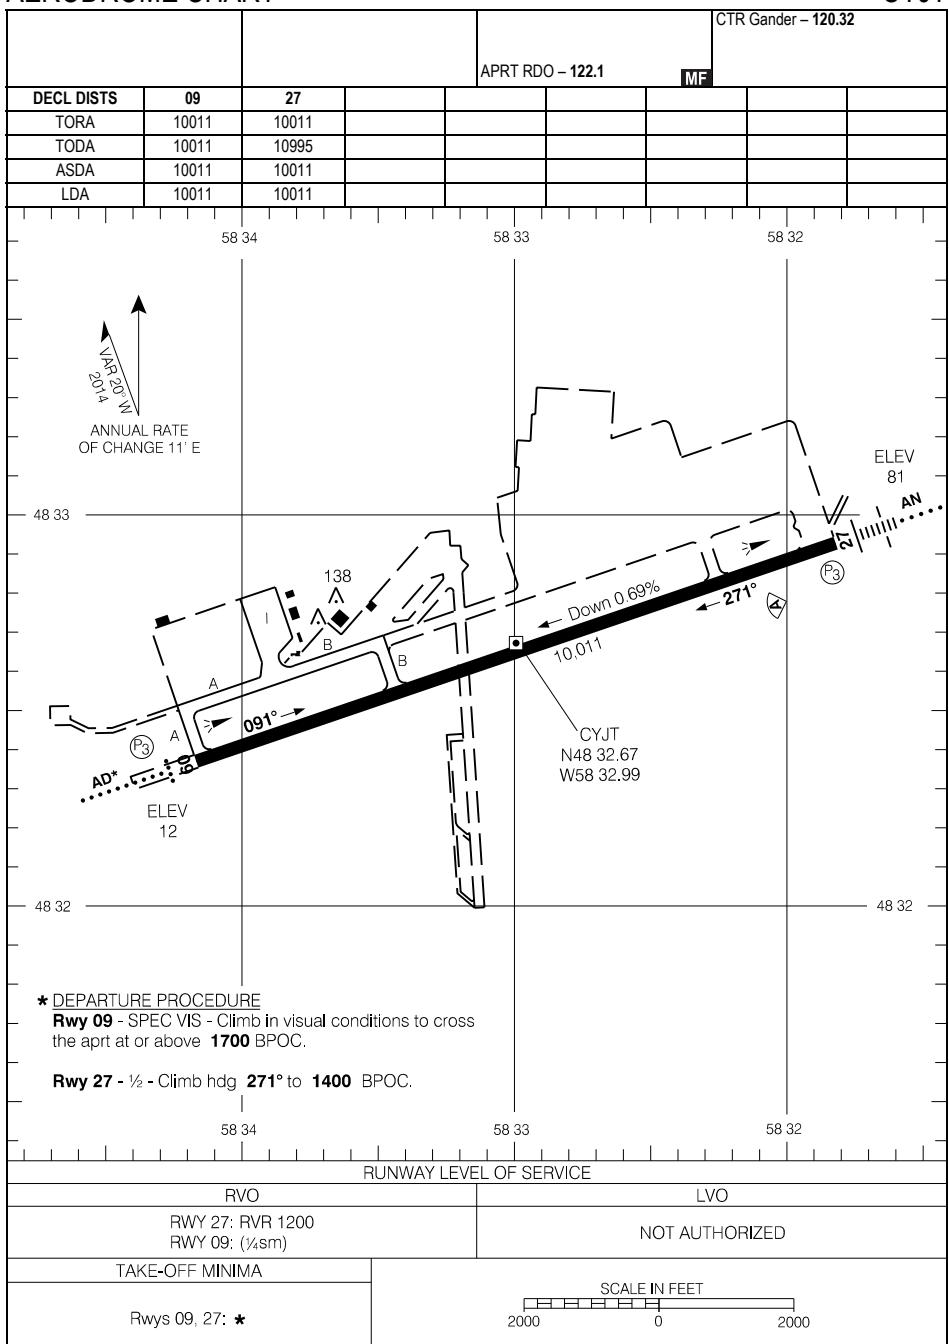

AERODROME CHART

EFF 21 MAR 24


CYJT

CYJT-AD

CYSU-AD

SUMMERSIDE, PE
CYSU

AERODROME CHART

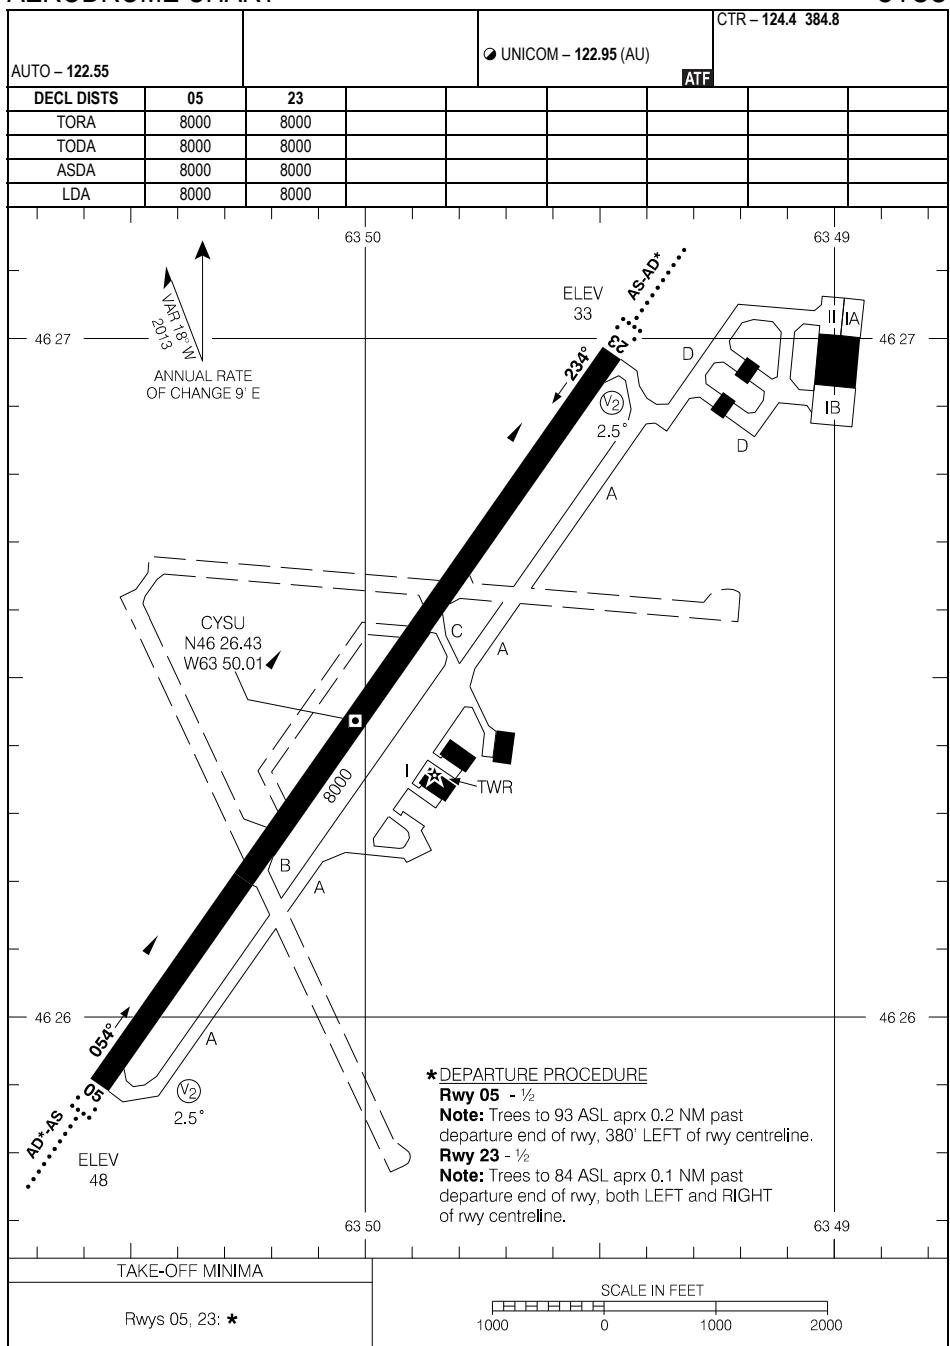

AERODROME CHART

EFF 7 OCT 21


CYSU-AD

CYSU

CYQY-AD

SYDNEY/J.A. DOUGLAS MCCURDY, NS
CYQY

AERODROME CHART

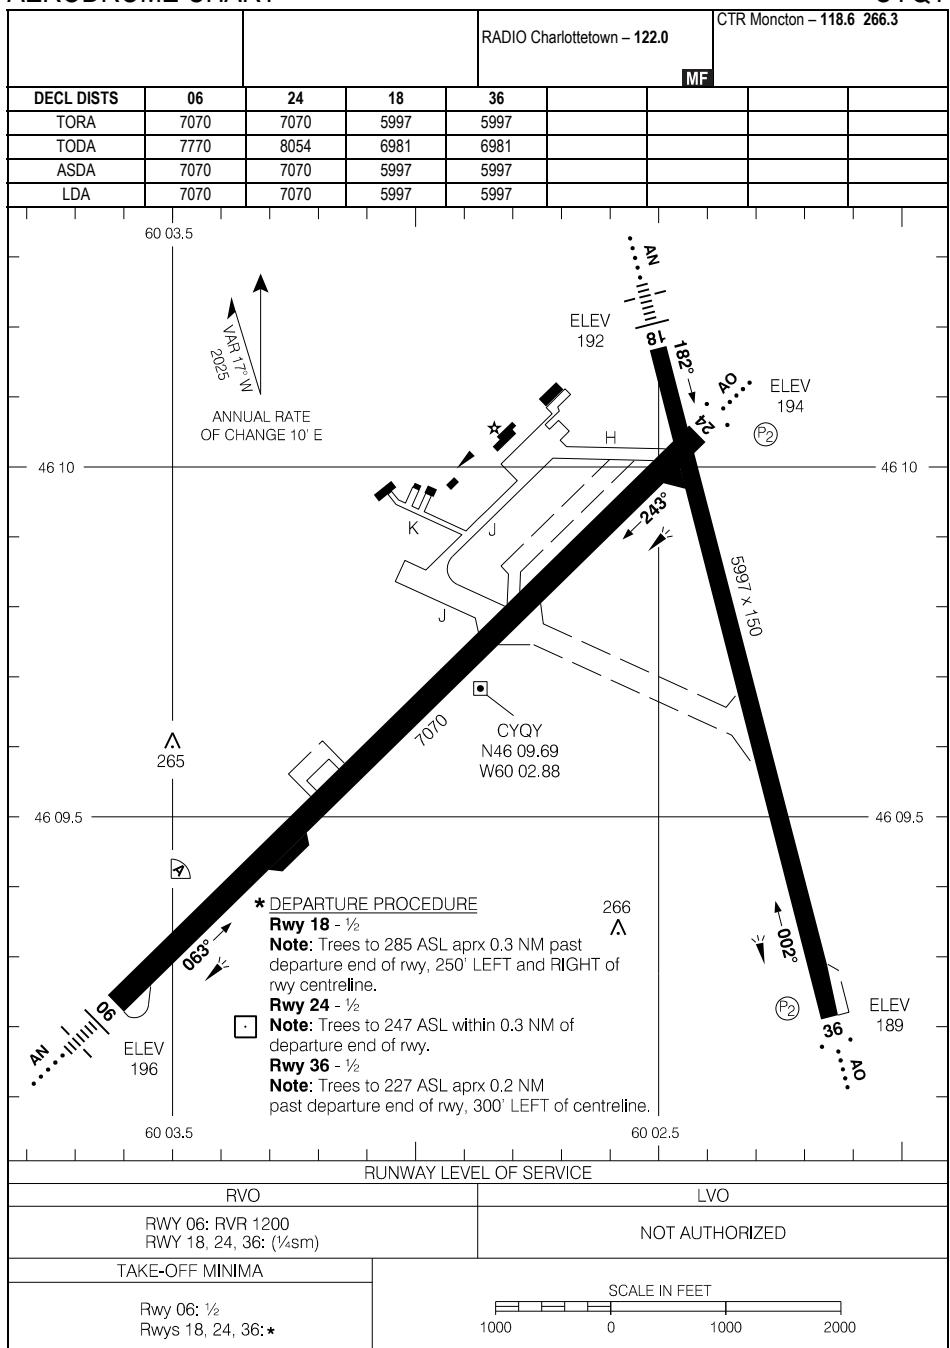

AERODROME CHART

EFF 20 FEB 25


CYQY

CYQY-AD

CYTN-AD

TRENTON, NS
CYTN

AERODROME CHART

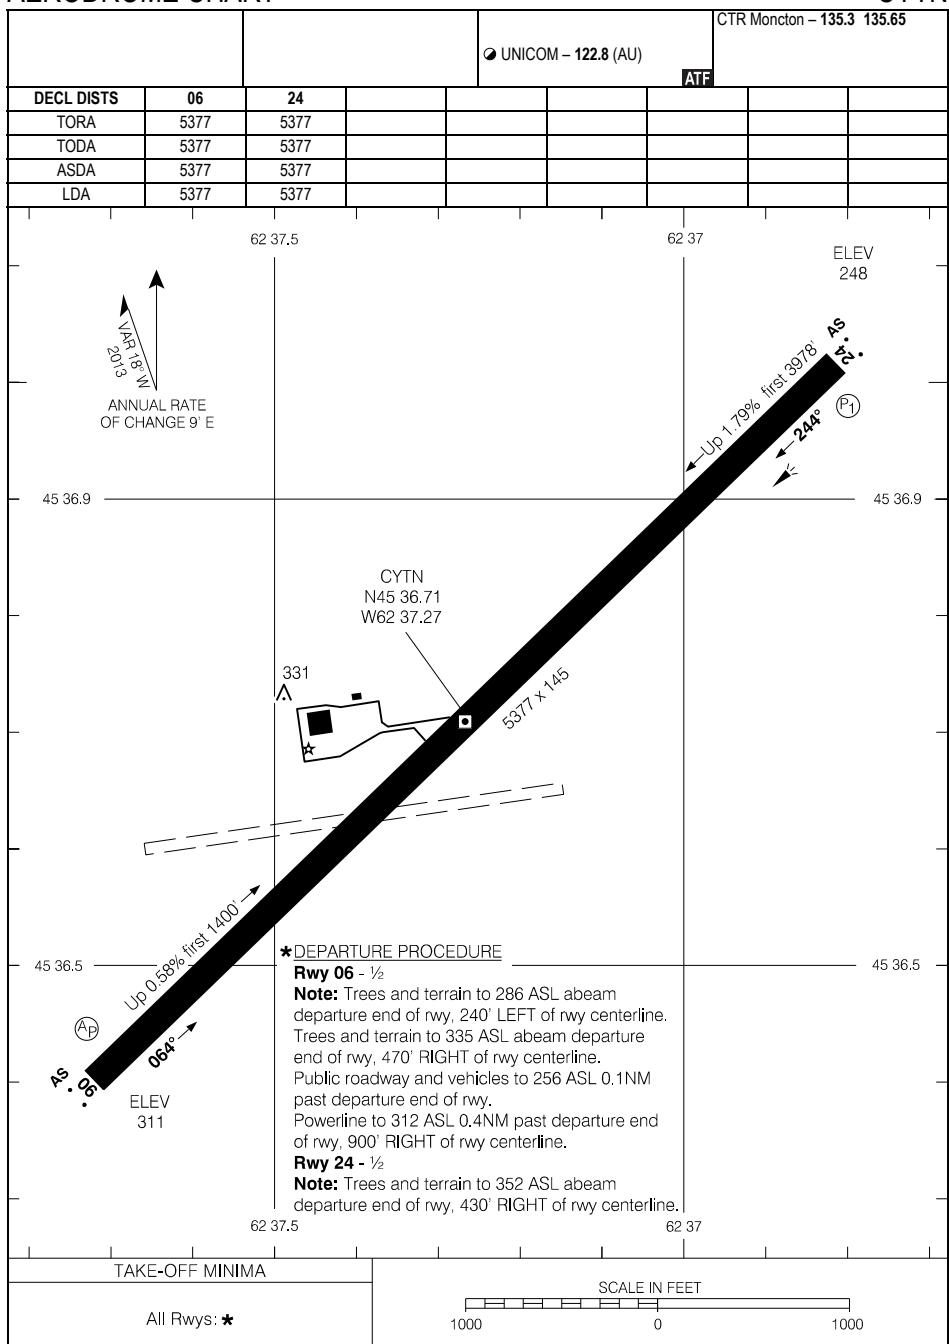

AERODROME CHART

EFF 27 JAN 22


CYTN

CYTN-AD

CYWK-AD

WABUSH, NL
CYWK

AERODROME CHART

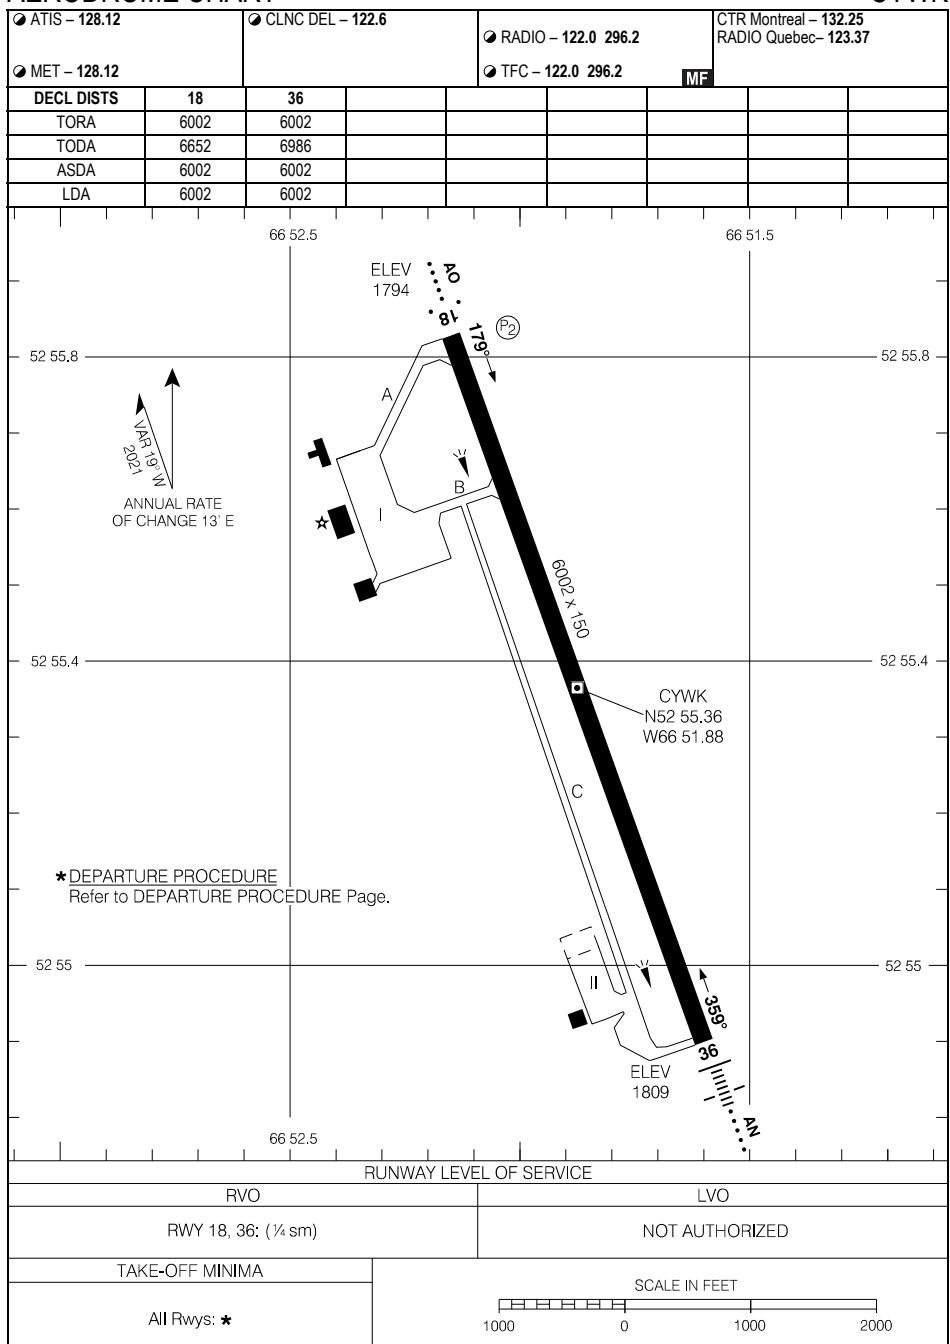

AERODROME CHART

EFF 23 FEB 23

CYWK


CYWK-AD

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

CCC2-AD

WINTERLAND, NL
CCC2

AERODROME CHART

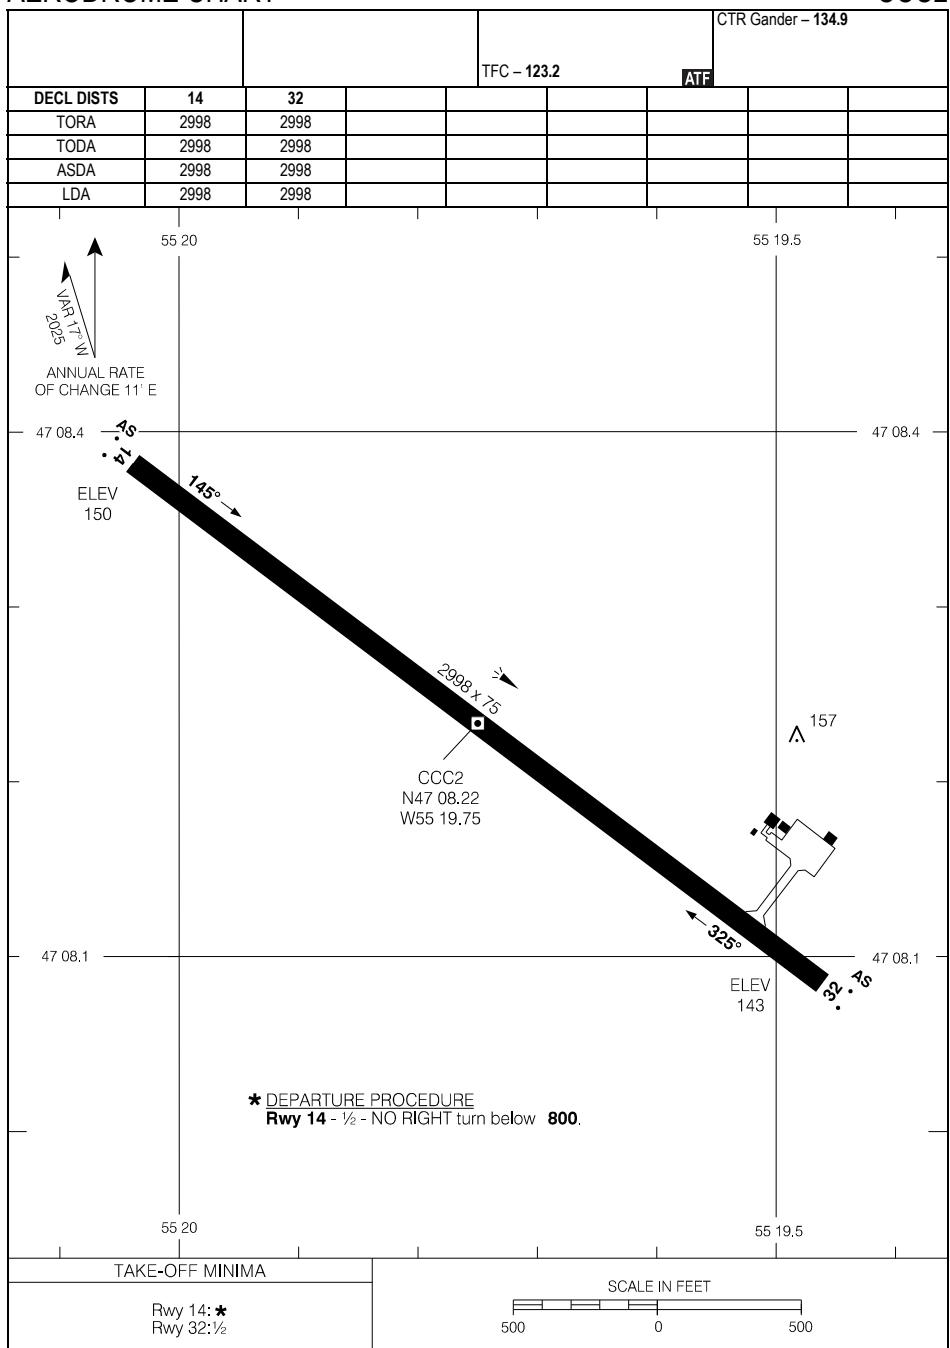

AERODROME CHART

EFF 12 JUN 25


CCC2

CCC2-AD

CYQI-AD

YARMOUTH, NS
CYQI

AERODROME CHART

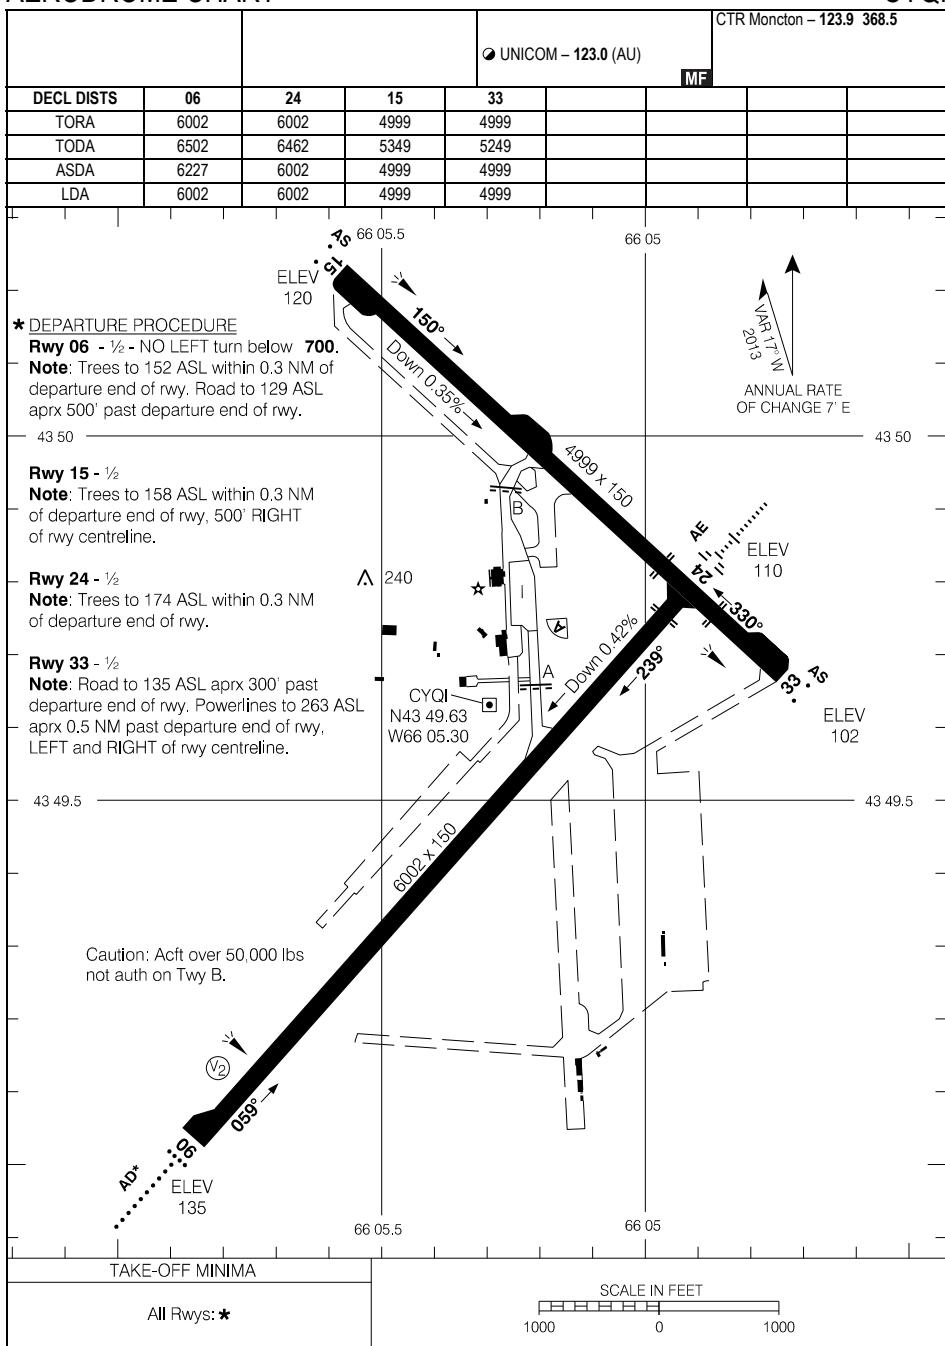

Source of Canadian Civil Aeronautical Data: © 2025 NAV CANADA All rights reserved

AERODROME CHART

EFF 10 AUG 23

CYQI

CYQI-AD